




YN5200 SPEEDLITE POWER BANK

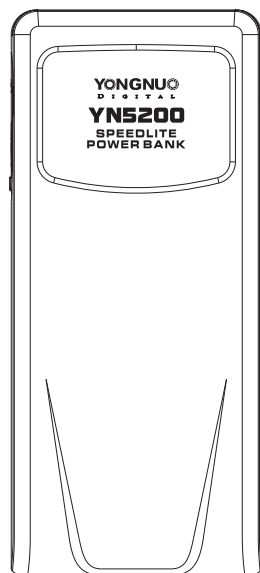

III.Name of each part

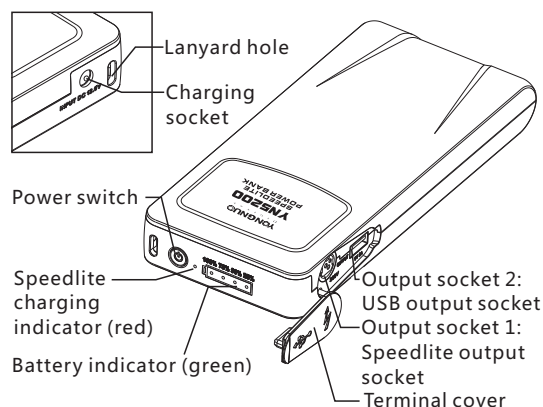

Accessories

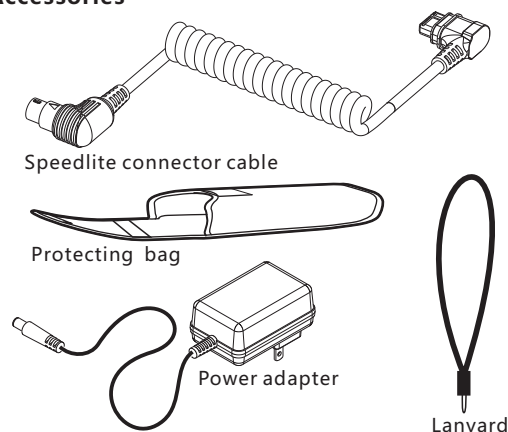

IV.Use power bank to charge the speedlite.


- 1.Connect the circular terminal of the speedlite connector cable to the power bank(speedlite output socket).
- 2.Connect the square terminal of the speedlite connector cable to the speedlite (external power source socket).
- 3.Turn on the speedlite power or press the switch of power bank, it will start to work, the battery indicator light will be lit, display the current power.
- 4.After the speedlite complete flashing, the speedlite could be charged. The red indicator will be lit when charging, and the red indicator will go out when finish charging.
- 5.After use, first turn off the speedlite, then press the power switch. When the battery indicator light goes out, the flash connector can be pulled out.

- Be sure to turn off the relevant equipment when connecting the products.
- The speedlite requires to install the battery and could works normally.
- When the speedlite is dormant, the power bank will automatically enter the closed state, and when the speedlite is wakened, the power bank will be automatically turned on to charge the speedlite.

V.Use power bank to charge other digital devices.

- 1.Insert the USB cable (not included) into the power bank output socket 2 and the digital device respectively.
- 2.Press the power switch and the battery indicator light will be on, which is to start charging for digital devices (supporting mobile phones, tablet PC, etc.).
- 3.After use, press the power switch again, the indicator light goes out, and the power bank is turned off.

- Output socket 1 and output socket 2 can not use at the same time.
- When the digital device is fully charged, the power bank will be turned off automatically.

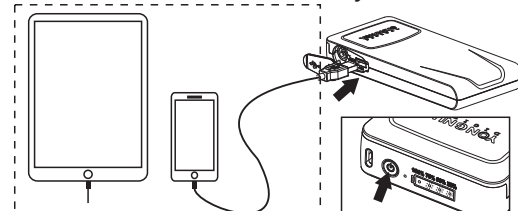


VI.Use the power adapter to charge the power bank*

When the battery is about to run out, the battery indicator blink, please charge the power bank in time.

Connect the power adapter to the AC outlet, insert the output line into the charging socket, the battery indicator will light on in turn and start charging, the fully charged will take about 4 hours, after full charged, four green indicator lights will light on.

***Must use the power adapter of the product original specification to charge the power bank (12.6V, 1.5A)**

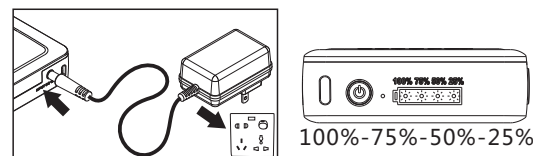

User Manual

I.Introduction

- YONGNUO YN5200 is a professional speedlite power bank. The built-in 11.1V 5200mAh large-capacity lithium battery supports the connected speedlite of full output about 2,000 times, and the full output time is only 1 second, realizes quick recycle and not miss any moment. It is especially suitable for the continuous shooting of external scenes, and the product is equipped with a USB port, which can be used as a mobile power supply for digital devices.
- Using standard speedlite connector cable, supports YONGNUO YN560 series, YN660 series, YN565 series, YN600EX-RT (II) , YN968EX-RT, YN968N, Canon 580EX II, 600EX-RT (II) speedlite and other compatible models with external power input port to realize quick recycle function.

II.Warning

- To avoid fire or electrical shock, do not expose this product to rain or moisture.
 - Do not use this product in flammable and explosive environment.
 - Do not expose children to this product.
 - Do not disassemble or maintain this product. Touching the internal high voltage circuit will cause electric shock.
 - Turn off the power before inserting or pulling out the flash connector.
 - When using the power adapter to charge the product, please remove the product from the protective casing.
 - In order to prevent speedlite from overheating, please do not flash continuously at full output more than 50 times.
- If the following situation occurs, please stop using it immediately.
- The product falls or is subjected to a strong impact to expose the product.
 - The speedlite connector cable is broken.
 - The products emit strange smells, heat or smoke.

VII.About automatic shutdown function

If without output, the product will automatically shut down in a short time to prevent abnormal power consumption.

VIII.Troubleshooting

- 1.Unable to start up
Please use the power adapter to charge the power bank.
- 2.Unable to charge the speedlite
Please confirm the internal battery of the speedlite can maintain the normal work of the speedlite, and the flash connection is in good condition, and the speedlite is in the state of normal work.
- 3.Unable to charge digital devices
Please confirm that the USB cable has been connected in good condition, and the switch of the power bank is in the working state of starting up.

IX.Specification

Battery capacity :11.1V/5200mAh(57.72Wh)

Input :DC 12.6V --- 1.5A

Output Socket 1:For Speedlite Only

Output Socket 2:DC 5V --- 2A

Battery Charging time: about 4 hours.

Flash recycling time: about 1 second(at full power)

Number of Flashes: about 2000 times(at full power)


External dimensions:174*75*25MM

Weight:424g

Contains items: Speedlite powe bank(1),Speedlite connector cable(1),Power adapter(1),Protecting bag(1),Lanyard (1),User manual(1)

The function of this manual are based on the test conditions of our company. Further notice will not be given if the design and specifications change.

YN5200 闪光灯移动电源

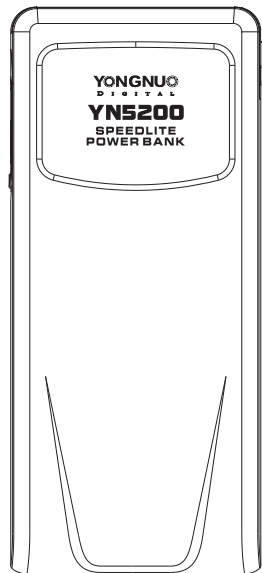

使用说明书

一、产品功能介绍

• 永诺YN5200是一款专业的闪光灯移动电源，内置11.1V 5200mAh大容量锂电池，支持连接闪光灯全功率输出约2000次，全光输出充电时间仅为1秒，实现快速回电，不错过完美瞬间，特别适用于外景连续拍摄使用，产品还配备USB接口，可作为数码设备移动电源使用。

• 使用标配的闪光灯连接线，支持永诺YN560系列，YN660系列,YN565系列,YN600EX-RT(II),YN968EX-RT,YN968N,佳能580EX II,600EX-RT(II)等兼容的支持外置电源输入接口的机顶闪光灯，实现快速回电功能。


二、警告：

- 请勿让本产品淋雨或受潮，以免发生火灾或触电。
- 请勿在易燃易爆的环境下使用本产品。
- 请勿让儿童接触本产品。
- 请勿自行拆卸或维修本产品，如果接触产品内部的高压电路，可能会触电。
- 插入或拔出闪光灯连接线前请关闭相关设备电源。
- 使用电源适配器给本产品充电时，请将产品从保护套中取出。
- 为避免闪光灯过热损坏闪光灯，请勿连续全功率闪光超过50次。


如果发生以下情况，请立即停止使用。

- 本产品跌落或受到强烈冲击，使产品的内部裸露。
- 闪光灯连接线出现破损。
- 产品发出奇怪的气味，发热或冒烟。

三、各部位名称

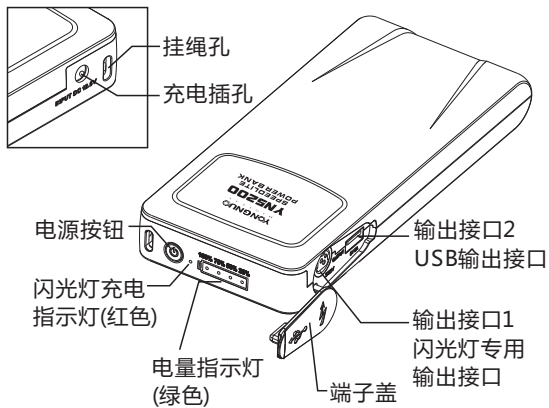


附件

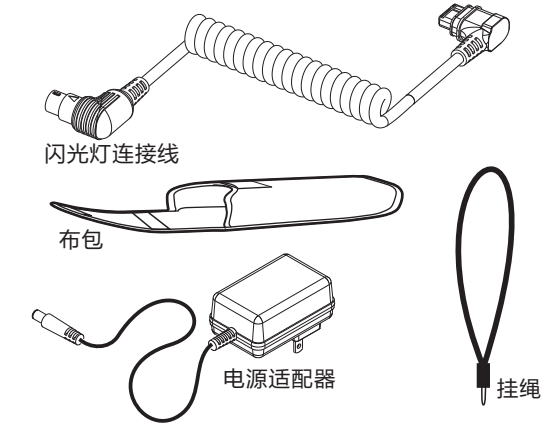


四、使用移动电源为闪光灯充电


1.将闪光灯连接线圆形端子连接至移动电源闪光灯专用输出接口。




2.将闪光灯连接线方形端子连接至闪光灯外部电源插槽。




3.打开闪光灯电源或轻按移动电源开关，移动电源即开始工作，电量指示灯点亮，显示当前电量。



4.闪光灯完成闪光后，将会给闪光灯进行充电，充电时红色指示灯点亮，完成充电后，红色指示灯熄灭。




5.使用完毕后，首先关闭闪光灯，然后按下移动电源开关，电量指示灯熄灭，方可拔出闪光灯连接线。



- 连接产品时请务必关闭相关设备电源。
- 闪光灯需要安装电池且闪光灯能正常工作。
- 闪光灯休眠时，移动电源会自动进入关机状态，当闪光灯唤醒时，移动电源将自动开机，并为闪光灯充电。

五、使用移动电源为其他数码设备充电


- 1.将USB数据线（不含）分别插入移动电源输出接口2及数码设备。
 - 2.按下电源开关，电量指示灯点亮，即开始为数码设备充电（支持手机、平板电脑等）。
 - 3.使用完毕后，再次按下电源盒开关，指示灯熄灭，移动电源即关闭电源。
- 输出接口1和输出接口2不能同时使用。
 - 为数码设备充满电后，移动电源将自动关机。

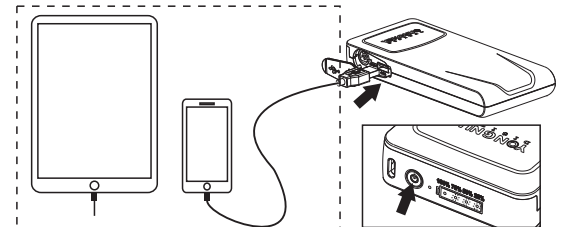

六、使用电源适配器给移动电源充电*

产品在电池电量即将耗尽时，电量指示灯闪烁，此时请及时对移动电源进行充电。将电源适配器连接至AC插座，电源适配器输出线插入充电插孔中，电量指示灯依次点亮，即开始充电，完全充满时间约4小时，充满电后，4个绿色指示灯亮。

***必须使用产品原配规格电源适配器为移动电源充电 (12.6V,1.5A)**

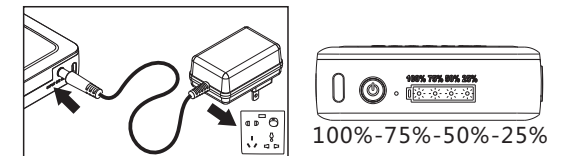

七、关于自动关机功能

本产品在无输出时，将会在短时间内自动关机，防止异常耗电。

八、故障排除

1.无法开机

请使用电源适配器为移动电源进行充电。

2.无法给闪光灯充电

请确认闪光灯内部电池可以维持闪光灯正常工作，并且闪光灯连接线已连接完好，闪光灯处于正常开机工作的状态。

3.无法为数码设备充电

请确认USB连接线已连接完好，按移动电源开关即处于开机的工作状态。

九、规格参数

电池容量:11.1V/5200mAh(57.72Wh)

输入:DC 12.6V $\overline{\text{---}}$ 1.5A

输出接口1:闪光灯专用

输出接口2:DC 5V $\overline{\text{---}}$ 2A

电池充电时间：约4小时

闪光灯充电时间：约1秒（全功率）

闪光次数：约2000次（全功率）

外形尺寸：174*75*25MM

重量:424克

所含物品：闪光灯移动电源(1)，闪光灯连接线(1)，电源适配器(1)，布包(1)，挂绳(1)，使用说明书(1)

本使用说明书中的功能是依据本公司的测试条件获得的。设计和规格如有变更，恕不另行通知。