

ASRock IMB-380-L Motherboard datasheet

<http://www.manuallib.com/asrock/imb-380-l-motherboard-datasheet.html>

Socket LGA1150 for Intel Core i7/i5/i3/Celeron (Haswell)

Intel® Q87 Express Chipset

Integrated Intel® HD Graphics Built-in Visuals

Supports DDR3 1600MHz, 4 x Long-DIMM, up to 32GB system memory

2 x COM (RS-232/422/485), 4 x COM (RS-232)

1 x HDMI, 1 x VGA, 1 x LVDS

4 x USB 3.0, 9 x USB 2.0, 4 x SATA3

2 x PCI, 1 x Mini-PCIe, 1 x mSATA, 1 x PCIe x16, 1 x PCIe x4

Gigabit LAN : 1 x Intel I217LM (with v-Pro support), 1 x Intel I210


1 x TPM Header

ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.

<http://www.manuallib.com>

IMB-380-L

Micro ATX Motherboard

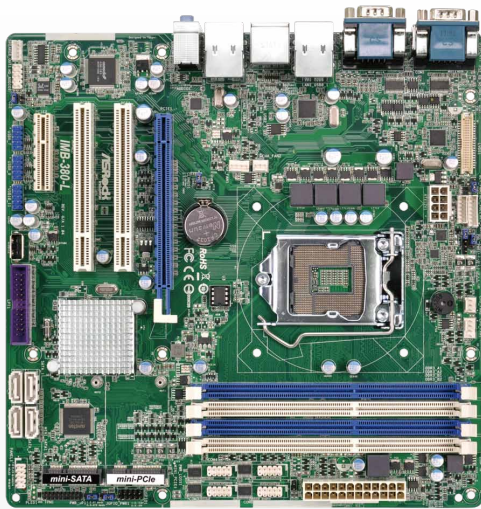

Spotlight Features

- Socket LGA1150 for Intel Core i7/i5/i3/Celeron (Haswell)
- Intel® Q87 Express Chipset
- Integrated Intel® HD Graphics Built-in Visuals
- Supports DDR3 1600MHz, 4 x Long-DIMM, up to 32GB system memory
- 2 x COM (RS-232/422/485), 4 x COM (RS-232)
- 1 x HDMI, 1 x VGA, 1 x LVDS
- 4 x USB 3.0, 9 x USB 2.0, 4 x SATA3
- 2 x PCI, 1 x Mini-PCIe, 1 x mSATA, 1 x PCIe x16, 1 x PCIe x4
- Gigabit LAN : 1 x Intel I217LM (with v-Pro support), 1 x Intel I210
- 1 x TPM Header

Specifications

Processor System	
Dimension	Micro-ATX (9.6-in x 9.6-in)
CPU	Socket LGA1150 for Intel Core i7/i5/i3/Celeron (Haswell)
Core Number	(By CPU, Max 4)
Max Speed	(By CPU)
L3 Cache	(By CPU)
Chipset	Q87
BIOS	UEFI
Expansion Slot	
PCI	2
Mini-PCIe	1 (Full Size + USB 2.0)
mSATA	1
PCIe	1 (x16)+ 1 (x4)
CFAST Card Socket	0
Memory	
Technology	Dual Channel DDR3 1066/1333/1600 MHz SDRAM
Max.	32GB
Socket	4 x Long DIMM
Graphics	
Controller	Intel HD Graphics (By CPU)
VRAM	Shared Memory
VGA	No
LVDS	24 bit dual channel
HDMI	Supports HDMI 1.4a, max resolution 1920 x 1200
DVI	Supports max resolution 1920 x 1200
Display Port	No
Multi Display	Yes (Three Display)
Ethernet	
Interface	10/100/1000 Mbps
Controller	GbE LAN1: Intel I210, LAN2: Intel I217LM (with v-Pro support)
Connector	2 x RJ-45
SATA	
Max Data Transfer Rate	2 x SATA2 (3.0Gb/s), 2 x SATA3 (6.0Gb/s), Supports RAID 0/1/5

Rear I/O	
VGA	1
HDMI	1
DVI-I/D	0
Display Port	0
Ethernet	2
USB	6 (4 x USB 3.0 compliant, 2 x USB 2.0 compliant)
Audio	3 (Mic-In, Line-Out, Line-In)
Serial	2 (RS-232/422/485)
PS/2	1 (Combo)


Internal Connector	
USB	6 (USB 2.0 compliant) 1 Vertical Type A USB Connector
LVDS/Inverter	1
VGA	0
Serial	4 (RS-232)
SATA	4 x SATA3 (6.0Gb/s), Supports RAID 0/1/5
m-SATA	1
Mini-PCIe	1
Parallel	1
IrDA	0
GPIO	4 x GPI + 4 x GPO
SATA PWR Output Con	2
Speaker Header	1

Watchdog Timer	
Output	Output from super I/O to drag RESETCON#
Interval	256 Segments, 0,1,2...255 Sec/Min

Power Requirements	
Input PWR	ATX PWR (8+24 pin)
Power On	AT/ATX Supported AT : Directly PWR on as power input ready ATX : Press button to PWR on after power input ready

Environment	
Operating Temperature	0°C – 60°C

Board Diagram

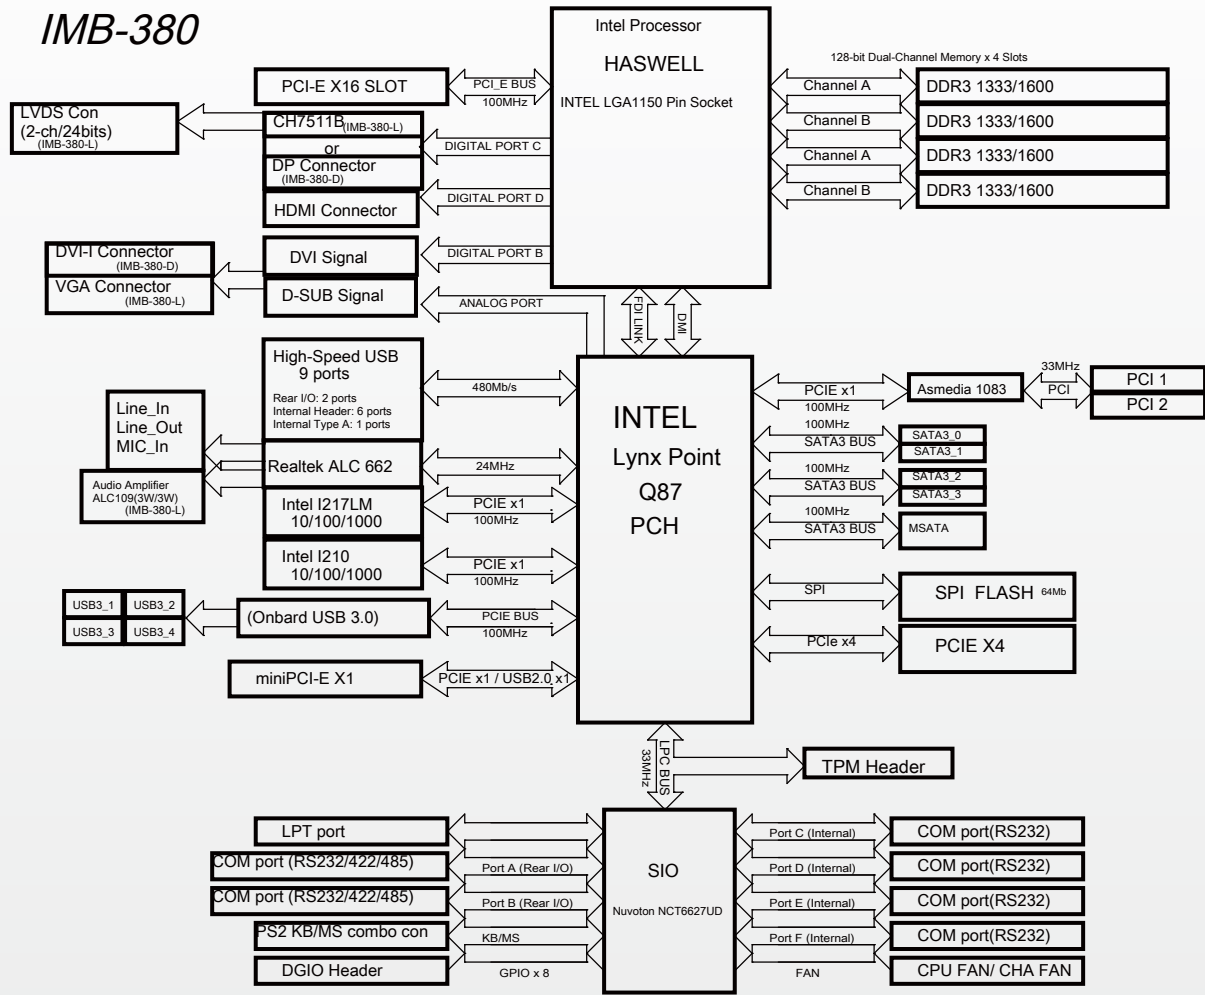

IPC Motherboards Focused Markets

ASRock IMB solutions can be widely used for industrial applications, such as process control, data acquisition, and so on. IMB-PCs are typically panel mounted and often incorporate touch screens for user interaction.

