




Exar XR21B1411L16 Enhanced 1-Ch Full-Speed USB UART

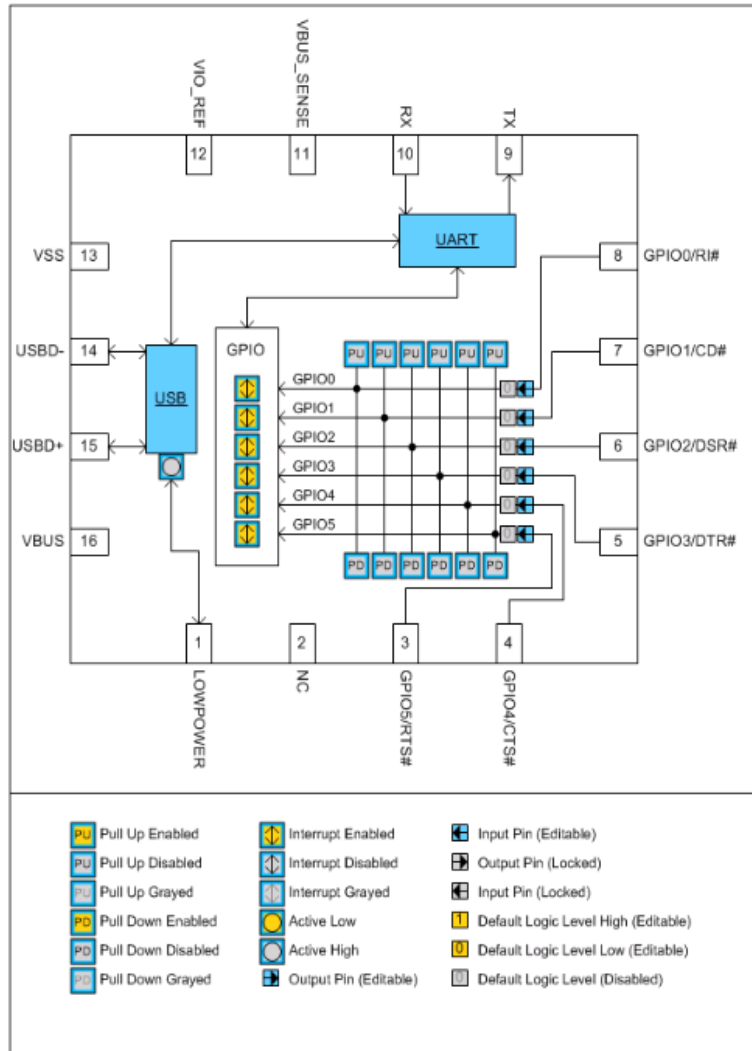

GPIO Pin Configuration

- ☒ GPIO Mode
- ☐ Auto RTS/CTS HW Flow Control
- ☐ Auto DTR/DSR HW Flow Control
- ☐ Half-Duplex XCVR Enable (RS-485)
- ☐ Active High
- ☐ Active Low

Manage Design Configuration Files

Check Design

☐ Allow configuration to be viewed by Exar
(This information will be treated confidentially and will only be used to improve future designs)

Load an Existing Design

Browse...

Load Design

[Contact Tech Support](#)

TABLE OF CONTENTS

1.0 OVERVIEW	3
2.0 GPIO PIN CONFIGURATIONS	3
2.1 CONFIGURING THE GPIO PINS IN GPIO MODE	3
2.1.1 CONFIGURING GPIO INPUTS	4
2.1.1.1 ENABLING INTERNAL PULL-UP OR PULL-DOWN RESISTORS	4
2.1.1.2 ENABLING GPIO INTERRUPTS	4
2.1.2 CONFIGURING GPIO OUTPUTS	5
2.2 CONFIGURING THE GPIO PINS IN AUTO RTS/CTS FLOW CONTROL MODE	6
2.3 CONFIGURING THE GPIO PINS IN AUTO DTR/DSR FLOW CONTROL MODE	7
2.4 CONFIGURING THE GPIO PINS IN AUTO HALF-DUPLEX TRANSCEIVER ENABLE MODE	8
3.0 USB CONFIGURATIONS	9
3.1 ENTERING A VALID VENDOR ID AND PRODUCT ID	9
3.2 USB MANUFACTURER, PRODUCT, SERIAL NUMBER STRINGS	10
3.3 REMOTE WAKE-UP SUPPORT	10
3.4 SELECTING THE POWER MODE	10
3.5 USB MAX POWER	10
3.6 LOWPOWER PIN POLARITY	10
4.0 UART SETTING CONFIGURATIONS	11
4.1 SELECTING THE CORE CLOCK FREQUENCY	12
4.2 SELECTING THE UART DEFAULT SETTINGS	12
5.0 CHECK DESIGN AND GENERATE CONFIGURATION FILE	12
6.0 XR21B1411 SOFTWARE DRIVER AND OTP PROGRAMMING TOOL	13
7.0 TECHNICAL SUPPORT	14

1.0 OVERVIEW

The XR21B1411 Enhanced 1-Channel Full-Speed USB UART has internal One-Time-Programmable (OTP) memory that can be used to customize the default settings of the XR21B1411. The web configuration tool for the XR21B1411 from Exar I/O Lab is shown above and can be accessed from a link on the XR21B1411 product page on Exar's website. This tool shows a visual representation of how the device will behave upon power-up such as the GPIO settings, UART settings and USB parameters (ie. Vendor ID, Product ID, Device Maximum Power, etc.). Once the XR21B1411 has been configured using this tool, the design configuration can be downloaded and used as an input file for Exar's OTP programming tool (also available from Exar's website) to program the XR21B1411 device.

This manual provides instruction for configuring the XR21B1411 and provides notes/tips for the various settings that are available. Note that once the XR21B1411 is programmed, no further changes or modifications can be made to the OTP.

2.0 GPIO PIN CONFIGURATIONS


There are 4 modes available for the GPIO pins. Details of these 4 modes can be found in the XR21B1411 datasheet on [Exar's website](#). The 4 modes that can be selected are:

- GPIO Mode
 - Auto RTS/CTS HW Flow Control
 - Auto DTR/DSR HW Flow Control
 - Auto Half-Duplex Transceiver Enable (typically used for RS-485)

2.1 *Configuring the GPIO pins in GPIO Mode*

There are 6 GPIO pins on the XR21B1411. By default, they are General Purpose I/Os that can be configured either as inputs or outputs. In this mode, the defaults for the GPIOs are:

- Inputs
 - Internal pull-up and pull-down resistors disabled
 - Interrupts are enabled for GPIOs configured as inputs

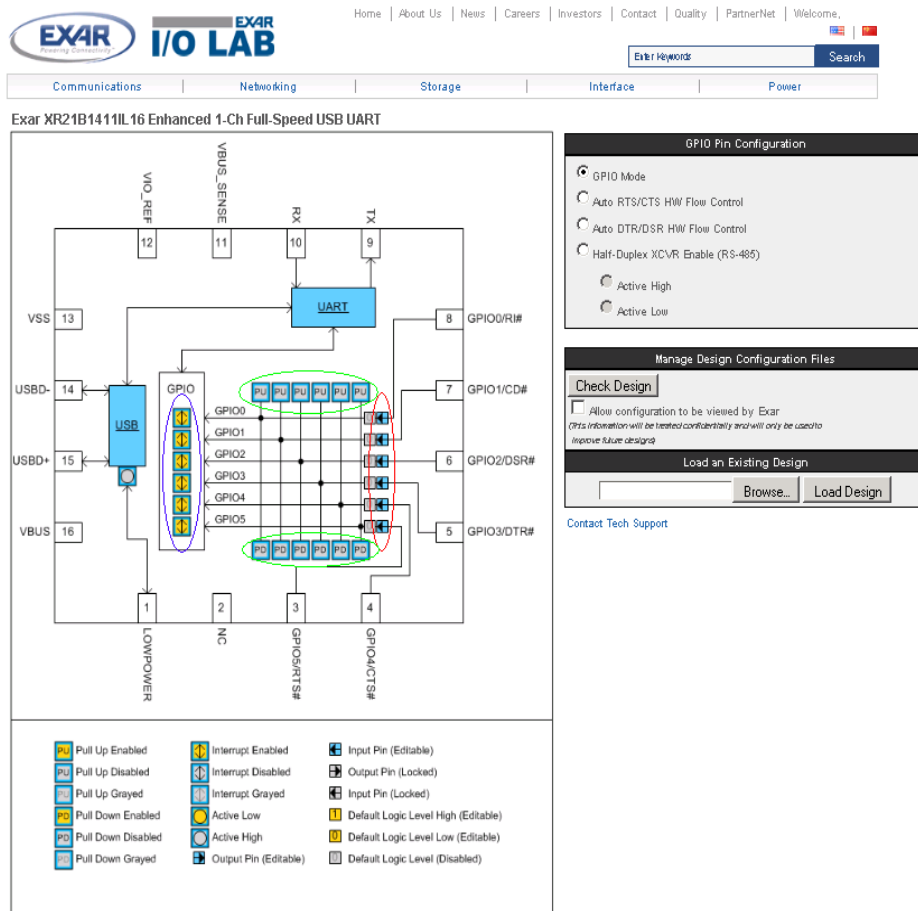

2.1.1 Configuring GPIO inputs

2.1.1.1 Enabling internal pull-up or pull-down resistors

As an input, a GPIO can have either an internal pull-up or pull-down resistor enabled. The pull-up or pull-down resistor for an input can be configured by clicking on "PU" or "PD" for the desired GPIO input pins (shown in the green circles in the image above). If enabled, the "PU" or "PD" will turn yellow for "enabled". Note that the configuration tool will not allow both to be enabled at the same time. The last block clicked, "PU" or "PD", will determine if the GPIO has an internal pull-up or pull-down resistor enabled. Clicking on the "PU" and "PD" blocks will not have any effects if the GPIO is an output. Also, changing an input to an output will clear any "PU" or "PD" block that has been enabled for that GPIO.

2.1.1.2 Enabling GPIO interrupts

By default, the GPIO interrupts are enabled. Any GPIO that is an input will generate an interrupt when its input state changes. The GPIO interrupt can be disabled by clicking on the GPIOs in the purple circle in the image above. If a GPIO is configured as an output, the interrupt will automatically be disabled for that GPIO.

2.1.2 Configuring GPIO outputs

By clicking on the arrows highlighted with the red circle above, the GPIOs will change from inputs to outputs as shown in the image below. Once the GPIO is an output, the block next to the output arrow will turn yellow and display "0" indicating that the default output state will be low upon power-up. Clicking on this block will change it to a "1" indicating that the default output state will be high upon power-up. An example of this is shown below for GPIO2.



I/O

LAB

EXAR
Powering Connectivity™

[Home](#) | [About Us](#) | [News](#) | [Careers](#) | [Investors](#) | [Contact](#) | [Quality](#) | [PartnerNet](#) | [Welcome,](#)

Enter keywords

Search

Communications


Networking

Storage

Interface

Power

Exar XR21B1411L 16 Enhanced 1-Ch Full-Speed USB UART

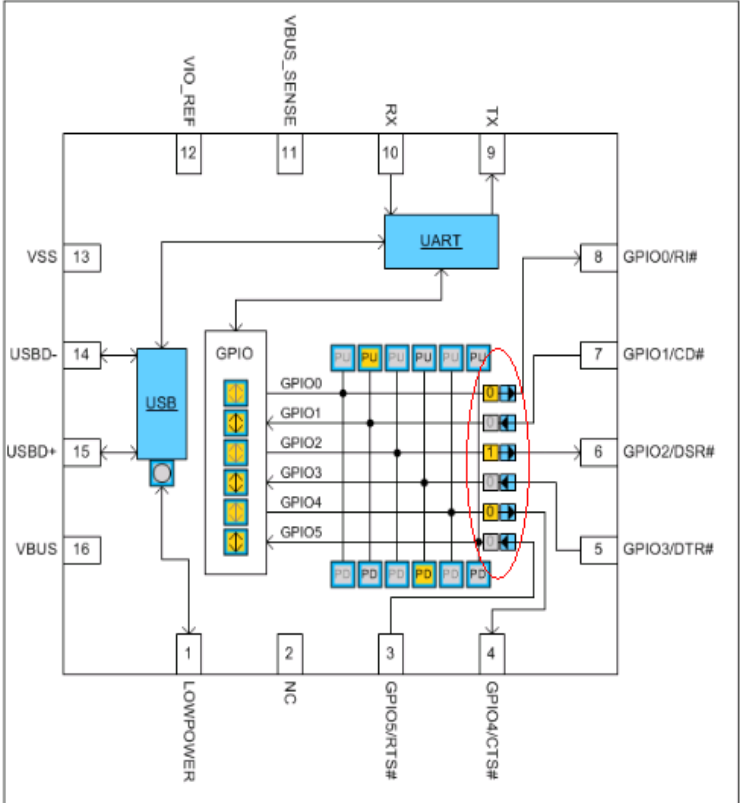

Pull Up Enabled

Pull Up Disabled

Pull Up Grayed

Pull Down Enabled

Pull Down Disabled

Pull Down Grayed

Interrupt Enabled

Interrupt Disabled

Interrupt Grayed

Active Low

Active High

Output Pin (Editable)

Input Pin (Editable)

Output Pin (Locked)

Input Pin (Locked)

Default Logic Level High (Editable)

Default Logic Level Low (Editable)

Default Logic Level (Disabled)

GPIO Pin Configuration

☒ GPIO Mode

☐ Auto RTS/CTS HW Flow Control

☐ Auto DTR/DSR HW Flow Control

☐ Half-Duplex XCVR Enable (RS-485)

☐ Active High

☐ Active Low


Manage Design Configuration Files

☐ Allow configuration to be viewed by Exar
(PI's information will be treated confidentially and will only be used to improve future designs)

[Contact Tech Support](#)

2.2 Configuring the GPIO Pins in Auto RTS/CTS Flow Control Mode

In Auto RTS/CTS flow control mode, GPIO5/RTS# becomes an output pin and GPIO4/CTS# becomes an input pin. GPIO5/RTS# can not be changed to an input and, similarly, GPIO4/CTS# can not be changed to an output. The configuration is shown below.

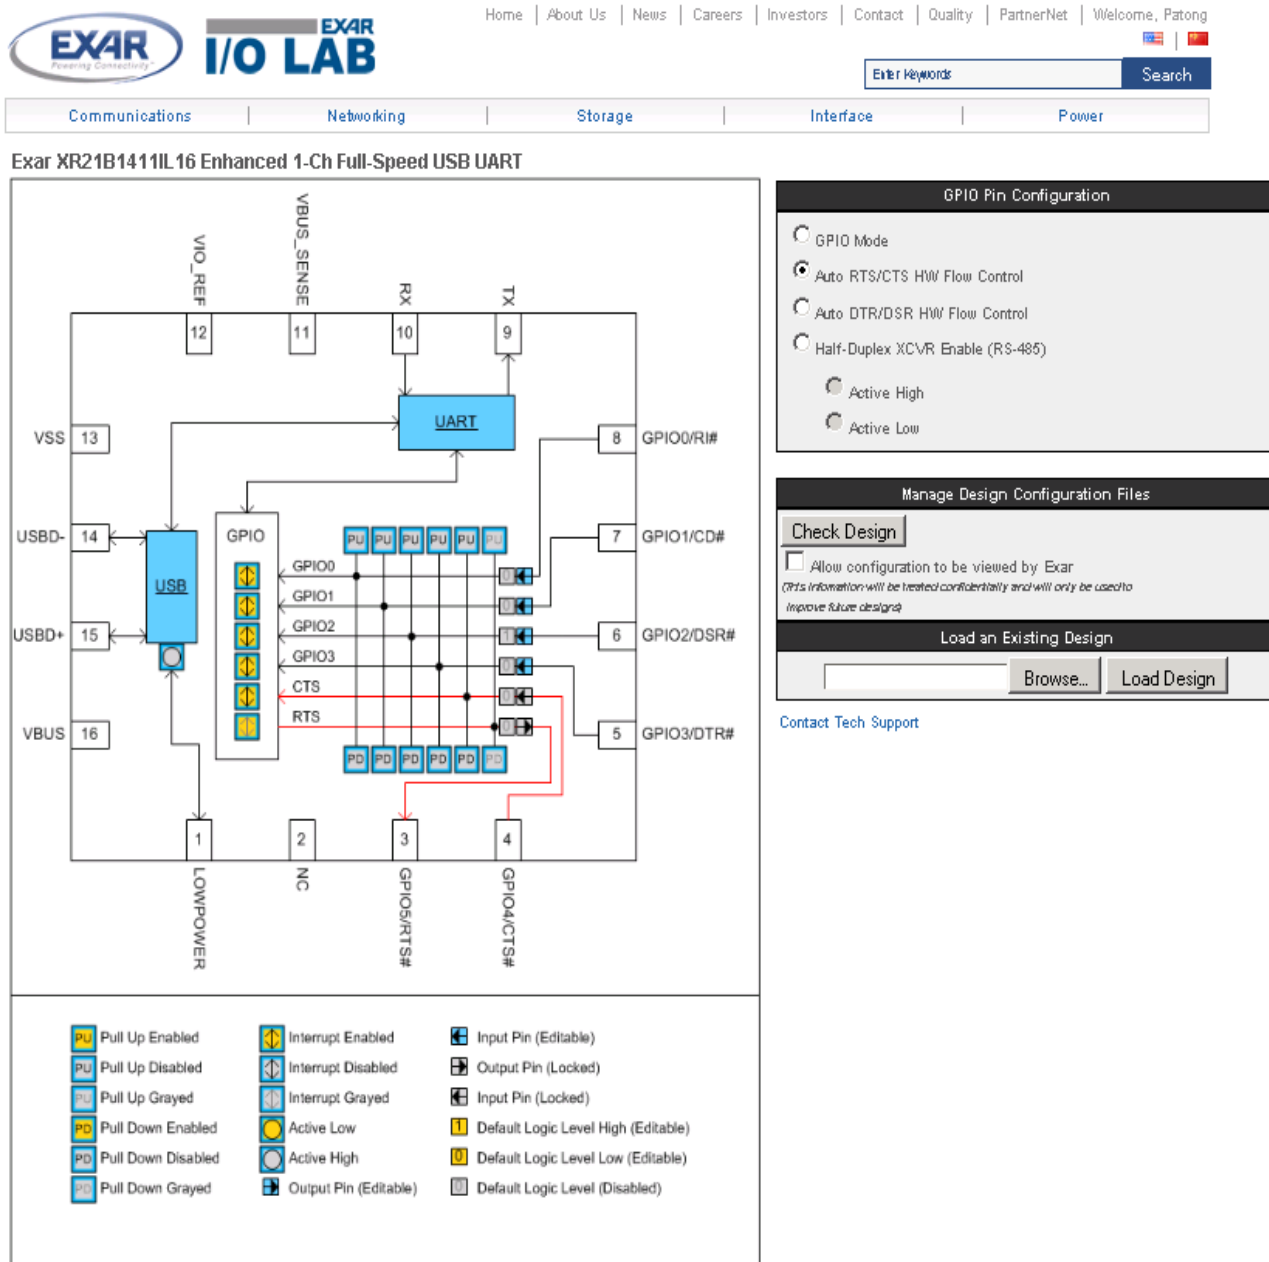

In this mode, GPIO3-GPIO0 can still be configured as described in **“Section 2.1, Configuring the GPIO pins in GPIO Mode” on page 1.**

2.3 Configuring the GPIO Pins in Auto DTR/DSR Flow Control Mode


Auto DTR/DSR Flow Control Mode is similar to Auto RTS/CTS Flow Control Mode. In this mode, GPIO3/DTR# is configured as an output and GPIO2/DSR# is configured as an input and their direction can not be changed. The Auto DTR/DSR Flow Control configuration is shown below.



[Home](#) | [About Us](#) | [News](#) | [Careers](#) | [Investors](#) | [Contact](#) | [Quality](#) | [PartnerNet](#) | [Welcome,](#)

Communications
Networking
Storage
Interface
Power

Exar XR21B1411IL 16 Enhanced 1-Ch Full-Speed USB UART

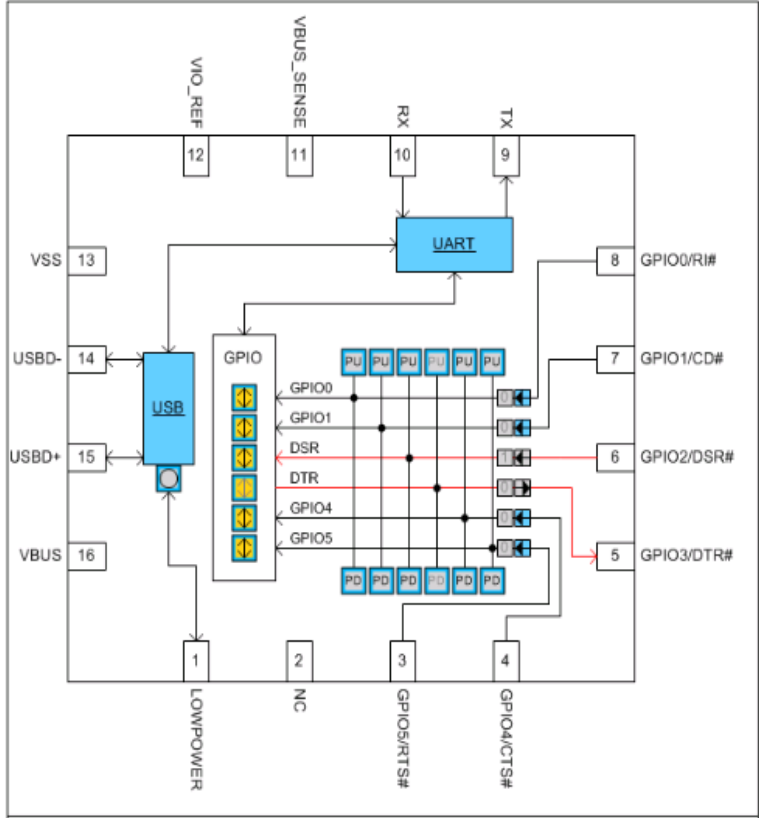

GPIO Pin Configuration

☐ GPIO Mode
☐ Auto RTS/CTS HW Flow Control
☒ Auto DTR/DSR HW Flow Control
☐ Half-Duplex XCVR Enable (RS-485)
☐ Active High
☐ Active Low

Manage Design Configuration Files

☐ Allow configuration to be viewed by Exar
(This information will be treated confidentially and will only be used to improve future designs.)

[Contact Tech Support](#)

Pull Up Enabled	Interrupt Enabled	Input Pin (Editable)
Pull Up Disabled	Interrupt Disabled	Output Pin (Locked)
Pull Up Grayed	Interrupt Grayed	Input Pin (Locked)
Pull Down Enabled	Active Low	Default Logic Level High (Editable)
Pull Down Disabled	Active High	Default Logic Level Low (Editable)
Pull Down Grayed	Output Pin (Editable)	Default Logic Level (Disabled)

In this mode, GPIO5, GPIO4, GPIO1, and GPIO0 can still be configured as described in [“Section 2.1, Configuring the GPIO pins in GPIO Mode” on page 1.](#)

2.4 Configuring the GPIO Pins in Auto Half-Duplex Transceiver Enable Mode

The Auto Half-Duplex Transceiver enable mode is typically used in half-duplex RS-485 applications. In this mode the GPIO5/RTS# pin is used to control the driver enable of an RS-485 transceiver. When this mode is selected, the polarity will also need to be selected as active high or active low.

- Active High - The GPIO5/RTS# pin will be low when the UART is not transmitting data and the GPIO5/RTS# pin will be high when the UART is transmitting data.
- Active Low - The GPIO5/RTS# pin will be high when the UART is not transmitting data and the GPIO5/RTS# pin will be low when the UART is transmitting data.

An example of how the Auto Half-Duplex Transceiver enable mode is shown below. The block next to the "TX EN" also shows whether the selected polarity is active high or active low.

[Home](#) | [About Us](#) | [News](#) | [Careers](#) | [Investors](#) | [Contact](#) | [Quality](#) | [PartnerNet](#) | [Welcome,](#)

Communications
Networking
Storage
Interface
Power

Exar XR21B1411 16 Enhanced 1-Ch Full-Speed USB UART

GPIO Pin Configuration

☐ GPIO Mode
☐ Auto RTS/CTS HW Flow Control
☐ Auto DTR/DSR HW Flow Control
☒ Half-Duplex XCVR Enable (RS-485)
 ☒ Active High
 ☐ Active Low

Manage Design Configuration Files

☐ Allow configuration to be viewed by Exar
(This information will be treated confidentially and will only be used to improve future designs)


[Contact Tech Support](#)

Pull Up Enabled	Interrupt Enabled	Input Pin (Editable)
Pull Up Disabled	Interrupt Disabled	Output Pin (Locked)
Pull Up Grayed	Interrupt Grayed	Input Pin (Locked)
Pull Down Enabled	Active Low	Default Logic Level High (Editable)
Pull Down Disabled	Active High	Default Logic Level Low (Editable)
Pull Down Grayed	Output Pin (Editable)	Default Logic Level (Disabled)

In this mode, GPIO4-GPIO0 can still be configured as described in [“Section 2.1, Configuring the GPIO pins in GPIO Mode” on page 1](#).

3.0 USB CONFIGURATIONS

By clicking on the "USB" block, an additional configuration window will appear on the right hand side of the screen, as shown below.

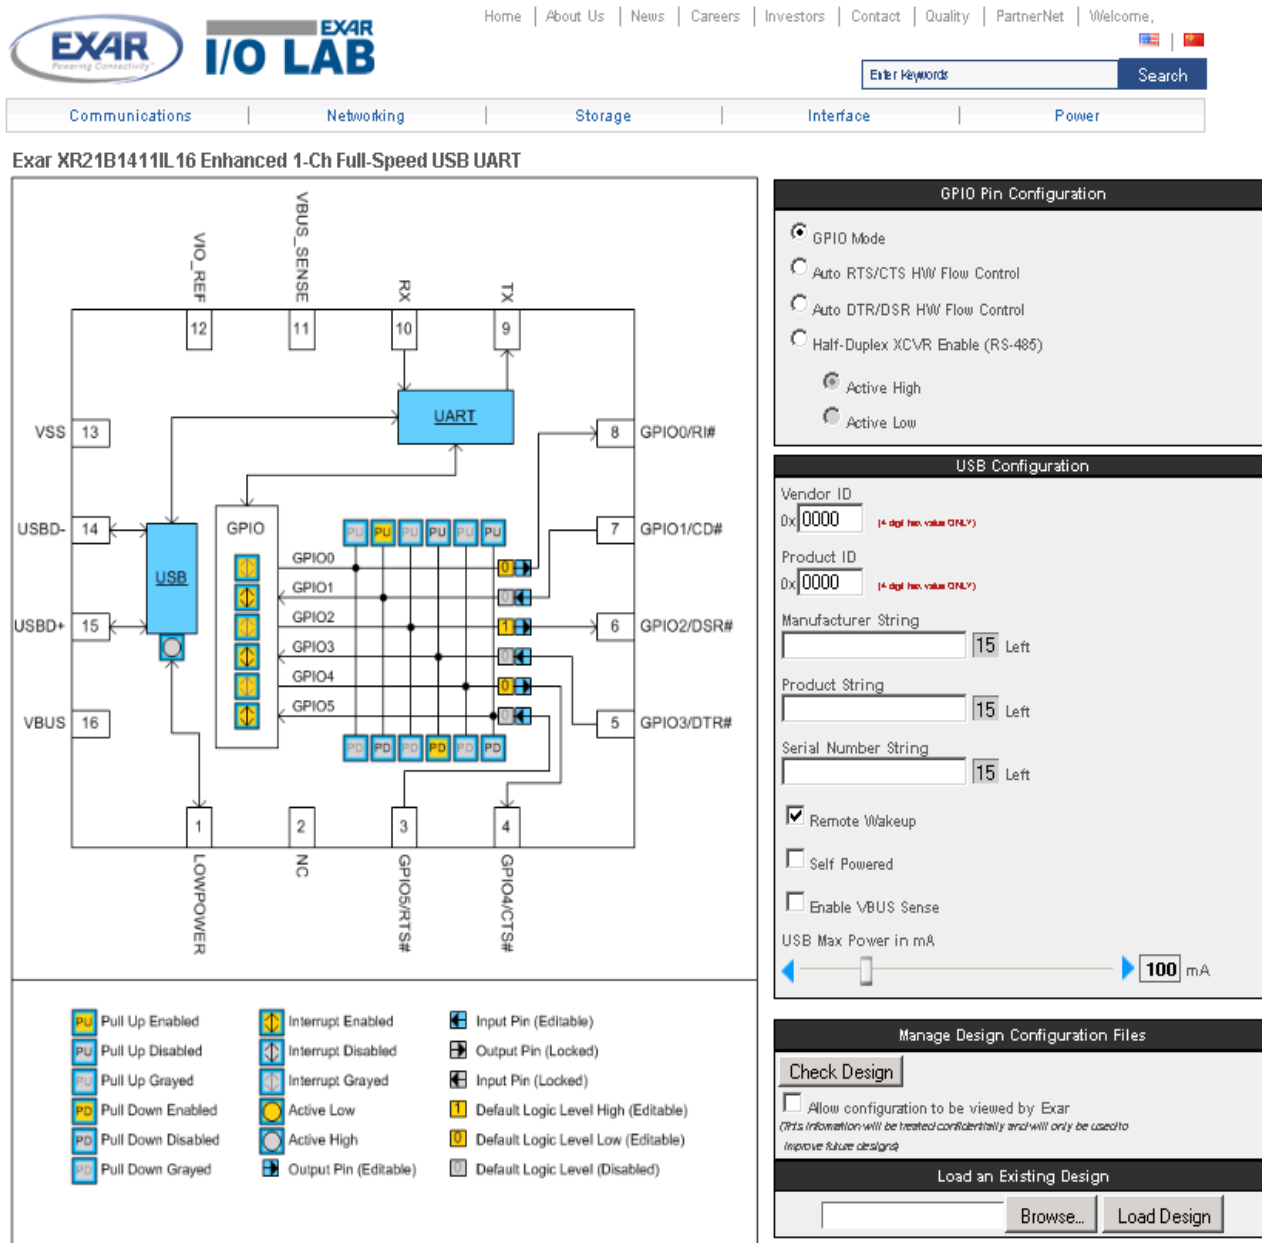

The screenshot displays the EXAR I/O LAB web configuration tool interface. The top navigation bar includes links for Home, About Us, News, Careers, Investors, Contact, Quality, PartnerNet, and Welcome. A search bar is located on the right. Below the navigation bar, a tabbed interface shows 'Communications', 'Networking', 'Storage', 'Interface', and 'Power'. The 'Interface' tab is selected, showing the 'Exar XR21B1411 16 Enhanced 1-Ch Full-Speed USB UART' configuration window.

The main configuration area is divided into two sections: 'GPIO Pin Configuration' and 'USB Configuration'.

GPIO Pin Configuration:

- GPIO Mode:** Radio buttons for GPIO Mode, Auto RTS/CTS HW Flow Control, Auto DTR/DSR HW Flow Control, and Half-Duplex XCVR Enable (RS-485).
- Active High/Low:** Radio buttons for Active High and Active Low.

USB Configuration:

- Vendor ID:** Text field with value 0x0000 (4 digit hex value ONLY).
- Product ID:** Text field with value 0x0000 (4 digit hex value ONLY).
- Manufacturer String:** Text field with value 15 Left.
- Product String:** Text field with value 15 Left.
- Serial Number String:** Text field with value 15 Left.
- Remote Wakeup:** Checked checkbox.
- Self Powered:** Unchecked checkbox.
- Enable VBUS Sense:** Unchecked checkbox.
- USB Max Power in mA:** Slider control set to 100 mA.

Manage Design Configuration Files:

- Check Design:** Button.
- Allow configuration to be viewed by Exar:** Unchecked checkbox. (This information will be treated confidentially and will only be used to improve future designs).
- Load an Existing Design:** Section with a text input field, a 'Browse...' button, and a 'Load Design' button.

Legend:

- Pull Up:** Pull Up Enabled, Pull Up Disabled, Pull Up Grayed.
- Pull Down:** Pull Down Enabled, Pull Down Disabled, Pull Down Grayed.
- Interrupt:** Interrupt Enabled, Interrupt Disabled, Interrupt Grayed.
- Active:** Active Low, Active High.
- Output Pin:** Output Pin (Editable), Output Pin (Locked), Output Pin (Disabled).
- Default Logic Level:** Default Logic Level High (Editable), Default Logic Level Low (Editable), Default Logic Level (Disabled).

[Contact Tech Support](#)

3.1 Entering a Valid Vendor ID and Product ID

In this new window, the USB parameters can be entered. The configuration tool will have defaults of 0x0000 in the Vendor ID (VID) and Product ID (PID) field. A VID or PID of 0x0000 is not an acceptable and will reported later as an error when the "Check Design" button is pressed if valid IDs have not been entered. If using Exar's VID (0x04E2) and PID (0x1411), these values will need to be entered. A unique range of PIDs can be requested from Exar by sending an e-mail request to uarttechsupport@exar.com.

3.2 USB Manufacturer, Product, Serial Number Strings

The default Manufacturer String is "Exar" and Product String is "XR21B1411" if no string values have been entered. There is no default value for the Serial Number String. If one string is entered, then all three strings need to be updated or they will not have a value when the OTP is programmed. Entering a value for the Serial Number String is optional.

3.3 Remote Wake-up Support

By default, remote wake-up support is enabled. This can be disabled by unchecking the box. Note that if the software driver does not have the remote wake-up feature enabled, then the XR21B1411 will not issue a remote wake-up signal when a remote wake-up event occurs. Note that the standard CDC-ACM driver does not support the Remote Wake-up feature.

3.4 Selecting the Power Mode

By default, bus-powered mode is enabled. The XR21B1411 can be configured for self-powered mode by checking the box next to "Self Powered". For self-power mode, it is recommended that the box next to "Enable VBUS Sense" also be checked. The VBUS Sense feature disables the internal pull-up resistor on the USBD+ pin when there is no power on the VBUS pin. This is required for USB compliance. If the VBUS Sense feature is not available, then an external mechanism is required to disable the power supply to the XR21B1411.

3.5 USB Max Power

By default, the USB maximum power is configured as 100 mA. This is the maximum for a low power device, as described in the USB specifications. Any board that requires more than 100 mA from VBUS will be considered a high power device. The maximum allowable supply current is 500 mA for a high power device. The USB max power can be changed by clicking on the arrows on either end of the scroll bar or by dragging the horizontal scroll bar.

3.6 LOWPOWER Pin Polarity

The default polarity of the LOWPOWER pin (pin 1) is active high as shown in the drawing. The polarity can be changed by clicking on the box below the USB block in the drawing. The inner circle will become yellow to indicate that the LOWPOWER pin is now active low.

4.0 UART SETTING CONFIGURATIONS


Clicking on the "UART" block will remove the USB Configuration window and display the "UART Configuration Window" as shown below.



[Home](#) | [About Us](#) | [News](#) | [Careers](#) | [Investors](#) | [Contact](#) | [Quality](#) | [PartnerNet](#) | [Welcome,](#)

[Communications](#) | [Networking](#) | [Storage](#) | [Interface](#) | [Power](#)

Exar XR21B1411IL16 Enhanced 1-Ch Full-Speed USB UART

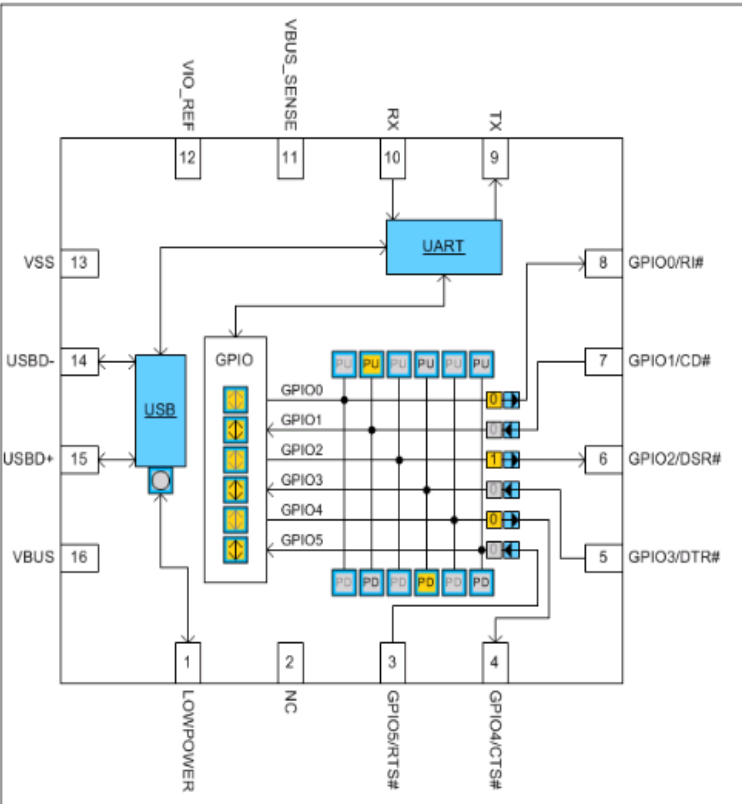

GPIO Pin Configuration

☒ GPIO Mode
☐ Auto RTS/CTS HW Flow Control
☐ Auto DTR/DSR HW Flow Control
☐ Half-Duplex XCVR Enable (RS-485)
☒ Active High
☐ Active Low

UART Configuration

Core Clock

☐ 6 Mhz
☐ 12 Mhz
☐ 24 Mhz
☒ 48 Mhz

Baud Rate
 Max: 12000000 Baud

Data Bits	Stop Bits	Parity
☐ 7 ☒ 8 ☐ 9	☒ 1 ☐ 2	☒ None ☐ Mark ☐ Space ☐ Even ☐ Odd

Manage Design Configuration Files

☐ Allow configuration to be viewed by Exar
(This information will be treated confidentially and will only be used to improve future designs)

Load an Existing Design

[Contact Tech Support](#)

Pull Up Enabled	Interrupt Enabled	Input Pin (Editable)
Pull Up Disabled	Interrupt Disabled	Output Pin (Locked)
Pull Up Grayed	Interrupt Grayed	Input Pin (Locked)
Pull Down Enabled	Active Low	Default Logic Level High (Editable)
Pull Down Disabled	Active High	Default Logic Level Low (Editable)
Pull Down Grayed	Output Pin (Editable)	Default Logic Level (Disabled)

4.1 Selecting the Core Clock Frequency

The available core clock frequencies are 6 MHz, 12 MHz, 24 MHz and 48 MHz. The selection of the core clock frequency will affect the maximum baud rate and the power consumption. The maximum baud rate can be calculated by dividing the core clock frequency by 4.

- 6 MHz core clock frequency => 1.5 Mbps maximum baud rate
- 12 MHz core clock frequency => 3 Mbps maximum baud rate
- 24 MHz core clock frequency => 6 Mbps maximum baud rate
- 48 MHz core clock frequency => 12 Mbps maximum baud rate


For details of how much power the XR21B1411 consumes with each core clock frequency, refer to the XR21B1411 datasheet on [Exar's website](#). Note that the higher the core clock frequency, the more power it consumes. If an application is battery-powered, it will be beneficial to use a 6 MHz core clock frequency if baud rates above 1.5 Mbps do not need to be supported.

4.2 Selecting the UART default settings


Default baud rates and character formats can be entered and selected. Most standard software drivers and applications will typically initialize the UART settings. However, this may be helpful for custom software drivers and/or software applications that do not initialize/configure the UART settings.

5.0 CHECK DESIGN AND GENERATE CONFIGURATION FILE

Once all of the desired configurations have been entered or selected, click on the "Check Design" button. This will check to see if there are any errors. If there are errors, then a pop-up message, as shown below, will appear indicating the error and a button to go back to the correct page to fix it.

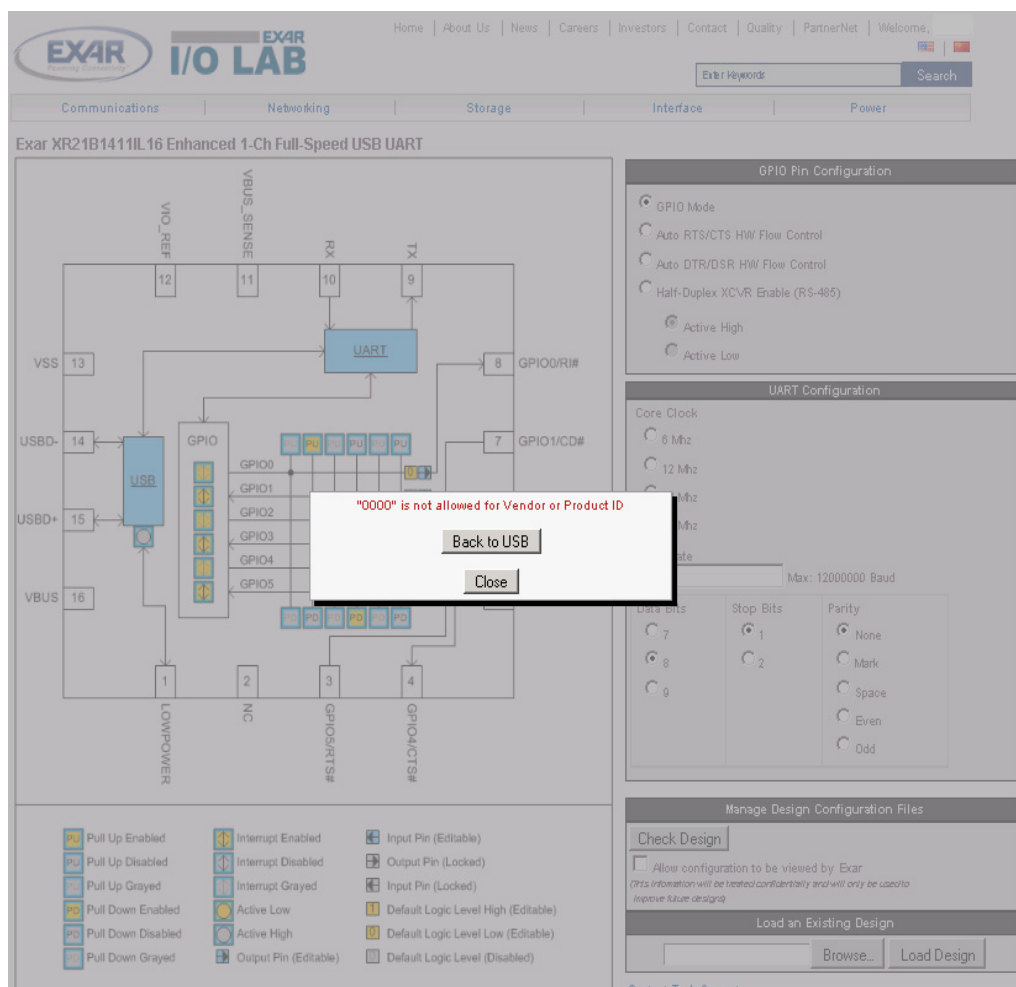

In this example, the VID and PID were not entered. Clicking on "Back to USB" will bring up the "USB Configuration" block where the VID and PIDs can be entered. Once the error has been fixed, click "Check Design" again. If there are no errors, then a pop-up window similar to the one below will appear.

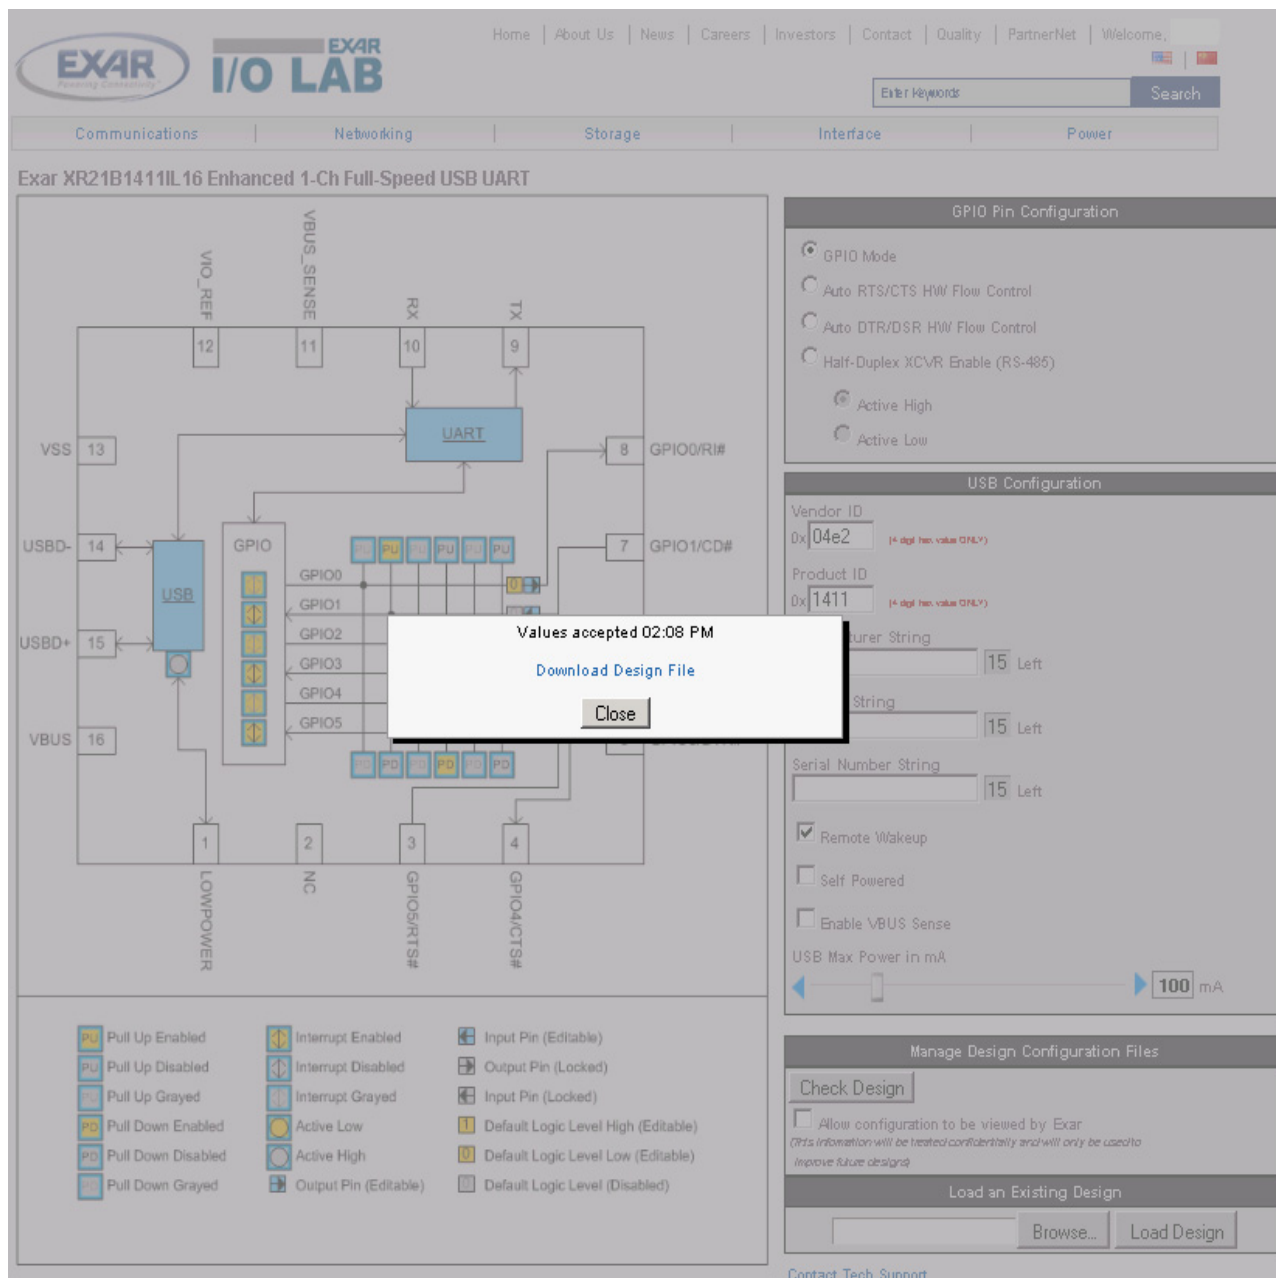

Click on "Download Design File" to view and save the generated file. The file will have a ".xml" extension. This saved file can be used at a later date by loading it using the "Load an Existing Design" block.

6.0 XR21B1411 SOFTWARE DRIVER AND OTP PROGRAMMING TOOL

The XR21B1411 Software Driver and OTP Programming Tool can be downloaded from [Exar's website](#). The software driver needs to be installed before the OTP Programming Tool can be used. It is recommended that the configuration be carefully reviewed before programming the OTP memory. Once the OTP memory has been programmed, it can not be un-programmed. It is also recommended that samples be programmed and tested before programming in volume.

7.0 TECHNICAL SUPPORT

If there are any questions about the web configuration tool, configuration file or the XR21B1411, send your questions to uarttechsupport@exar.com.

NOTICE

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Copyright 2010 EXAR Corporation

Datasheet September 2010.

Send your UART technical inquiry with technical details to hotline: uarttechsupport@exar.com.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.