




User' s Manual

MX Series Industrial Print Engine

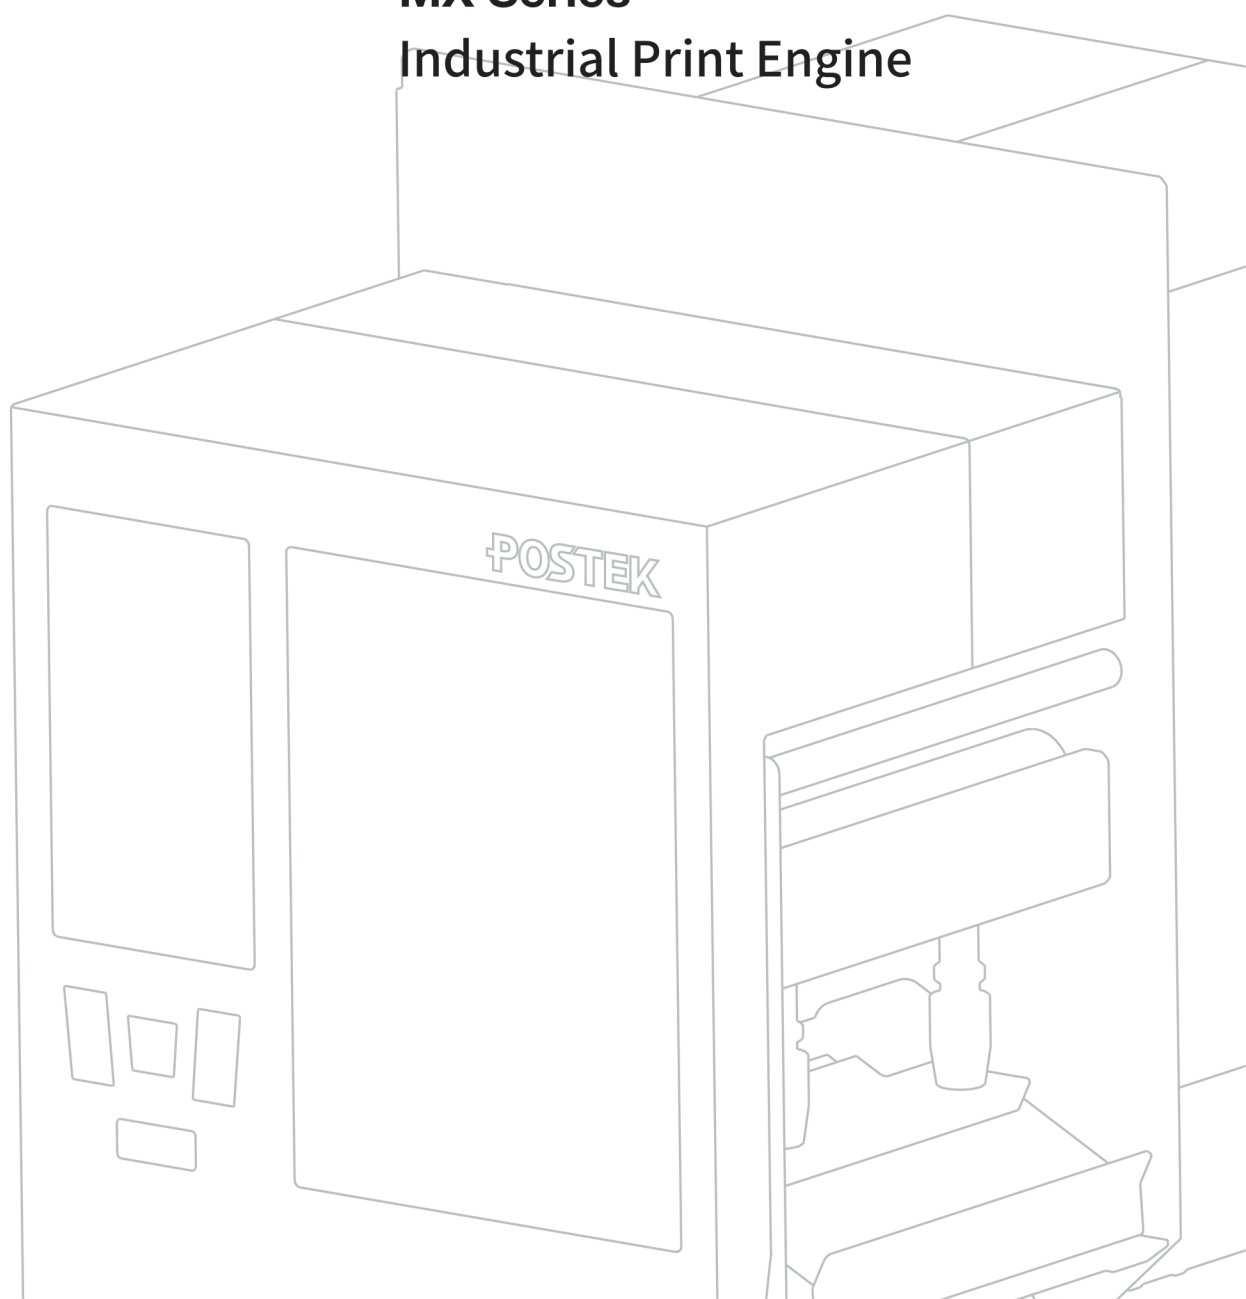

FCC Notice

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment may generate, use and/or radiate radio frequency energy. If not installed and used in full accordance with this User's Manual, interference to radio communications may occur. This equipment complies with the limits for a Class A Information Technology Equipment pursuant to Part 15 of the FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area may also cause interference. In such case the user, at his/her expense, will be required to correct the interference using whatever means necessary.

Trademarks

POSTEK is a registered trademark by POSTEK Electronics Co., Ltd.

ARM is a registered trademark of Advanced RISC Machines Ltd.

Microsoft, Windows are registered trademarks of Microsoft Corporation.

Copyright

© 2023 by Postek Electronics Co., Ltd. All rights reserved. Under the copyright laws, this manual cannot be reproduced in any form without the prior written permission of POSTEK. No patent liability is assumed, with respect to the use of the information contained herein.

Disclaimer

POSTEK barcode/RFID printers are developed and produced by Postek Electronics Co., Ltd (hereinafter "POSTEK") with the adoption of direct thermal/thermal transfer printing and RFID encoding techniques. For thermal transfer printing, matching ribbons and media are required. Meanwhile, the wide variety of RFID chip and antenna designs makes it difficult to guarantee RFID tags 100% compatibility with POSTEK printers. To satisfy your printing needs, please consult with the reseller(s) to choose the matching consumables for POSTEK printers.

This manual has been validated and reviewed for accuracy. The instructions and descriptions it contains are accurate for the POSTEK printer at the time of this manual's distribution. However, succeeding printers and manuals are subject to change without notice. POSTEK assumes no liability for damages incurred directly or indirectly from errors, omissions or discrepancies between the printer and this manual.

To protect your interests, and to prevent loss due to improper handling, please read the corresponding user's manual before operation, and don't use the printer during abnormal conditions. In no event shall POSTEK be liable for any damage or loss caused by human misoperations, including but not limited to loss of business profits, business interruption, loss of business information, or other pecuniary loss.

Although this manual describes and details many issues which could possibly occur, the manufacturer cannot warrant against unpredictable conditions during the printer's application. For problems such as the printer not working, missed or unclear print content, etc., POSTEK and/or its resellers are

responsible for troubleshooting (according to POSTEK Warranty Clauses) only. In no event shall POSTEK or the resellers involved be liable for any direct or indirect loss, including but not limited to loss of business profits, business interruption, loss of business information, or other pecuniary loss.

Important Safety Instructions

- Only qualified and trained service technicians should attempt to repair the printer.
- Do not place the printer on or near a heat source.
- Be sure that your power source matches the rating listed on the regulatory label on the back of the printer. Be certain your power source is grounded.
- To avoid getting an electric shock, do not use a worn or damaged power cord. If the power cord becomes damaged or frayed, replace it immediately.
- Do not insert anything into the ventilation slots or openings on the printer.
- The printer should never be operated in a location where it can get wet. Personal injury may result.
- The printhead becomes hot while printing. To protect from damaging the printhead and risk of personal injury, avoid touching the printhead.
- To get increased printhead longevity and higher quality printouts, always use approved labels, tags and thermal transfer ribbons. Approved supplies can be ordered from your POSTEK authorized reseller.
- Static electricity that accumulates on the surface of the human body or other surfaces can damage or destroy the printhead or electronic components in this device. DO NOT touch the printhead or the electronic components with bare hands.
- Place the printer on a flat, firm, solid surface.
- Never operate in a high-temperature environment.
- Turn off the power when not in use for extended periods.
- Follow all recommendations and setup instructions included in this manual.

Contents

Preface	1
Important Notes.....	2
Chapter 1: Introduction.....	4
1.1 Specifications	4
1.2 Contents in the Box.....	6
Chapter 2: Setup and Use	7
2.1 Main Parts and Structures	7
2.1.1 Front View.....	7
2.1.2 Interior View	9
2.1.3 Rear View.....	11
2.1.4 Consumables Loading Path.....	13
2.2 Setting up the Printer	17
2.2.1 Interface Connection	17
2.2.2 Connecting to a Power Source	17
2.2.3 Loading the Ribbon.....	19
2.2.4 Loading the Media	22
2.3 Installing the Printer Driver	32
2.3.1 USB Port Installation	32
2.3.2 Network Port Installation	36
2.4 Installing Label Editing Software	42
Chapter 3: Operations and Settings	43
3.1 The Front Panel.....	43
3.1.1 Panel Buttons	44
3.1.2 Status Indicator	44
3.1.3 LCD Touchscreen.....	45
3.2 Settings.....	46
3.2.1 General Settings	46
3.2.2 Communication.....	55
3.2.3 RFID	59
3.2.4 Management.....	63
3.2.5 Advanced.....	65
3.3 Mechanical Adjustments	84
3.3.1 Adjusting the Media Sensor	84
3.3.2 Adjusting the Printhead Pressure	86
3.3.3 Adjusting the Ribbon Tension.....	88
Chapter 4: Maintenance	89
4.1 Cleaning the Printhead	89
4.2 Cleaning the Platen Roller	89
4.3 Cleaning the Printer Interior	89
4.4 Cleaning the Sensors.....	90
Chapter 5: Troubleshooting.....	91
5.1 Error Messages.....	91
5.2 Miscellaneous Issues.....	99

Appendix A: Interface Specifications 100

Appendix B: ASCII Table 104

Preface

This manual explains how to set up and begin using your printer. It also provides detailed information on configuring your printer, basic operations, care, and troubleshooting.

Please read this manual carefully before using the POSTEK printer.

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol	Description
 WARNING	Alerts you to a medium or low risk hazard that could, if not avoided, result in moderate or minor injury.
 CAUTION	Alerts you to a potentially hazardous situation that could, if not avoided, result in equipment damage, data loss, performance deterioration, or unanticipated results.
 NOTE	Provides additional information to emphasize or supplement important points in the main text.

Version

Version 1.0, published in January, 2023.

Important Notes

Please read the following passages thoroughly before proceeding.

Printhead

The thermal printhead can be easily damaged due to its precision construction. A printhead damaged by misuse is not covered under the terms of the warranty. To ensure longevity of the printhead, please note the following:

- DO NOT scrape or use tools that might damage the printhead surface.
- To protect from corroding the printhead, DO NOT touch the printhead with bare hands.
- DO NOT use thermal paper or thermal transfer ribbons which contain Na, K or Cl elements.
- Keep the printhead from any form of liquid or dampness.
- Only use a cotton swab dipped in anhydrous isopropyl alcohol to clean the printhead.
- Always use high-quality consumables:
 - When the printhead module is closed, pressure is placed directly onto the printhead; dirt such as paper scraps, sand, dust and glue can scrape or damage the printhead.
 - The printhead is also easily damaged by static electricity, which may be generated by poor quality ribbons.
- Always inspect consumables for high quality before purchasing.



CAUTION

The printer functions under Direct Thermal or Thermal Transfer print modes. Thermal Transfer is set as the factory default (requires ribbon for printing). However, if you need to print on Direct Thermal materials (ribbon is not required), please contact your printer supplier or service provider to reduce the printhead pressure. This can protect your printhead from early performance deterioration due to direct contact with the thermal media. Any physical printhead damage caused by direct thermal printing is not covered under warranty.

Cutter (Optional)

The printer equipped with a cutter can automatically cut the label after printing. However, automatic cutters pose a safety hazard since the blades are very sharp. To prevent injuries and cutter failures while using one of the many types of automatic cutters, please follow the safety and maintenance rules listed below:

- Before using the cutter, be sure you have been trained by a qualified individual. A written procedure covering the cutter's use is recommended.
- It is very important to choose the right cutter model for the application to ensure personal safety and prevent damage to the cutter caused by cutting wrong types of media.
- Keep loose items such as long hair, clothing, jewelry, away from the cutter.
- Don't put anything except print media inside the cutter.
- Turn off power of printer if you notice abnormality with the cutting process and alert a qualified technician to resolve the issue.
- Never cut a print media which exceeds the maximum operating conditions of the cutter.
- Not every cutter model is designed to be able to cut through adhesive. Use only the dedicated cutters to cut through adhesive materials. Even so, regular cleaning is required to remove the adhesive built up on the blades over time to prevent cutter jam.
- Routine inspection and maintenance are required to be performed by a qualified technician to keep the cutter in good working conditions.

Chapter 1: Introduction

1.1 Specifications

Model	MX2/MX2 Pro	MX3/MX3 Pro	MX6/MX6 Pro
Model with RFID	MX2r/MX2r Pro	MX3r/MX3r Pro	MX6r/MX6r Pro
Printing Mode	Direct Thermal	Direct Thermal and Thermal Transfer	
Max Print Speed	18 ips (457.2 mm/s)	14 ips (355.6 mm/s)	6 ips (152.4 mm/s)
Max Media Width	4.72" (120 mm)		
Max Print Width	4.09" (104 mm)	4.16" (105.7 mm)	4.16" (105.6 mm)
Max Print Length	196" (5000 mm)		
MPU	64-bit, quad Arm® Cortex®-A53 core, maximum operating frequency 1.8 GHz		
GPU	GC NanoUltra 3D (1 shader) &GC320 2D OpenGL ES 2.0		
Memory	2GB DDR4 RAM, 8GB managed NAND flash		
HEAT™ Level ^①	I		
RFID Encoder	Supports UHF EPC Gen 2, ISO 18000-6C protocols (Only available for RFID models)		
Media Roll	Maximum Media Width: 4.72" (120 mm) Minimum Media Width: 0.39" (10 mm) Maximum Outer Diameter: 12" (304.8 mm) Inner Diameter: 1.5" (38mm) / 3" (76.2mm) (Only the Pro models are equipped with media supply mechanism)		
Liner Rewind	Maximum Outer Diameter: 7.87" (200 mm) (Only the Pro models are equipped with liner rewinder)		
Minimum Label Length	Tear-off: 0.2" (5 mm)		
	Peel-off: 0.47" (12 mm)		
Media Thickness	Regular Barcode Label Printer and Regular RFID Label Printer: 0.0024" ~ 0.012" (0.06 ~ 0.305 mm), including liner		
	Mount-on-Metal RFID Label Printer ^② : 0.063" (1.6 mm) max., including liner		
Ribbon	N/A	Maximum Ribbon Length: 1968' (600 m) Maximum Outer Diameter: 3.38" (86 mm) Inner Diameter: 1" (25.4 mm) Ink side: both In and Out	
	N/A	Width: 0.79" to 4.33" (20 mm to 110 mm)	
Media Sensor	Upper reflective: detects black marks on print side Lower reflective: detects black marks on back side Transmissive: detects gaps, notches, holes		

Model	MX2/MX2 Pro	MX3/MX3 Pro	MX6/MX6 Pro
Model with RFID	MX2r/MX2r Pro	MX3r/MX3r Pro	MX6r/MX6r Pro
Fonts	Five built-in dot matrix fonts, which include Basic Latin and Latin-1 Supplement character sets. Two built-in scalable fonts. One supports Latin, Greek and Cyrillic scripts, and the other is a GB2312 Chinese character set specifically. User downloadable TrueType fonts.		
Barcode Types	1D Barcodes: Code 39, Code 93, Code 128/subset A,B,C, Codabar, Interleave 2 of 5, UPC A/E 2 and 5 add-on, EAN-13/8/128, UCC-128, GS1-128, etc. 2D Barcodes: MaxiCode, PDF417, Data Matrix, QR Code, GS1 DataMatrix, GS1 QR Code, CS Code, etc.		
Interfaces	RS-232 Serial, 10/100/1000Mbps Ethernet, USB DEVICE 2.0, USB HOST, General I/O Signal Interface, Logic Control I/O Signal Wiring Terminal Block		
LCD Display	4.5" LCD Capacitive Touchscreen		
Power Source	100 ~ 240 V AC, 50/60 Hz		
Weight	MX2 & MX2r: 26.46 lbs (12 kgs) MX2 Pro & MX2r Pro: 36.38 lbs (16.5 kgs)	MX3 & MX3r: 29.76 lbs (13.5 kgs) MX3 Pro & MX3r Pro: 39.68 lbs (18 kgs)	MX6 & MX6r: 30.86 lbs (14 kgs) MX6 Pro & MX6r Pro: 40.79 lbs (18.5 kgs)
Dimensions	MX & MXr: W 9.6" (245 mm) x D 16.0" (405.8 mm) x H 12.1" (306.7 mm) MX Pro & MXr Pro: W 20.3" (515 mm) x D 16.0" (405.8 mm) x H 14.4" (366 mm)		
Operating Environment	Temperature: 32° F ~ +104° F (0° C ~ 40° C) Relative humidity: 5% ~ 90% non condensing Maximum Altitude: 5000 m		
Storage Environment	Temperature: -40° F ~ +140° F (-40° C ~ 60° C) Relative humidity: 5% ~ 90% non condensing		

①: *HEAT™*, or *Heating Equilibrium Adaptive Tuning*, is a POSTEK designed and developed cutting-edge technology that sets the benchmark for heat management in thermal printing. Printers equipped with *HEAT™* have significant improvements in their printout clarity and print speed. The *HEAT™* level represents the fineness of the heating uniformity with level I being the finest.

②: For Mount-on-Metal RFID tags, the flexibility of the tag and whether or not to use fillings to bridge the gaps between tags can affect print quality and even encoding success rate. It is strongly recommended to test the tags on this POSTEK printer before purchasing.

Optional Features

RFID Verifier*	External-mount module (Only available for RFID models)
Visual Verifier*	There are three software packages listed below for the visual verifier, and users can choose one from them based on needs and budget: 1. Verifies 1D & 2D barcode data. 2. Verifies 1D & 2D barcode data and evaluates printed barcode symbologies. 3. Verifies 1D & 2D barcode data, evaluates printed barcode symbologies, and inspects print defects. (An internal or external rewinder is required to keep the media flat without bending or buckling when passing through the visual scanning area.)
Ribbon Saving Kit*	Including the following items: 1. The ribbon take-up clutch. 2. The automatic printhead open/close module. 3. The media tension mechanism for a MX Pro model printer. (For standard models, the media supply system must take measures to prevent the media from being loose while backfeeding.)
Wireless Module*	WIFI IEEE 802.11a/b/g/n/ac/ax, 2.4/5GHz, Bluetooth 5.0

**Factory dependent.*

1.2 Contents in the Box

Inspect the shipping carton(s) for possible shipping damage, if damage is discovered, notify the shipping company to report the nature and extent of the damage.

Please check the items according to the Quick Start Guide. If there are any items missing, notify your authorized reseller.

Chapter 2: Setup and Use

2.1 Main Parts and Structures

The MX series comprises two types of printer models, the Standard MX and the MX Pro. In addition to the features of the Standard MX model, the MX Pro model offers a much larger main frame that incorporates the media supply and liner rewinding mechanism.

2.1.1 Front View

Figure 2-1 shows the front view of the Standard MX.

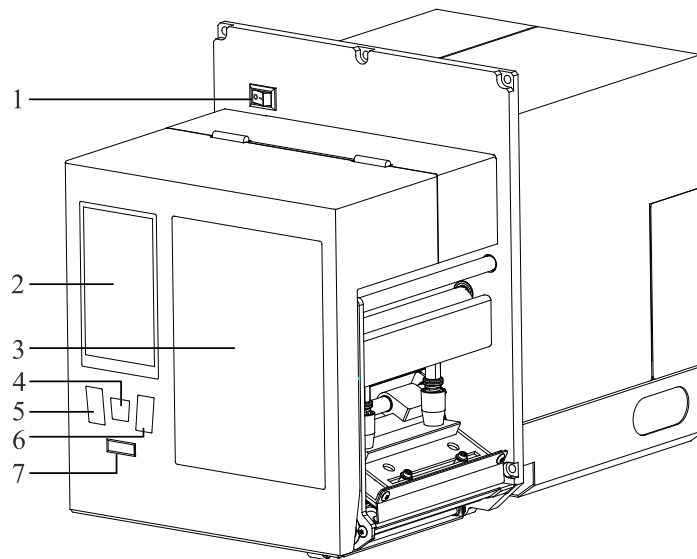


Figure 2-1 Front View (Standard MX)

Table 2-1 Front View Description

Number	Description
1	Power Switch
2	LCD Touchscreen
3	Observation Window Pane
4	[FEED/Calibration] Button
5	[PAUSE/Self Test] Button
6	[CANCEL/Reset] Button
7	Status Indicator

Figure 2-2 shows the front view of the MX Pro.

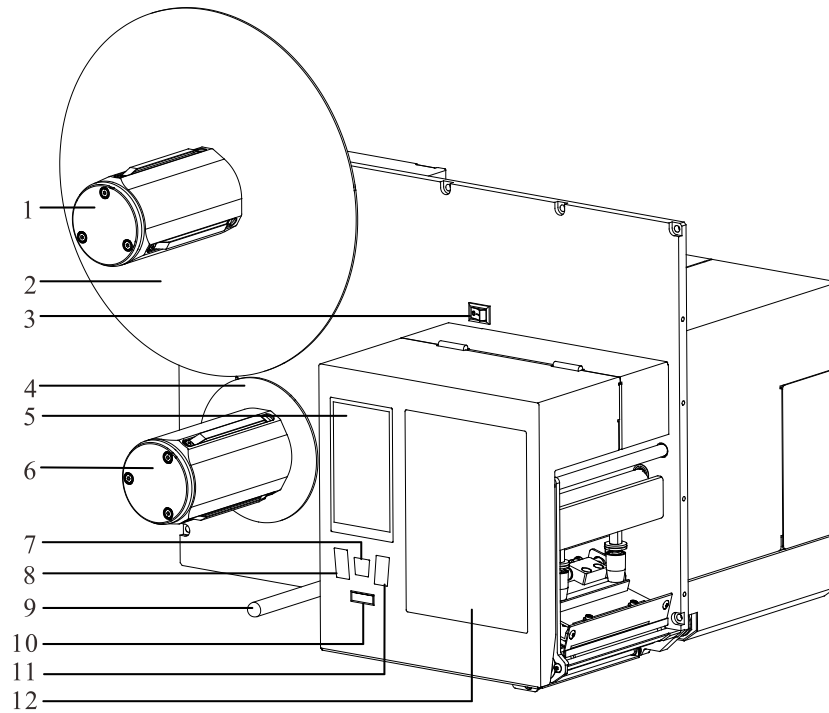


Figure 2-2 Front View (MX Pro)

Table 2-2 Front View Description

Number	Description
1	Media Spindle
2	Stop Plate Media Spindle
3	Power Switch
4	Stop Plate Rewind Spindle
5	LCD Touchscreen
6	Rewind Spindle
7	[FEED/Calibration] Button
8	[PAUSE/Self Test] Button
9	Liner Guide Rod
10	Status Indicator
11	[CANCEL/Reset] Button
12	Observation Window Pane

2.1.2 Interior View

Figure 2-3 shows the interior view of the Standard MX.

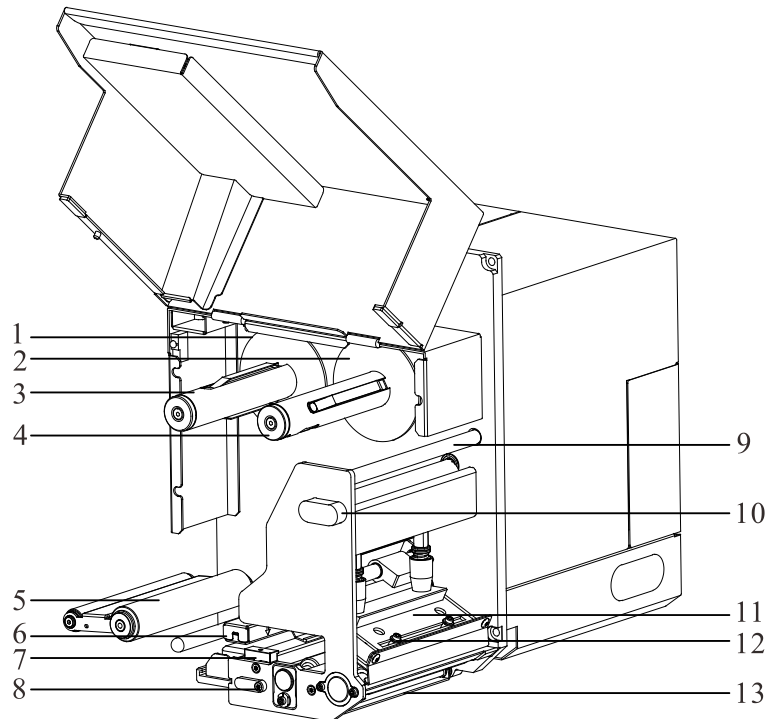


Figure 2-3 Interior View (Standard MX)

Table 2-3 Interior View Description

Number	Description
1	Stop Plate Ribbon Supply Spindle
2	Stop Plate Ribbon Take-up Spindle
3	Ribbon Supply Spindle
4	Ribbon Take-up Spindle
5	Dancer Assembly
6	Media Sensor Assembly
7	Media Guide
8	Hook Handle
9	Ribbon Guide Rod
10	Printhead Handle
11	Printhead Assembly
12	Pressure Bar
13	Pinch Roller Assembly

Figure 2-4 shows the interior view of the MX Pro.

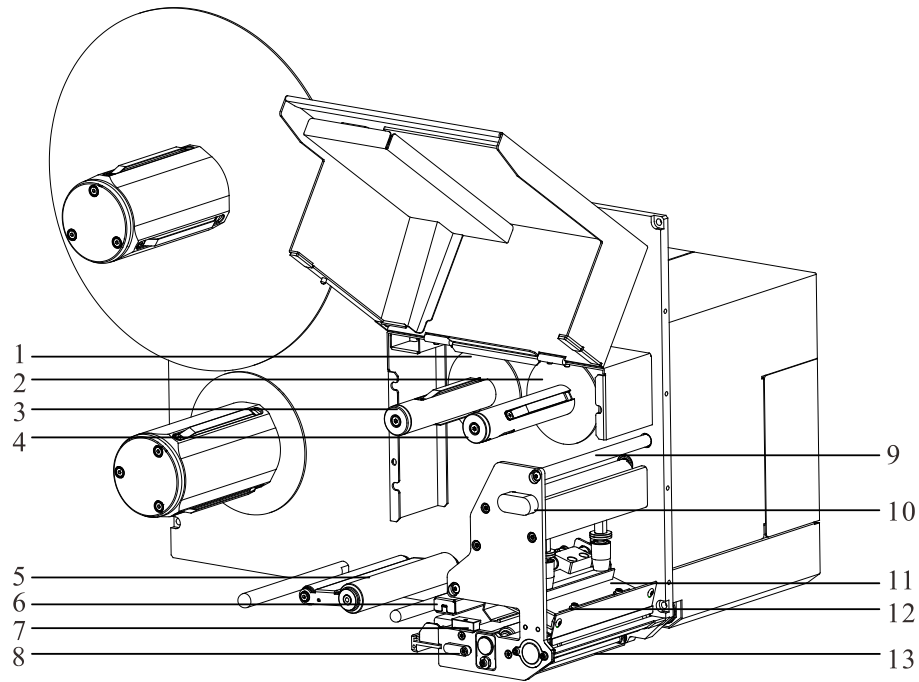


Figure 2-4 Interior View (MX Pro)

Table 2-4 Interior View Description

Number	Description
1	Stop Plate Ribbon Supply Spindle
2	Stop Plate Ribbon Take-up Spindle
3	Ribbon Supply Spindle
4	Ribbon Take-up Spindle
5	Dancer Assembly
6	Media Sensor Assembly
7	Media Roll Guide
8	Hook Handle
9	Ribbon Guide Rod
10	Printhead Handle
11	Printhead Assembly
12	Pressure Bar
13	Pinch Roller Assembly

2.1.3 Rear View

The printer is equipped with multiple interfaces. Figure 2-5 shows the rear view of the Standard MX.

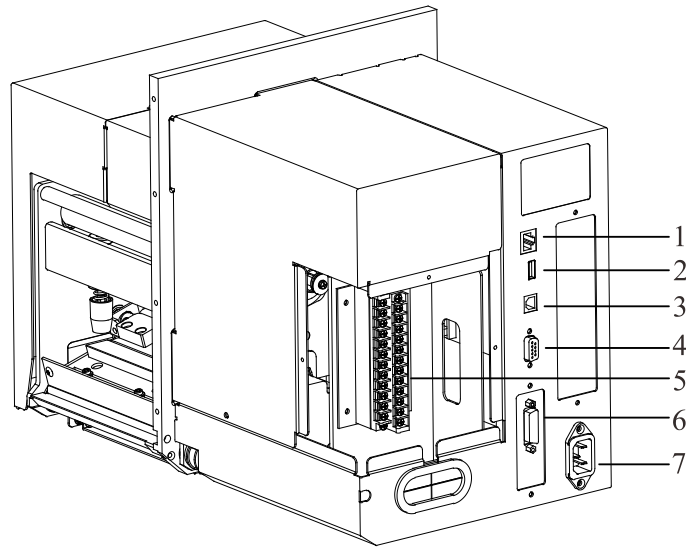


Figure 2-5 Rear View (Standard MX)

Table 2-5 Rear View Description

Number	Description
1	Ethernet Port
2	USB Host
3	USB Device
4	RS-232 Serial Port
5	Logic Control I/O Signal Wiring Terminal Block
6	General I/O Signal Interface
7	AC Port

Figure 2-6 shows the rear view of the MX Pro.

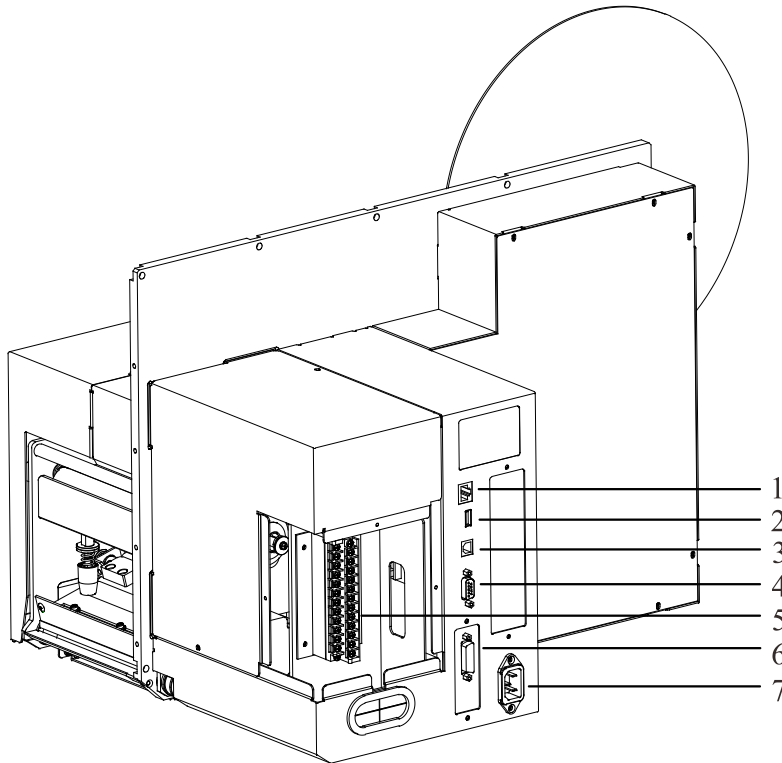


Figure 2-6 Rear View (MX Pro)

Table 2-6 Rear View Description

Number	Description
1	RS-232 Serial Port
2	USB Host
3	USB Device
4	Ethernet Port
5	Logic Control I/O Signal Wiring Terminal Block
6	General I/O Signal Interface
7	AC Port

2.1.4 Consumables Loading Path

Figure 2-7 shows the consumables' loading paths in Tear-off mode of the Standard MX.

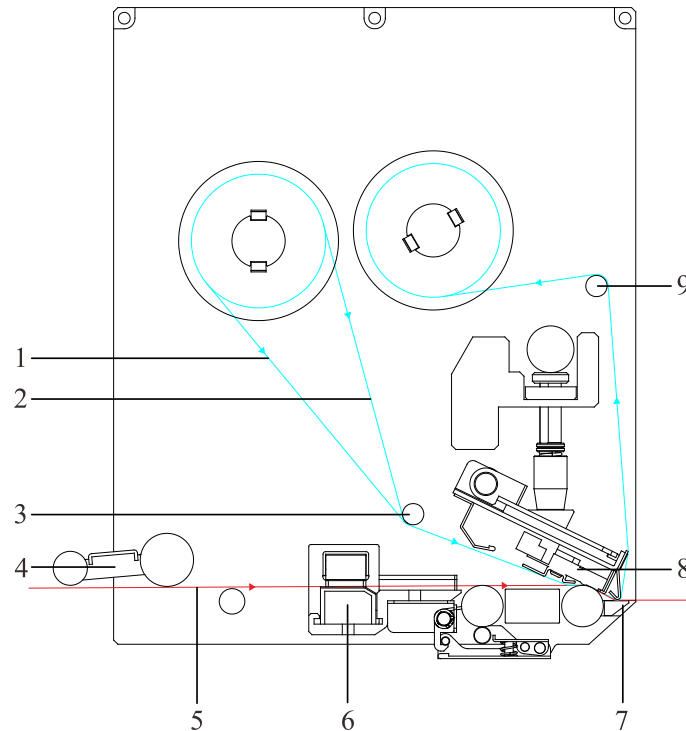


Figure 2-7 Loading Paths in Tear-off Mode (Standard MX)

Table 2-7 Loading Path Description

Number	Description
1	Ribbon Path (Ribbon-ink side: out)
2	Ribbon Path (Ribbon-ink side: in)
3	Ribbon Guide Rod (Ribbon Supply)
4	Dancer Assembly
5	Media Path
6	Media Sensor Assembly
7	Tear-off Bar
8	Printhead Assembly
9	Ribbon Guide Rod (Ribbon Take-up)

Figure 2-8 shows the consumables' loading paths in Tear-off mode of the MX Pro.

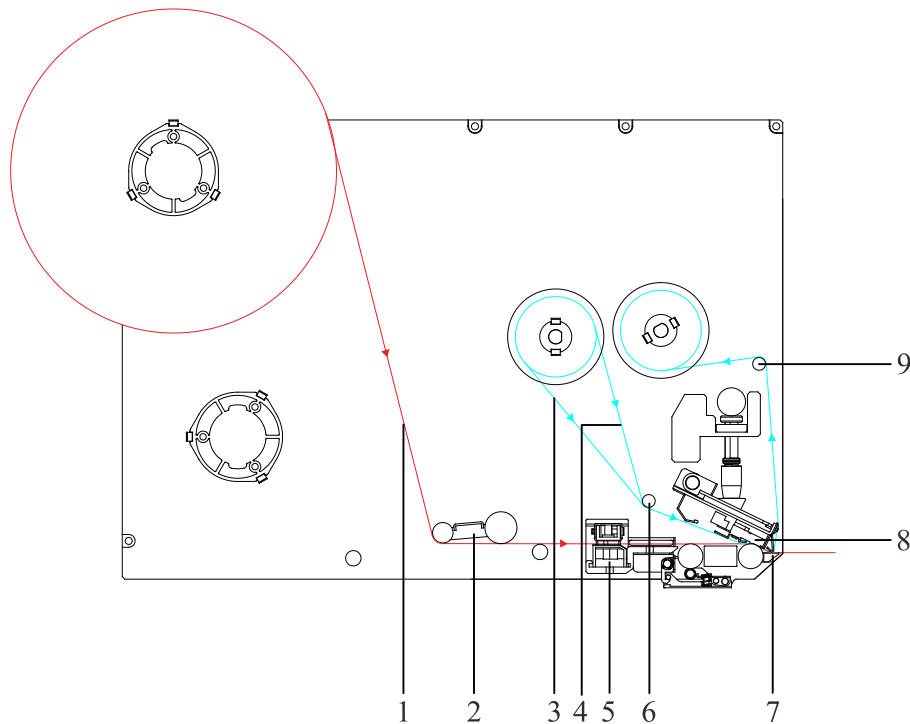


Figure 2-8 Loading Paths in Tear-off Mode (MX Pro)

Table 2-8 Loading Path Description

Number	Description
1	Media Path
2	Dancer Assembly
3	Ribbon Path (Ribbon-ink side: out)
4	Ribbon Path (Ribbon-ink side: in)
5	Media Sensor Assembly
6	Ribbon Guide Rod (Ribbon Supply)
7	Tear-off Bar
8	Printhead Assembly
9	Ribbon Guide Rod (Ribbon Take-up)

Figure 2-9 shows the consumables' loading paths in Peeler Mode of the Standard MX.

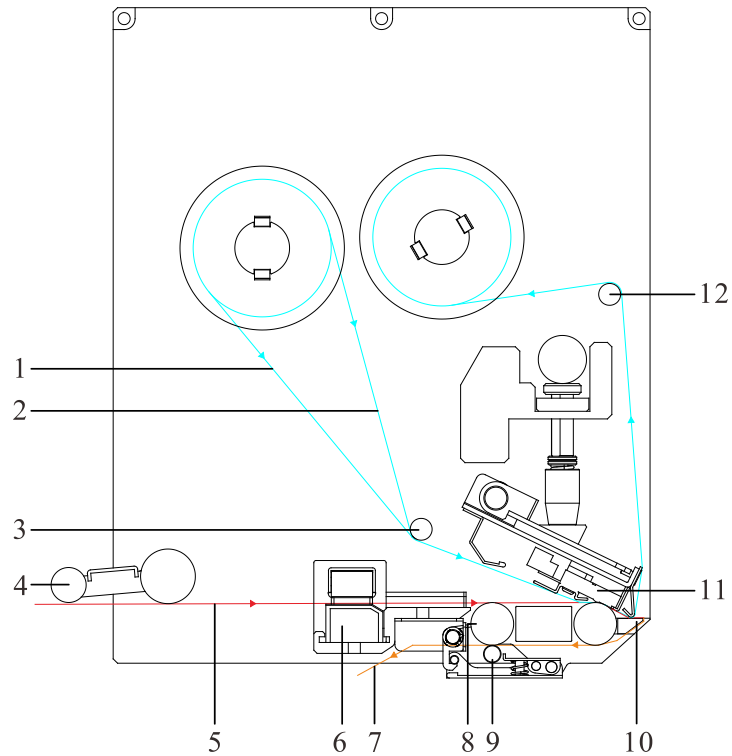


Figure 2-9 Loading Paths in Peeler Mode (Standard MX)

Table 2-9 Loading Path Description

Number	Description
1	Ribbon Path (Ribbon-ink side: out)
2	Ribbon Path (Ribbon-ink side: in)
3	Ribbon Guide Rod (Ribbon Supply)
4	Dancer Assembly
5	Media Path
6	Media Sensor Assembly
7	Liner Path
8	Peeling Roller
9	Pinch Roller Assembly
10	Peel-off Bar
11	Printhead Assembly
12	Ribbon Guide Rod (Ribbon Take-up)

Figure 2-10 shows the consumables' loading paths in Peeler Mode of the MX Pro.

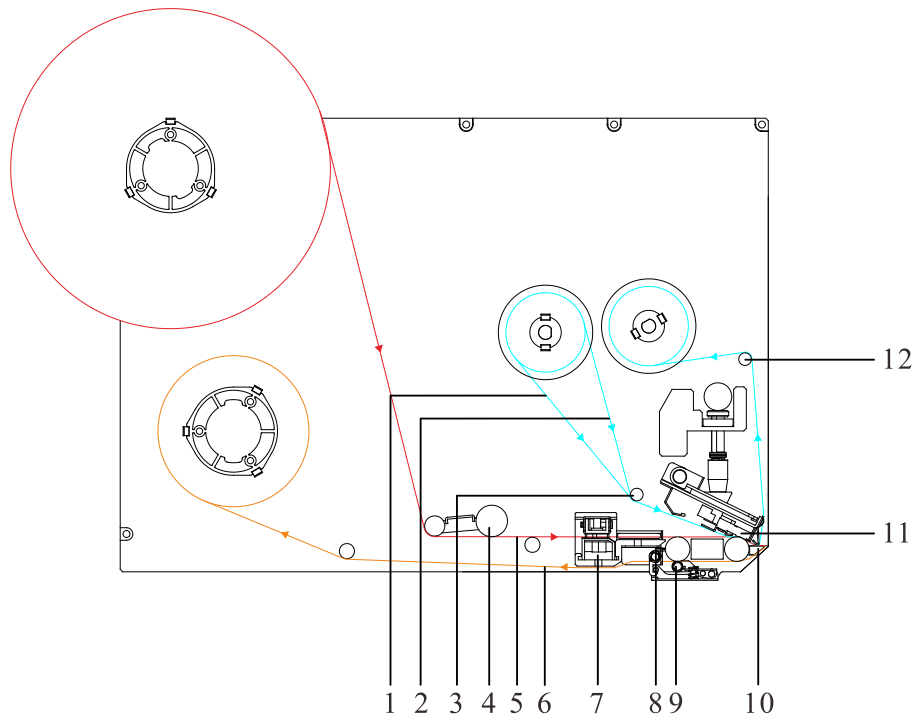


Figure 2-10 Loading Paths in Peeler Mode (MX Pro)

Table 2-10 Loading Path Description

Number	Description
1	Ribbon Path (Ribbon-ink side: out)
2	Ribbon Path (Ribbon-ink side: in)
3	Ribbon Guide Rod (Ribbon Supply)
4	Dancer Assembly
5	Media Path
6	Liner Path
7	Media Sensor Assembly
8	Peeling Roller
9	Pinch Roller Assembly
10	Peel-off Bar
11	Printhead Assembly
12	Ribbon Guide Rod (Ribbon Take-up)

2.2 Setting up the Printer

2.2.1 Interface Connection

The printer supports RS-232 Serial, USB DEVICE and 10/100/1000 Mbps Adaptive Ethernet interface connections.

To connect:

- Make sure the printer is powered OFF.
- The printer will identify the communication port automatically.
- The default settings of the printer port can be obtained from the self-test report.
- Cable configurations for Serial (RS-232C) interface can be found in [Appendix A: Interface Specifications](#).
- Please take the following measures to reduce cable noise.
 - Restrict the length of the interface cable to less than 6' (1.83 M) if possible.
 - Keep the interface cable separate from the power cords.

2.2.2 Connecting to a Power Source



WARNING

- *Do not use the printer near liquids or corrosive chemicals.*
- *Connecting to a wrong power source may cause damage to your printer. POSTEK assumes no liability for any damage in such cases. The rating for the printer is 110/240 VAC $\pm$ 10%, 50/60 Hz.*

1. Make sure the printer is switched OFF.
2. Plug the female end of the power cord into the AC Port on the back of the printer. See Figure 2-11.

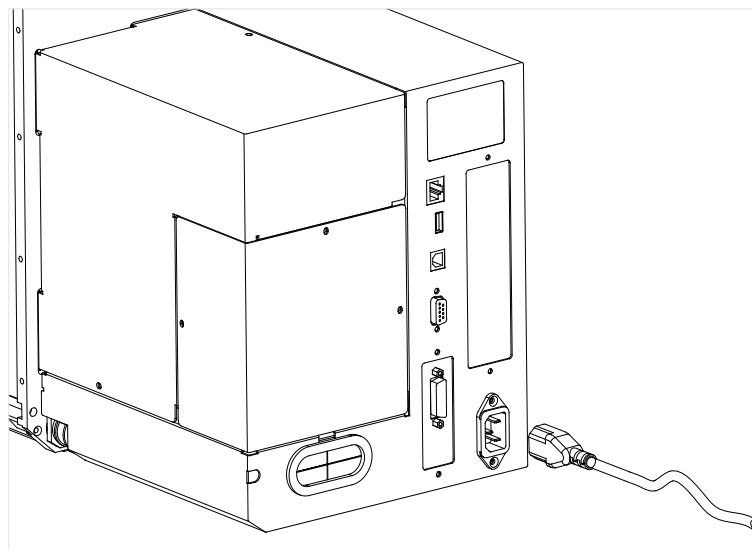


Figure 2-11 Connect the Power Cord

3. Plug the male end of the power cord into a live wall outlet. See Figure 2-12.

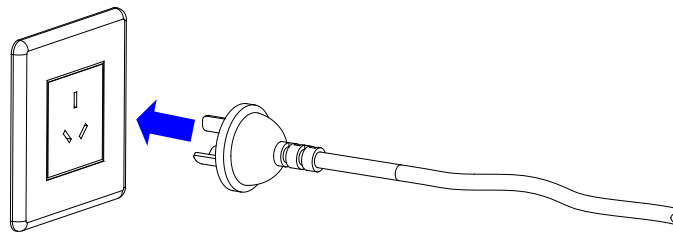


Figure 2-12 Plug the Power Cord



NOTE

The shape of power plug varies depending on the region in which it was purchased.

2.2.3 Loading the Ribbon



CAUTION

- Load ribbon only when using the thermal transfer printing mode. Remove any ribbon that may be loaded when using the direct thermal printing mode.
- Use ribbon that is wider than the media to protect the printhead from wear.

To load the ribbon, refer to Figure 2-13 through Figure 2-18 and follow the steps below:

1. Lift the Flip-up Cover of the printer.
2. Turn the Printhead Handle counter clockwise to open the Printhead. See Figure 2-13.

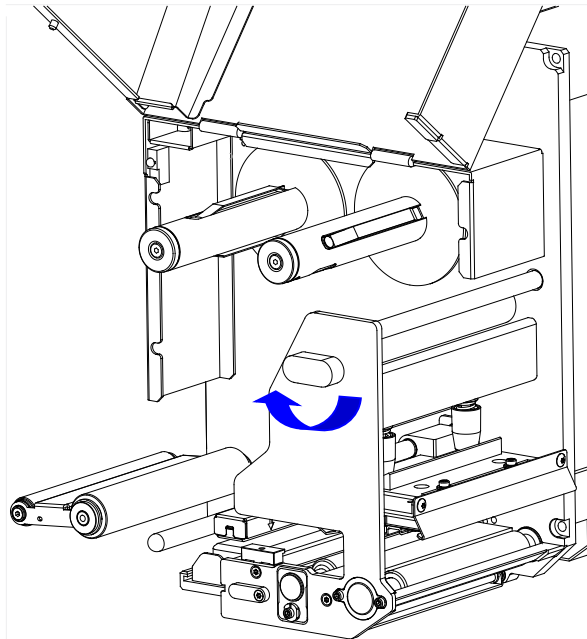


Figure 2-13 Open the Printhead

3. Stick a label to the outside/ inside of the ribbon to check which side the ink is on. See Figure 2-14.

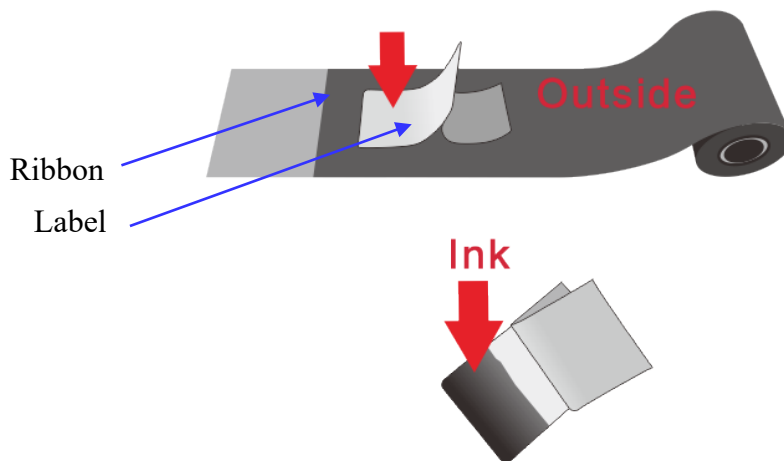


Figure 2-14 Check Ink Side

4. Place the ribbon roll on the Ribbon Supply Spindle, see Figure 2-15. Make sure that the ribbon roll is firmly pushed against the Stop Plate.

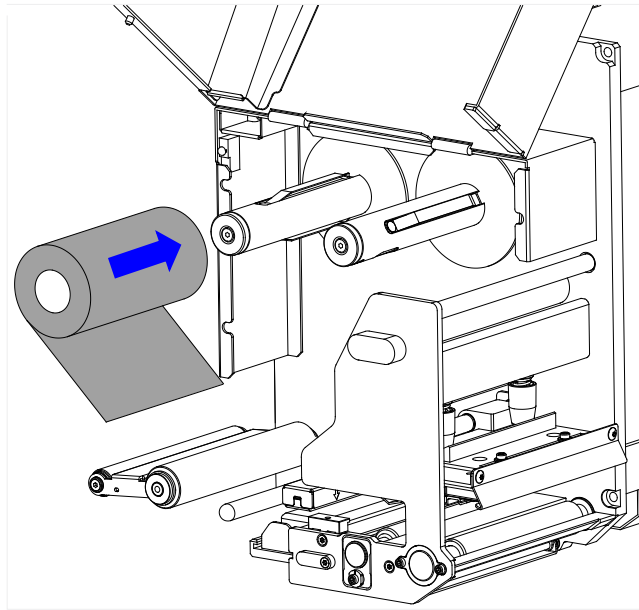


Figure 2-15 Load Ribbon Roll

5. Follow the ribbon path (please refer to [2.1.4 Consumables Loading Path](#)), thread the ribbon under the Ribbon Guide Rod and pass the Printhead Assembly, make sure that the ribbon's ink side is facing the media. See Figure 2-16.

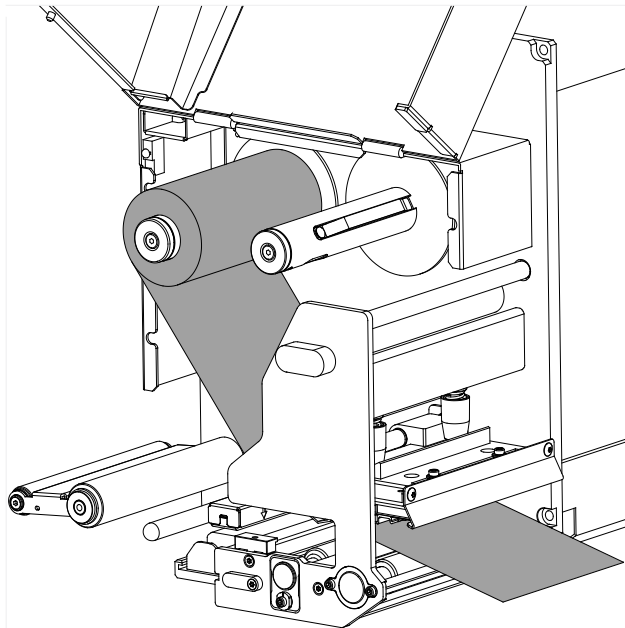


Figure 2-16 Thread Ribbon through Printhead Assembly

6. Wrap the ribbon around a spare ribbon core to form a Ribbon Take-up Roll. See Figure 2-17.

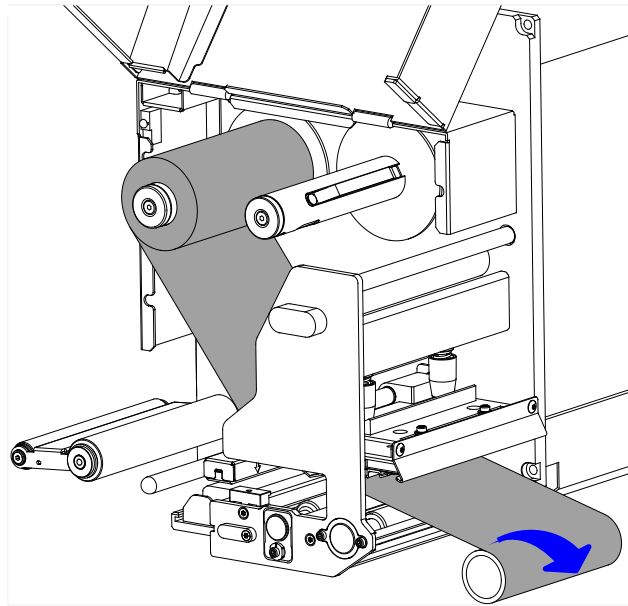


Figure 2-17 Wrap Ribbon on the Core

7. Slide the Ribbon Take-up Roll on the Ribbon Take-up Spindle and push it firmly against the Stop Plate. Turn the Take-up Spindle until the ribbon is tightly wound. See Figure 2-18.

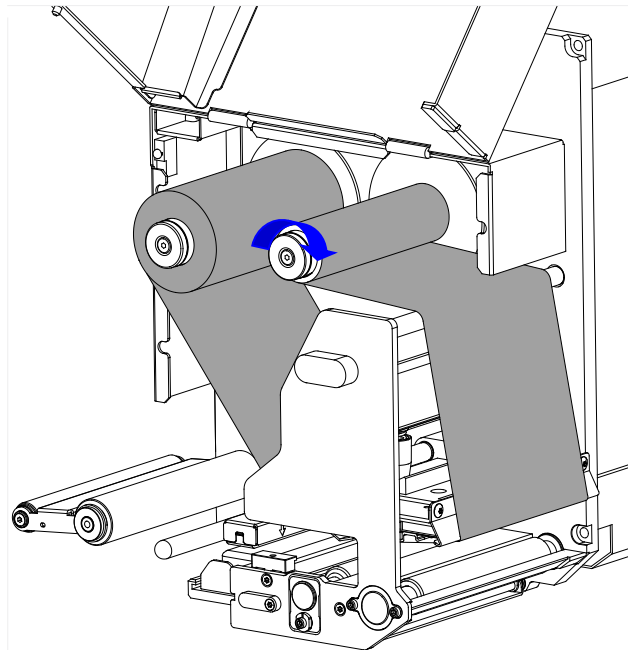


Figure 2-18 Ribbon Roll Loaded

 NOTE

To make sure the Ribbon End Sensor works properly, please use ribbon rolls that end with reflective or transparent materials.

2.2.4 Loading the Media



CAUTION

- *When it is the first time installing the media or when changing to a different type of media, media sensor calibration must be performed.*
 - *No calibration is needed when using continuous media.*
-

The printer has three different handling modes for printed label: Standard Mode, Tear-off Mode, and Peeler Mode.

- When the handling mode is set to Standard Mode, the printer stops at the leading edge of the next label and goes into standby as soon as the print job is complete.
- When the handling mode is set to Tear-off Mode, after the print job is finished, the printer will feed the label until the gap between the current label and the next label aligns with the Tear-off Bar allowing easy tear off for the user.
- When the handling mode is set to Peeler Mode, the printer stops and waits for the printed and peeled-off label to be taken away before resuming the print job.

2.2.4.1 Switching Media Core Adapters



CAUTION

The MX Pro is equipped with both 1.5" and 3" media core adapters. The 1.5" core adapter is located inside the 3" core adapter. To load a 1.5" core media roll, please first remove the 3" core adapter; and then adjust the position of the Media Roll Guide Stopper.

To switch to 1.5" media core adapter, please use the Allen wrench bundled with the printer to remove the screw securing the 3" core adapter, and then slide the 3" core adapter out to remove it from the printer, as shown in Figure 2-19.

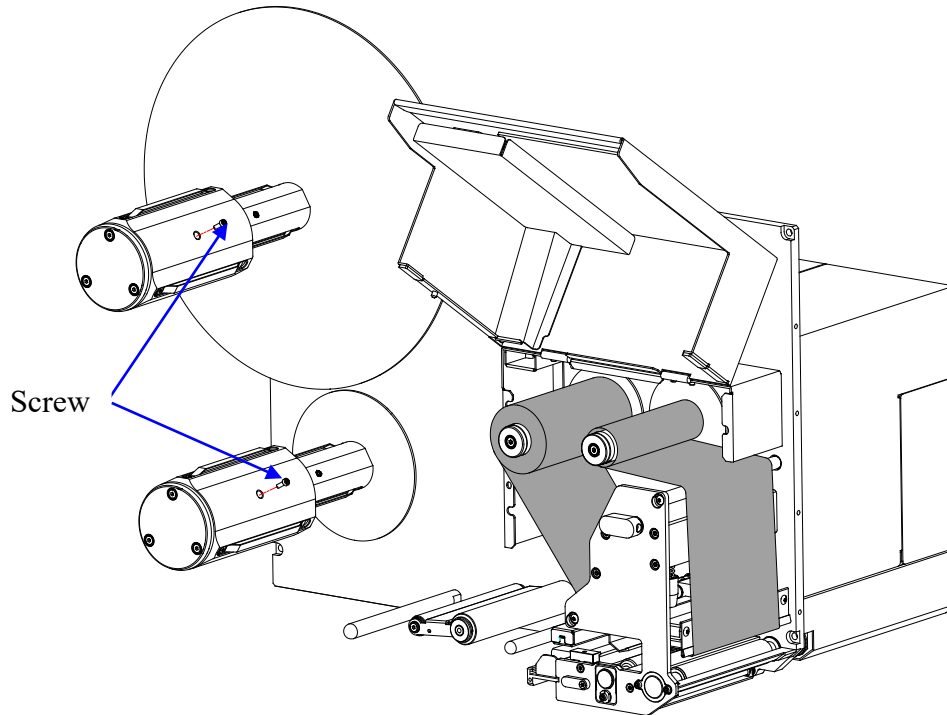


Figure 2-19 Remove the 3" core adapter

2.2.4.2 Tear-off Mode



CAUTION

- *Tear-off Mode is the default handling mode.*
- *The media installation procedure in Standard Mode is the same as in Tear-off Mode.*

To load media into the printer while under Tear-off Mode, follow the steps below:

1. Load a media roll onto the Media Spindle, make sure that the media roll is firmly pushed against the Stop Plate. As shown in Figure 2-20.

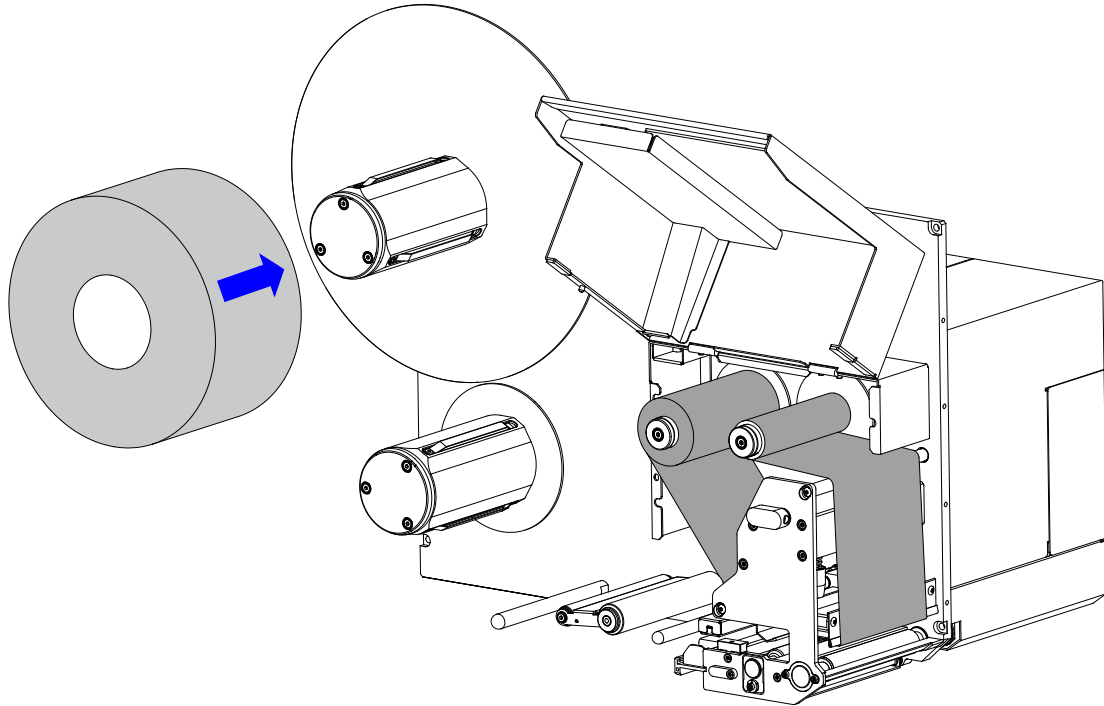


Figure 2-20 Load the Media Roll

2. Thread the media along the Media Path as shown in Figure 2-8, loaded media is shown in Figure 2-21.

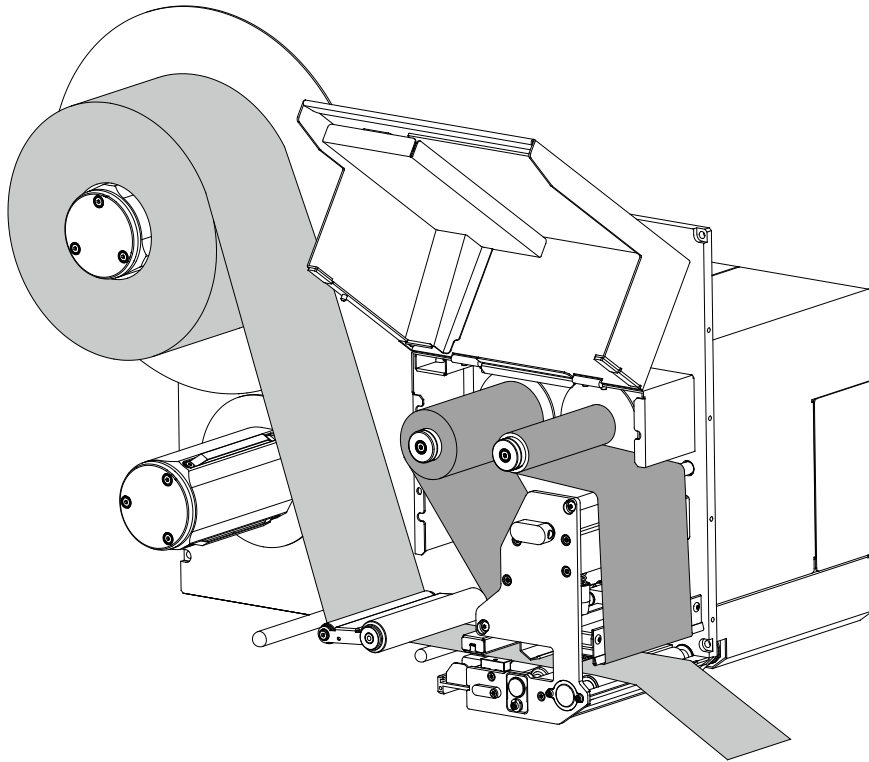


Figure 2-21 Thread the Media

3. Slide the Media Guide to the edge of the media, and make sure not to pinch or squeeze the media; keep the media flat and smooth.
4. Adjust the media sensor. See [3.3.1 Adjusting the Media Sensor](#).
5. Turn the Printhead Handle clockwise to lock the Printhead in place, as shown in Figure 2-22.

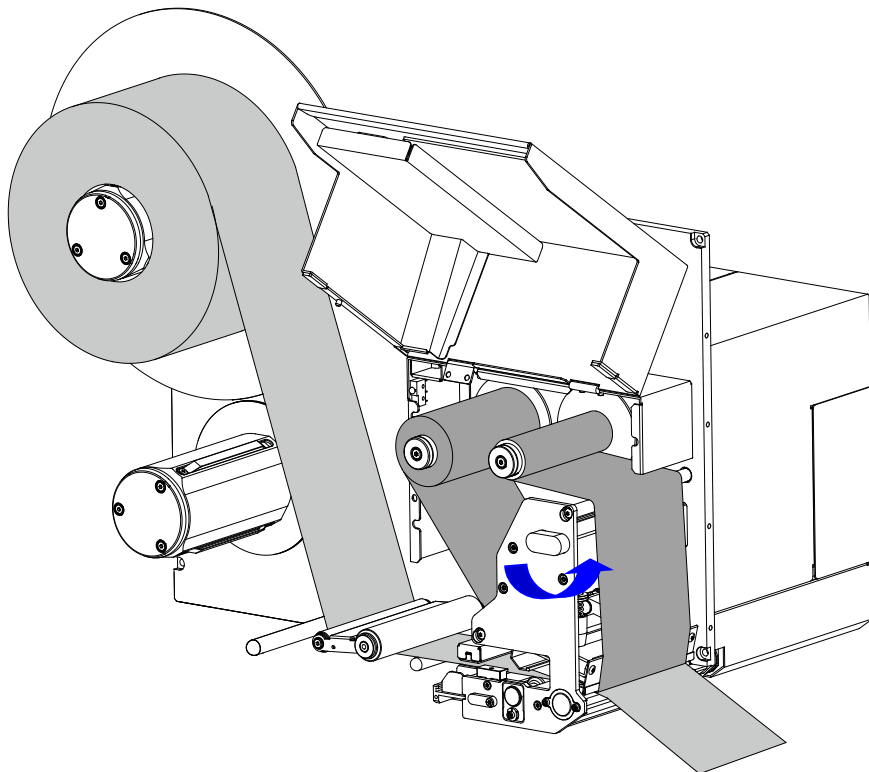


Figure 2-22 Lock the Printhead

6. Turn on the printer and wait for the printer to boot normally, then calibrate the media sensor.

 NOTE

You can choose to calibrate the media sensor manually (press and hold the [FEED/Calibration] button for around 4 seconds) or automatically (refer to [3.2.1.5 Calibration & registration](#)).

7. Close the flip-up cover. Enter the LCD touch-screen settings menu and set the printed label handling mode to Tear-off Mode (please refer to [3.2.1.7 Printed label handling](#)). As shown in Figure 2-23.

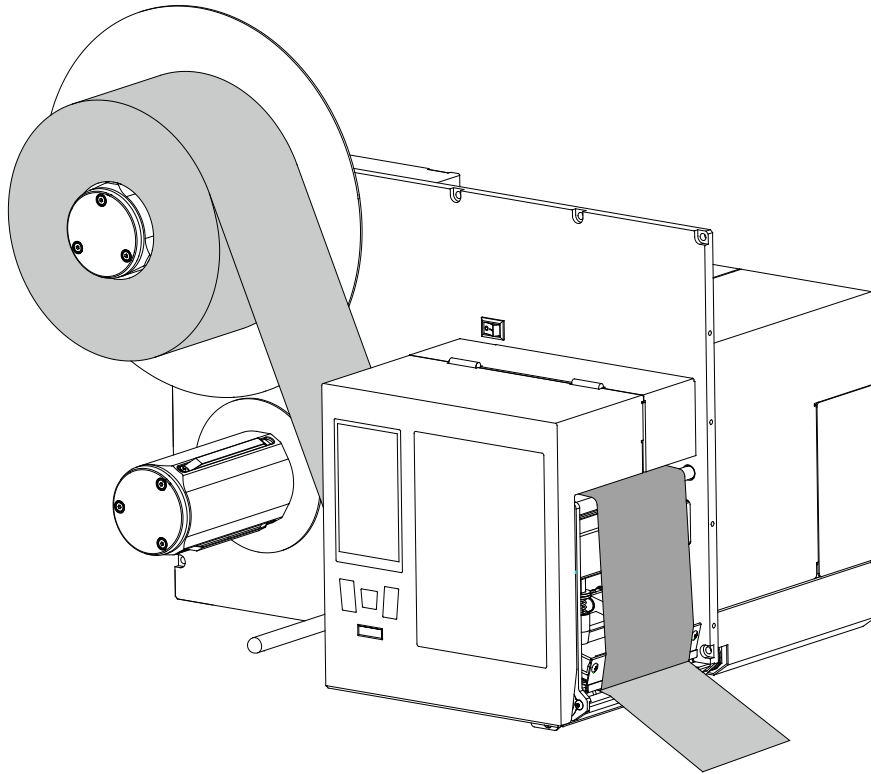


Figure 2-23 Close the Flip-up Cover

2.2.4.3 Peeler Mode

To load media into the printer while under Peeler Mode, follow the steps below:

1. Load a media roll onto the media spindle, please refer to step 1 in [2.2.4.2 Tear-off Mode](#).
2. Thread the media along the Media Path as shown in Figure 2-10, loaded media is shown in Figure 2-24.

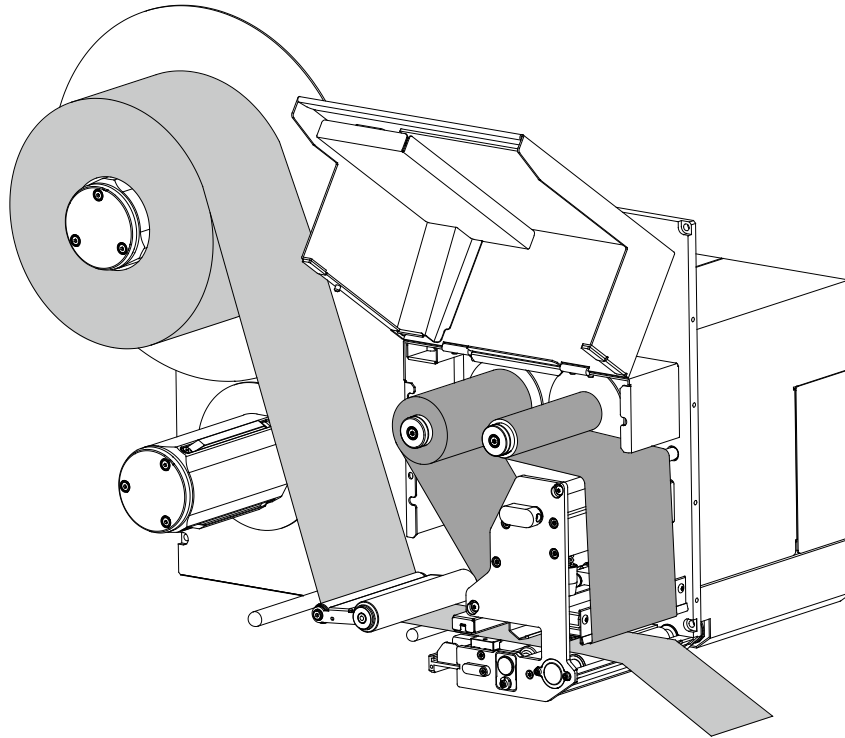


Figure 2-24 Load the Media

3. Slide the Media Guide to the edge of the media, and make sure not to pinch or squeeze the media; keep the media flat and smooth.
4. Adjust the media sensor. See [3.3.1 Adjusting the Media Sensor](#).
5. Turn the Printhead Handle clockwise to lock the Printhead in place, as shown in Figure 2-25.

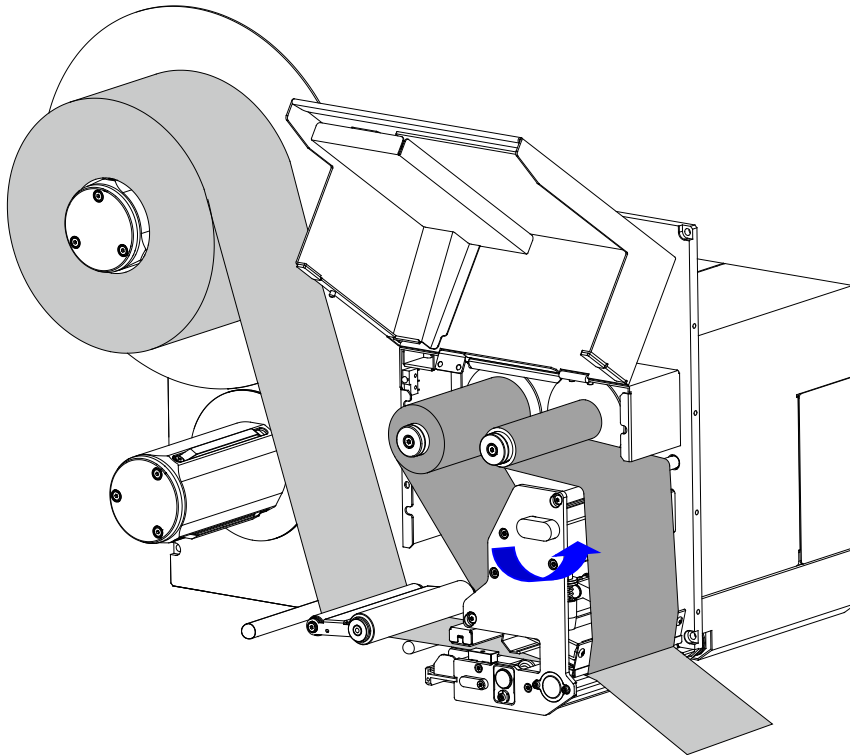


Figure 2-25 Lock the Printhead

6. Turn on the printer and wait for the printer to boot normally, then calibrate the media sensor.

 NOTE

You can choose to calibrate the media sensor manually (press and hold the [FEED/Calibration] button for around 4 seconds) or automatically (refer to [3.2.1.5 Calibration & Registration](#)).

7. Turn the Printhead Handle counter clockwise to open the Printhead, then turn the Hook Handle counter clockwise to release the Pinch Roller Assembly, as shown in Figure 2-26.

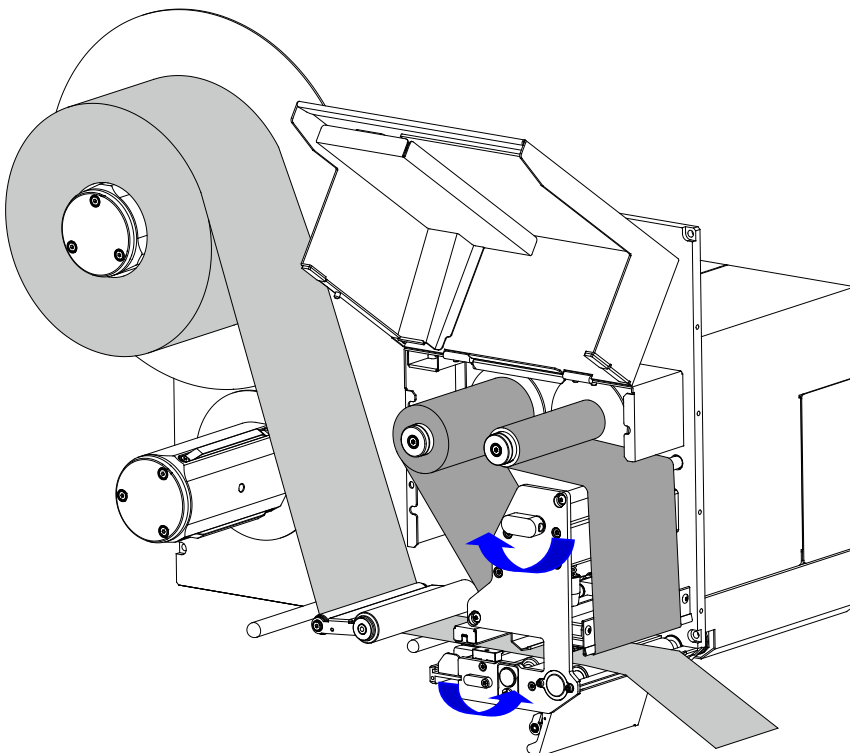


Figure 2-26 Release the Pinch Roller Assembly

8. Extend approximately 400 mm long media out of the printer. Peel off the face label(s) from the exposed media, leaving just the liner. As shown in Figure 2-27.

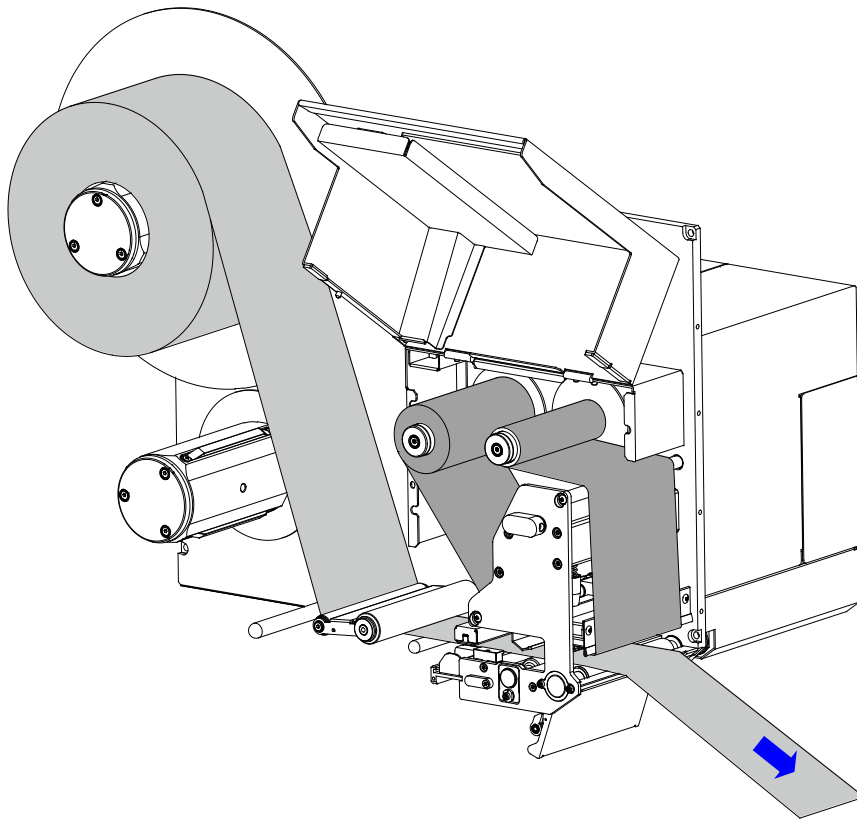


Figure 2-27 Extend the Media

9. Refer to the Liner Path as shown in Figure 2-10. Thread the liner in between the Peeling Roller and Pinch Roller Assembly, then wrap it around a spare core to form a Liner Take-up Roll. As shown in Figure 2-28.

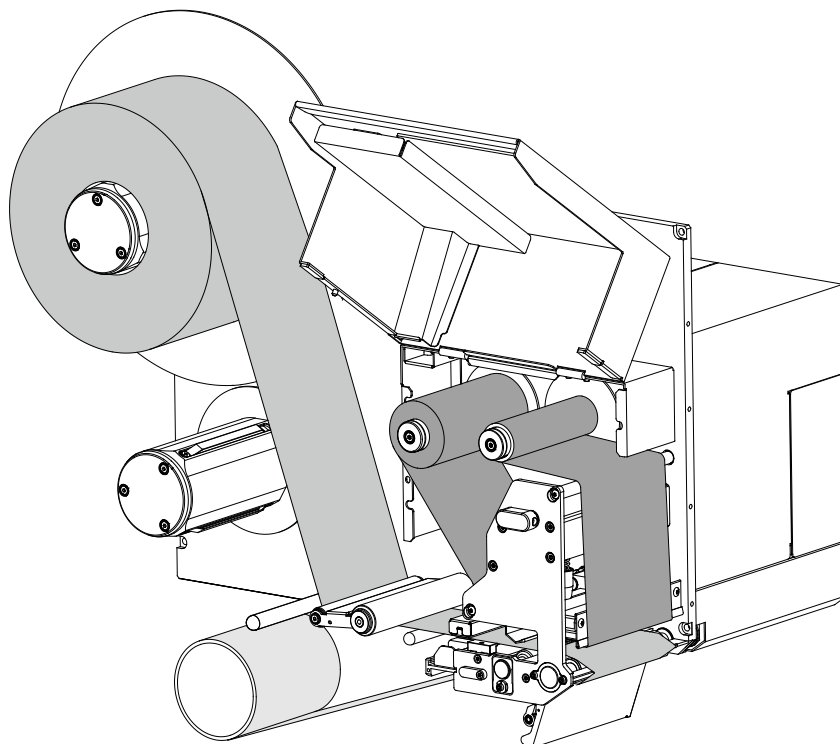


Figure 2-28 Thread the Liner

10. Slide the Liner Take-up Roll on the Rewind spindle and push it firmly against the Stop Plate. Turn the Rewind spindle counter clockwise until the liner is tightly wound. See Figure 2-29.

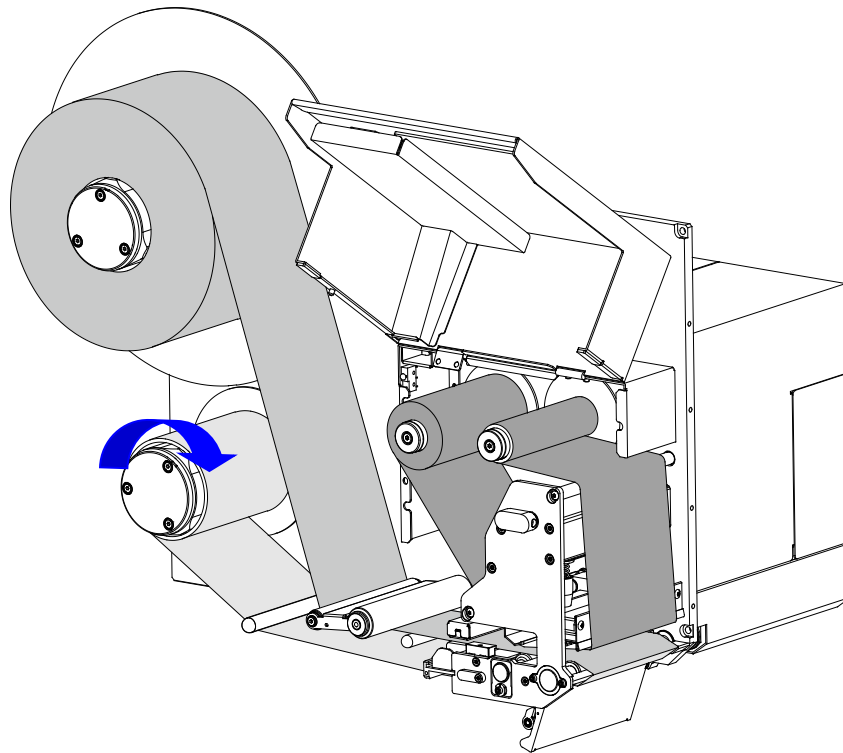


Figure 2-29 Liner Loaded

11. Turn the Printhead Handle clockwise to lock the Printhead in place, and flip the Pinch Roller Assembly towards the hooks until you hear a “click”. As shown in Figure 2-30.

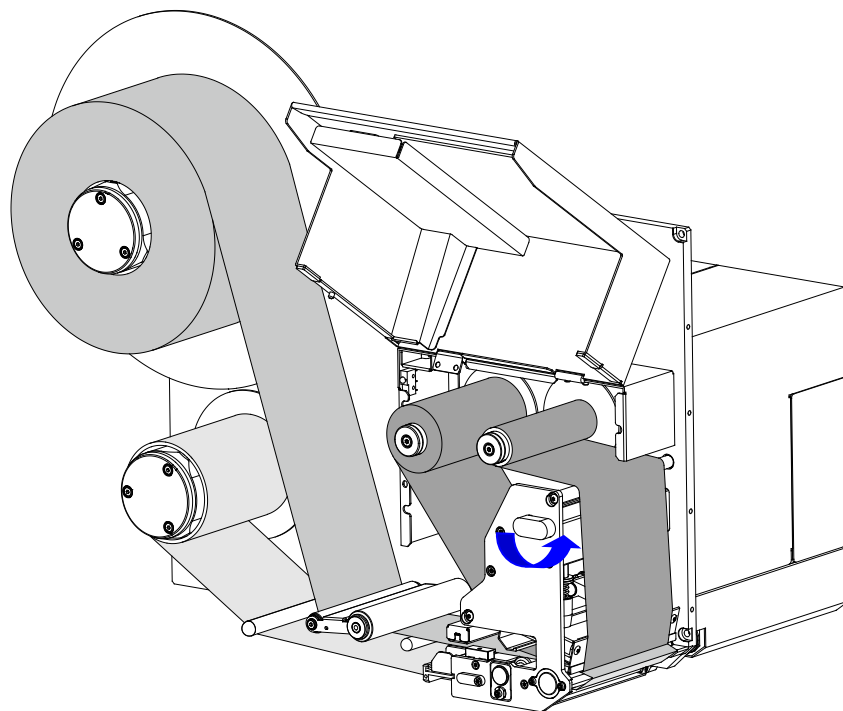


Figure 2-30 Lock the Printhead

12. Close the flip-up cover. Enter the LCD touch-screen settings menu and set the printed label handling mode to Peeler Mode (please refer to [3.2.1.7 Printed Label Handling](#)). As shown in

Figure 2-31.

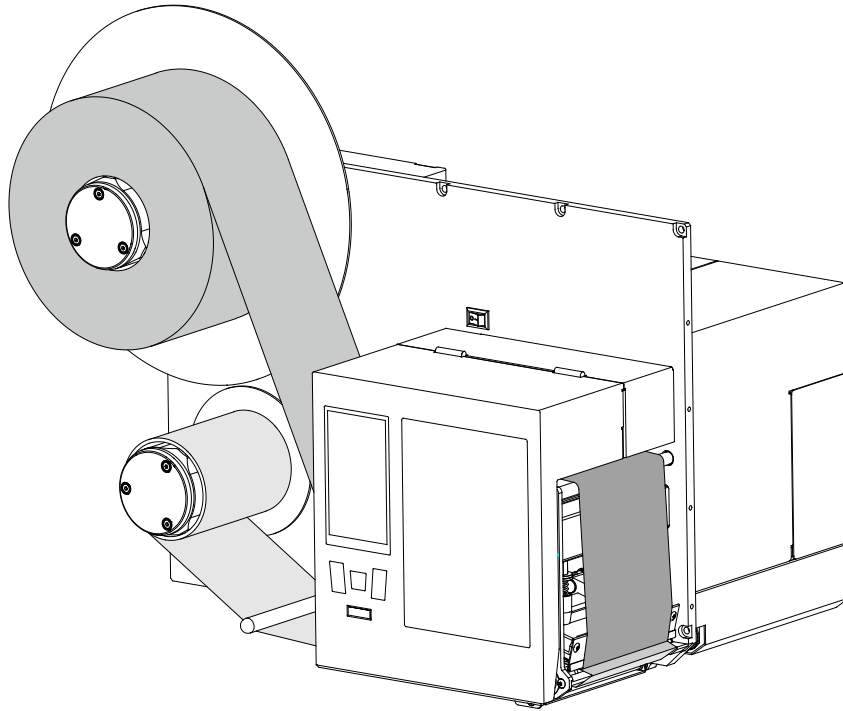


Figure 2-31 Close the Flip-up Cover

2.3 Installing the Printer Driver

2.3.1 USB Port Installation



CAUTION

If you already have a POSTEK printer driver installed on your computer, the printer driver for the additional printer will be installed automatically.

When installing the POSTEK printer driver for the first time, if you connect the printer to your computer via the USB port, please refer to the steps below to complete the printer driver installation (take Windows10 operating system as an example).

1. Connect the printer to your computer using a USB cord, then power on the printer.
2. Visit the POSTEK website: <http://www.postekchina.com> and download the printer driver.
3. Double-click the printer driver icon to bring up the “License Agreement” screen. Select “I accept the Items in the license agreement” and click “Next”, as shown in Figure 2-32.

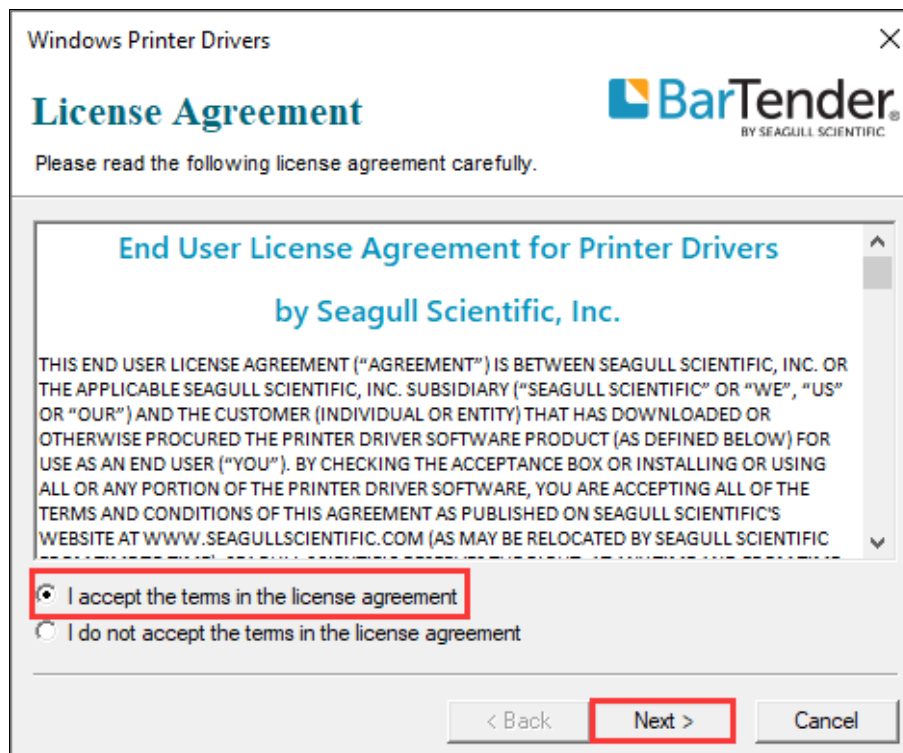


Figure 2-32 License Agreement Screen

4. The “Installation Directory” screen displays. Click “Browse...” and select where the files will be installed, then click “Next”, as shown in Figure 2-33.

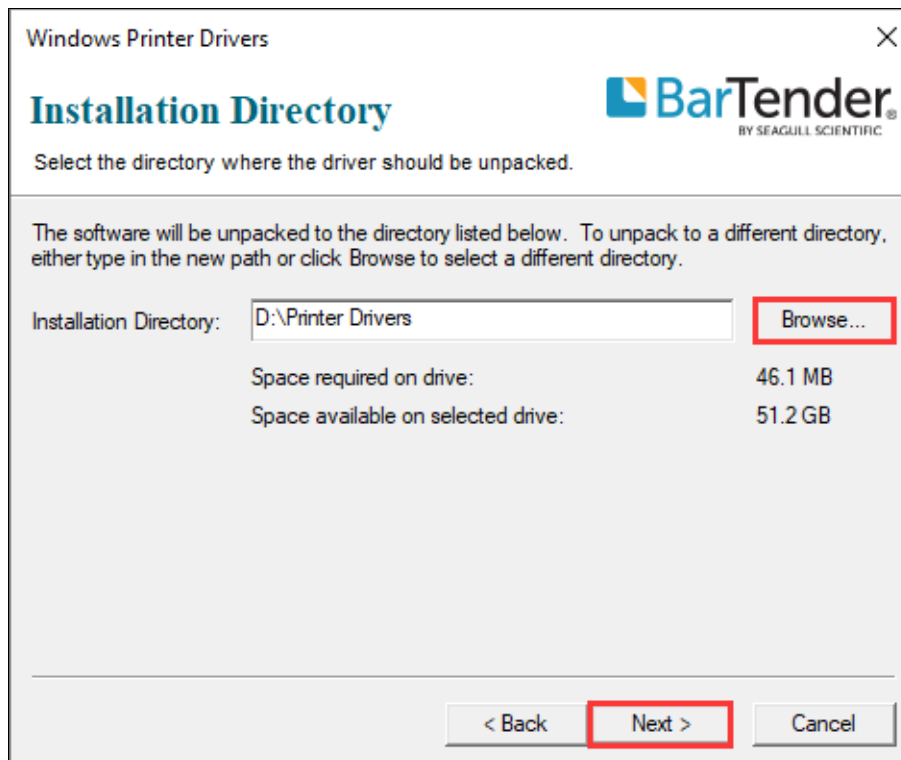


Figure 2-33 Installation Directory Screen

5. On the “Installation Information” screen, check the box that says “Run Driver Wizard after unpacking drivers”, then click “Finish”, as shown in Figure 2-34.

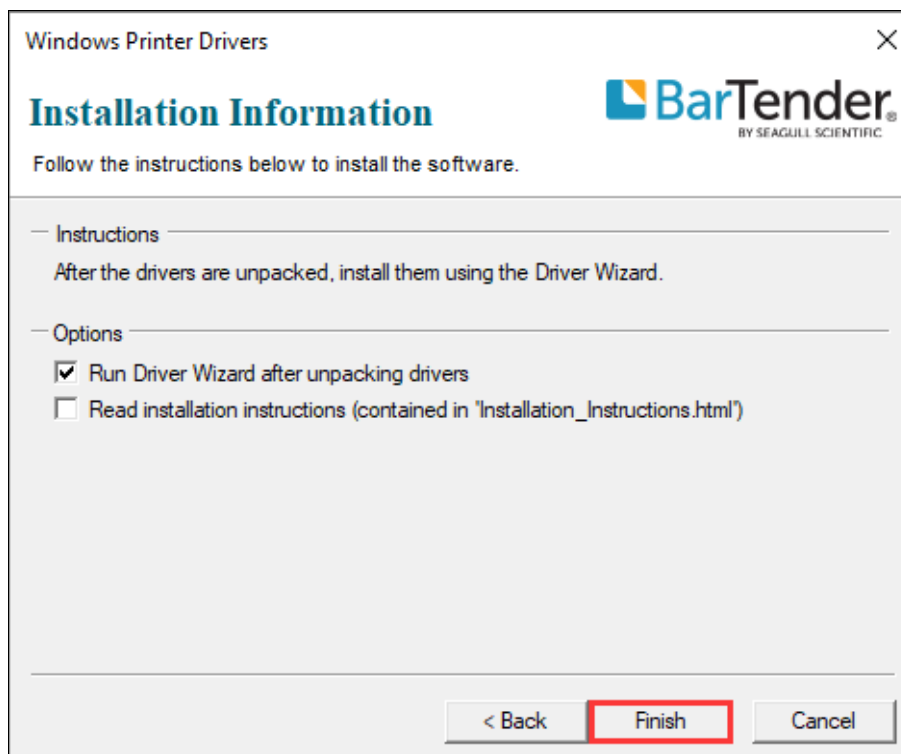


Figure 2-34 Installation Information Screen

6. On the “Seagull Driver Wizard” screen, select “Install printer drivers”, and then click “Next”, as shown in Figure 2-35.

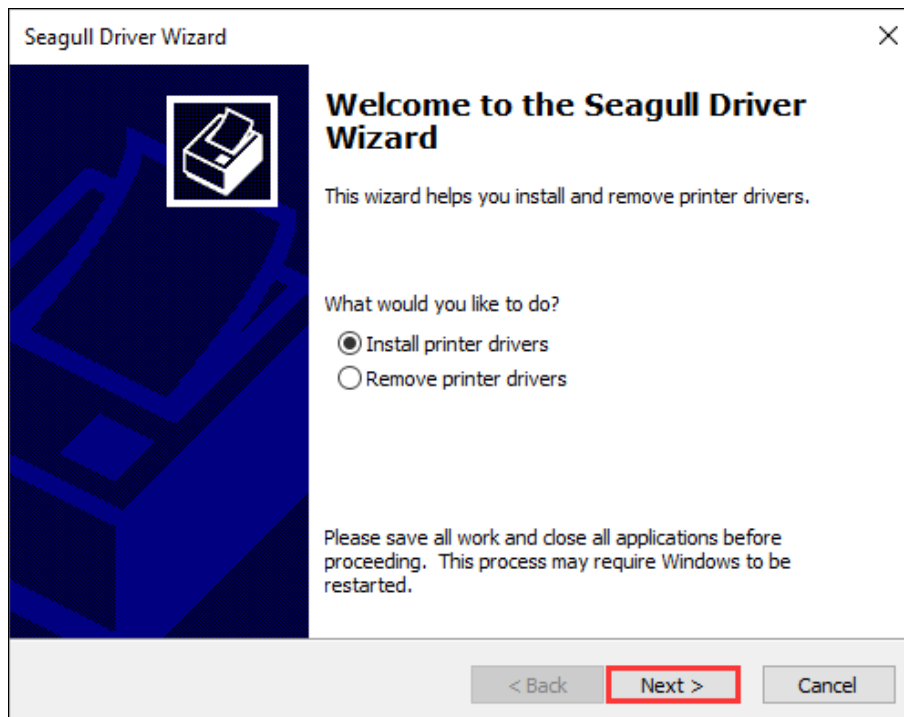


Figure 2-35 Seagull Driver Wizard Screen

7. The connected printer will be detected, click “Next”, as shown in Figure 2-36.

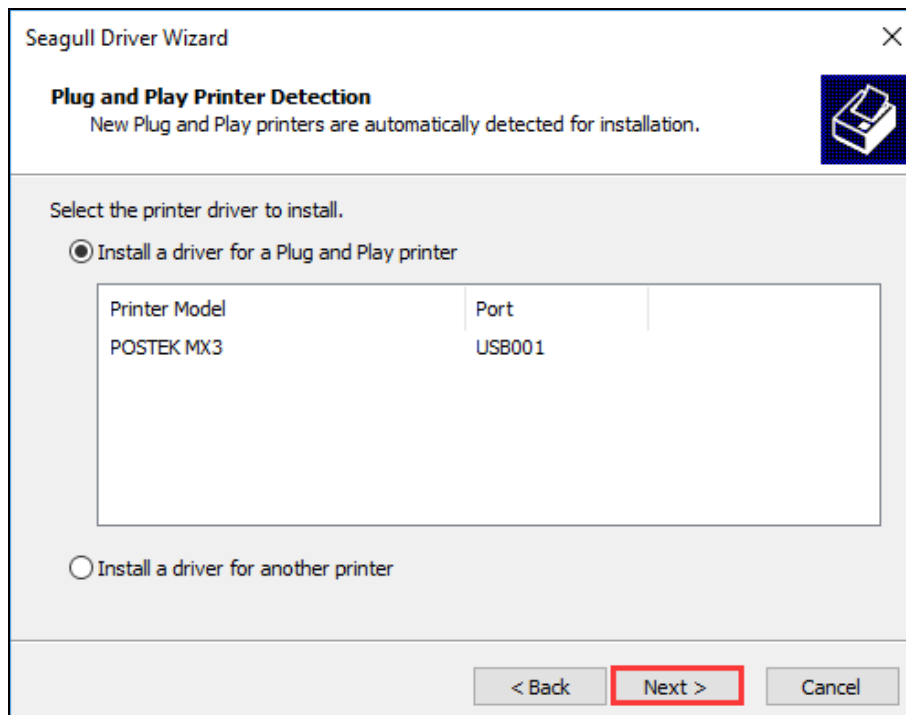


Figure 2-36 Printer Detected

8. On the “Specify Printer Name” screen, enter a name for the printer, as shown in Figure 2-37, then click “Next” to complete the driver installation.

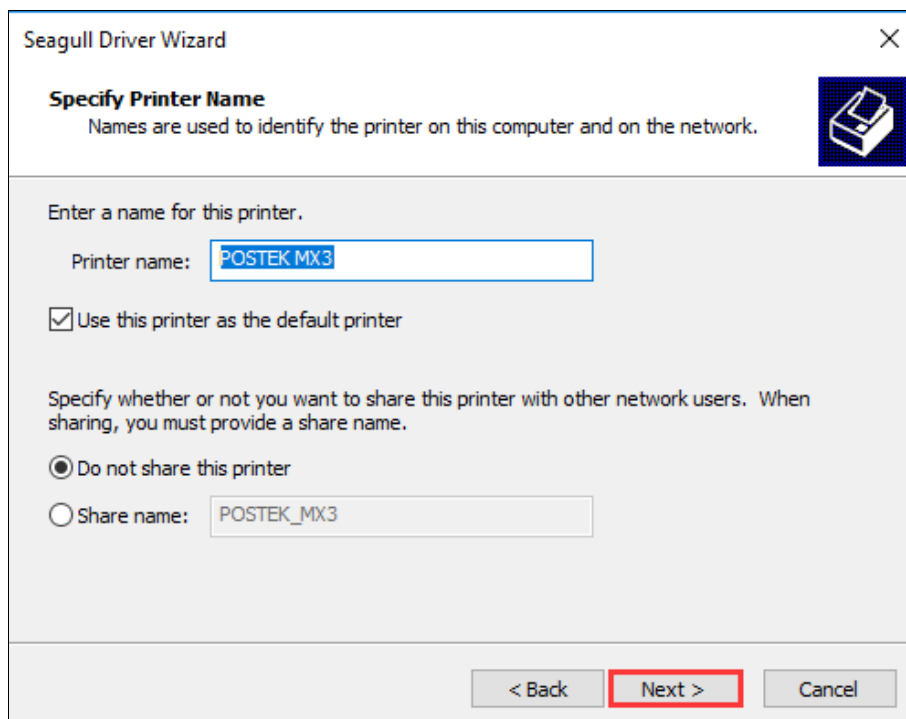


Figure 2-37 Specify Printer Name

9. Print a test page to see whether the printer is connected properly, as shown in Figure 2-38.

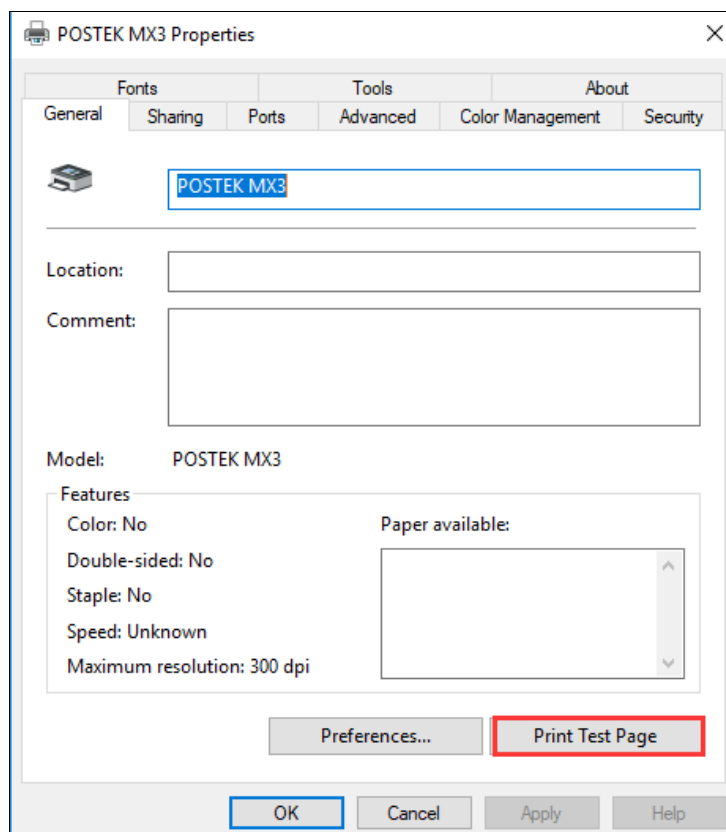


Figure 2-38 Print Test Page

2.3.2 Network Port Installation

If you connect the printer to your computer via the Ethernet port, you will need to configure the printer's network parameters before installing the printer driver and configuring the printer's port information.

2.3.2.1 Ethernet Configuration

Configure the printer's network parameters via the LCD touchscreen settings menu., and the steps are as follows:

s

1. Connect the printer and the computer to the same LAN using an Ethernet cable, then power on the printer.
2. Check the LAN information. See Figure 2-39.

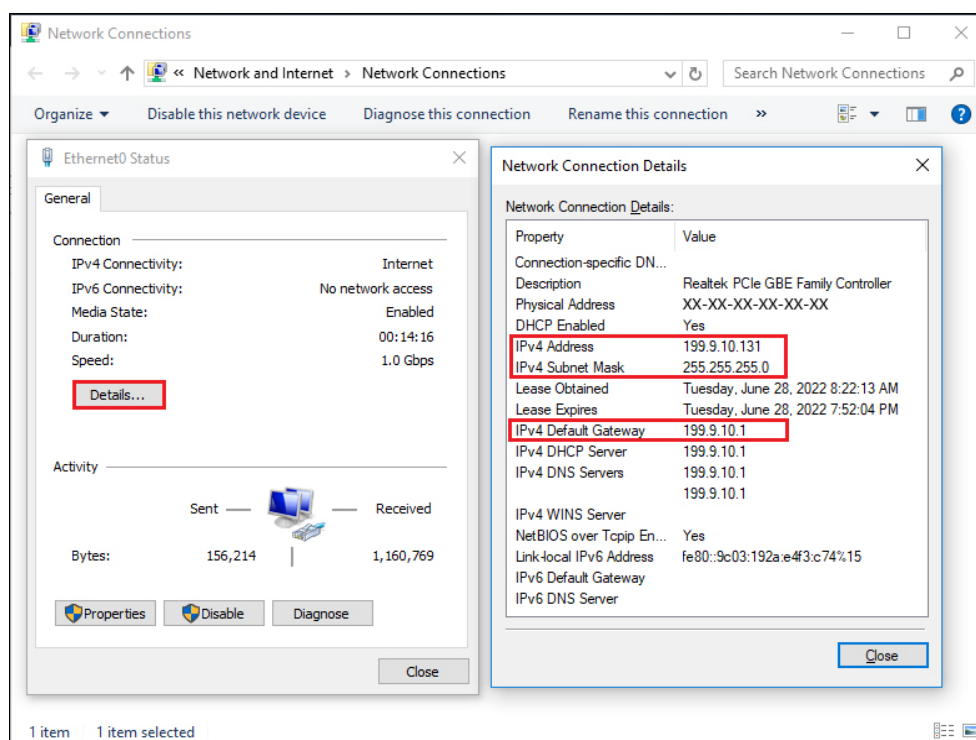


Figure 2-39 Check the LAN Information

3. Enter the LCD touchscreen settings menu and set the network related parameters, see [3.2.2.2 Ethernet](#).

2.3.2.2 Driver Installation and Port Configuration

After the printer's network parameters have been configured, please refer to the following steps to complete the driver installation and port configuration.

1. Visit the POSTEK website: <http://www.postekchina.com> and download the printer driver.
2. Double-click the printer driver icon, follow the prompted screen to extract the driver installer and run the driver installation wizard (for details, please refer to Steps 3~6 in [2.3.1 USB Port Installation](#)).
3. On the “Connect Printer” screen, select “Network (Ethernet or WiFi)”, and then click “Next”, as shown in Figure 2-40.

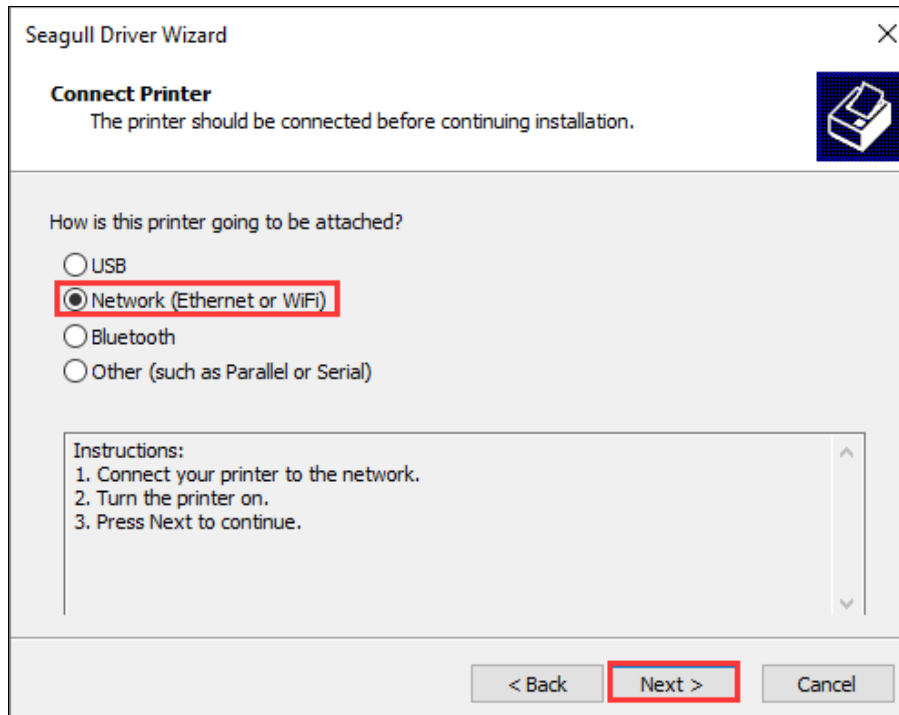


Figure 2-40 Connect Printer Screen

4. The “Specify Printer Model” screen displays, select the printer model, and click “Next”, as shown in Figure 2-41.

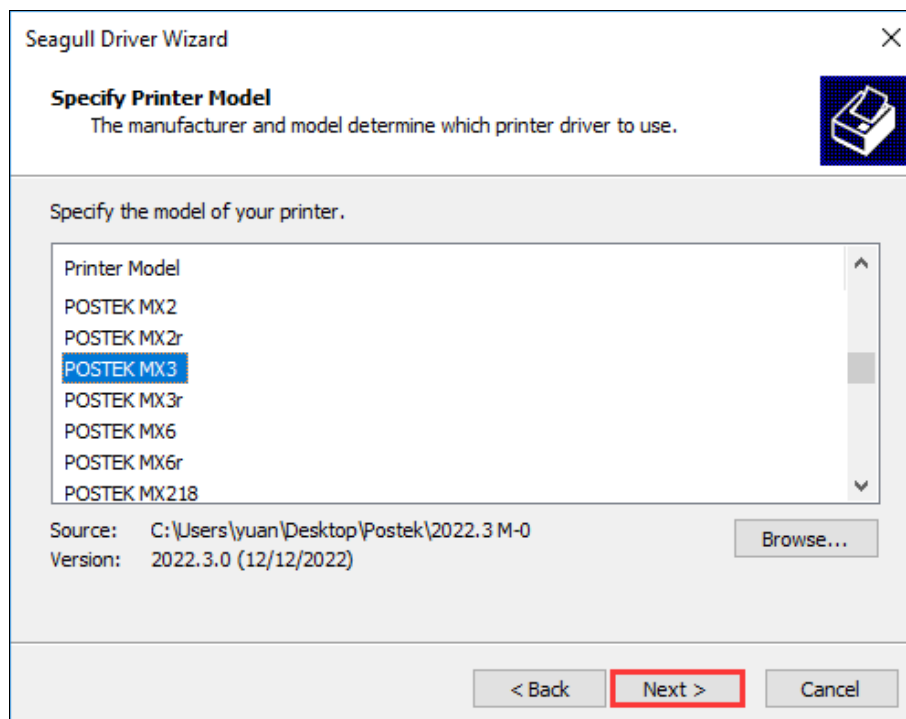


Figure 2-41 Specify Printer Model Screen

- On the “Specify Port” screen, click “Create Port...” to bring up “Create Port” dialog box, select “Standard TCP/IP Port” - “New Port...”, as shown in Figure 2-42.

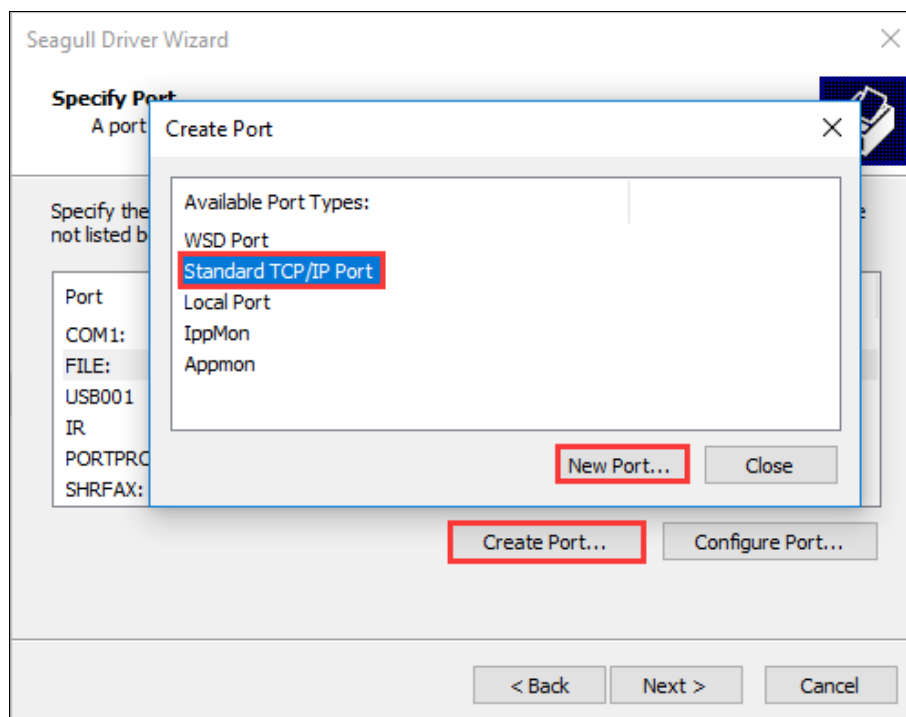


Figure 2-42 Create Port

- The “Add Standard TCP/IP Printer Port Wizard” screen displays, click “Next”, as shown in Figure 2-43.

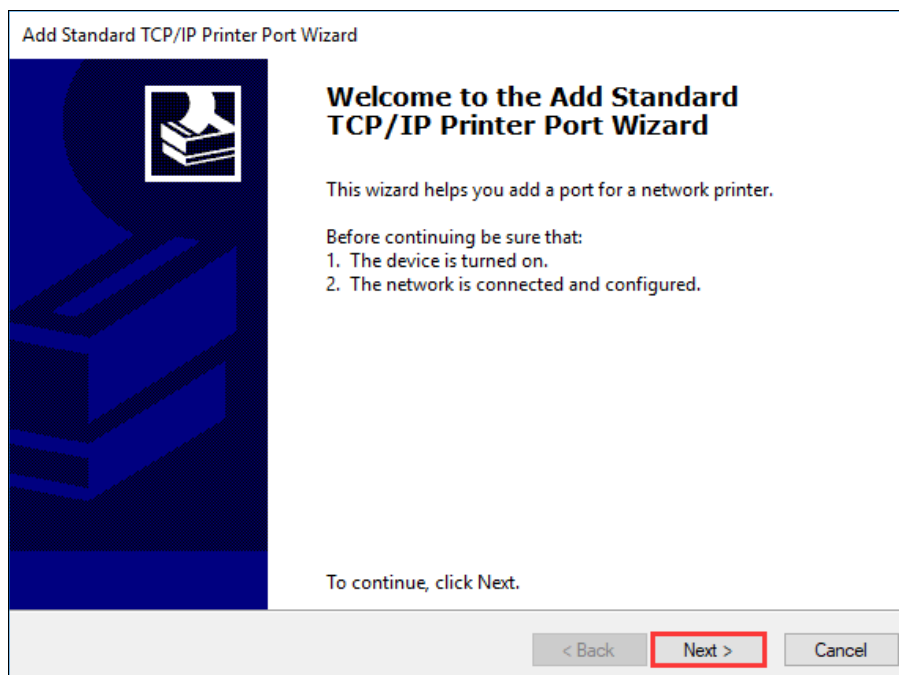


Figure 2-43 Add Standard TCP/IP Printer Port Wizard

7. On the “Add Port” screen, enter the IP Address of the printer (Note: the IP address here must be consistent with the IP address of the printer that has been set, and the port name will be generated automatically), and then click “Next”, as shown in Figure 2-44.

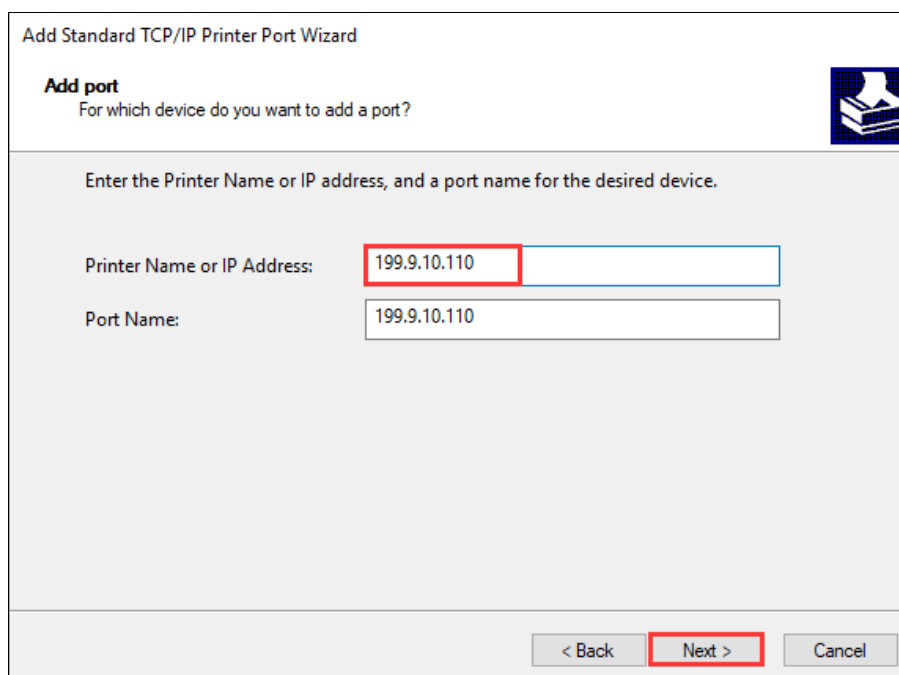


Figure 2-44 Add Port Screen

8. Windows will automatically detect the TCP/IP port. Click “Finish” to complete adding Standard TCP/IP Printer Port, as shown in Figure 2-45.

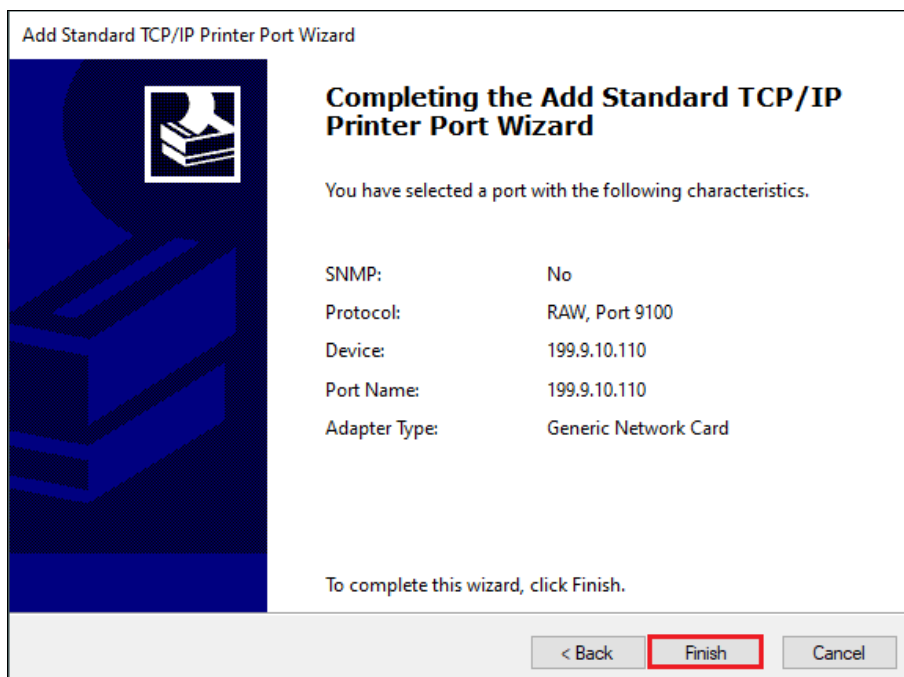


Figure 2-45 Complete adding Standard TCP/IP Printer Port

- Return to the “Specify Port” screen, select the TCP/IP Port that has been added, and click “Next”, as shown in Figure 2-46.

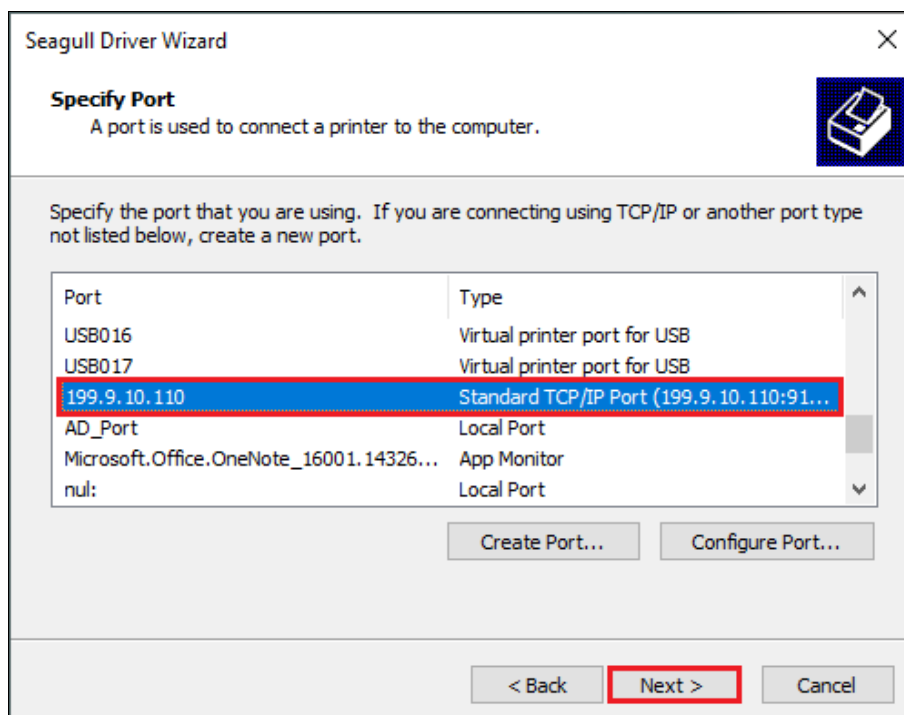


Figure 2-46 Specify Port Screen

- On the “Specify Printer Name” screen, enter a name for the printer, as shown in Figure 2-47. Click “Next” to complete the driver installation.

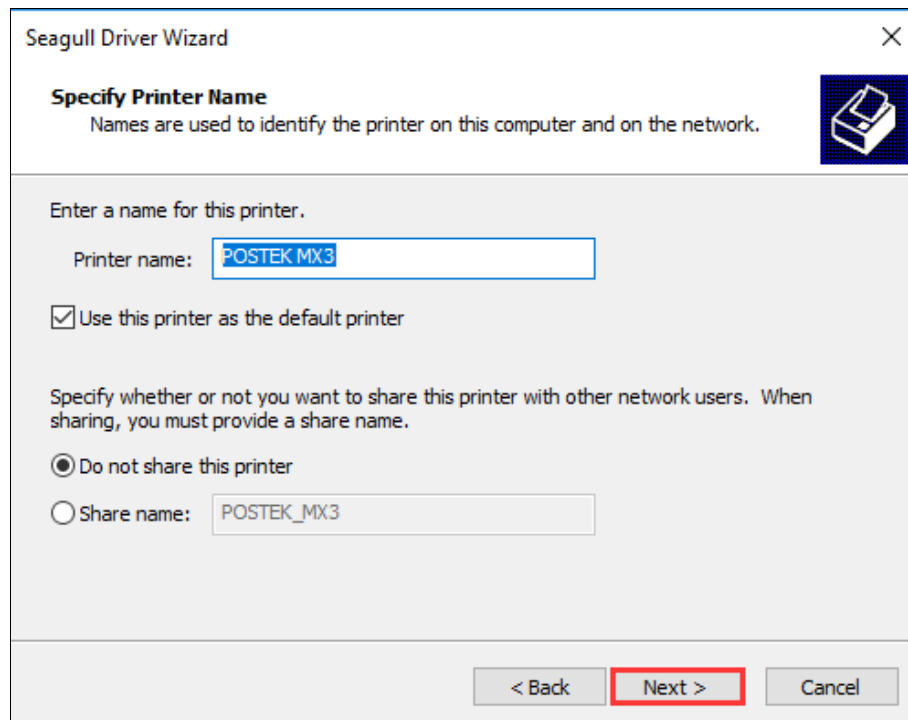


Figure 2-47 Specify Printer Name

11. Print a test page to see whether the printer is connected properly. As shown in Figure 2-48.

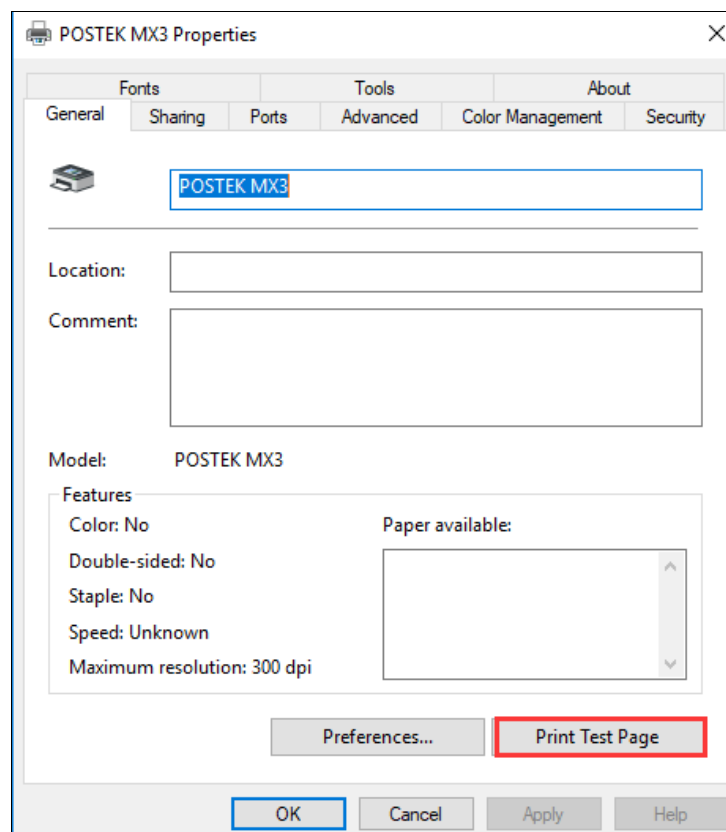


Figure 2-48 Print Test Page

2.4 Installing Label Editing Software

Each printer also comes with a BarTender UltraLite edition software. To access to the software and the directions for use, please scan the QR code on the Quick Start Guide or visit POSTEK website: <http://www.postekchina.com>.

Chapter 3: Operations and Settings

3.1 The Front Panel

The Front Panel of the printer consists of:

- Three multi-function buttons: [PAUSE/Self Test], [FEED/Calibration], and [CANCEL/Reset]
- One status indicator
- One 4.5" LCD Capacitive Touchscreen

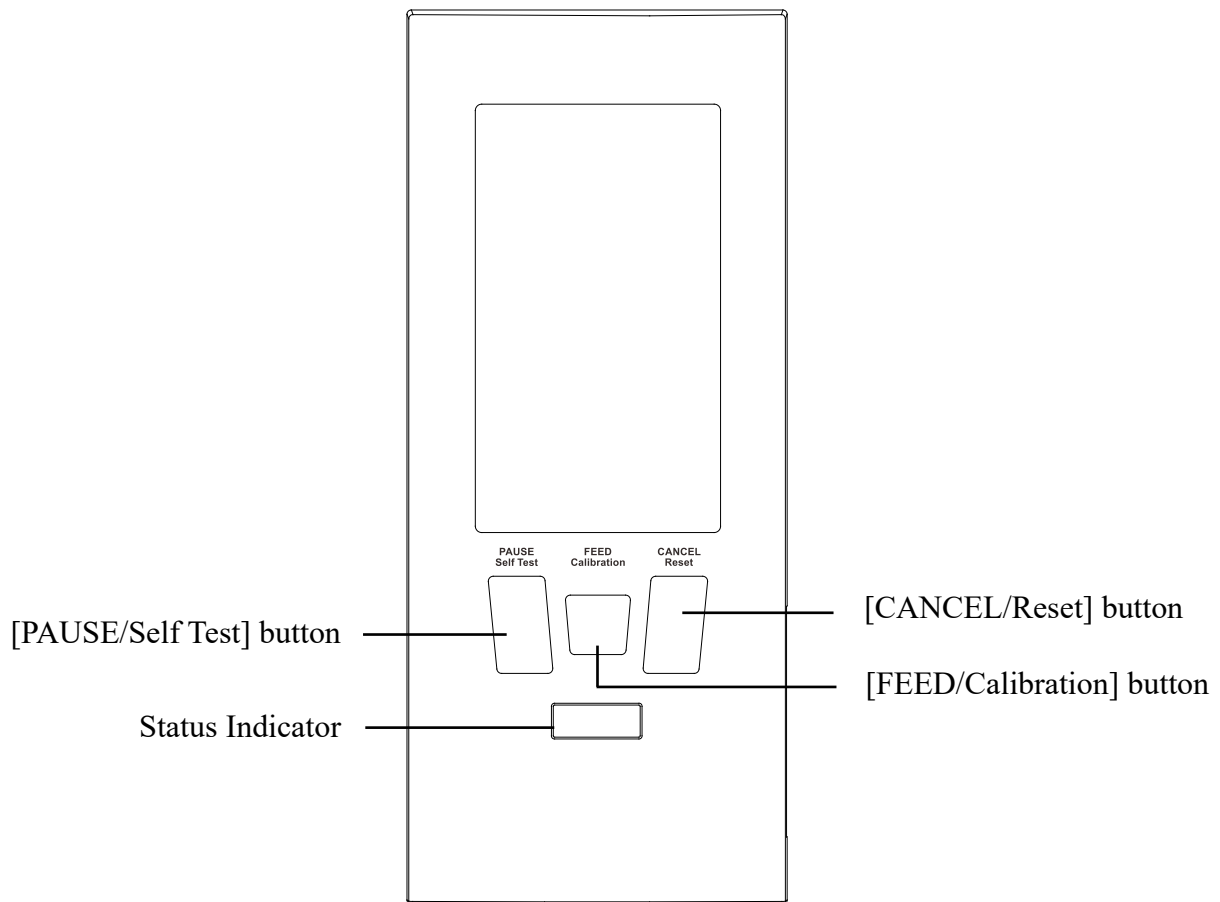


Figure 3-1 Front Panel

3.1.1 Panel Buttons

The three buttons have different functions based on the mode of the operation is performed, please refer to Table 3-1 for details.

Table 3-1 Panel Button Description

Button	Function
[PAUSE/Self Test]	- When the printer is in working or standby, press once to pause the printer. - When the printer is paused, press once to resume. - When the printer is in standby, press and hold the button for around 4 seconds, the printer will print a self-test report.
[FEED/Calibration]	- When the printer is in standby, press once and the printer will feed one label. - When the printer is in standby, press and hold the button for around 4 seconds, the printer will automatically feed labels and the media sensor calibration is performed.
[CANCEL/Reset]	- When the printer is in error, and there is no print job in process, press once and the printer enters the standby state. - When the printer is in standby, press and hold the button for around 4 seconds to enter the Reset settings menu.

3.1.2 Status Indicator

The lighting pattern of the status indicator show the various operating states of the printer, please refer to Table 3-2 for details.

Table 3-2 Indicator Description

Indicator	Printer Status
White solid	Printer is in ready or initialization state
White breathing	Printer in hibernation
White blinking	Upgrade in progress
Blue solid	Working state
Blue blinking	Pause state
Blue blinking quickly	Cancelling print job
Red blinking	Printer in error

3.1.3 LCD Touchscreen

The front panel of the printer contains a 4.5" LCD capacitive touchscreen. Settings can be easily configured on the touchscreen. The main screen is shown in Figure 3-2.

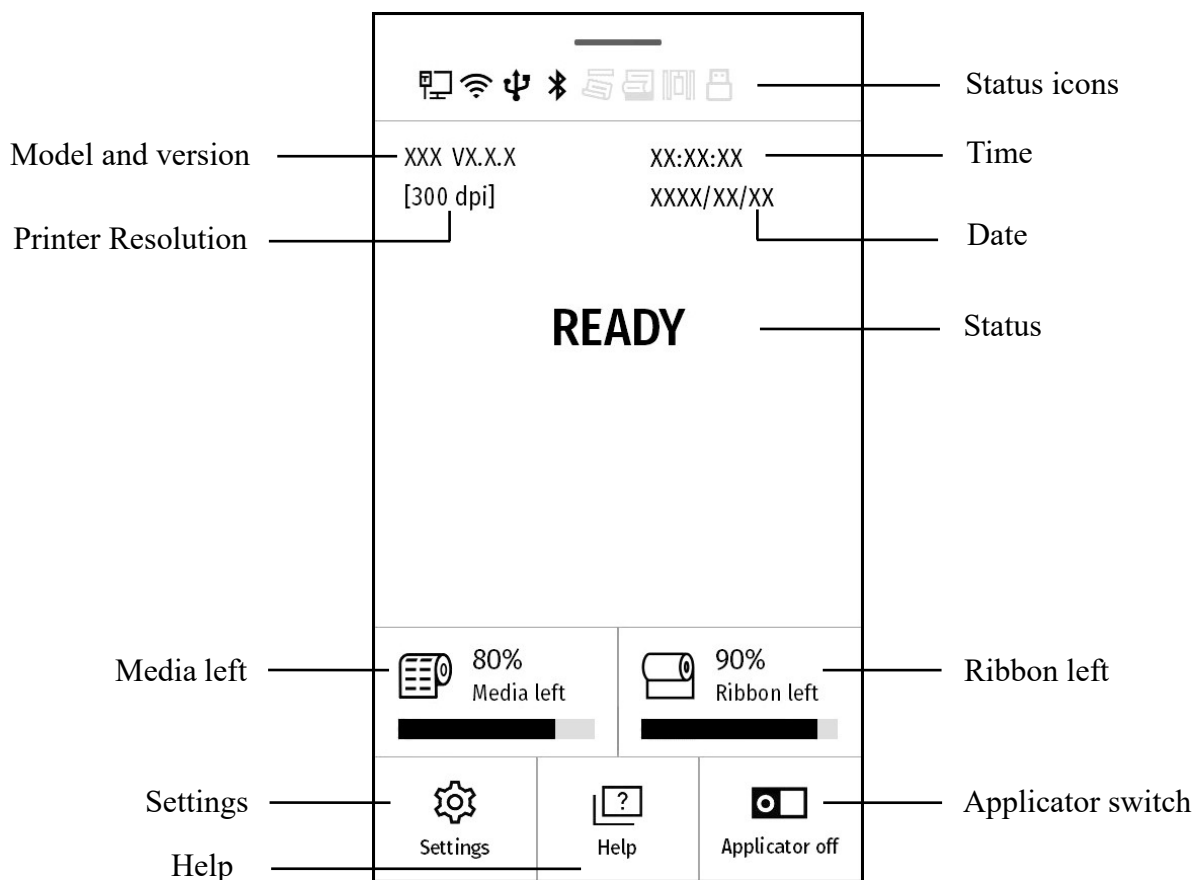


Figure 3-2 Main Screen

For a detailed description of the status icons, see Table 3-3.

Table 3-3 Status Icon Description

Icons	Description	Icons	Description
	Network is connected		Network is not connected
	WiFi is connected		WiFi is not connected
	USB is connected		USB is not connected
	Bluetooth is connected		Bluetooth is not connected
	Tear-off mode on		Tear-off mode off
	Peeler mode on		Peeler mode off
	RFID function on		RFID function off
	USB device is connected		USB device is not connected

3.2 Settings

3.2.1 General Settings

3.2.1.1 Darkness

On the LCD touchscreen, select "Settings" > "General" > "Darkness" to enter the Darkness menu, as shown in Figure 3-3.

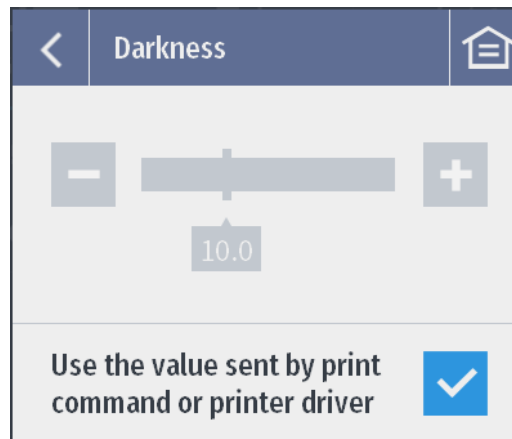


Figure 3-3 Darkness Menu

Set the print darkness from this menu. (*Note: Too high the print darkness may result in poor print quality.*) The print darkness defaults to the value sent by print command or printer driver, if you want to use the menu settings, please uncheck the box "Use the value sent by print command or print driver".

Accepted values: 0.0 to 30.0

3.2.1.2 Speed

On the LCD touchscreen, select "Settings" > "General" > "Speed" to enter the Speed menu, as shown in Figure 3-4.

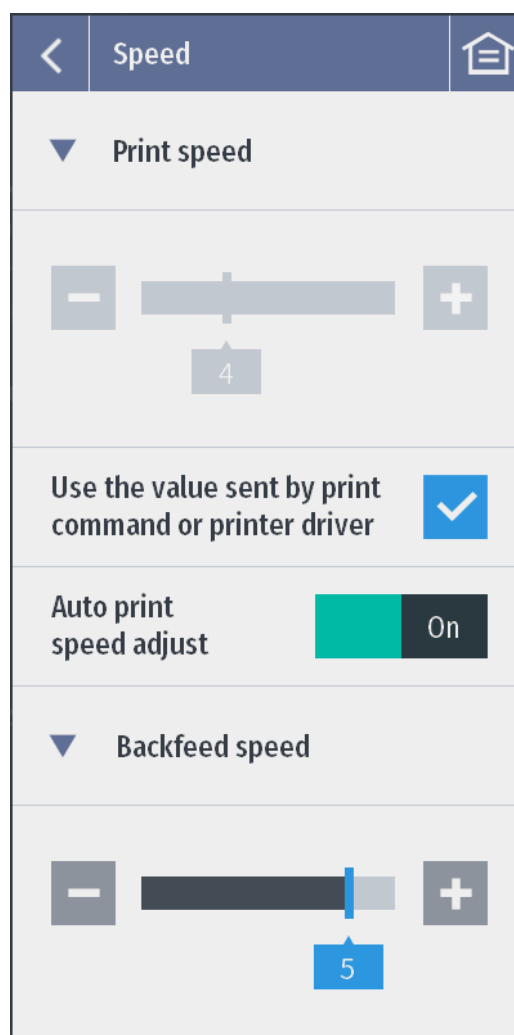


Figure 3-4 Speed Menu

Set the print speed and backfeed speed from this menu. Speed unit: ips (inches per speed).

Print speed: Set the print speed. (*Note: Slower print speed typically yields better print quality.*)

The print speed defaults to the value sent by print command or printer driver, if you want to use the menu settings, please uncheck the box "Use the value sent by print command or printer driver".

Accepted values: 0.5, 1 to 18 (for 203dpi models)

0.5, 1 to 14 (for 300dpi models)

0.5, 1 to 6 (for 600dpi models)

Default value: 4

Auto print speed adjust: Set the Automatic Adjustment of the Print Speed on or off.

Due to low ambient temperature, the darkness level you have chosen may not be achievable at the currently selected print speed. The printer will either decrease the print speed or lower the darkness level to start printing. The printhead temperature may increase as a result of continuous printing. If Auto Print Speed Adjust is on, the printer may decrease the print speed to start. As the printhead temperature increases during continuous printing, the printer would automatically increase the print speed until the print speed reaches the originally selected print speed.

If Auto Print Speed Adjust is turned off, the printer may lower the darkness level to start. As the printhead temperature increases during continuous printing, the printer will automatically increase the print darkness level until the set darkness is reached.

Note: *Different print speeds may result in differences in printing results, so please use this function according to your actual needs.*

Backfeed speed: Set the backfeed speed of the label, i.e., the speed at which the label back feed from the tear-off/peeling/cutting position to the print position. Low backfeed speed helps get higher print position accuracy.

Accepted values: 0.5, 1 to 6

Default value: 2

3.2.1.3 Sensor Type

On the LCD touchscreen, select "Settings" > "General" > "Sensor Type" to enter the Sensor Type menu, as shown in Figure 3-5.

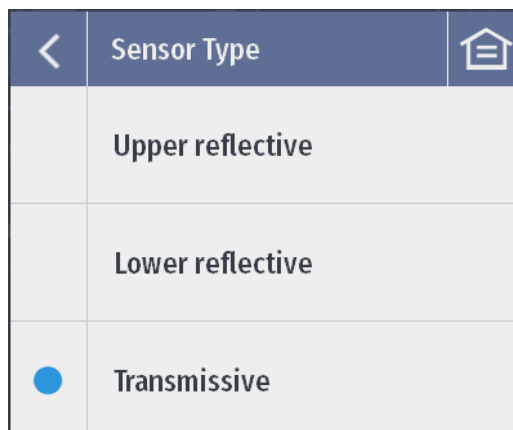


Figure 3-5 Sensor Type Menu

Set the media sensor type from this menu. For labels with a black mark on the surface, choose the upper reflective sensor; for labels with a black mark at the bottom, choose the lower reflective sensor; for gaps, notches and holes, choose the transmissive sensor.

Accepted values: Upper reflective, Lower reflective, Transmissive

Default value: Transmissive

3.2.1.4 Print Mode

On the LCD touchscreen, select "Settings" > "General" > "Print Mode" to enter the Print Mode menu, as shown in Figure 3-6.

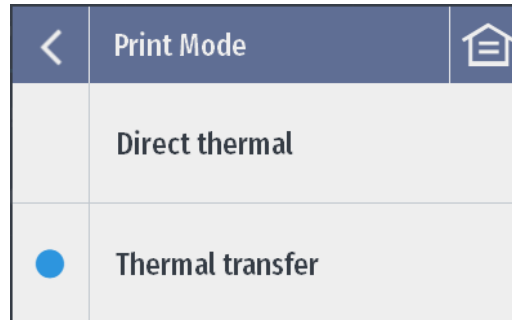


Figure 3-6 Print Mode Menu

Set the print mode from this menu.

Accepted values: *Direct thermal, Thermal transfer*

Default value: *Thermal transfer*

Note: *If you need to print on Direct Thermal materials (ribbon is not required), please contact your dealer for professional adjustment of the print module to avoid excessive wear of the printhead.*

3.2.1.5 Calibration & Registration

On the LCD touchscreen, select "Settings" > "General" > "Calibration & Registration" to enter the Calibration & Registration menu, as shown in Figure 3-7.

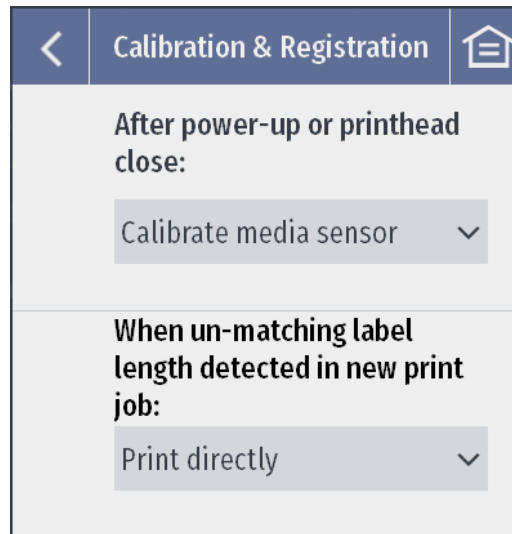


Figure 3-7 Calibration & Registration Menu

After power-up or printhead close: Set the printer's next action when the printer is powered on or the printhead is closed.

Accepted values: *No Action, Calibrate media sensor, Feed to next label*

Default value: *Calibrate media sensor*

When un-matching label length detected in new print job: Set the printer's action when the label length in a newly received print job does not match the current label length.

Accepted values: *Print after calibration, Print directly*

Default value: *Print directly*

3.2.1.6 Print Direction

On the LCD touchscreen, select "Settings" > "General" > "Print Direction" to enter the Print Direction menu, as shown in Figure 3-8.

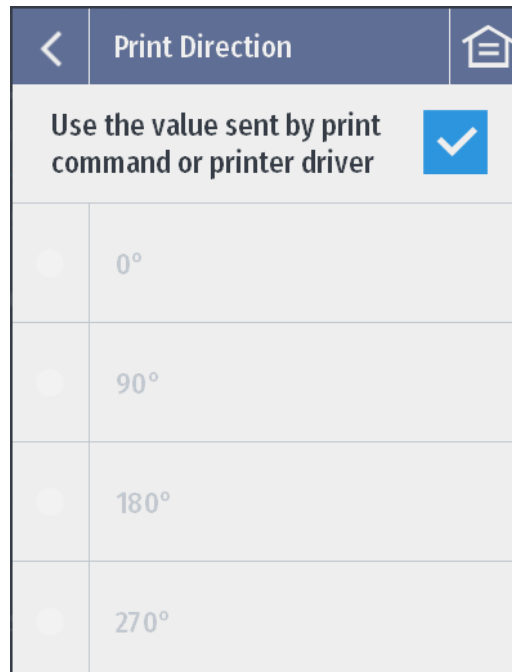


Figure 3-8 Print Direction Menu

Set the print direction of the label content. The print direction defaults to the value sent by print command or printer driver, if you want to use the menu settings, please uncheck the box "Use the value sent by print command or print driver".

Accepted values: 0°, 90°, 180°, 270°

Default value: 0°

3.2.1.7 Printed Label Handling

On the LCD touchscreen, select "Settings" > "General" > "Printed Label Handling" to enter the Printed Label Handling menu, as shown in Figure 3-9.

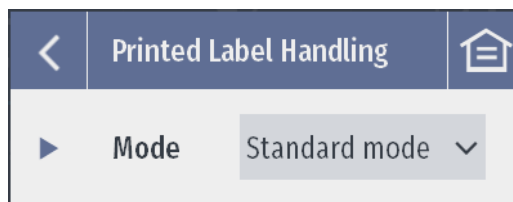


Figure 3-9 Printed Label Handling Menu

Set the printed label handling mode from this menu.

Accepted values: *Standard mode, Tear-off mode, Peeler mode*

Default value: *Tear-off mode*

The Tear-off Mode menu, as shown in Figure 3-10.



Figure 3-10 Tear-off Mode Menu

Tear-off position offset: Adjust the relative position between the label's tear-off line and the tear-off bar of the printer when the label is being teared off.

Increase the value of this parameter will move the tear-off line in the same direction as the media feeding direction, as shown in Figure 3-11.

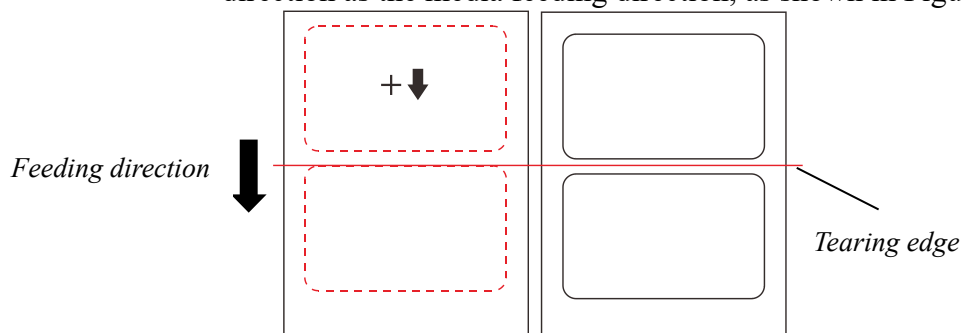


Figure 3-11 Increase Tear-off position Offset Diagram

Decrease the value will move the tear-off line in the opposite direction of media feeding, as shown in Figure 3-12.

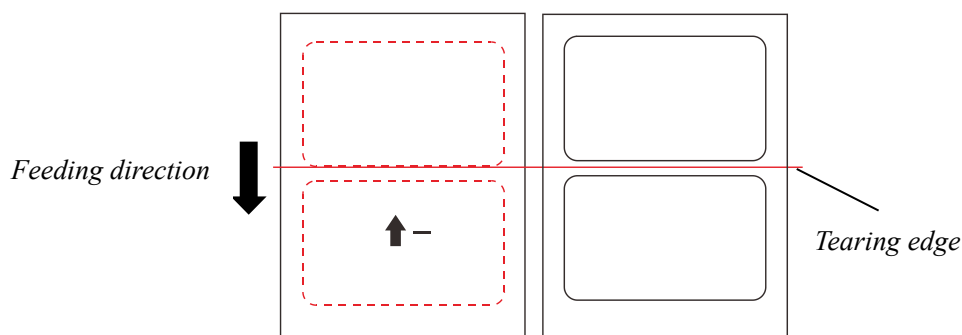


Figure 3-12 Decrease Tear-off position Offset Diagram

Accepted values: -1249.8 to 1249.8 mm (for 203dpi models)
 -847.3 to 847.3 mm (for 300dpi models)
 -423.6 to 423.6 mm (for 600dpi models)

The Peeler Mode menu, as shown in Figure 3-12.

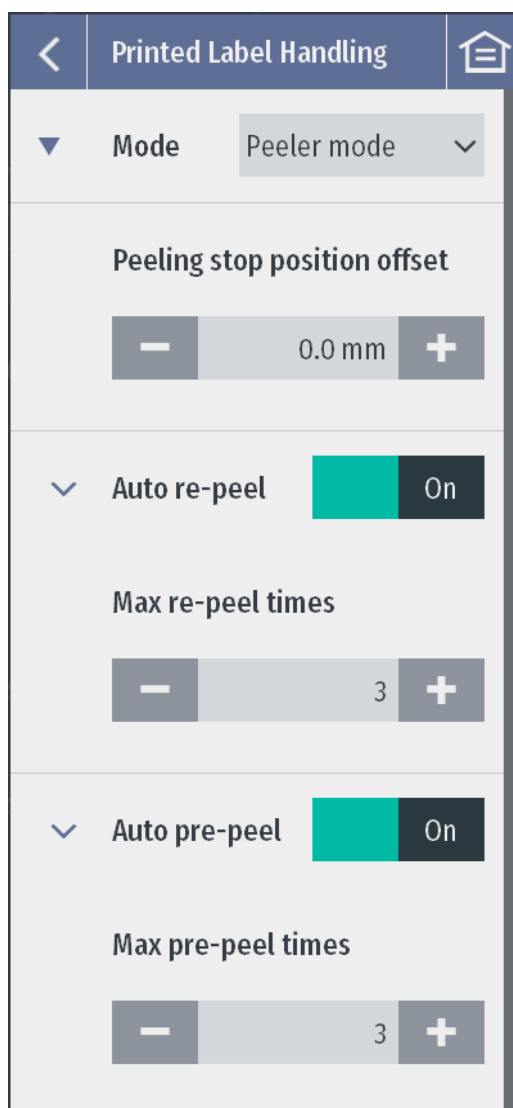


Figure 3-13 Peeler Mode Menu

Peeling stop position offset: Adjust the relative position between the label's trailing edge and the peeling edge of the printer when peeling stops.

Increase the value of this parameter will move the label's trailing edge in the same direction as the media feeding direction, as shown in Figure 3-14.

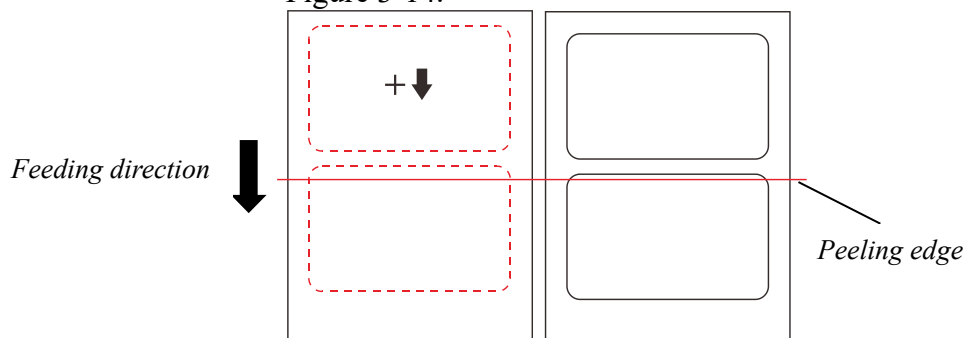


Figure 3-14 Increase Peeling Stop Position Offset Diagram

Decrease the value will move the label's trailing edge in the opposite direction of media feeding, as shown in Figure 3-15.

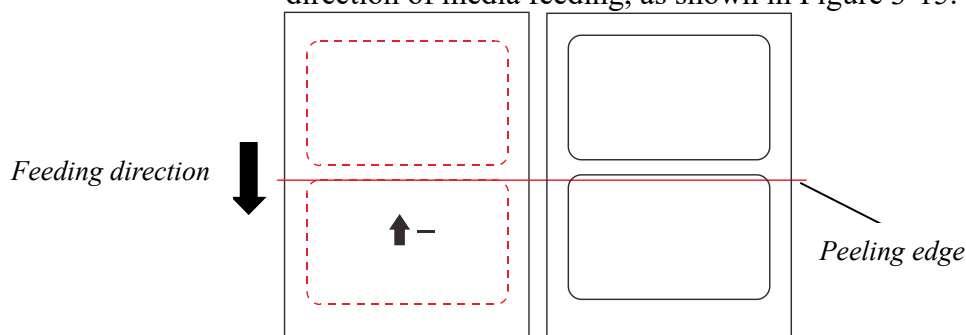


Figure 3-15 Decrease Peeling Stop Position Offset Diagram

Accepted values: -1249.8 to 1249.8 mm (for 203dpi models)
 -847.3 to 847.3 mm (for 300dpi models)
 -423.6 to 423.6 mm (for 600dpi models)

Auto re-peel: Set the auto re-peel function on or off. For labels with a length no greater than 22 mm (0.866"), Auto Re-Peel can back feed the label and peel it again after failed peeling. If Auto Re-Peel fails, please try to increase Re-Peel Times; if it still fails, you may have to change the label stock.

Max re-peel times: Set the maximum number of times to re-peel.

Accepted values: 1 to 6

Default value: 3

Auto pre-peel: Set the auto pre-peel function on or off. For labels that are difficult to peel off, Auto Pre-Peel tries to peel the leading edge of the label off the release liner before printing, making the label peel-able after printing. If Auto Pre-Peel fails, please try to increase Pre-Peel Times; if it still fails, you may have to change the label stock.

Max pre-peel times: Set the maximum number of times to pre-peel.

Accepted values: 1 to 6

Default value: 3

3.2.2 Communication

3.2.2.1 Serial Port

On the LCD touchscreen, select "Settings" > "Communication" > "Serial Port" to enter the Serial Port menu, as shown in Figure 3-16.

Serial Port	
Baudrate	115200 ▼
Data bits	8 ▼
Parity	None ▼
Stop bits	1 ▼
Flow control	None ▼

Figure 3-16 Serial Port Menu

Set the parameters of the serial port.

Baud rate: Set the baud rate of the printer's serial port. You need to select the value that matches the computer host.

Accepted values: 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200

Default value: 115200

Data bits: Set the data bits of the printer. You need to select the value that matches the computer host.

Accepted values: 7, 8

Default value: 8

Parity: Set the parity of the printer. For accurate communication, you need to select the value that matches the computer host.

Accepted values: no parity, odd parity, even parity

Default value: no parity

Stop bits: Set the stop bits of the printer.

Accepted values: 1, 2

Default value: 1

Flow control: Set the printer's serial port flow control method. Enabling the data flow control function ensures that the printer receives and prints data accurately and without error.

Accepted values: None, Xon/Xoff, Rts/Cts

Default value: None

3.2.2.2 Ethernet

On the LCD touchscreen, select "Settings" > "Communication" > "Ethernet" to enter the Ethernet menu, as shown in Figure 3-17.

<	Ethernet	⌂
Name	ethernet_32769	
Description	GbE Controller	
MAC address	E0:BE:03:22:7C:DA	
Connection status	Connected	
IPv4	199.9.10.119	
IPv6	ethernet_32769	
Port	9100	

Figure 3-17 Ethernet Menu

Set the network port parameters.


Name: Display the name of the NIC.

Description: NIC description.

MAC address: Display the MAC address of the NIC.

Connection status: Display the network connection status.

IPv4: Display the IPv4 IP address of the printer. IPv4 settings menu, as shown in Figure 3-18. For a description of the IPv4 setting items, see Table 3-4.

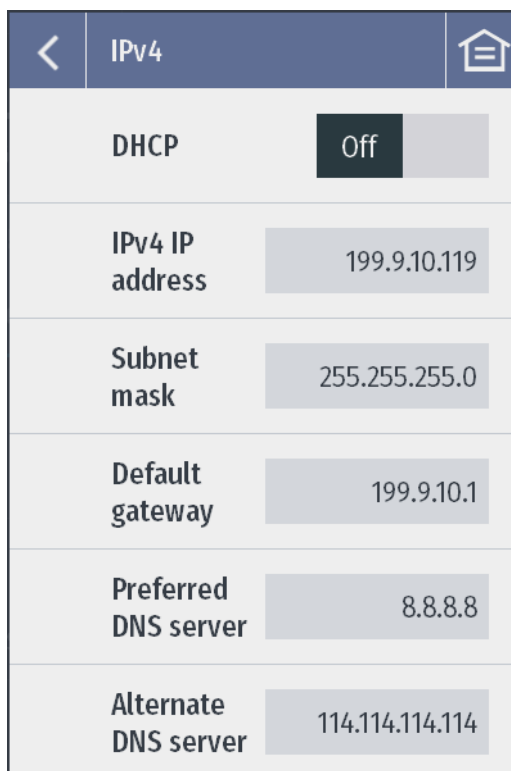

IPv4	
DHCP	Off
IPv4 IP address	199.9.10.119
Subnet mask	255.255.255.0
Default gateway	199.9.10.1
Preferred DNS server	8.8.8.8
Alternate DNS server	114.114.114.114

Figure 3-18 IPv4 Settings Menu

Table 3-4 Description of IPv4 Setting Items

Items	Description
DHCP	Set to enable or disable the function of obtaining the printer IP address dynamically. When DHCP is enabled, "IPv4 address", "Subnet Mask" and "Default Gateway" cannot be set manually.
IPv4 address	Set the IP address of the printer. (Note: The IP address set here must be in the same network segment as the LAN and cannot be duplicated with the IP addresses of other network devices in the LAN.)
Subnet mask	Set the subnet mask. Default value: 255.255.255.0
Default Gateway	Set the default gateway, which must be in the same network segment as the IP address.
Preferred DNS Server	Set the DNS server address.
Alternate DNS Server	Set the alternate DNS server address.

IPv6: Display the IPv6 address of the printer.

Port: Set the network port. Default value: 9100.

3.2.2.3 General I/O

On the LCD touchscreen, select "Settings" > "Communication" > "General I/O" to enter the General I/O menu, as shown in Figure 3-19.

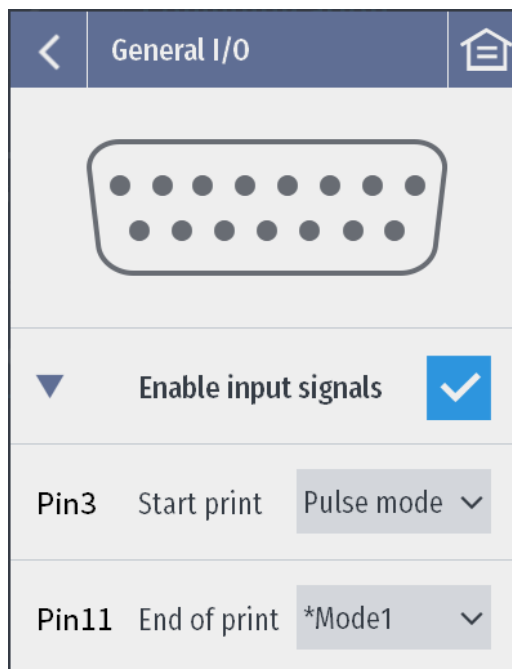


Figure 3-19 General I/O Menu

Set the input signal and output signal of the General I/O interface.

Enable input signals: Check to enable the input signals of the General I/O interface.

Pin3: Set the input signal Start Print.

Pulse mode: Falling edge trigger.

Level mode: Enable printing when level is low.

Pin11: Set the output signal End of Print.

Mode 1: Signal level transitions from high to low only when printing starts, and return to high when printing ends.

Mode 2: Signal level transitions from low to high only when printing starts, and return to low when printing ends.

Mode 3: Signal level transitions from high to low and remains low for 20 ms when a label print is completed. No signal level change during continuous printing.

Mode 4: Signal level transitions from low to high and remains low for 20 ms when a label print is completed. No signal level change during continuous printing.

3.2.3 RFID

3.2.3.1 RFID Settings

On the LCD touchscreen, select "Settings" > "RFID" to enable the RFID function, and then select "RFID Settings" to enter the RFID Settings menu, as shown in Figure 3-20.

RFID Settings	
Read power	10.0 dBm
Write power	10.0 dBm
Frequency region	NA
Protocol type	ISO 18000-6C
Optimal R/W position	0.0 mm
Max attempts to reprint VOID tag	1

Figure 3-20 RFID Settings Menu

Set the RFID reader module parameters from this menu.

Read power: Set the read power of RFID module.

Accepted values: 0.0 to 30.0 dBm

Write power: Set the write power of the RFID module.

Accepted values: 0.0 to 30.0 dBm

Frequency region: Select the UHF frequency region.

Accepted values: NA, NA2, NA3, IN, JP, PRC, EU3, KR2, AU, NZ, MY, ID, PH, TW, MO, RU, SG, VN, TH, AR, HK, BD, BR, OPEN

The frequency ranges by country/region are listed in Table 3-5.

Table 3-5 Frequency Description

Frequency Name	Region	Frequency Range
NA	North America	902 ~ 928
NA2	North America 2	917 ~ 928
NA3	North America 3	917 ~ 923
IN	India	865 ~ 867
JP	Japan	915 ~ 921
PRC	China	920 ~ 925
EU3	Europe 3	865 ~ 868
KR2	South Korea 2	917 ~ 921
AU	Australia	918 ~ 926

Frequency Name	Region	Frequency Range
NZ	New Zealand	922 ~ 928
MY	Malaysia	919 ~ 923
ID	Indonesia	923 ~ 925
PH	Philippines	918 ~ 920
TW	Taiwan, China	922 ~ 928
MO	Macau, China	920 ~ 925
RU	Russia	866 ~ 868
SG	Singapore	920 ~ 925
VN	Vietnam	866 ~ 869
TH	Thailand	920 ~ 925
AR	Argentina	915 ~ 928
HK	Hong Kong, China	865 ~ 868
BD	Bangladesh	925 ~ 926
BR	Brazil	902 ~ 928
OPEN	Open Band	865 ~ 928

Protocol type: Display the protocol type supported by the printer.

Optimal R/W position: Set the optimal read/write position of the RFID tag.

Note: The optimal read/write position of RFID chip is generally the distance from the edge of the tag head to the center of the chip. Manually adjusting the value of the optimal read/write position of RFID chip can correct the inaccuracy value generated by automatic calibration.

The optimal read/write position diagram, see Figure 3-21.

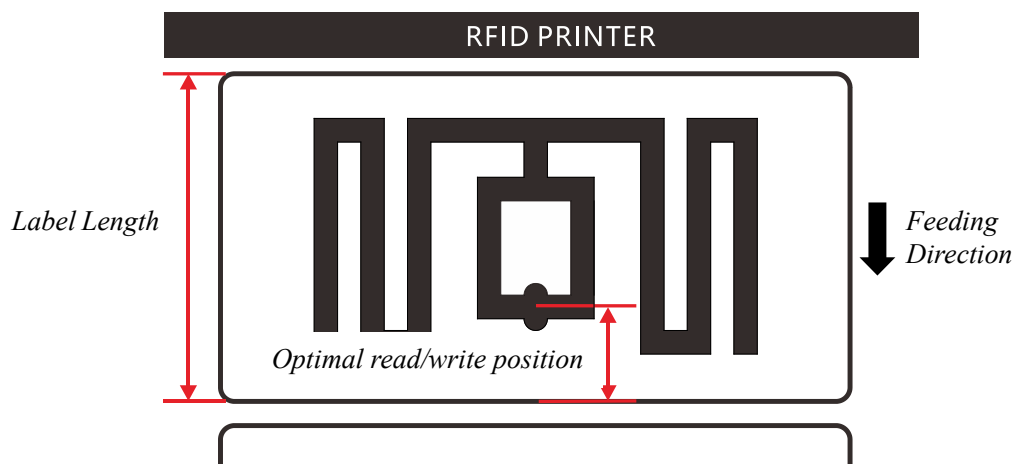


Figure 3-21 Optimal Read/Write Position Diagram

*Accepted values: 0 to 1249.8 mm (for 203dpi models)
0 to 847.3 mm (for 300dpi models)
0 to 423.6 mm (for 600dpi models)*

Max attempts to reprint VOID tag: Set the maximum number of new RFID tags to retry after the current RFID tag is determined to be invalid (VOID). If any retry is successful, the printer continues to perform the print job; if the RFID encoding still fails after the number of new labels retried reaches the set value, the printer will report an error.

Accepted values: 0 to 5

3.2.3.2 Read RFID Tag Data

On the LCD touchscreen, select "Settings" > "RFID" to enable the RFID function, and then select "Read RFID Tag Data" to enter the Read RFID Tag Data menu, as shown in Figure 3-22.

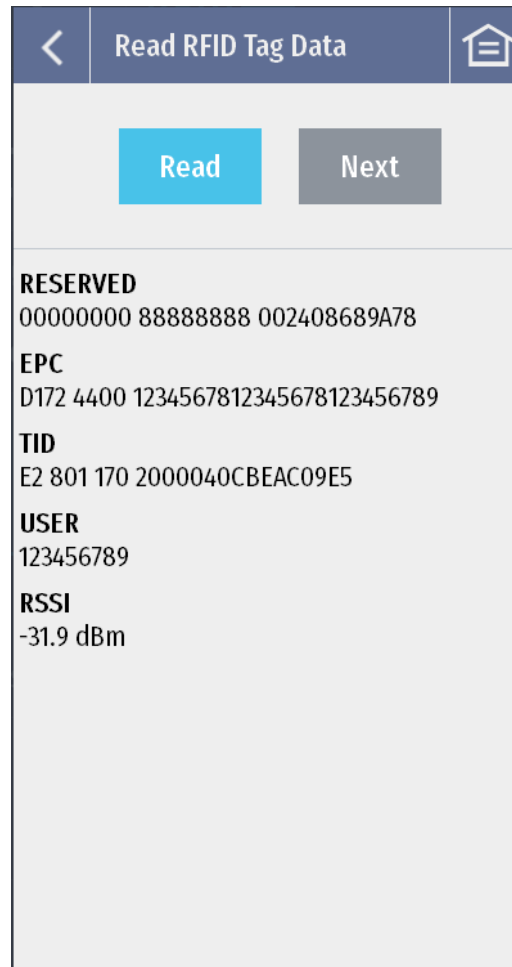


Figure 3-22 Read RFID Tag Data Menu

Read: When the printhead is open, press "Read" to continuously read the RFID tag with the strongest read power and display the data on the LCD touchscreen. Continuous reading will automatically quit after 2 minutes, or can be stopped by pressing "Pause" or closing the printhead.

RESERVED: Display the inactivation password and access password of RFID tag.

EPC: Display the EPC data of the RFID tag.

TID: Display the unique identification number of the RFID tag.

USER: Display user-defined data.

RSSI: Show the signal strength of the RFID tag antenna.

Next: When the printhead is closed, press "Next" to feed and read the next RFID tag.

3.2.3.3 Calibration

On the LCD touchscreen, select "Settings" > "RFID" to enable the RFID function, and then select "Calibration" to enter the Calibration menu, as shown in Figure 3-23.

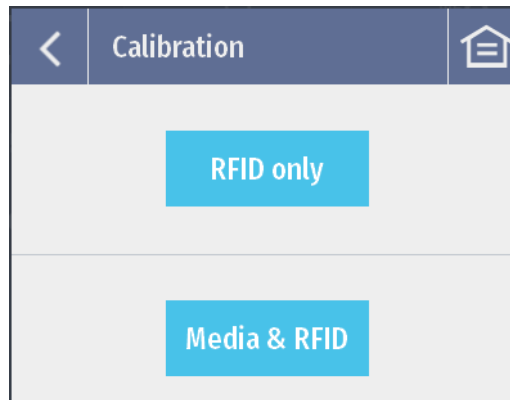


Figure 3-23 Calibration Menu

Perform the RFID calibration to detect the optimal read/write position of the RFID tag.

RFID only: Press "RFID only" to directly perform RFID calibration only.

Media & RFID: Press "Media & RFID" to calibrate the media sensor first and then perform the RFID calibration.

3.2.4 Management

3.2.4.1 Preference

On the LCD touchscreen, select "Settings" > "Management" > "Preference" to enter the Preference menu, as shown in Figure 3-24.

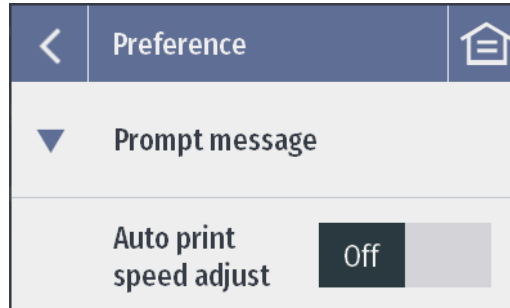


Figure 3-24 Preference Menu

Enable or disable the Automatic Adjustment of the Print Speed prompt message.

Accepted values: *On, Off*

Default value: *Off*

3.2.4.2 Label Formats

On the LCD touchscreen, select "Settings" > "Management" > "Label Formats" to enter the Label Formats menu, as shown in Figure 3-25.



Figure 3-25 Label Formats Menu

Under this menu, up to 100 label format files can be managed. You can select and apply a file in the list, save the current label format, and rename or delete a label format.

3.2.5 Advanced

3.2.5.1 Applicator Logic Control

On the LCD touchscreen, select "Settings" > "Advanced" > "Applicator Logic Control" to enter the Applicator Logic Control menu, as shown in Figure 3-26.

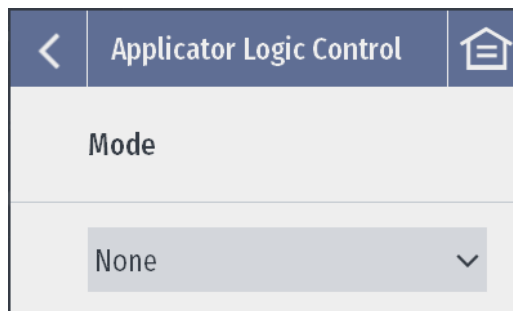


Figure 3-26 Applicator Logic Control Menu

Set the applicator mode from this menu.

Acceptable values: *None, Single air cylinder touch-on, Single air cylinder blow-on, Double air cylinder touch-on, Double air cylinder blow-on, Wipe-on*

Single air cylinder touch-on – The label is picked up by the tamp, and then carried by the single air cylinder to touch the surface of the package to apply.

Single air cylinder blow-on - The label is picked up by the tamp, carried by the air cylinder to approach the package, and then is blown by compressed air onto the surface of the object.

Double air cylinder touch-on - The label is picked up by the tamp, and then carried by the two air cylinders to touch the surface of the package to apply.

Double air cylinder blow-on - The label is picked up by the tamp, carried by the two air cylinders to approach the package, and then is blown by compressed air onto the surface of the object.

Wipe-on - The movement of the label peeling and the package is in sync, while the peeled label is applied onto the surface of the package by a wiper or brush.

The Single Air Cylinder Touch-on menu, see Figure 3-27.

Applicator Logic Control	
Mode	
Single air cylinder touch-on ▼	
Tamp position sensor	Single ▼
Label taking delay	0.0 mm
Label blowing delay	0.0 mm
Touch-on hold time	60 ms
Product detect timeout	50 s
Active signal	...

Figure 3-27 Single Air Cylinder Touch-on Menu

Tamp position sensor: The tamp position sensor is a magnetic switch installed on one end (Single) or both ends (Double) of the air cylinder to detect the presence of the tamp.

Acceptable values: Single, Double

Label taking delay: Set the length for the label to move from the peeling start point to start the vacuum to pick up the label.

Label blowing delay: Set the length for the label to move from the peeling start point to start blowing the label.

Touch-on hold time: Set the amount of time the tamp is held on after a successful touch-on.

Acceptable values: 0 to 3000 ms

Product detect timeout: Set the maximum time to wait for the arrival of the package to be labeled after the label has been picked up by the tamp.

Acceptable values: 0 to 300 s

Active signal: Set the active input signal level for each sensor. 1 indicates high signal level active, while 0 indicates low signal level active.

The Wipe-on menu, see Figure 3-28.

<	Applicator Logic Control	≡
Mode		
Wipe-on ▼		
Product detect timeout	50	s
Active signal	...	

Figure 3-28 Wipe-on Menu

Product detect timeout: Set the maximum time to wait for the arrival of the package to be labeled after the label has been picked up by the tamp.

Acceptable values: 0 to 300 s

Active signal: Set the active input signal level for each sensor. 1 indicates high signal level active, while 0 indicates low signal level active.

3.2.5.2 Label Position Offset

On the LCD touchscreen, select "Settings" > "Advanced" > "Label Position Offset" to enter the Label Position Offset menu, as shown in Figure 3-29.

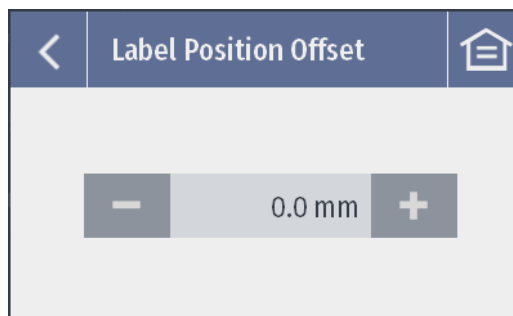


Figure 3-29 Label Position Offset Menu

To compensate for positioning deviations, this parameter can be used to adjust the relative position between the label's leading edge and the heater line of the printhead when the current label is advanced to the starting point.

Increase the value of this parameter will move the leading edge of the label in the same direction as the media feeding direction, as shown in Figure 3-30.

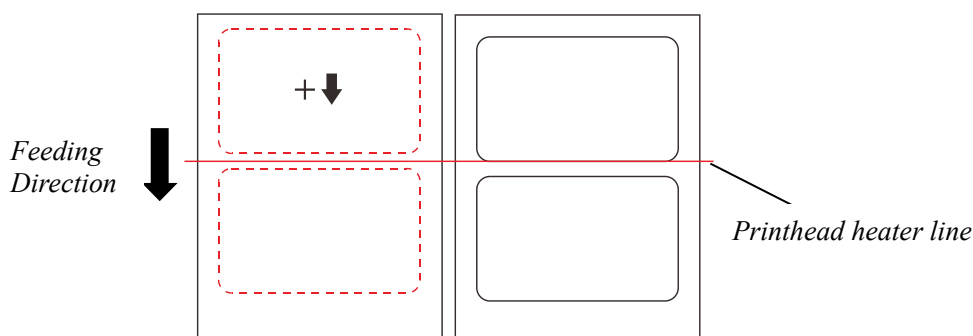


Figure 3-30 Increase Label Position Offset Diagram

Decrease the value will move the leading edge of the label in the opposite direction of media feeding, as shown in Figure 3-31.

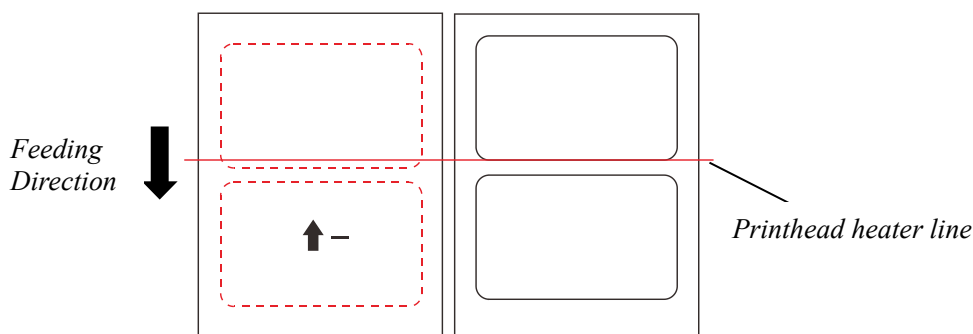


Figure 3-31 Decrease Label Position Offset Diagram

Accepted values: -1249.8 to 1249.8 mm (for 203dpi models)
 -847.3 to 847.3 mm (for 300dpi models)
 -423.6 to 423.6 mm (for 600dpi models)

3.2.5.3 Horizontal Offset

On the LCD touchscreen, select "Settings" > "Advanced" > "Horizontal Offset" to enter the Horizontal Offset menu, as shown in Figure 3-32.

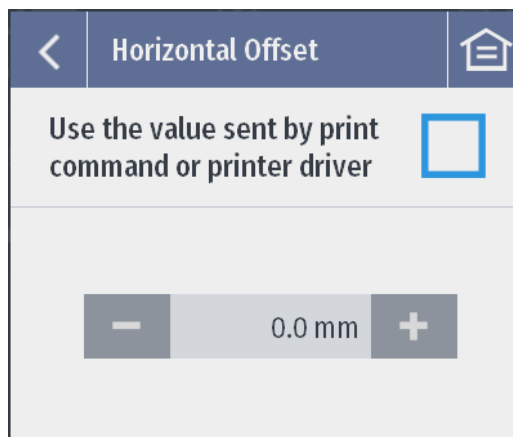


Figure 3-32 Horizontal Offset Menu

This parameter can be used to adjust the horizontal print position on a label. Facing the front side of the printer, increase the value of this parameter to move the print position to the right. Vice versa, the value can be decreased to move the print position to the left. The Horizontal Offset diagram, as shown in Figure 3-33.

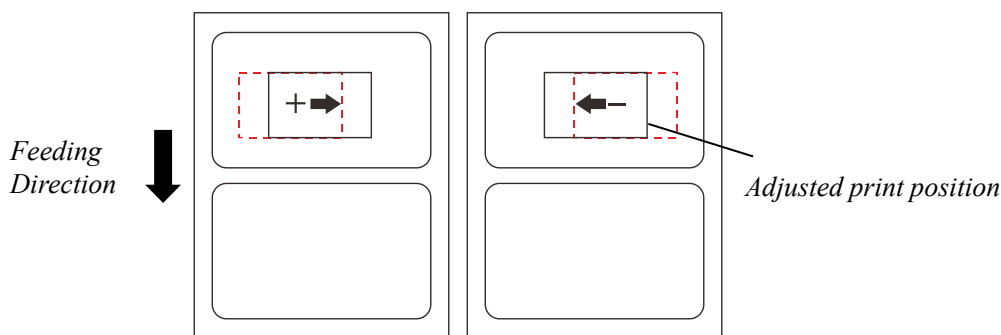


Figure 3-33 Horizontal Offset Diagram

Accepted values: -1249.8 to 1249.8 mm (for 203dpi models)

-847.3 to 847.3 mm (for 300dpi models)

-423.6 to 423.6 mm (for 600dpi models)

Note: If "Use the value sent by print command or printer driver" is checked, you cannot set the horizontal offset from the settings menu.

3.2.5.4 Vertical Offset

On the LCD touchscreen, select "Settings" > "Advanced" > "Vertical Offset" to enter the Vertical Offset menu, as shown in Figure 3-34.

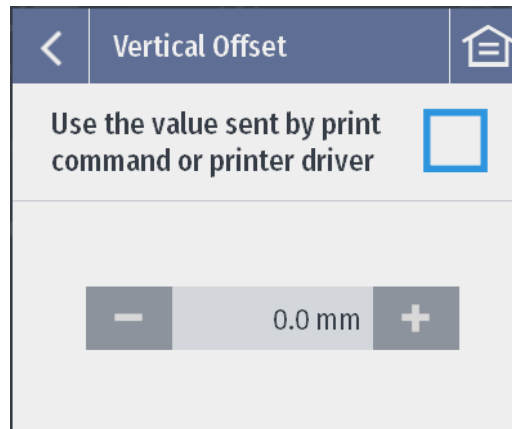


Figure 3-34 Vertical Offset Menu

This parameter can be used to adjust the vertical print position on a label. Increase the value of this parameter to move the print position in the same direction as the media feeding direction. Subsequently, decreasing the value would move the print position in the opposite direction. The Vertical Offset diagram, as shown in Figure 3-35.

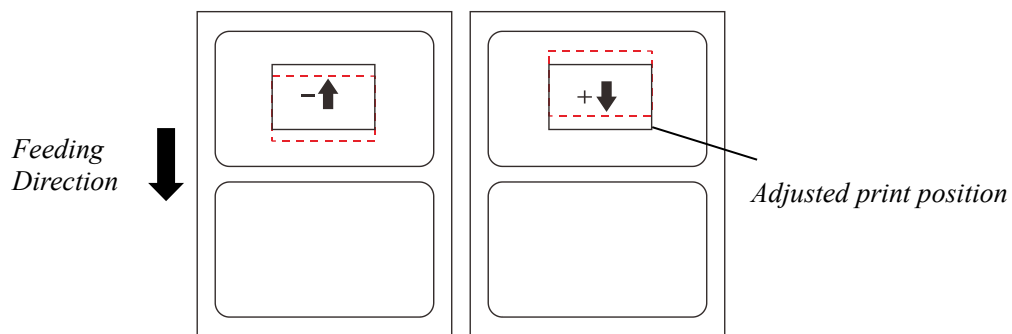


Figure 3-35 Vertical Offset Diagram

Accepted values: -1249.8 to 1249.8 mm (for 203dpi models)
 -847.3 to 847.3 mm (for 300dpi models)
 -423.6 to 423.6 mm (for 600dpi models)

Note: If "Use the value sent by print command or printer driver" is checked, you cannot set the vertical offset from the settings menu.

3.2.5.5 Registration Accuracy

On the LCD touchscreen, select "Settings" > "Advanced" > "Registration Accuracy" to enter the Registration Accuracy menu, as shown in Figure 3-36.

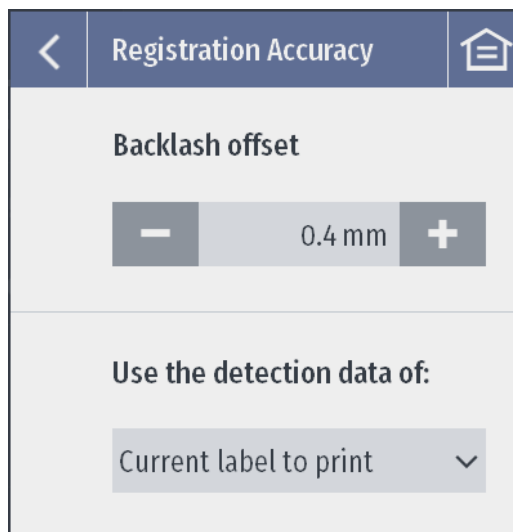


Figure 3-36 Registration Accuracy Menu

Adjust the positioning accuracy of the backfeed label.

Backlash offset: This offset is used to correct the backlash when the platen roller has just reversed its feeding direction.

If the print position deviates in the opposite direction of media feeding, as shown in Figure 3-37, please try to increase the Backlash Offset.

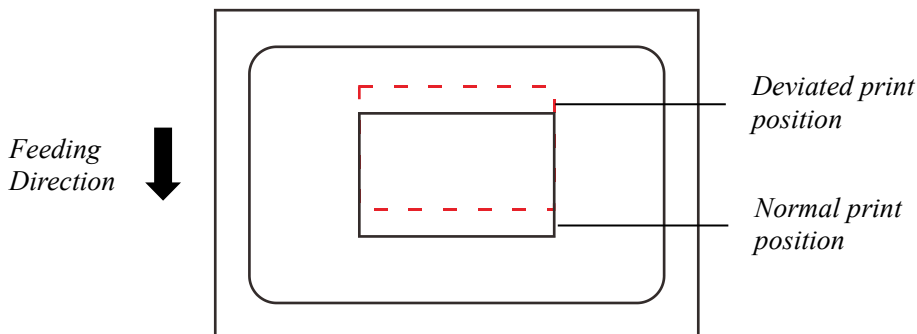


Figure 3-37 Increase Backlash Offset Diagram

If the print position deviates in the direction of media feeding, as shown in Figure 3-38, please try to decrease the Backlash Offset.

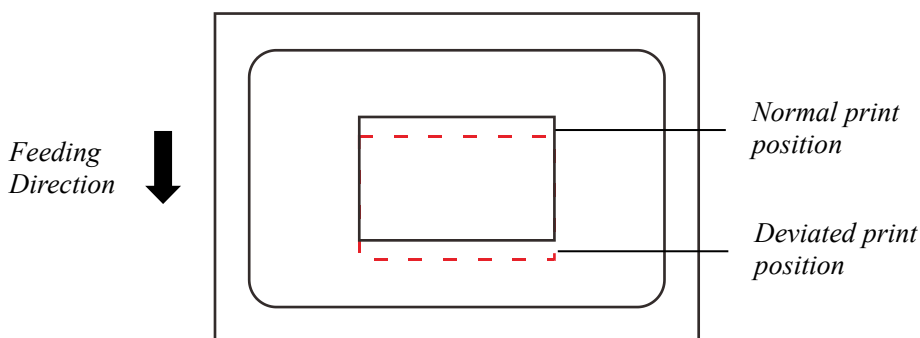


Figure 3-38 Decrease Backlash Offset Diagram

Accepted values: -5.0 to 5.0 mm

Default value: 0.6 mm (for 203dpi models)

0.4 mm (for 300dpi models)

0.2 mm (for 600dpi models)

Use the detection data of: Set the label positioning to be based on the current label to print or the latest detected label. Normally, there is no need to change the settings. However, if the label stock being used has inconsistent gap sizes due to manufacturing issues. When the label rolls used with inconsistent label or gap sizes due to manufacturing errors, please select "Current label to print" so as to improve the label positioning accuracy.

Accepted values: Current label to print, Latest detected label

Default value: Latest detected label

3.2.5.6 Sensor Signal Strength

On the LCD touchscreen, select "Settings" > "Advanced" > "Sensor Signal Strength" to enter the Sensor Signal Strength menu, as shown in Figure 3-39.

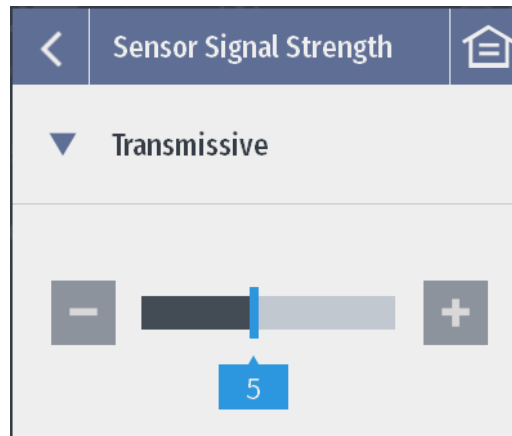


Figure 3-39 Sensor Signal Strength Menu

Set the sensitivity of the media sensor. When the media sensor calibration fails, it is recommended to adjust the sensor signal strength appropriately so as to improve the detection sensitivity.

Accepted values: 1 to 10

Default value: 5

3.2.5.7 Reset

On the LCD touchscreen, select "Settings" > "Advanced" > "Reset" to enter the Reset menu, as shown in Figure 3-40.

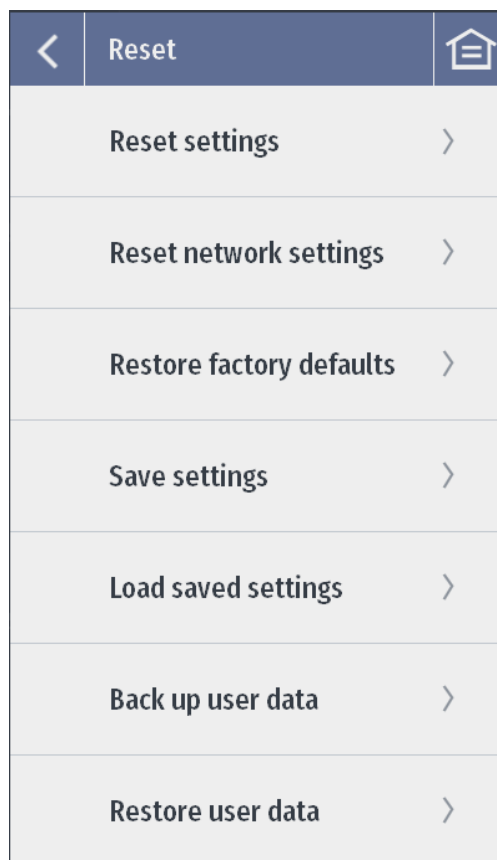


Figure 3-40 Reset Menu

Reset the printer from this menu.

Reset settings: The printer will be reset to default settings except the security, language, and account settings. Any customizations you've made to the printer, such as the print speed and print darkness, will be discarded. The user data, such as the downloaded fonts, will not be affected.

Reset network settings: This will reset all network settings, including Ethernet, WLAN and Bluetooth.

Restore factory defaults: All data will be erased from the printer, including the system and application data, the settings, the downloaded data, and all other user data.

Save settings: Save all current settings.

Load saved settings: Load saved settings, the current settings will be overwritten.

Back up user data: This will back up all data in the printer, including the system and application data, the settings, downloaded files, and other user data.

Restore user data: The backed-up user data, if available, will be recovered after the printer being reset to factory default settings.

3.2.5.8 Languages

On the LCD touchscreen, select "Settings" > "Advanced" > "Language" to enter the Languages menu, as shown in Figure 3-41.

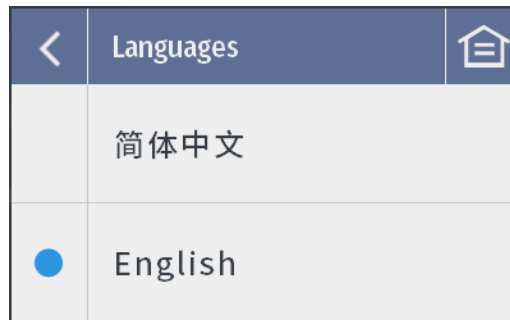


Figure 3-41 Language Menu

Set the language that the printer displays.

Accepted values: 简体中文、English

3.2.5.9 Units

On the LCD touchscreen, select "Settings" > "Advanced" > "Units" to enter the Units menu, as shown in Figure 3-42.

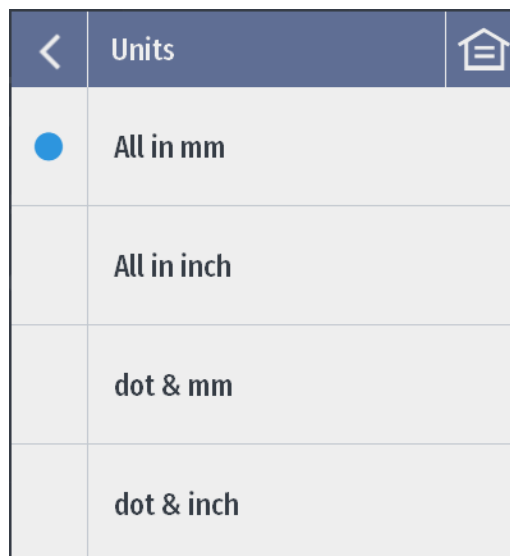


Figure 3-42 Units Menu

Set the units of the setting values.

Accepted values: All in mm, All in inch, dot & mm, dot & inch

3.2.5.10 Date & Time

On the LCD touchscreen, select "Settings" > "Advanced" > "Date & Time" to enter the Date & Time menu, as shown in Figure 3-43.

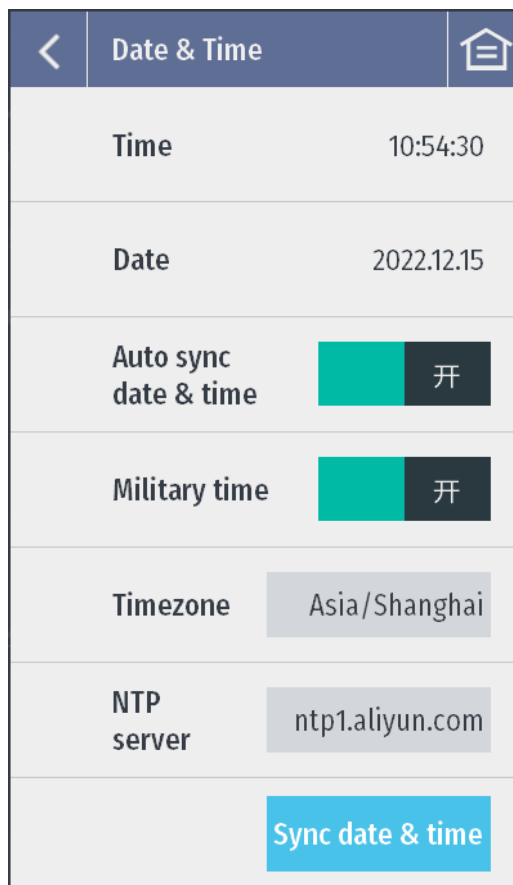


Figure 3-43 Date & Time Menu

Set the date and time displayed on the printer.

Time: Display the current time.

Date: Display the current date.

Auto sync date & time: Set the automatic date and time synchronization function on or off. When this function is on, the NTP server date and time will be automatically synchronized every time the printer is powered on and connected to the internet.

Military time: Set the 24-hour system on or off.

Timezone: Select the time zone.

NTP server: Select the NTP server address.

Sync date & time: When the printer is connected to the internet, press "Sync date & time", the system will immediately synchronize the date and time with the NTP server.

3.2.5.11 Maximum Feed Length

On the LCD touchscreen, select "Settings" > "Advanced" > "Maximum Feed Length" to enter the Maximum Feed Length menu, as shown in Figure 3-44.



Figure 3-44 Maximum Feed Length Menu

Set the maximum feed length for media sensor calibration. This value needs to be set to more than 2 times of the actual label height.

Accepted values: 100.0 to 15000.0 mm

Default value: 1000.0 mm

3.2.5.12 Media Feed Calibration

On the LCD touchscreen, select "Settings" > "Advanced" > "Media Feed Calibration" to enter the Media Feed Calibration menu, as shown in Figure 3-45.

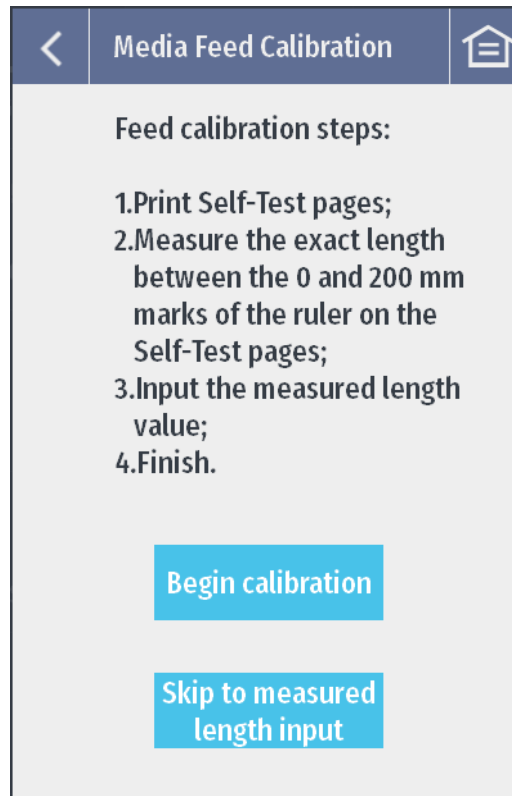


Figure 3-45 Media Feed Calibration Menu

Begin calibration: Press "Begin calibration" and follow the steps to complete the calibration process.

Skip to measured length input: Press "Skip to measured length input" to skip to Input Measured Length menu.

3.2.5.13 Media Roll Diameter

On the LCD touchscreen, select "Settings" > "Advanced" > "Media Roll Diameter" to enter the Media Roll Diameter menu, as shown in Figure 3-46.

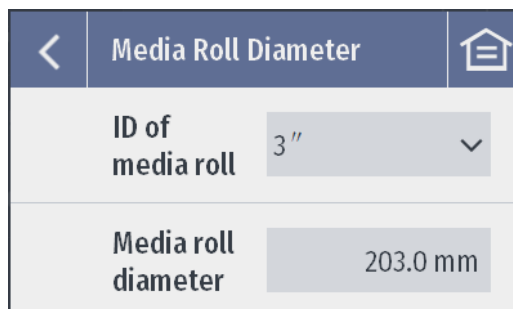


Figure 3-46 Media Roll Diameter Menu

The Remaining Amount of Media Monitoring system detects the real-time variation in diameter of the media roll when printing. By taking both the real-time diameter and the full roll diameter of the media roll into calculation, the system can determine how much media remains on a media roll. The default inner diameter is 3"(76.2 mm). The default value of the diameter of the full media roll is 8"(203.0 mm). If the inner diameter and the full media roll's real diameter are different from the default values, please modify them under this menu.

The real-time remaining media percentage will be displayed on the LCD screen. When the real-time diameter of the media roll equals or is greater than the diameter value as defaulted or modified in the system, the remaining media will be displayed as 100% on the LCD screen.

ID of media roll: The inner diameter of the media roll. (*Note: The printer is equipped with both 1.5" and 3" media core adapters. The 1.5" core adapter is located inside the 3" core adapter. To load a 1.5" core media roll, please first remove the 3" core adapter; and then adjust the position of the Media Roll Guide Stopper.*)

Accepted values: 1.5", 3"

Default value: 3"

Media roll diameter: The full roll diameter of the media roll.

Accepted values: 76.2 to 304.8 mm

Default value: 203.0 mm

3.2.5.14 Ribbon Outer Diameter

On the LCD touchscreen, select "Settings" > "Advanced" > "Ribbon Outer Diameter" to enter the Ribbon Outer Diameter menu, as shown in Figure 3-47.



Figure 3-47 Ribbon Outer Diameter Menu

The Remaining Amount of Ribbon Monitoring system detects the real-time variation in diameter of the ribbon roll when printing. By taking both the real-time diameter and the full roll diameter of the

ribbon roll into calculation, the system can determine how much ribbon remains on a ribbon roll. The default value of the diameter of the full ribbon roll is 2.5" (63.6 mm). If the full ribbon roll's real diameter is different from the default value, please modify it under this menu.

The real-time remaining ribbon percentage will be displayed on the LCD screen. When the real-time diameter of the ribbon roll equals or is greater than the diameter value as defaulted or modified in the system, the remaining ribbon will be displayed as 100% on the LCD screen.

Accepted values: 25.4 to 86.0 mm

Default value: 63.6 mm

3.2.5.15 Programming Language

On the LCD touchscreen, select "Settings" > "Advanced" > "Programming Language" to enter the Programming Language menu, as shown in Figure 3-48.

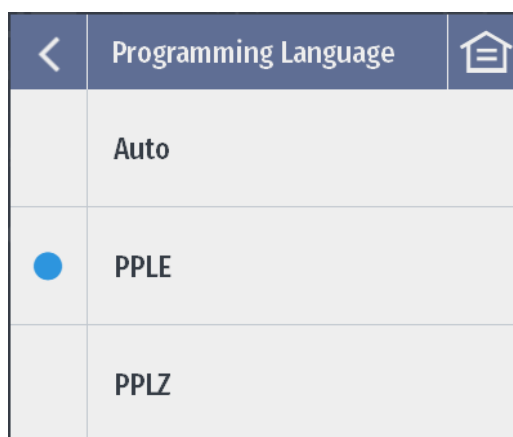


Figure 3-48 Programming Language Menu

Set the programming language of the printer.

Accepted values: Auto, PPLE, PPLZ

Default value: PPLE

3.2.5.16 Firmware Update

On the LCD touchscreen, select "Settings" > "Advanced" > "Firmware Update" to enter the Firmware Update menu, as shown in Figure 3-49.



Figure 3-49 Firmware Update Menu

Upgrade the printer firmware.

OTA update: Upgrade the printer firmware by downloading the upgrade package from a remote server via the internet.

USB update: Upgrade the printer firmware by downloading the upgrade package to the printer via the local USB port.

3.2.5.17 Dump Mode

On the LCD touchscreen, select "Settings" > "Advanced" > "Dump Mode" to enter the Dump Mode menu, as shown in Figure 3-50.

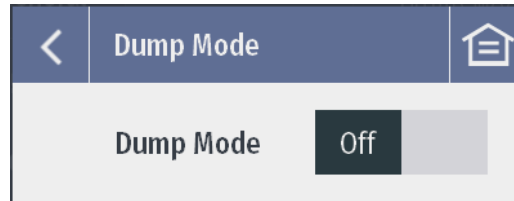


Figure 3-50 Dump Mode Menu

Set the Dump Mode on or off. When the Dump Mode is on, the printer prints out the received data directly without parsing.

Accepted values: On, Off

Default value: *Off*

3.2.5.18 Print Test

On the LCD touchscreen, select "Settings" > "Advanced" > "Print Test" to enter the Print Test menu, as shown in Figure 3-50.

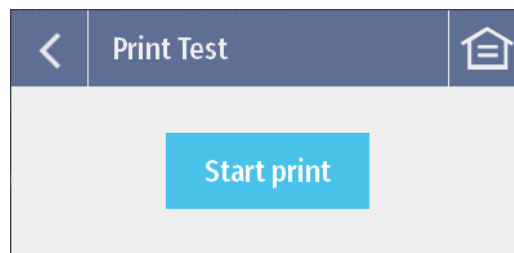


Figure 3-51 Print Test Menu

Press “Start print”, the printer will perform print tests by printing a variety of test patterns at print darkness levels of 10, 12, 14, 16, 18, and 20.

The test patterns, as shown in Figure 3-52.

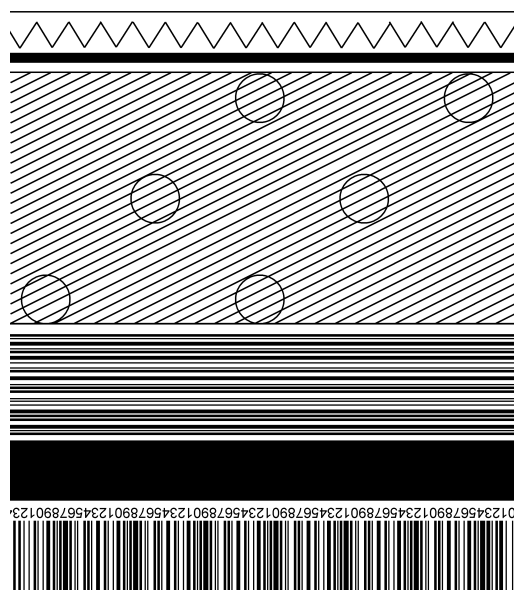


Figure 3-52 Test Patterns

3.2.5.19 About

On the LCD touchscreen, select "Settings" > "Advanced" > "About" to enter the About page, as shown in Figure 3-53.



Figure 3-53 About Page

This menu allows you to view the device name, printer model, OX version, UI version, BSP version, OS version, RT version, HEAT version, hardware version, firmware ID and device serial number.

3.3 Mechanical Adjustments

3.3.1 Adjusting the Media Sensor

The printer's Reflective and Transmissive integrated Media Sensor can be adjusted left and right, as shown in Figure 3-54.

To adjust the Media Sensor: Move the Media Sensor Handle to adjust the media sensor to the appropriate position. Make sure that its position is directly over the gap, hole, notch or black mark.

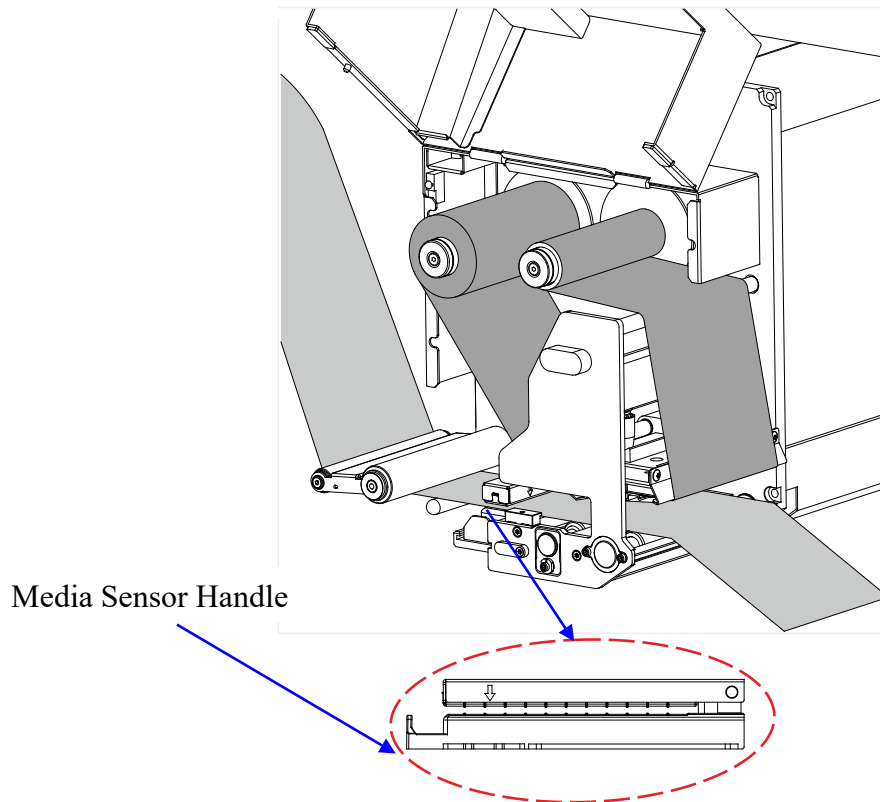


Figure 3-54 Adjust the Media Sensor Position

NOTE

- The printer has three types of media sensors:
 - Transmissive sensor, detects gap, hole or notch between labels;
 - Lower reflective sensor, detects black mark on the backside of the media;
 - Upper reflective sensor, detects black mark on the front side of the media.The way to set the sensor type can be found in [3.2.1.3 Sensor type](#).
- When roll media is produced, the media end would be fixed on the media core with duct tape or scotch tape. If your printer cannot detect the Media Out signal well, please refer to Figure 3-55 to check the position of the tape.

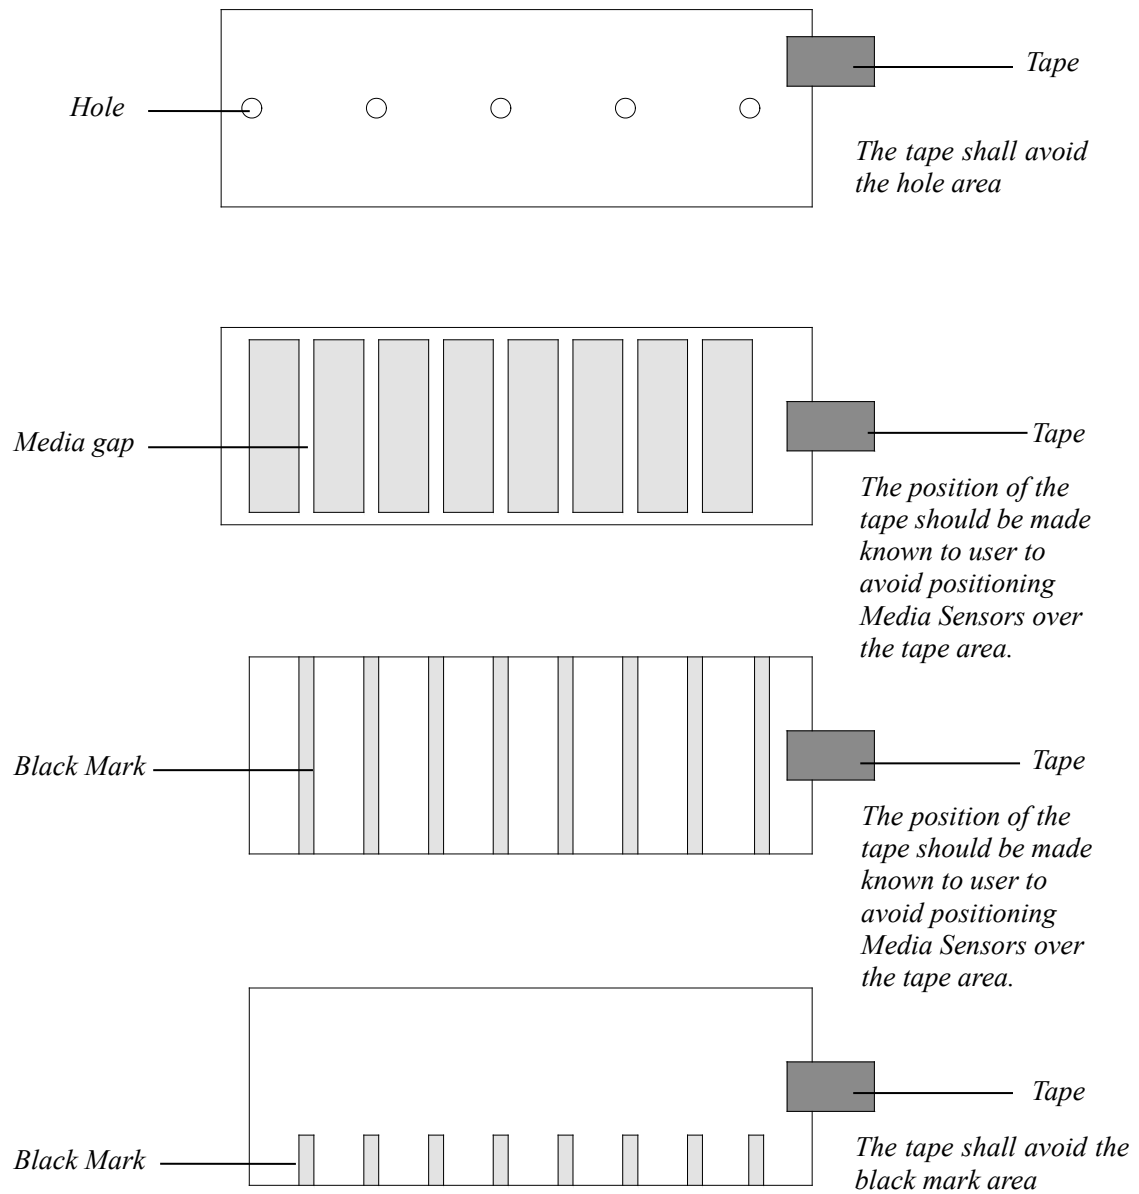


Figure 3-55 End-fixing Tape Position

3.3.2 Adjusting the Printhead Pressure



CAUTION

A qualified technician is required to adjust the printhead pressure. Printhead damage or poor printout quality may occur if the procedure is not done correctly.

The printhead pressure module contains two spring assemblies, respectively controlling the pressure of the printhead on both sides, as shown in Figure 3-56.

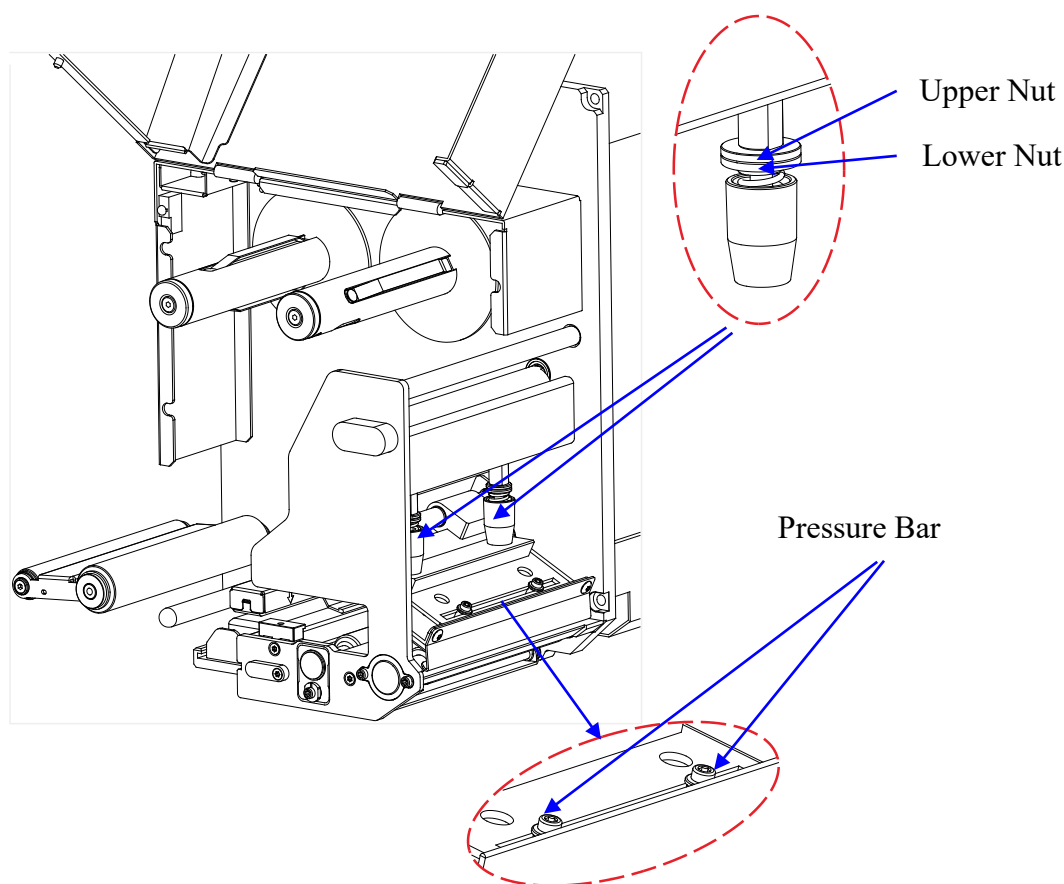


Figure 3-56 Printhead Pressure Adjustment

Follow the steps below to adjust the printhead pressure:

1. Loosen the Upper Nut counterclockwise.
2. Turn the Lower Nut to the proper position (Turn the Lower Nut counterclockwise decreases the printhead pressure, while turn the Lower Nut clockwise increases the printhead pressure).
3. Tighten the Upper Nut clockwise until it is fixed.
4. Repeat steps 1~3 on another spring assembly to complete the adjustment of the printhead pressure.

Follow the steps below to adjust the printhead balance:

1. To adjust the balance of the printhead, only one Pressure Bar's position needs to be adjusted. Moving the Pressure Bar to the left increases the left side pressure of the printhead; moving the Pressure Bar to the right increases the right side pressure of the printhead. Always place one Pressure Bar at end position when making adjustments. Choose the left side or right side Pressure

Bar to adjust, then slightly loosen the Pressure Bar by using the Allen wrench bundled with the printer.

2. Slide the Pressure Bar to an estimated position and fasten it with the Allen wrench.
3. Test print to check the evenness of the printout quality.
4. Repeat steps 2 and 3 until even printout is achieved.

3.3.3 Adjusting the Ribbon Tension

Tension on both ribbon supply and ribbon take-up spindles can be adjusted, refer to Figure 3-57, by following the steps below.

1. Slightly loosen the Setscrew with the Allen wrench bundled with the printer.
2. To increase the tension, turn the Tension Adjustment Screw clockwise by the Allen wrench; to decrease the tension, turn it counterclockwise. The tension level can be read from the Tension Level Indicator. When tension is set at the desired level, fasten the Setscrew to complete the adjustment.

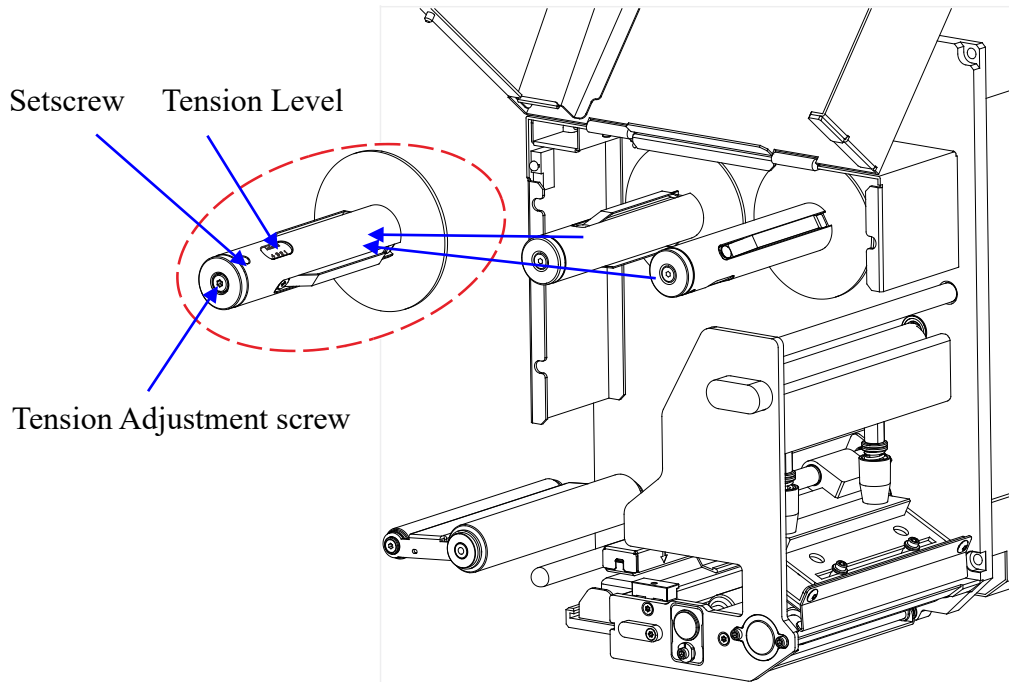


Figure 3-57 Ribbon Tension Adjustment

Chapter 4: Maintenance



WARNING

- *Make sure the printer is powered off before performing maintenance operations.*
 - *The Printhead may be hot due to recent printing. Wait until the Printhead cools before performing maintenance.*
 - *Use only anhydrous isopropyl alcohol to clean the print head.*
-

4.1 Cleaning the Printhead

Due to the Printhead's functionality in the printer, it comes into contact with consumables and therefore is susceptible to dirt accumulation. If dirt is not removed, the Printhead may be damaged. To ensure longevity of the Printhead, follow the recommended maintenance guidelines below:

Clean the Printhead after every (1) roll of ribbon use or every (3) rolls of label media use. To clean the Printhead:

1. Turn off the printer.
2. Lift the Flip-up cover of the printer.
3. Turn the Printhead Handle counter clockwise to open the Printhead.
4. Remove the ribbon (if applicable) and media.
5. Use a cotton swab dipped in anhydrous isopropyl alcohol. Wipe the Printhead from end to end.
6. Allow a few seconds for the Printhead to dry before using the printer again.

4.2 Cleaning the Platen Roller

The roller can accumulate debris from consumables, such as dirt, sand, dust or glue. To ensure longevity of the Platen Roller, follow the recommended maintenance guidelines below:

Clean the Platen Roller after every (3) rolls of label media used. To clean the Platen Roller:

1. Turn off the printer.
2. Lift the Flip-up cover of the printer.
3. Turn the Printhead Handle counter clockwise to open the Printhead.
4. Remove the ribbon (if applicable) and media.
5. Use a cotton swab dipped in anhydrous isopropyl alcohol. Rub the swab along the Platen Roller from end to end while rotating the roller until the swab no longer accumulates ink or debris.

4.3 Cleaning the Printer Interior

Over time, the printer's interior may collect dust or debris from the consumables. It is advised to periodically clean the printer's interior in order to prevent the accumulated dirt from damaging internal parts.

To clean the printer interior, use a cotton swabs dipped into anhydrous isopropyl alcohol and remove any dirt.

4.4 Cleaning the Sensors

Over time, dust and debris will accumulate over the sensors and affect their performance, to ensure proper detection, please clean the sensors with cotton swabs dipped into anhydrous isopropyl alcohol periodically.

Chapter 5: Troubleshooting

Occasionally situations occur that require some troubleshooting. Possible issues and potential solutions are listed in this section. While not every situation is addressed, you may find some of these tips useful.

5.1 Error Messages

The LCD touchscreen displays messages when there is an error. See Table 5-1 for error messages, the possible causes, and the recommended solutions.

Table 5-1 Error Messages

Error Message	Possible Cause	Recommended Solution
Memory error. Error code:1	/	Please restart the printer. If error remains, please contact a qualified professional for service.
System error. Error code:2	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Upgrade failed. Error code:3	/	Try again
System error. Error code:4	/	Please restart the printer. If error remains, please contact a qualified professional for service.
System error. Error code:5	/	Please restart the printer. If error remains, please contact a qualified professional for service.
System error. Error code:6	/	Please restart the printer. If error remains, please contact a qualified professional for service.
System error. Error code:7	/	Please restart the printer. If error remains, please contact a qualified professional for service.
System error. Error code:8	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Transmissive sensor failure. Error code:9	Incorrect signal strength setting	Go to "Settings" > "Advanced" > "Sensor Signal Strength" to adjust the signal strength.
	The sensor module is not installed or broken.	/
Lower reflective sensor failure. Error code:10	Incorrect signal strength setting	Go to "Settings" > "Advanced" > "Sensor Signal Strength" to adjust the signal strength.
	The sensor module is not installed or broken.	/
Upper reflective	Incorrect signal strength	Go to "Settings" > "Advanced" > "Sensor

Error Message	Possible Cause	Recommended Solution
sensor failure. Error code: 11	setting.	Signal Strength" to adjust the signal strength.
	The sensor module is not installed or broken.	/
Thermal transfer printing not supported. Error code: 12	Only direct thermal printing supported with this printer.	/
Failed to enable peeler mode. Error code: 14	Peeler mode not supported with this printer	/
	Peeler module not installed	/
	Peeler module broken	/
Failed to enable applicator mode. Error code: 16	Applicator mode not supported with this printer	/
	Applicator module assembly not installed	/
	Applicator module assembly broken	/
Updates failed. Error code:100	Not enough Flash memory.	Please go to "Settings" > "Mgmt" to clean up some files such as images or fonts to free up space.
Updates failed. Error code:101	High memory usage by other applications.	Please restart the printer and try again.
Updates failed. Error code:102	Invalid update file.	Please check your download source.
Updates failed. Error code:103	Data verification error.	Please try again.
Updates failed. Error code:104	Failed writing Flash memory.	Please contact a qualified professional for service.
Updates failed. Error code:105	Failed connecting to internet.	Please check network connection.
Updates failed. Error code:106	Execution error.	Please try again.
Data error. Error code:10001	/	There is an error when receiving data, Please restart the printer.
Data error. Error code:10002	/	There is an error when sending data, Please restart the printer.
Serial port error. Error code:11000	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Serial port error. Error code:11001	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Serial port error. Error code:11002	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Serial port error. Error code:11003	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Serial port error.	/	Please restart the printer. If error remains,

Error Message	Possible Cause	Recommended Solution
Error code:11004		please contact a qualified professional for service.
Serial port error. Error code:11005	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Serial port error. Error code:11006	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Serial port error. Error code:11007	/	Please restart the printer. If error remains, please contact a qualified professional for service.
USB Device port error. Error code:12000	/	Please restart the printer. If error remains, please contact a qualified professional for service.
USB Device port error. Error code:12001	/	Please restart the printer. If error remains, please contact a qualified professional for service.
USB failed to send data. Error code:12002	/	Please check the USB connection. If error remains, please contact a qualified professional for service.
USB read error. Error code:12003	/	Please check the USB connection. If error remains, please contact a qualified professional for service.
Ethernet port error. Error code:12500	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Ethernet port error. Error code:12501	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Ethernet port error. Error code:12502	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Ethernet port error. Error code:12503	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Ethernet port error. Error code:12504	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Ethernet port error. Error code:12505	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Invalid command. Error code:20000	Instructions sent to the printer contain an invalid command	Please check the command syntaxes.
	The configured printer programming language doesn't match that in the instructions sent to the printer	Please go to "Settings" > "Advanced"> "Programming Language" to select the matching programming language.
Invalid command. Error code:20001	Instructions sent to the printer contain an invalid command	Please check the command syntaxes.
	The configured printer programming language	Please go to "Settings" > "Advanced"> "Programming

Error Message	Possible Cause	Recommended Solution
	doesn't match that in the instructions sent to the printer	Language" to select the matching programming language.
Invalid command. Error code:21000	Instructions sent to the printer contain an invalid command	Please check the command syntaxes.
	The configured printer programming language doesn't match that in the instructions sent to the printer	Please go to "Settings" > "Advanced"> "Programming Language" to select the matching programming language.
Invalid command. Error code:22000	Instructions sent to the printer contain an invalid command	Please check the command syntaxes.
	The configured printer programming language doesn't match that in the instructions sent to the printer	Please go to "Settings" > "Advanced"> "Programming Language" to select the matching programming language.
Keypad error. Error code:23000	/	Please restart the printer. If error remains, please contact a qualified professional for service.
LCD error. Error code:24000	/	Please restart the printer. If error remains, please contact a qualified professional for service.
LCD error. Error code:24001	/	Please restart the printer. If error remains, please contact a qualified professional for service.
System error. Error code:30000	/	Please restart the printer. If error remains, please contact a qualified professional for service.
System error. Error code:30001	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Printhead open. Error code:30002	/	Please close the printhead
Data processing timeout. Error code:30003~30004	/	Impaired performance of CPU by heat, ambient temperature needs to be well maintained.
System error. Error code:30100~30119	/	Please restart the printer. If error remains, please contact a qualified professional for service.
Excessive label size. Error code: 31000	/	Not enough memory to process label data of this size.
Media sensor calibration failed. Error code:31001	/	Ensure that the media sensor is aligned with the sensing marks, e.g. gaps, holes, black marks.
	/	Choose the best media sensor for the situation: transmissive, upper reflective, or lower reflective.
	/	The media sensor needs cleaning.
	/	Incorrect signal strength setting, go to "Settings" > "Advanced" > "Sensor Signal Strength" to adjust the signal strength.
Out of media.	/	Replace the media.

Error Message	Possible Cause	Recommended Solution
Error code: 31002		
Media detection error. Error code: 31003	Media sensor calibration not performed after replacing a new media.	Press and hold the [FEED/Calibration] button (hold for around 4 seconds) to perform Media Sensor Calibration
	/	Ensure that the media sensor is aligned with the sensing marks, e.g. gaps, holes, black marks.
	/	Choose the best media sensor for the situation: transmissive or lower reflective.
	/	Media sensor needs cleaning.
	/	Incorrect signal strength setting, go to "Settings" > "Advanced" > "Sensor Signal Strength" to adjust the signal strength.
Ribbon detection error. Error code: 31004	Ribbon breaks	Reload the ribbon.
	Ribbon sensor module failure	/
Out of ribbon. Error code: 31005	/	Replace the ribbon.
Media sensing mark misdetected. Error code: 31006	Misdetection caused by preprinted text or image, RFID inlays, etc., on the label.	Please adjust the media sensor to move away from these positions. If error remains, please contact a qualified professional for service.
Out of media. Error code: 31007	/	Replace the media.
Media detection error. Error code: 31008	Media sensor calibration not performed after replacing a new media.	Press and hold the [FEED/Calibration] button (hold for around 4 seconds) to perform Media Sensor Calibration
	/	Ensure that the media sensor is aligned with the sensing marks, e.g. gaps, holes, black marks.
	/	Choose the best media sensor for the situation: transmissive or lower reflective.
	/	Media sensor needs cleaning.
	/	Incorrect signal strength setting, go to "Settings" > "Advanced" > "Sensor signal strength" to adjust the signal strength.
Ribbon detection error. Error code: 31009	Ribbon breaks	Reload the ribbon.
	Ribbon sensor module broken	/
Out of ribbon. Error code: 31010	/	Replace the ribbon
Printhead open failed. Error code: 31100	Sensor or motor failure.	Please contact a qualified professional for service.
Printhead close failed. Error code: 31101	Sensor or motor failure.	Please contact a qualified professional for service.
System error. Error code: 32000~32025	/	Please restart the printer. If error remains, please contact a qualified professional for service.

Error Message	Possible Cause	Recommended Solution
Printhead overheated. Error code: 32028	/	Please decrease print speed or lower the print darkness.
Power overload. Error code: 32029	/	Please decrease print speed or lower the print darkness. If error remains, it's probably a power supply failure. Please contact a qualified professional for service.
Low ambient temperature. Error code: 32030	/	Due to low ambient temperature, the printer needs to print at a lower darkness level in order to maintain the currently set print speed. After printing starts, the print darkness may gradually increase to the current setting as the print head temperature rises. Press Continue below to start printing with lowered print darkness. Or you can turn on the "Auto Print Speed Adjust" function by going to "Settings" > "General" > "Speed". The printer will automatically reduce the print speed to ensure the print darkness level when the ambient temperature is low. Go to "Settings" > "Mgmt" > "Preference" to stop this message from showing up again.
Tamp not back in place. Error code: 33000	/	/
Tamp failed to take label. Error code: 33001	/	/
Product not present. Error code: 33002	/	/
Label application failed. Error code: 33003	/	/
Label application failed. Error code: 33004	Tamp failed to reach product	/
	Wrong adhesive	/
Label application failed. Error code: 33005	Tamp failed to reach product	/
	Wrong adhesive	/
Peel-off error. Error code: 33030	Peeling failed	Please check if the media is correctly loaded, and make sure the liner between the peeling edge and the pinch roller is not loose
	The peel-off offset is set inappropriately, the peeled-off label cannot reach the peel-off sensor's range	/
	The peel-off sensor is not installed	/

Error Message	Possible Cause	Recommended Solution
	Peel-off sensor malfunction	Please contact a qualified professional for service.
Auto Re-Peel failed. Error code: 33031	/	Please go to "Settings" > "General" > "Printed Label Handling" > "Peeler mode", and try to increase Re-Peel Times; if it still fails, you may have to change the label stock.
Label length exceeds limit. Error code: 33032	The label length exceeds the threshold.	Please turn off Auto Re-Peel.
Auto Pre-Peel failed. Error code: 33033	/	Please go to "Settings" > "General" > "Printed Label Handling" > "Peeler mode", and try to increase Pre-Peel Times; if it still fails, you may have to change the label stock.
RFID module initialization failed. Error code: 40001	/	Please have a qualified professional check if the RFID module is correctly installed.
RFID function closed. Error code: 40002	/	Please turn on the RFID function from the LCD menu.
RFID data send error. Error code: 40003	/	Please have a qualified professional check if the RFID module is correctly installed.
RFID data receive error. Error code: 40004	/	Please have a qualified professional check if the RFID module is correctly installed.
No RFID Tags found. Error code: 40001	Media with RFID tags is not correctly loaded	/
	Damaged RFID tags	/
	RFID calibration has not been performed	/
	Read power is set too low	Please go to "Settings" > "RFID" > "RFID Settings" to increase the read power.
	Loose RFID antenna connection	/
Excessive read power. Error code: 40002	/	Please go to "Settings" > "RFID" > "RFID Settings" to lower the read power.
RFID unlock failed. Error code: 40003	Wrong password	Please check the password
	Access password is not available in the chipset of the tag	/
	Data field to unlock doesn't exist in the chipset of the tag	/
	Tag is permanently locked.	/
RFID encoding failed. Error code: 40004	Data length is out of range	/
	Wrong password for the locked memory banks	/

Error Message	Possible Cause	Recommended Solution
	Data field to encode doesn't exist in the chipset of the tag.	/
Read RFID data failed. Error code: 40005	Read length is greater than the length of the memory bank	/
	Wrong password for locked memory banks	/
	Data field to read doesn't exist in the chipset of the tag.	/
RFID lock failed. Error code: 40006	Wrong password for memory banks already locked	/
	Data field to lock doesn't exist in the chipset of the tag	/
	Tag is permanently unlocked.	/
Tag ID verification failed. Error code: 40007	/	Please replace the RFID tag stock with which meets the designated tag ID specifications
RFID calibration failed. No RFID tags detected. Error code: 41008	Media with RFID tags is not correctly loaded	/
	Damaged RFID tags	/
	Loose RFID antenna connection	/
	Unstable electromagnetic coupling between the printer's RFID antenna and the RFID tag.	Please replace the RFID tag stock
RFID calibration failed. RFID tags are too close to each other. Error code: 41009	/	/
Un-matching RFID tags detected. Error code: 41011	New RFID tag stock loaded without performing RFID Calibration.	Please perform Media & RFID Calibration.
System error. Error code: 42001	/	Please restart the printer. If error remains, please contact a qualified professional for service.

5.2 Miscellaneous Issues

Table 5-2 identifies miscellaneous issues with the printer, the possible causes, and the recommended solutions.

Table 5-2 Miscellaneous Issues

Problem	Possible Cause	Recommended Solution
Poor printout quality	Incorrect Darkness setting	Please go to "Settings" > "General" > "Darkness" to set the appropriate darkness.
	Media and ribbon are not properly matched	Replace the media and/or the ribbon
	Insufficient printhead pressure	Adjust the printhead pressure, refer to 3.3.2 Adjusting the Printhead Pressure
Horizontally displaced print	Media not well guided	Reload the media, refer to 2.2.4 Loading the Media
	Unbalanced printhead pressure	Adjust the printhead pressure, refer to 3.3.2 Adjusting the Printhead Pressure
Skipped labels	Media Sensor Calibration not performed	Press and hold the [FEED/Calibration] button (hold for around 4 seconds) to perform Media Sensor Calibration
	Incorrect page setup in the computer software	Correct the page setup values in the software
	Incorrect media sensor type	Please go to "Settings" > "General" > "Sensor type" to choose the best media sensor for the situation
Print blank pages	Ribbon loaded incorrectly	Reload the ribbon. Refer to 2.2.3 Loading the Ribbon
Partial blurry prints	Unbalanced printhead pressure	Adjust the printhead pressure, refer to 3.3.2 Adjusting the Printhead Pressure
Vertical blank lines in print	Dirty printhead	Clean the printhead
	Damaged heating elements on the printhead	Replace the printhead, please contact an authorized POSTEK service provider for technical support.
Ribbon take-up slack or stopped	Low torque on ribbon take-up spindle	Increase the ribbon take-up tension, refer to 3.3.3 Adjusting the Ribbon Tension
Ribbon slides against media	Torque too high on ribbon supply spindle	Reduce the ribbon supply tension, refer to 3.3.3 Adjusting the Ribbon Tension
Dirty printouts	Adhesive bleed	Change the media roll
Printouts slanted	Label not squarely die cut	Change the media roll
	Media not well guided	Reload the media, refer to 2.2.4 Loading the Media
Compressed printouts	Print speed too high for the media being used	Please go to "Settings" > "General" > "Speed" to a decrease print speed.
Data Sent but Not Printing	The driver is incorrect.	Ensure the correct driver is chosen in the label software.
	Memory overflow	Reset the printer.


NOTE

For errors not listed here, please contact an authorized POSTEK Service Provider for further assistance.

Appendix A: Interface Specifications

General I/O Signal Interface

Pin layout of the connector:

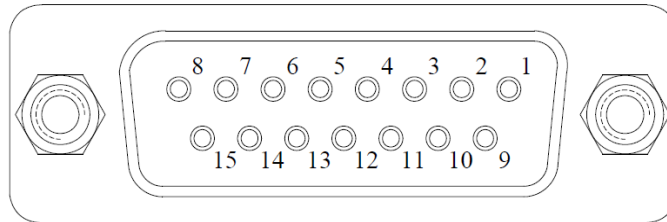


Pin No.	Signal Name	Signal Type	Active Level	Description
1	Ground	Ground	-	I/O signal ground
2	I/O Signal Power	Power	-	DC power supply, 5V or 24V selectable via the K1 switch on the General I/O Signal Interface Board.
3	Start Print	Input	Low	Start to print a label Pulse mode: Falling edge trigger Level mode: Enable printing when level is Low
4	Feed or Cancel	Input	Low	Feed: Signal level transitions from High to Low and remains Low for 20 ms before transitioning to high again to take effect, and feed to the next label head Cancel: Signal level transitions from High to Low and remains Low for 200 ms before transitioning to high again to take effect, and delete the data of the current print job
5	Pause	Input	Low	To be triggered by the falling edge of the input pulse signal
6	Reprint or Continue	Input	Low	Reprint: Signal level transitions from High to Low and remains Low for 20 ms before transitioning to high again to take effect, and reprint the last label Continue: Signal level transitions from High to Low and remains Low for 20 ms before transitioning to high again to take effect, and continue the print job (Note: When the reprint function is disabled, the reprint signal is invalid.)
7	24 VDC	Power	-	Power supply, rated at 24 V, 100 mA
8	Power GND	Ground	-	Power ground of 24 VDC
9	Ribbon Low	Output	Low	Signal level transitions from High to Low when the remaining amount of ribbon is low

Pin No.	Signal Name	Signal Type	Active Level	Description
10	Error or Pause	Output	Low	Signal level transitions from High to Low when status of the printer is in error or pause
11	End of Print	Output	Configurable	Mode 1: Signal level transitions from High to Low only when printing starts; and return to High when printing ends. Mode 2: Signal level transitions from Low to High only when printing starts; and return to Low when printing ends. Mode 3: Signal level transitions from High to Low and remains Low for 20 ms when a label print is completed. No signal level change during continuous printing. Mode 4: Signal level transitions from High to Low and remains Low for 20 ms when a label print is completed. No signal level change during continuous printing.
12	Media Out	Output	Low	Signal level transitions from High to Low when out of media
13	Ribbon Out	Output	Low	Signal level transitions from High to Low when out of ribbon
14	Data Ready	Output	Low	Signal level transitions from High to Low when data of a label is ready to print
15	Media Low	Output	Low	Signal level transitions from High to Low when the remaining amount of media is low

Logic Control I/O Signal Wiring Terminal Block


Layout of the poles in the terminal block:

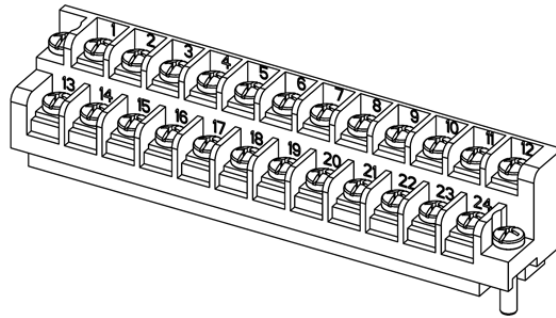

Pole no.	Signal Name	Signal Type	Description
1	Red indicator light	Output	Red flashing: printer fault
2	Green indicator light	Output	Green solid-on: normal operation
3	Yellow indicator light	Output	Yellow flashing: warning
4	Alarm bell	Output	Intermittent ringing upon fault and warning
5	Air blow valve control	Output	Electromagnetic valve, blow air to assist picking up the label
6	Valve control	Output	Reserved
7	Conveyor belt control	Output	To move or stop conveyor belt
8	Vacuum valve control	Output	Electromagnetic valve, vacuum generation for picking up label
9	24 VDC	Power	Power supply, rated at 24V, 100 mA
10	24 VDC	Power	Power supply, rated at 24V, 100 mA
11	24 VDC	Power	Power supply, rated at 24V, 100 mA
12	24 VDC	Power	Power supply, rated at 24V, 100 mA
13	Tamp home sensor, magnetic switch	Input	The tamp home sensor is used to signal that the tamp unit has returned to the fully retracted or "home" position
14	End of stroke sensor, magnetic switch	Input	The end of stroke sensor is used to signal that the tamp pad has reached the position for applying the label
15	Vacuum gauge	Input	This is to detect if the label has been picked up successfully
16	Vacuum gauge	Input	Reserved
17	Fiber-optic sensor	Input	The alternative to pole no. 15, to detect if the label has been picked up successfully
18	Product presence sensor	Input	Diffuse photoelectric sensor, detects the presence of the object to be labeled
19	Rotary encoder	Input	For synchronizing with the conveyor belt.
20	Tamp cylinder valve	Output	Electromagnetic valve, controls the movement of the tamp
21	Power GND	Ground	Power ground of 24 VDC
22	Power GND	Ground	Power ground of 24 VDC
23	Power GND	Ground	Power ground of 24 VDC
24	Power GND	Ground	Power ground of 24 VDC

RS-232 Serial

The RS232 connector on the printer is a DB9F:

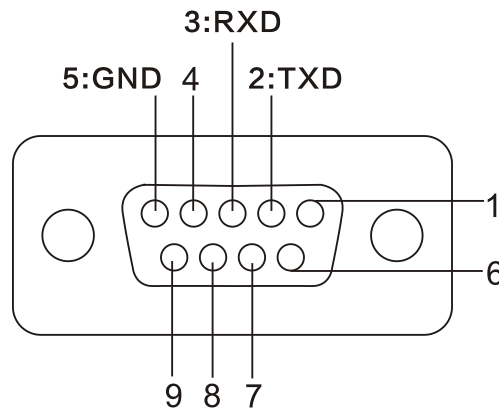

Number	Description	Definition
1	/	/
2	Out	TX
3	In	RX
4	/	/
5	-	Ground
6	/	/
7	/	/
8	/	/
9	/	/

Baud rate: 9600, 19200, 38400, 57600 and 115200

Data format: 8 data bits, 1 start bit or 1 stop bit.

Flow control: None. If you are using software or drivers under the Windows environment, the flow control must be set to "hardware."

Any communications port can transmit data from the host (RS232, Ethernet, or USB). Preliminary communications settings are not required since the printer will automatically detect which port is active.



CAUTION

Never send data from 2 ports at the same time. Data cannot be sent to more than one port simultaneously or data corruption and print errors may occur.

Appendix B: ASCII Table

	0	1	2	3	4	5	6	7
0	NUL			0	@	P	`	p
1	SOH	XON	!	1	A	Q	a	q
2	STX		“	2	B	R	b	r
3		XOFF	#	3	C	S	c	s
4			\$	4	D	T	d	t
5		NAK	%	5	E	U	e	u
6	ACK		&	6	F	V	f	v
7	BEL		‘	7	G	W	g	w
8	BS		(	8	H	X	h	x
9			)	9	I	Y	i	y
A	LF		*	:	J	Z	j	z
B		ESC	+	;	K	[	k	{
C	FF		,	<	L	\	l	
D	CR		-	=	M	]	m	}
E	SO	RS	.	>	N	^	n	~
F	SI	US	/	?	O	_	o	DEL
	0	1	2	3	4	5	6	7



NOTE

The € sign is included in the embedded table at DEC128 or HEX 80.

