




Sample photo

Order symbol: CAB P 302017
Product nbr: 8104303
Description: Polyester cabinet
Remarks: Grey door

EAN: 6418074050007
El. number:
 Finland 3424133
 Denmark 8212018002
 Sweden 2539817

Including: Cabinet base, door with PUR gasket, 3mm double bit lock(s) with transport and plastic key, screws for mounting plate/DIN-rail and wall fastening lugs with screws. Wall mounting screws not supplied.

Dimensions:		L	W	H	Rating:	
mm:	300	200	170	Ingress Protection (EN 60529): IP 66		
inch:	11.8	7.9	6.7	Impact Resistance (EN 50102): IK 10		
Materials:					Electrical insulation: Totally insulated	
Material:	GRP				UV resistance: UL 508	
Base colour:	RAL 7032				Flammability Rating (UL 746 C 5): UL 94 5V	
Cover colour:	RAL 7032				Glow Wire Test (IEC 695-2-1) °C: 960	
Cover screws material:	Stainless steel				UL Type: UL TYPE 3, 3R, 3S, 4, 4X, 12, 13	
Gasket material:	Polyurethane				Certificates:	
Temperatures:						
Short term:	-50 ... 150 °C					
Continuous:	-40 ... 70 °C					
Short term:	-60 ... 302 °F					
Continuous:	-40 ... 158 °F					
Accessories:						
MP 3020	Mounting plate					

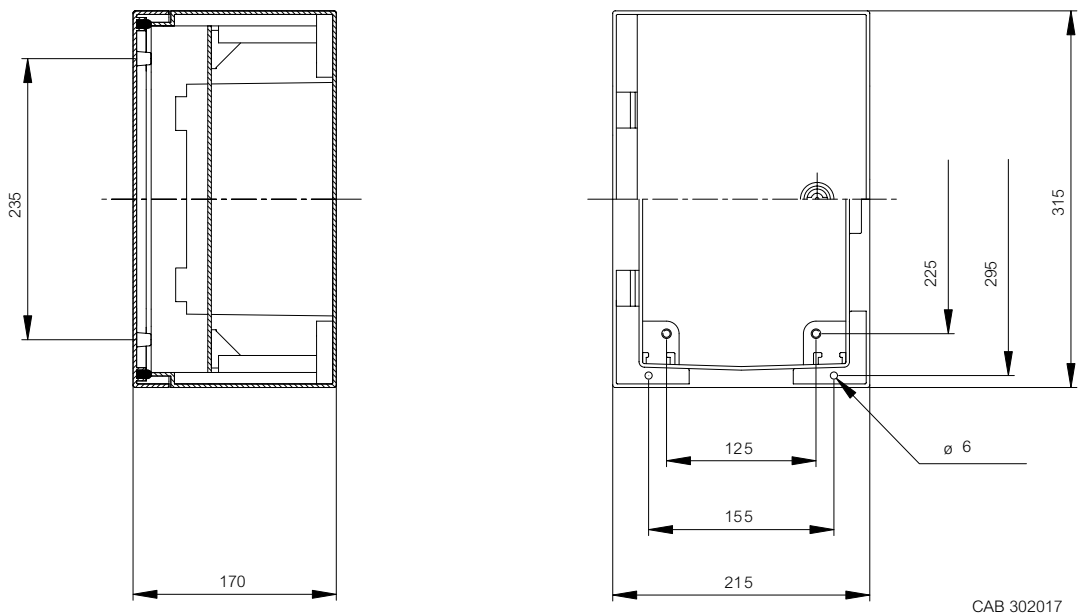

CAB 302017




Sample photo

Order symbol: CAB P 403017
Product nbr: 8104304
Description: Polyester cabinet
Remarks: Grey door

EAN: 6418074050014
El. number:
 Finland 3424135
 Denmark 8212018015
 Sweden 2539819

Including: Cabinet base, door with PUR gasket, 3mm double bit lock(s) with transport and plastic key, screws for mounting plate/DIN-rail and wall fastening lugs with screws. Wall mounting screws not supplied.

Dimensions:		L	W	H	Rating:
mm:		400	300	170	Ingress Protection (EN 60529): IP 66
inch:		15.7	11.8	6.7	Impact Resistance (EN 50102): IK 10
Materials:					Electrical insulation: Totally insulated
Material:		GRP			UV resistance: UL 508
Base colour:		RAL 7032			Flammability Rating (UL 746 C 5): UL 94 5V
Cover colour:		RAL 7032			Glow Wire Test (IEC 695-2-1) °C: 960
Cover screws material:		Stainless steel			UL Type: UL TYPE 3, 3R, 3S, 4, 4X, 12, 13
Gasket material:		Polyurethane			Certificates:
Temperatures:					
Short term:		-50 ... 150 °C			
Continuous:		-40 ... 70 °C			
Short term:		-60 ... 302 °F			
Continuous:		-40 ... 158 °F			
Accessories:					
MP 4030		Mounting plate			

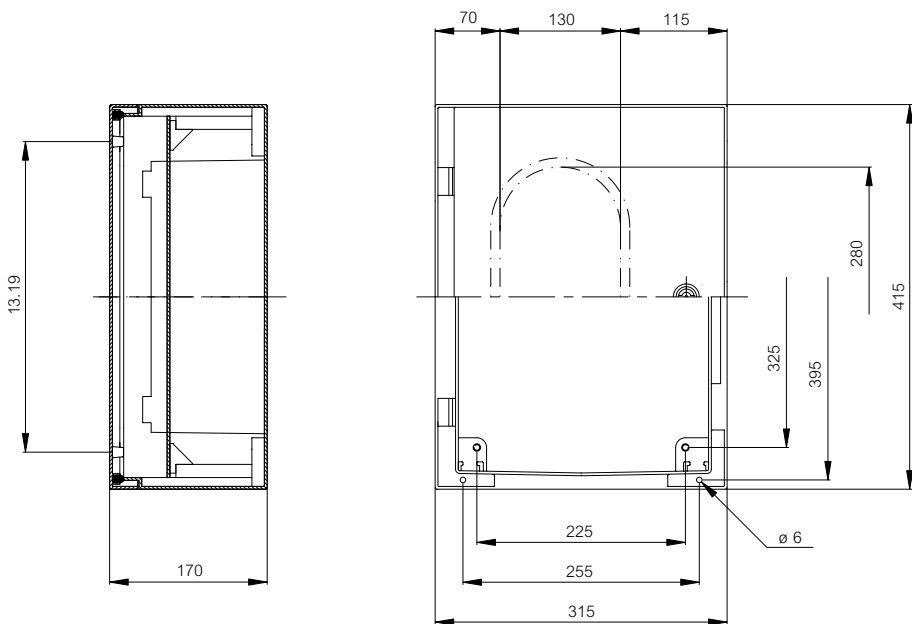




Sample photo

Order symbol: CAB P 504023
Product nbr: 8104305
Description: Polyester cabinet
Remarks: Grey door

EAN: 6418074050021
El. number:
 Finland 3424137
 Denmark 8212018028
 Sweden 2539821

Including: Cabinet base, door with PUR gasket, 3mm double bit lock(s) with transport and plastic key, screws for mounting plate/DIN-rail and wall fastening lugs with screws. Wall mounting screws not supplied.

Dimensions:		L	W	H	Rating:
mm:	500	400	230		Ingress Protection (EN 60529): IP 66
inch:	19.7	15.7	9.1		Impact Resistance (EN 50102): IK 10
Materials:					Electrical insulation: Totally insulated
Material:	GRP				UV resistance: UL 508
Base colour:	RAL 7032				Flammability Rating (UL 746 C 5): UL 94 5V
Cover colour:	RAL 7032				Glow Wire Test (IEC 695-2-1) °C: 960
Cover screws material:	Stainless steel				UL Type: UL TYPE 3, 3R, 3S, 4, 4X, 12, 13
Gasket material:	Polyurethane				Certificates:
Temperatures:					
Short term:	-50 ... 150 °C				
Continuous:	-40 ... 70 °C				
Short term:	-60 ... 302 °F				
Continuous:	-40 ... 158 °F				
Accessories:					
MP 5040	Mounting plate				

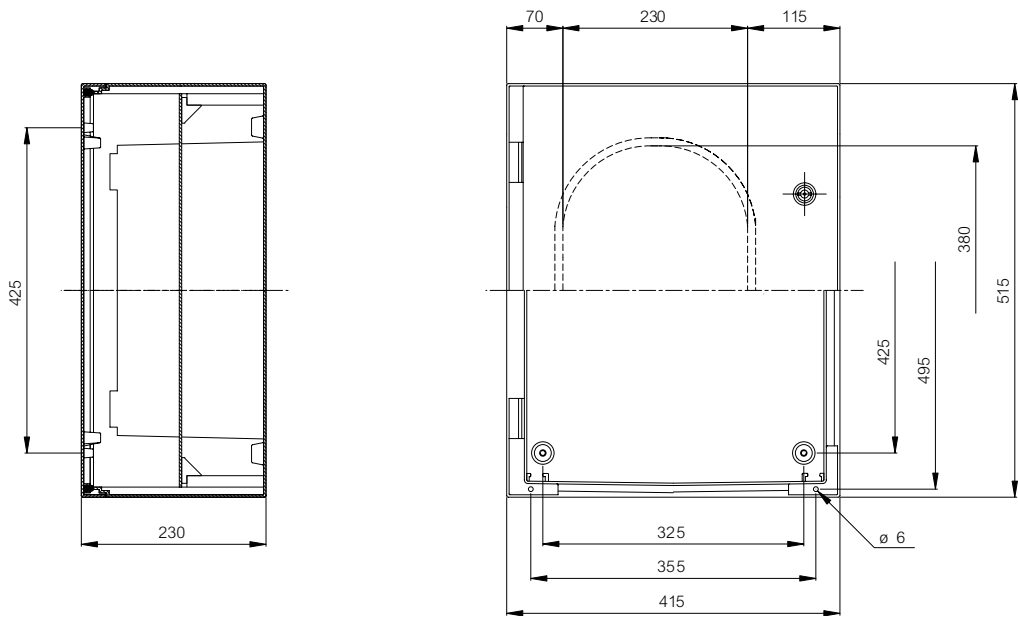




Sample photo

Order symbol: CAB P 705027
Product nbr: 8104307
Description: Polyester cabinet
Remarks: Grey door

EAN: 6418074050045
El. number:
 Finland 3424141
 Denmark 8212018044
 Sweden 2539825

Including: Cabinet base, door with PUR gasket, 3mm double bit lock(s) with transport and plastic key, screws for mounting plate/DIN-rail and wall fastening lugs with screws. Wall mounting screws not supplied.

Dimensions:				Rating:
mm:	L	W	H	Ingress Protection (EN 60529): IP 66 Impact Resistance (EN 50102): IK 10 Electrical insulation: Totally insulated UV resistance: UL 508 Flammability Rating (UL 746 C 5): UL 94 5V Glow Wire Test (IEC 695-2-1) °C: 960 UL Type: UL TYPE 3, 3R, 3S, 4, 4X, 12, 13
inch:	700	500	270	
Materials:				Certificates:
Material:	GRP			
Base colour:	RAL 7032			
Cover colour:	RAL 7032			
Cover screws material:	Stainless steel			
Gasket material:	Polyurethane			
Temperatures:				
Short term:	-50 ... 150 °C			
Continuous:	-40 ... 70 °C			
Short term:	-60 ... 302 °F			
Continuous:	-40 ... 158 °F			
Accessories:				
MP 7050	Mounting plate			

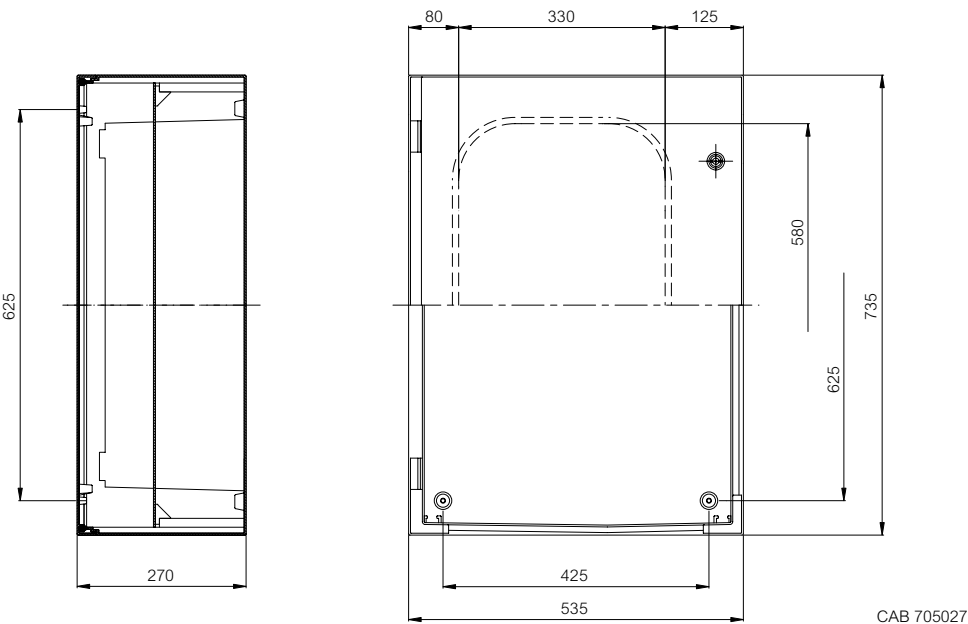

CAB 705027



Sample photo


Order symbol: CAB P 806030
Product nbr: 8104308
Description: Polyester cabinet
Remarks: Grey door

EAN: 6418074050052
El. number:
 Finland 3424143
 Denmark 8212018057
 Sweden 2539827

Including: Cabinet base, door with PUR gasket, 3mm double bit lock(s) with transport and plastic key, screws for mounting plate/DIN-rail and wall fastening lugs with screws. Wall mounting screws not supplied.

Dimensions:			
mm:	800	600	300
inch:	31.5	23.6	11.8
Materials:			
Material:	GRP		
Base colour:	RAL 7032		
Cover colour:	RAL 7032		
Cover screws material:	Stainless steel		
Gasket material:	Polyurethane		
Temperatures:			
Short term:	-50 ... 150 °C		
Continuous:	-40 ... 70 °C		
Short term:	-60 ... 302 °F		
Continuous:	-40 ... 158 °F		
Accessories:			
MP 8060	Mounting plate		

Rating:
Ingress Protection (EN 60529): IP 66
Impact Resistance (EN 50102): IK 10
Electrical insulation: Totally insulated
UV resistance: UL 508
Flammability Rating (UL 746 C 5): UL 94 5V
Glow Wire Test (IEC 695-2-1) °C: 960
UL Type: UL TYPE 3, 3R, 3S, 4, 4X, 12, 13
Certificates:

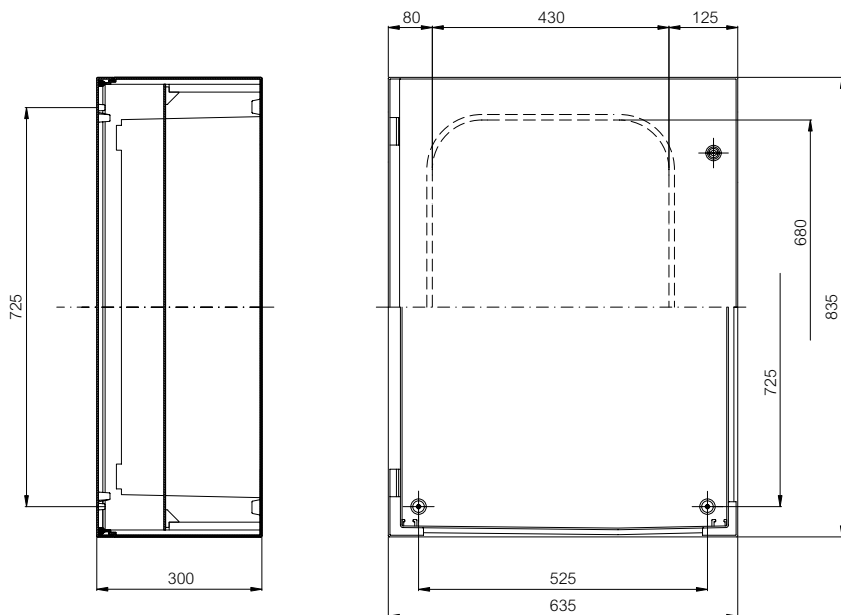

CAB 806030



Sample photo

Order symbol: CAB P 1008030

Product nbr: 8104309

Description: Polyester cabinet

Remarks: Grey door

EAN: 6418074050069

El. number:

Finland 3424145

Denmark 8212018060

Sweden 2539829

Including: Cabinet base, door with PUR gasket, 3mm double bit lock(s) with transport and plastic key, screws for mounting plate/DIN-rail and wall fastening lugs with screws. Wall mounting screws not supplied.

Dimensions:		L	W	H	Rating:
mm:	1000	800	300		Ingress Protection (EN 60529): IP 66
inch:	39.4	31.5	11.8		Impact Resistance (EN 50102): IK 10
Materials:					Electrical insulation: Totally insulated
Material:	GRP				UV resistance: UL 508
Base colour:	RAL 7032				Flammability Rating (UL 746 C 5): UL 94 5V
Cover colour:	RAL 7032				Glow Wire Test (IEC 695-2-1) °C: 960
Cover screws material:	Stainless steel				UL Type: UL TYPE 3, 3R, 3S, 4, 4X, 12, 13
Gasket material:	Polyurethane				Certificates:
Temperatures:					
Short term:	-50 ... 150 °C				
Continuous:	-40 ... 70 °C				
Short term:	-60 ... 302 °F				
Continuous:	-40 ... 158 °F				
Accessories:					
MP 10080	Mounting plate				

