

HooToo Inc.

HooToo IP Camera User Manual (part four)

For Model : HT-IP210P




How to Use HT-IP210P on Android& iOS Devices

1. Regular settings


- a) Assemble the camera and its antenna; connect camera and your router with a network cable (your android or iOS devices is connecting the same router).
- b) Download **HooToo Mycam Pro** from Google Play Store or App Store and install it in your Android or iOS devices.




- c) Open it, tap on **Add camera**.

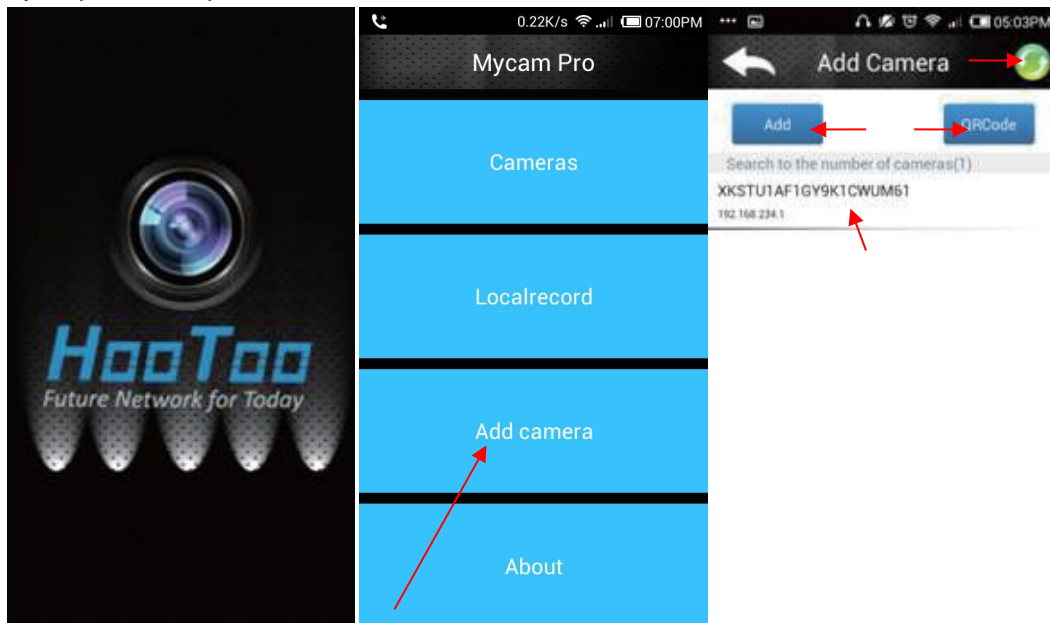


Here you got 3 options to add this HT-IP210P camera, please choose one of them:



- a. Tap  (refresh) to search this camera's UID and IP address in list.
- b. Tap **Add** to add camera by UID (p2p) code and password.
- c. Tap QRCode, scan the QR code on the bottom of camera

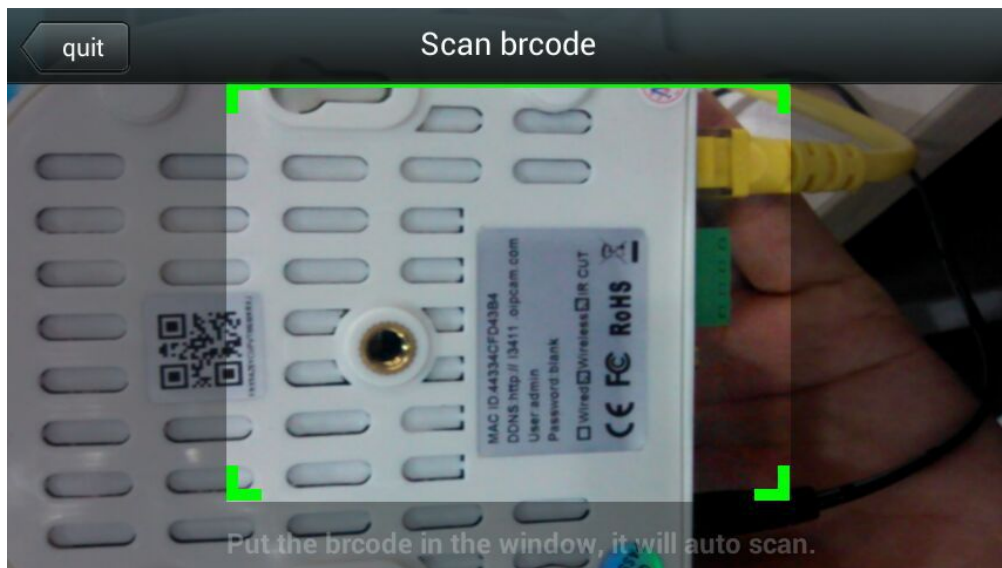
Then, go to step 4,

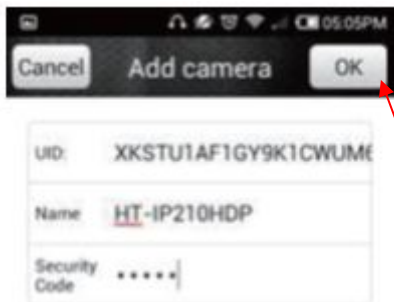

- d) Rename this camera if you like, enter camera's password: 000000 (default), And then press ok to continue.




- e) Tap  to get back to home page, tap **Cameras**. You will see camera connected, click  to view camera live video. Touch Screen to move camera's lens.

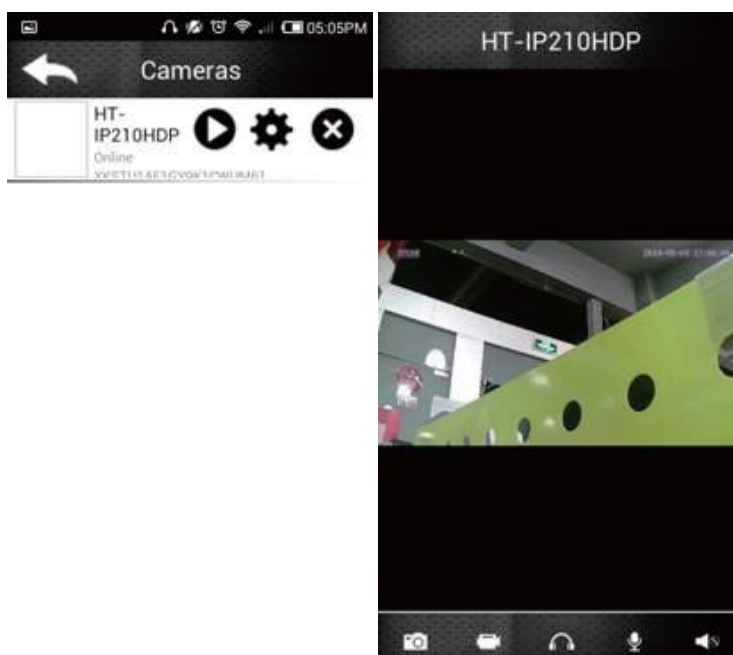

 Snapshot,  Video record,  listen,  talk,  mute


Press snapshot or video record, then you can find records here:

Note: records will occupy your android devices' local storage space, not computer's.

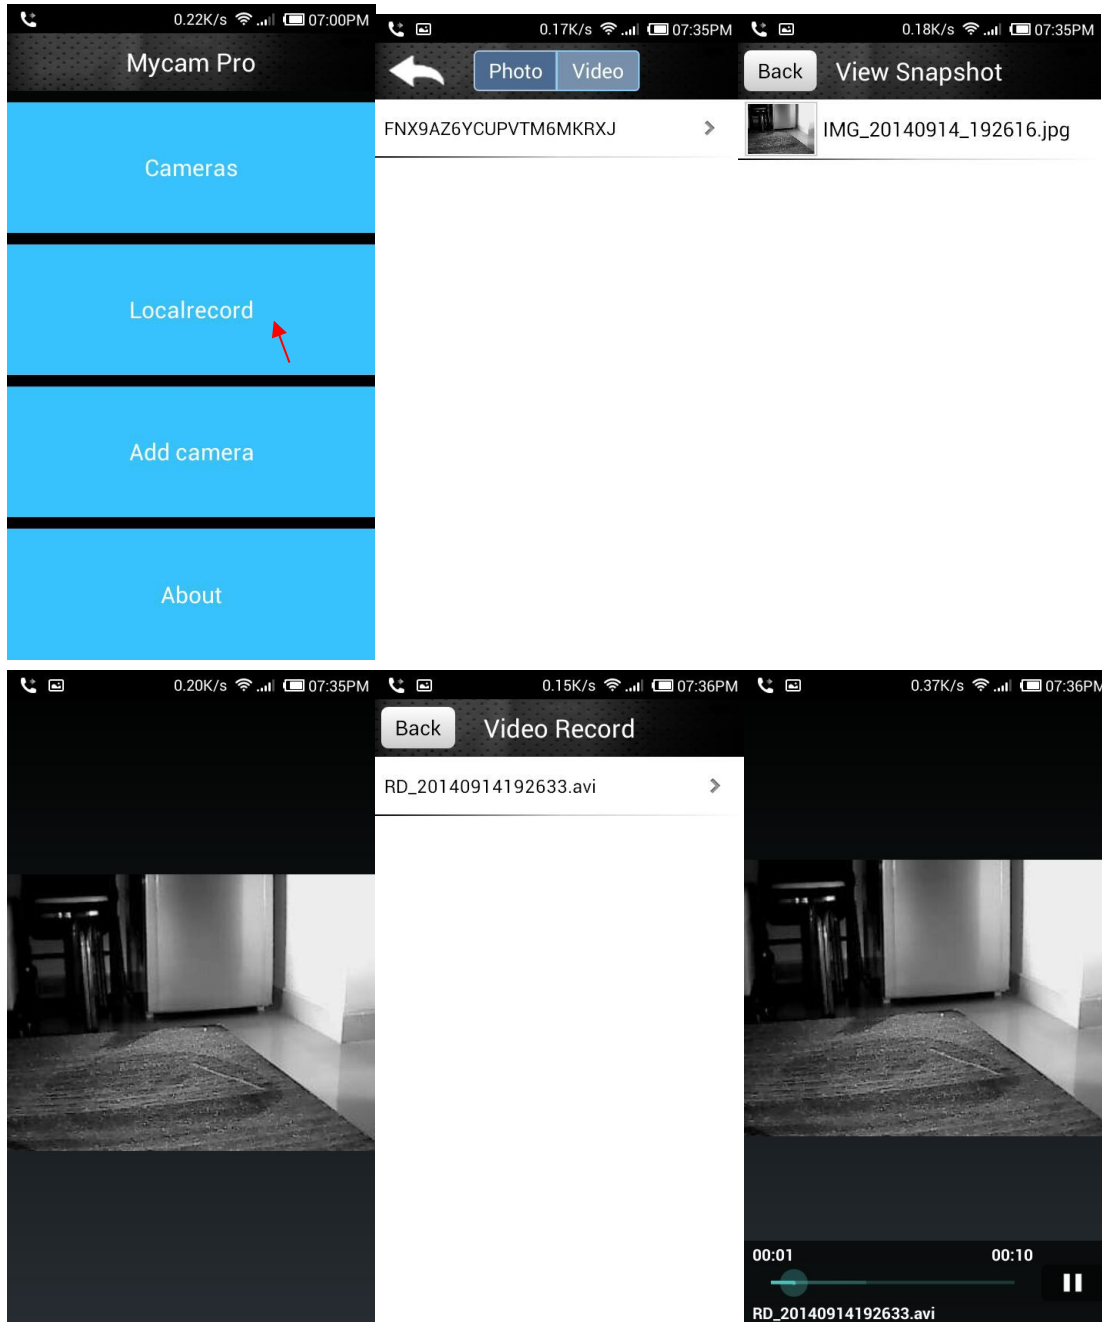


2. Advance settings

1. Go to App home page, tap **Cameras**, click ⚙️

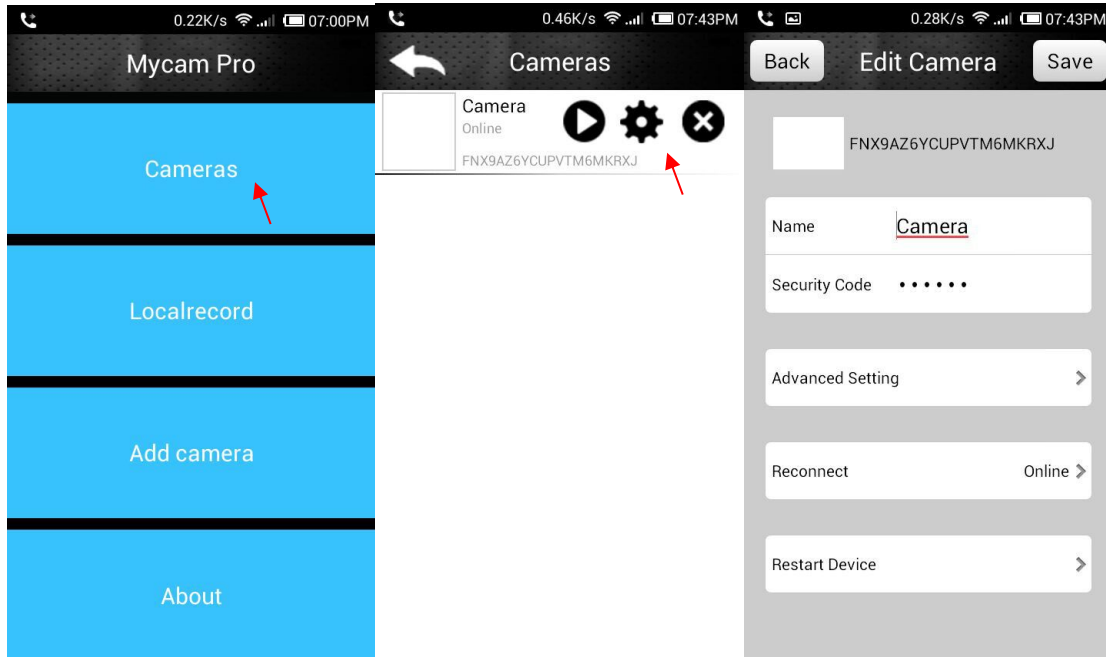

2. In **Edit Camera** page, you can change camera's name.
3. Go to Advanced Settings:
 - a. Set password

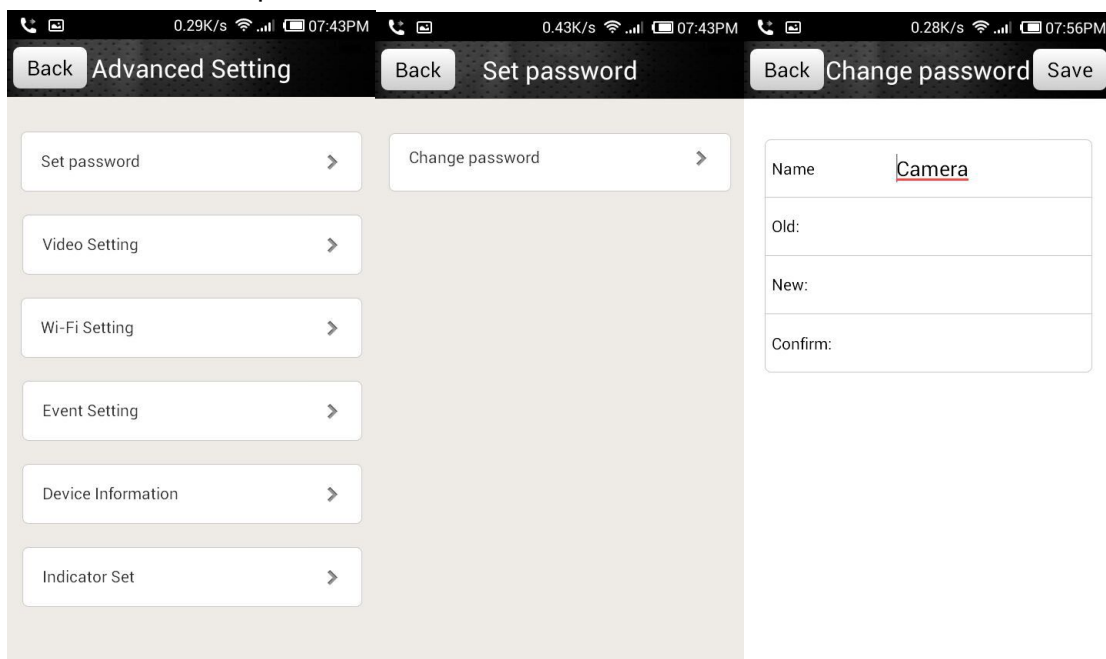

b. Video Setting

The first screenshot shows the 'Video Setting' menu with three options: 'Video Quality' (Max), 'Video Flip' (Normal), and 'Environment Mode' (Indoor(60hz)).

The second screenshot shows the 'Video Quality' selection screen with five options: 'Max', 'High', 'Medium', 'Low', and 'Min'. 'Max' is selected with a blue checkmark.

The third screenshot shows the 'Video Flip' selection screen with four options: 'Normal', 'Flip', 'Mirror', and 'Flip & Mirror'. 'Normal' is selected with a blue checkmark.

c. Wi-Fi Setting


The first screenshot shows the 'Wi-Fi Setting' menu with the 'SSID' set to 'None(Disconnect)'.

The second screenshot shows a list of available Wi-Fi networks: 'NETGEAR39', 'IP-Cam-Test', 'IPCAM-AP-WEM9VT', 'nopassword', and 'Sunvalley-AP1_2.4G'.

The third screenshot shows the details for the selected network 'IP-Cam-Test'. It displays 'Signal strength: 76%', 'Security: WPA2 AES', and a 'Wireless password' field. The 'Show password' checkbox is checked. 'OK' and 'Cancel' buttons are at the bottom.


Select a Wi-Fi network nearby, enter Wi-Fi password to join it.

d. Event Setting

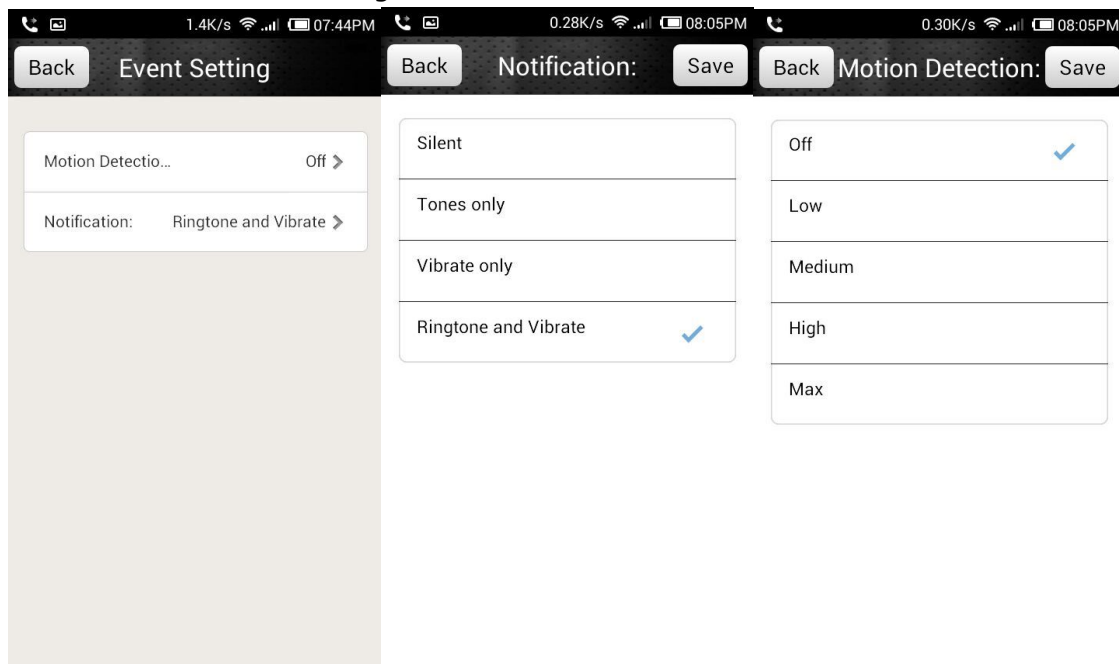

- Adjust camera motion detection sensitivity
- Select motion detection notification method

e. Indicator Set

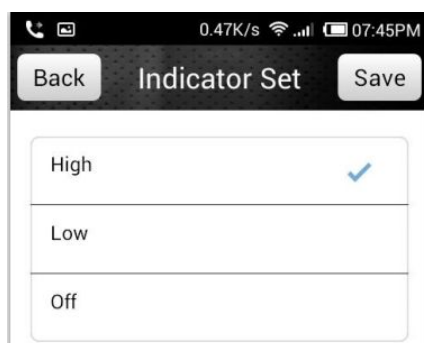

About this camera

