


## ■ Name of Each Part of DK-5005A

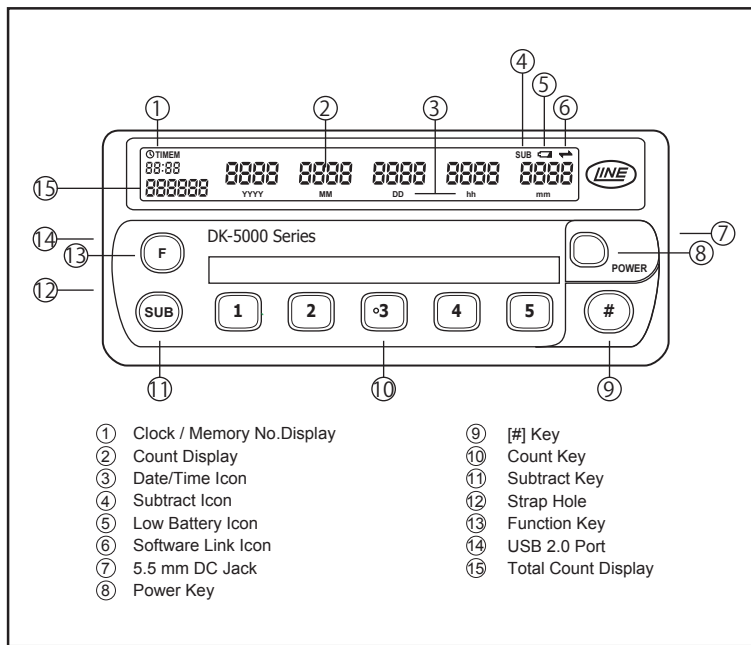

## ■ Before Start Counting

### [Setting Date and Time]

• Press Power Key for 1 second to turn up the device.

• Push Count Key **1** with **F** Key pressed.

Now you can start setting date and time.

• Date and Time will be displayed on LCD of the device as shown below in the manner of "YYYY MM DD hh mm."



• Every time you push each Count Key, each corresponding figure of year, month, day, hour or minute will be increased.

**1** = year **2** = month **3** = day **4** = hour **5** = minute

When you push each Count Key with **SUB** Key pressed, each corresponding figure will be decreased.

• Push **F** Key after you input date and time.

Now the setting of date and time is finished, and you can start counting.

• If you proceed with counting, refer to the next section "■ Start Counting."

If you want to turn off the device, press Power Key for 3 seconds.

### \*NOTE


If the power supply is shut off, the built-in clock stops. This requires resetting of Date & Time when you use the device next time.

To avoid stopping the clock, please install batteries into the device. As long as the electricity is supplied to the device through AC/DC adapter or USB charging cable, power is not supplied nor drained from batteries. Therefore, it is recommended that batteries be always installed in the device even if the electricity is supplied to the device through AC/DC adapter or USB charging cable.


## ■ Start Counting

• Press Power Key for 1 second to turn up the device.

• On its LCD, the device displays count values of 5 counters, total count of 5 counters, and time.

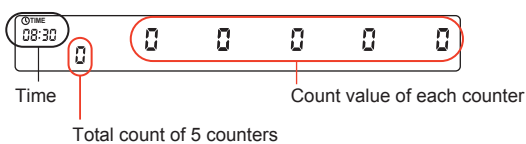

• Every time you push Count Key **1** - **5**, the count value of each counter increases.

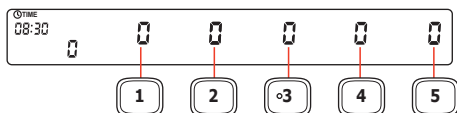

By pushing each Count Key with **SUB** Key pressed, each count value decreases.

## ■ Save Record (Count value)

The device can save up to 250 "records."

A "record" is timestamped data containing 5 count values and total count value.

**1 record = (Individual Count Values) + (Total count of 5 counters) + (Date&Time)**

There are two ways to save a record.

### [1. Save Record with Resetting Count Values to 0 (zero)]

• Press **#** Key for 1 second at the count values that you want to save.

• LCD starts to blink, and count value of each counter and total count value will be saved with timestamp.

• LCD stops blinking when saving the record is completed.

Each count value is reset to 0 (zero).



• Now you can start counting again.

### [2. Save Record without Resetting Count Values to 0 (zero)]

• Push Count Key **5** with **F** Key pressed at the count values that you want to save.

• LCD starts to blink, and count value of each counter and total count value will be saved with timestamp. Each count value will not be reset to 0 (zero).

• LCD stops blinking when saving the record is completed. You can continue counting.

### \*NOTE

If you turn off the device without resetting count values to 0 (zero), the last count values will internally remain.

Next time you turn up the device, you can start counting from the last count values. but if you want to reset the values to 0 (zero), press **#** Key for 1 second.

■ View Saved Record

- Push Count Key **3** with **F** Key pressed.
- The device shows the record which you saved last time.

[If no record is saved in the device]



[If any records are saved in the device]



The record which you saved last time is displayed.

- ▶View count values : Push **4** Key
- ▶View Date and Time : Push **3** Key
- ▶View the previous record : Push **2** Key
- ▶View the next record : Push **1** Key

- By pushing **F** Key, you can start counting again.

■ Clear All the Records

- Push Count Key **3** with **F** Key pressed to show the record you saved.
- Push Count Key **5** to clear all the records. The message below will be displayed on LCD to confirm whether to clear all the records.



[If YES (Clear All the Records)]

- ▶Press Count Key **4** for 1 second.

YES will be selected, and all the records will be cleared from the device.

While clearing all the records, the device shows "All data ---- Clear" on its LCD.



"no data" will be shown on LCD to confirm that there is no record saved in the device.



Push **F** Key, and you can start counting again.

[If NO (Do Not Clear All the Records)]

- ▶Press Count Key **5** for 1 second.

Records will not be cleared.

Push **F** Key, and you can start counting again.

■ List of Key Operations

Purpose	Key Operation
Turn ON device	Power Key 1 second
Turn OFF device	Power Key 3 seconds
Start setting Date and Time	[F] + [1]
Go back to Counting	[F]
Save record with reset	[#] 1 second
Save record without reset	[F] + [5]
View saved record	[F] + [3]
View Count Value	[F] + [3]→[4]
View Date and Time	[F] + [3]→[4]→[3]
View the previous record	[F] + [3]→[2]
View the next record	[F] + [3]→[1]
Clear all the records	[F] + [3]→[5]→[4] 1 second

■ Exclusive Software

Exclusive software for DK-5000 Series offers you the functions to export the records to your computer, to manage and edit the data in .xls/.csv format and many more! Please visit our website and download the software, which we hope you will find useful, for free of charge at the link below:

<http://www.lineseiki.com/products/productdetails.aspx?Id=119>