

UG0641
User Guide
Alpha Blending



a  **MICROCHIP** company



a  MICROCHIP company

Microsemi Headquarters

One Enterprise, Aliso Viejo,
CA 92656 USA

Within the USA: +1 (800) 713-4113

Outside the USA: +1 (949) 380-6100

Sales: +1 (949) 380-6136

Fax: +1 (949) 215-4996

Email: sales.support@microsemi.com

www.microsemi.com

©2018 Microsemi, a wholly owned subsidiary of Microchip Technology Inc. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

About Microsemi

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Learn more at www.microsemi.com.

Contents

1	Revision History	1
1.1	Revision 5.0	1
1.2	Revision 4.0	1
1.3	Revision 3.0	1
1.4	Revision 2.0	1
1.5	Revision 1.0	1
2	Alpha Blending	2
2.1	Hardware Implementation	2
2.2	Inputs and Outputs	2
2.3	Configuration Parameters	3
2.4	Timing Diagrams	4
2.5	Resource Utilization	4

Figures

Figure 1	Block Diagram of Alpha Blending IP	2
Figure 2	Timing Diagram of Alpha Blending IP	4

Tables

Table 1	Inputs and Outputs of Alpha Blending IP	2
Table 2	Configuration Parameters	3
Table 3	Resource Utilization of PolarFire	4
Table 4	Resource Utilization of SmartFusion2	4

1 Revision History

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the current publication.

1.1 Revision 5.0

All the sections were updated in revision 5.0 of this document.

1.2 Revision 4.0

In revision 4.0 of this document, the Resource Utilization section and the Resource Utilization Report table were updated. For more information, see [Resource Utilization](#), page 4.

1.3 Revision 3.0

In revision 3.0 of this document, the Testbench section was updated with the Steps to simulate the core using test bench.

1.4 Revision 2.0

In revision 2.0 of this document, the SAR 76066 was updated.

1.5 Revision 1.0

Revision 1.0 was the first publication of this document.

2 Alpha Blending

Alpha blending is the process of combining an image with a background to create the appearance of partial or full transparency. It is used to render multiple images into a single background image in separate passes and make one final image.

For example, an 8-bit alpha input can represent 256 levels of transparency with a value of 0 denoting that the image is completely transparent and a value of 255 denoting that the image is completely opaque. Alpha blending defines the transparency of individual images when blended with the background image.

The following are the equation for pixel-wise alpha blending:

$$R_{out} = R_{in1} \times (1 - \alpha_{in}) + R_{in2} \times \alpha_{in}$$

$$G_{out} = G_{in1} \times (1 - \alpha_{in}) + G_{in2} \times \alpha_{in}$$

$$B_{out} = B_{in1} \times (1 - \alpha_{in}) + B_{in2} \times \alpha_{in}$$

Where,

R_{in1} , G_{in1} , and B_{in1} represent the red, blue, and green values of image1

R_{in2} , G_{in2} , and B_{in2} represent the red, blue, and green values of image2


R_{out} , G_{out} , and B_{out} represent the red, blue, and green values of the output image

α_{in} is the input alpha value

2.1 Hardware Implementation

The following figure shows the hardware implementation of alpha blending.

Figure 1 • Block Diagram of Alpha Blending IP

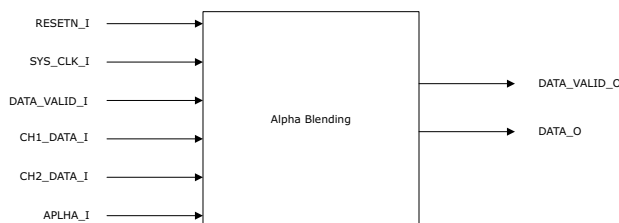

When the DATA_VALID_I signal goes high, the R, G, and B values of the output is computed according to the preceding equation.

DATA_O is valid when DATA_VALID_O (which is equivalent to DATA_VALID_I with two clock cycle delay) goes high.

2.2 Inputs and Outputs

The following table lists the description of input and output ports.

Table 1 • Inputs and Outputs of Alpha Blending IP

Signal Name	Direction	Width	Description
RESETN_I	Input	1-bit	The active-low asynchronous reset signal to design
SYS_CLK_I	Input	1-bit	System clock
DATA_VALID_I	Input	1-bit	Input data valid

Table 1 • Inputs and Outputs of Alpha Blending IP (continued)

Signal Name	Direction	Width	Description
CH1_DATA_I	Input	3 × G_PIXEL_WIDTH	Channel1 input data CH1_DATA_I [3 × g_PIXEL_WIDTH-1] to CH1_DATA_I [2 × g_PIXEL_WIDTH] represents R value of input1 CH1_DATA_I [2 × g_PIXEL_WIDTH-1] to CH1_DATA_I [g_PIXEL_WIDTH] represents G value of input1 CH1_DATA_I [g_PIXEL_WIDTH-1] to CH1_DATA_I [0] represents B value of input1
CH2_DATA_I	Input	3 × G_PIXEL_WIDTH	Channel2 input data CH2_DATA_I [3 × g_PIXEL_WIDTH-1] to CH2_DATA_I [2 × g_PIXEL_WIDTH] represents R value of input2 CH2_DATA_I [2 × g_PIXEL_WIDTH-1] to CH2_DATA_I [g_PIXEL_WIDTH] represents G value of input2 CH2_DATA_I [g_PIXEL_WIDTH-1] to CH2_DATA_I [0] represents B value of input2
ALPHA_I	Input	8-bit	Alpha input
DATA_VALID_O	Output	1-bit	Asserted when output data is valid
DATA_O	Output	3 × G_PIXEL_WIDTH	Output data DATA_O [3 × g_PIXEL_WIDTH-1] to DATA_O [2 × g_PIXEL_WIDTH] represents R output DATA_O [2 × g_PIXEL_WIDTH-1] to DATA_O [g_PIXEL_WIDTH] represents G output DATA_O [g_PIXEL_WIDTH-1] to DATA_O [0] represents B output

2.3 Configuration Parameters

The following table lists the description of the configuration parameters used in the hardware implementation of the Alpha Blending IP. They are the generic parameters and can vary based on the application requirements.


Table 2 • Configuration Parameters

Name	Description
G_PIXEL_WIDTH	Bit width of each pixel

2.4 Timing Diagrams

The following figure shows the timing diagram of alpha blending IP.

Figure 2 • Timing Diagram of Alpha Blending IP

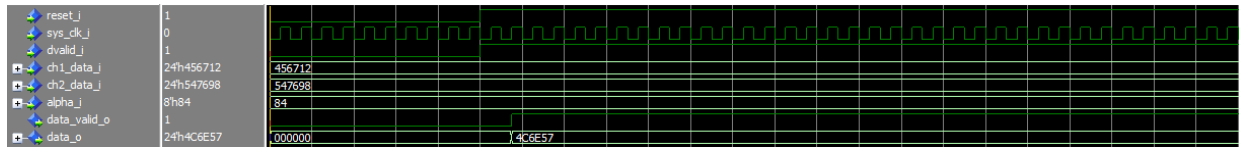

2.5 Resource Utilization

The alpha blending IP is implemented on SmartFusion[®]2 system-on-chip (SoC) field programmable gate array (FPGA) device (M2S150T-1152 FC package) and PolarFire[®] FPGA (MPF300TS -1FCG1152E package).

Table 3 • Resource Utilization of PolarFire¹

Resource	Usage
DFFs	242
4-Input LUTs	273
MACC	6
RAM1Kx18	0
RAM64x18	0

1. When G_PIXEL_WIDTH = 8

Table 4 • Resource Utilization of SmartFusion2¹

Resource	Usage
DFFs	242
4-Input LUTs	273
MACC	6
RAM1Kx18	0
RAM64x18	0

1. When G_PIXEL_WIDTH = 8