


INSTALLATION MANUAL

EN

Battery-protection "BAT BREAKER"

type 10012388

suitable for the PV energy storage system

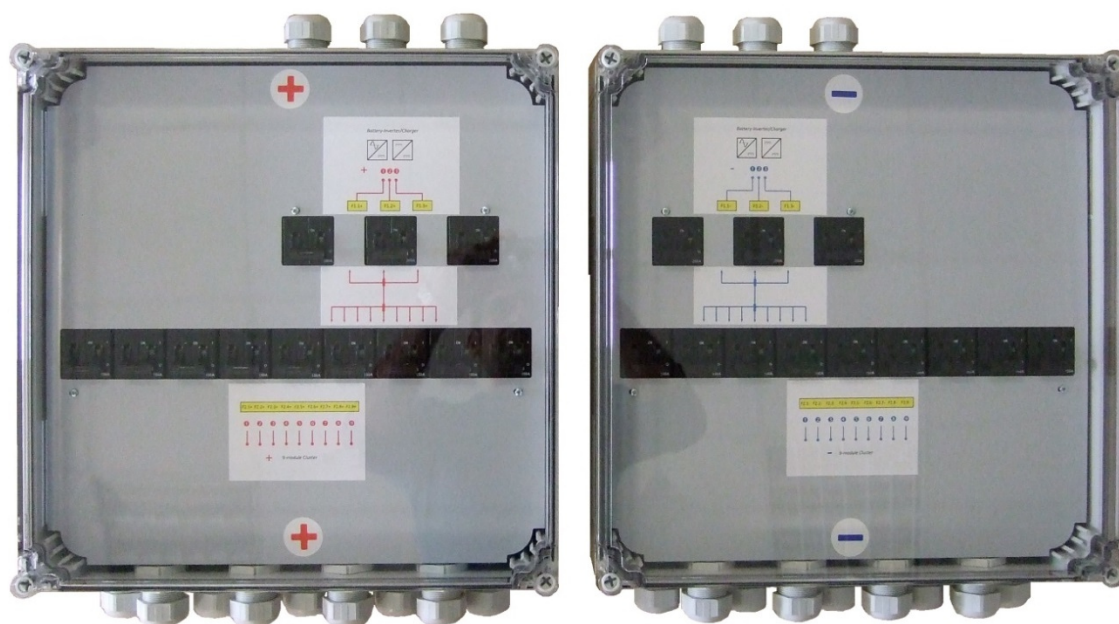

3 x



Sunny Island (all types except 8.0H)

If a different battery inverter/charger is aimed to use: Please clarify the technical capability in accordance with BMZ GmbH who keeps the responsibility for the system!

power storage system:

9 x "ESS 7.0"

respectively

9 x "ESS 9.0"

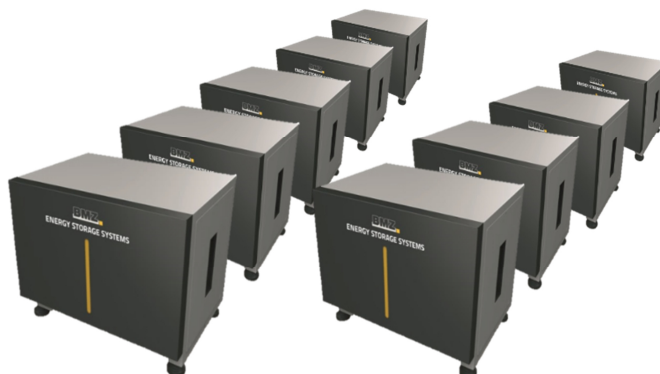


TABLE OF CONTENTS


1. Scope of application and appropriate usage.....	3
2. Scope of delivery	4
3. Mounting the "BAT BREAKER"	5
3.1 Selecting the mounting location.....	5
3.2 Minimum distances/dimension/mounting method	6
4. Electrical connecting	7
5. Maintenance and cleaning	8
6. How to stock the "BAT BREAKER"	8
7. Disposal.....	8
8. Specification in detail	9
8.1 Tripping characteristic	9
8.2 Technical data "BAT BREAKER" type 10012388.....	10

1. Scope of application and appropriate usage

You may use the battery-protection series "BAT BREAKER" in general for stationary or even mobile battery storage systems within different technologies (Lead, Lithium...) as a protection against overcurrent and short-circuit current. The voltage for charging/discharging is limited to max. 75V DC. The circuit breaker's nominal current-values are matching the BMZ-GmbH Systems requirements and making the maximum safety and availability for the system feasible.


If you observe a releasing of circuit breakers there must be a failure in the system! Before switching on again the circuit breaker you have to ensure the system's error-free performance!

The "BAT BREAKER" should be installed in close distance to the energy-storage unit. This provides the best protection for the system and cabling!

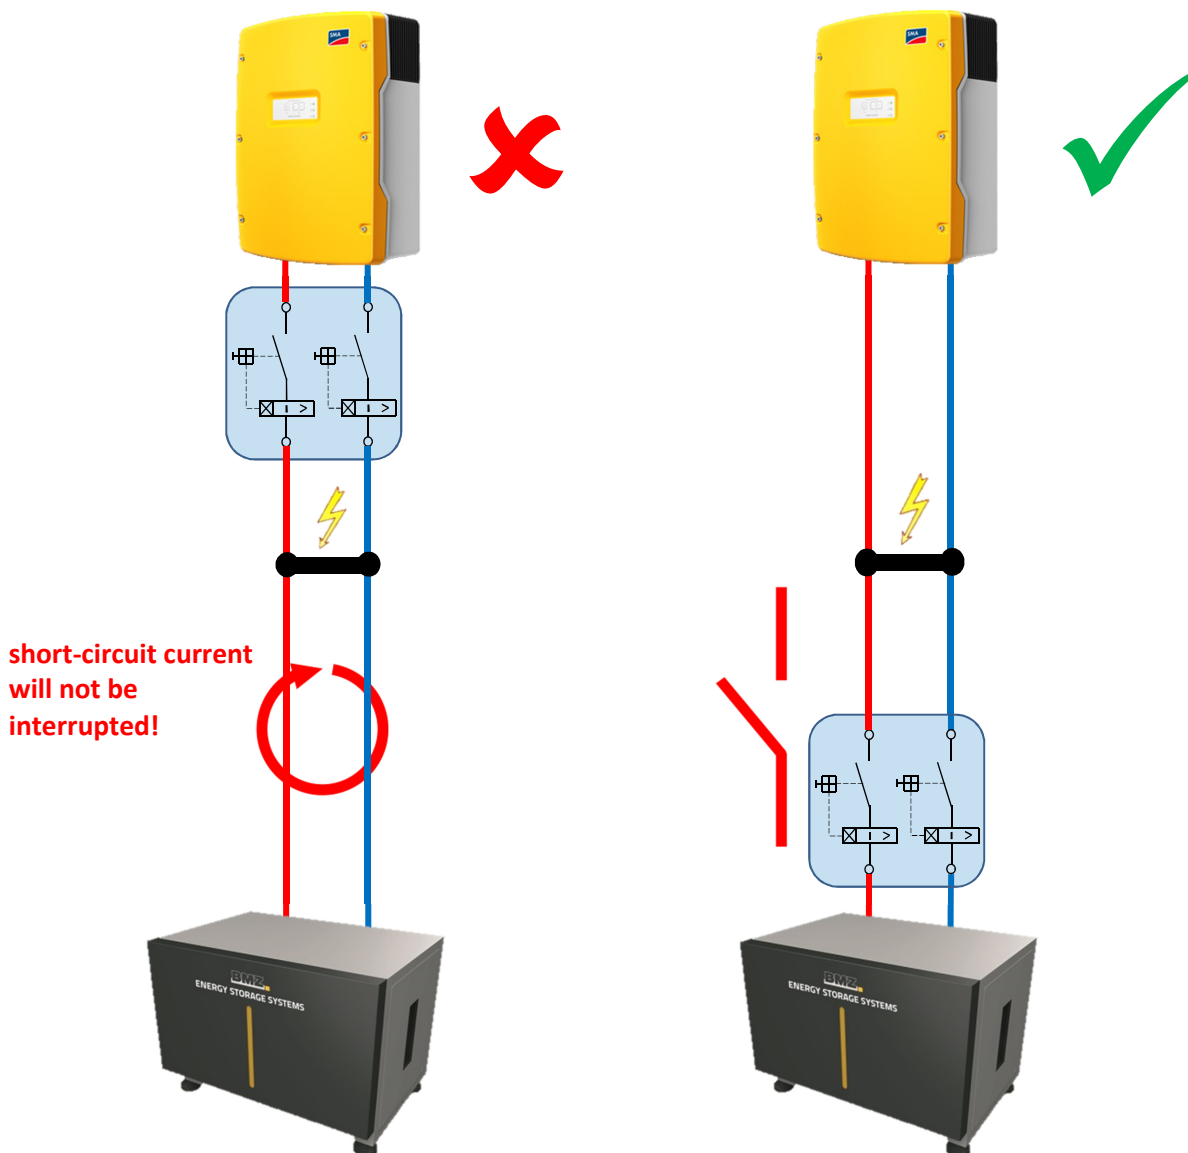

2. Scope of delivery

A

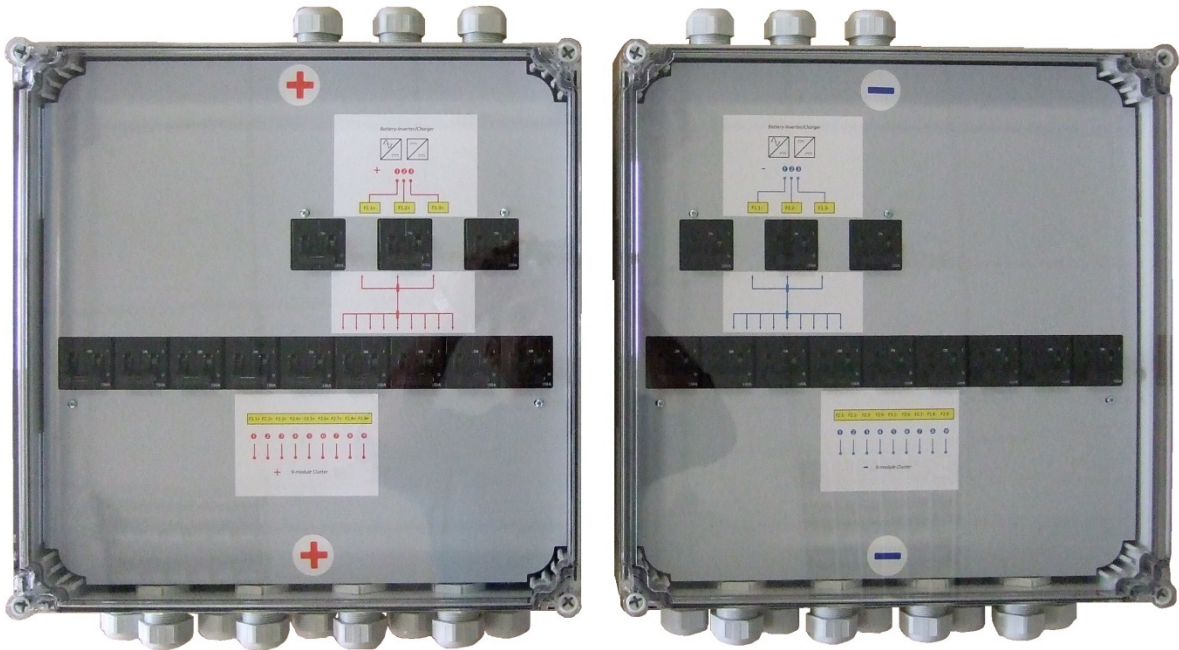

B



C



D



position	quantity	component
A	1	BAT BREAKER type 10012388 (two devices!)
B	24	Cable gland M32 x 1,5
C	4	Twisting sleeve (without aperture) M32 x 1,5
D	24	Locknut M32

3. Mounting the "BAT BREAKER"

3.1 Selecting the mounting location




DANGER

risk of explosion or fire


- do not mount the BAT BREAKER on flammable construction materials!
- do not mount the BAT BREAKER near highly flammable materials!
- do not mount the BAT BREAKER in potentially explosive areas!

- ☒ mount on a solid surface
- ☒ the mounting location and method must be suitable for the weight and dimension
- ☒ the mounting location must be accessible at all times
- ☒ climatic conditions must be in compliance with the specification
- ☒ the device may not be exposed to direct sunlight and weather
- ☒ the mounting location has to be protected against splashing water


installation position



3.2 Minimum distances/dimension/mounting method

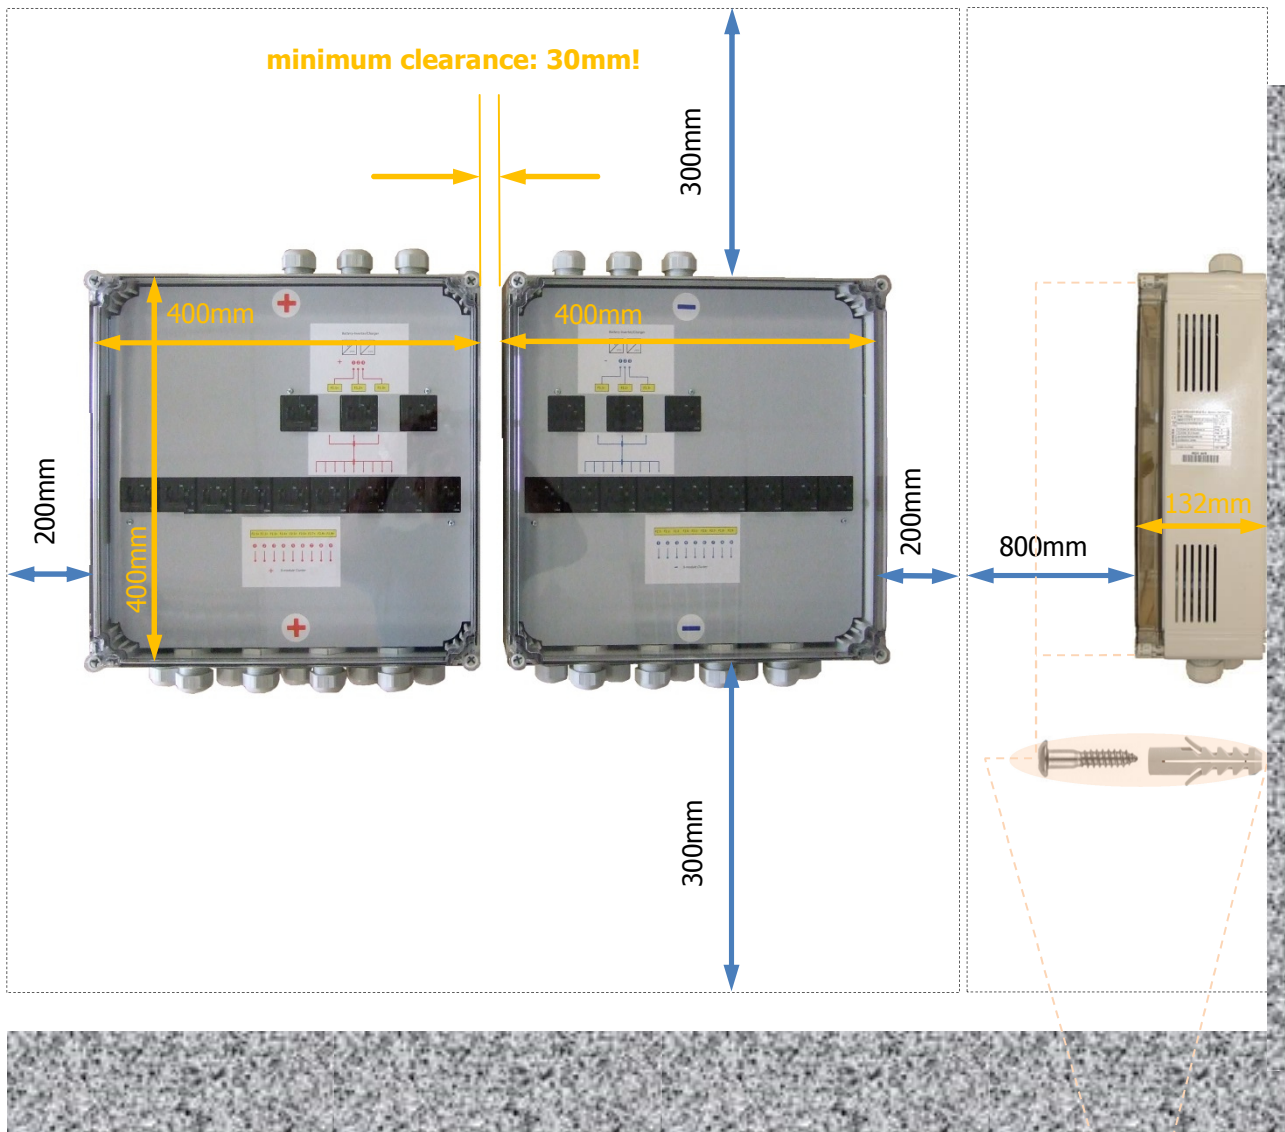

Select the correct mode of mounting, **depending on the mounting surface**, for example 8 x expansion anchor "S8"+ 8 x chipboard screw Ø5.0

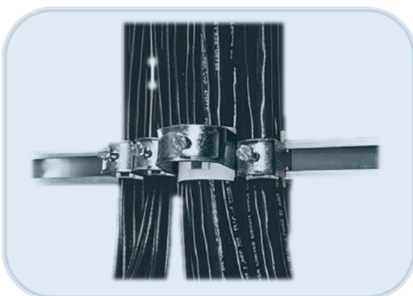


Do not forget the cable catch rail!

ATTENTION: Max. diameter head of bolt: Ø10mm!

4. Electrical connecting




previously remove
the cover!



M32 Ø13-21mm



TOP: max. 3 x charger/inverter

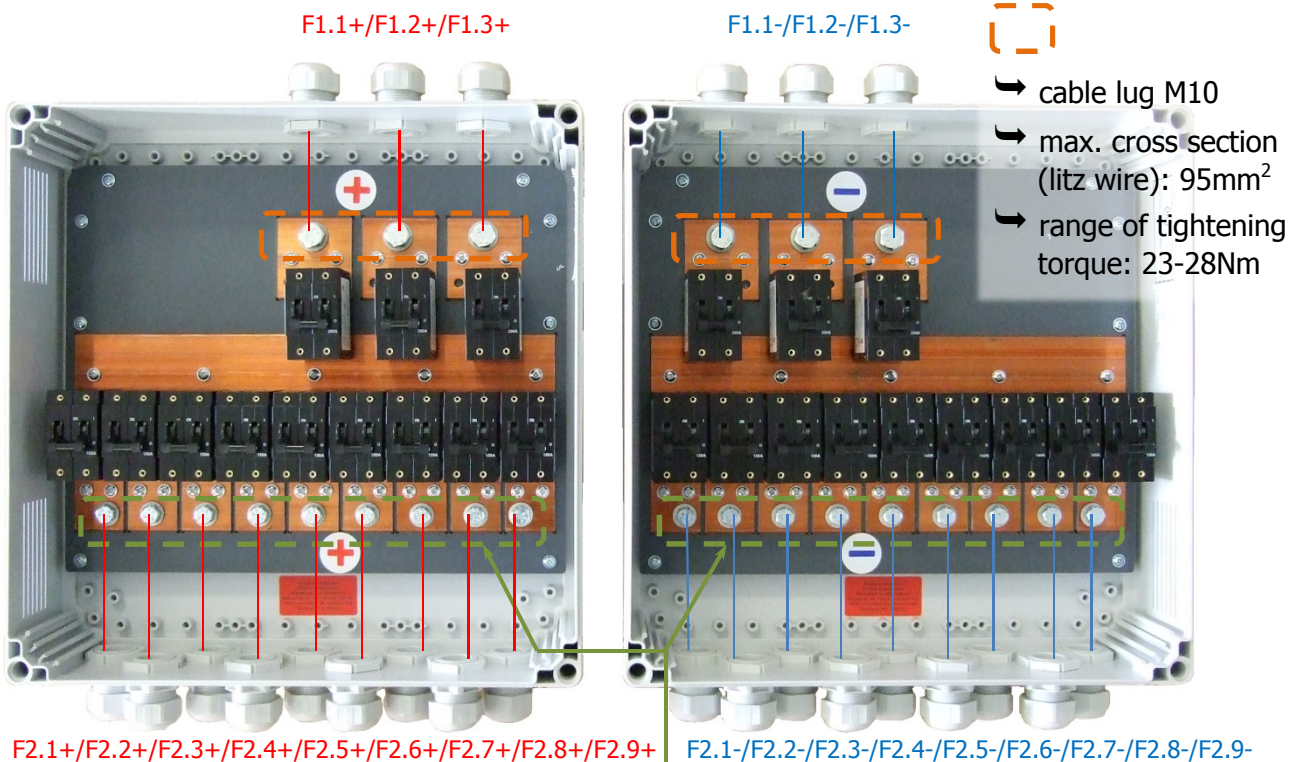

do not use the narrow
flange cable lugs for
switch gear connections!



BOTTOM: 9 x "ESS 7.0"
respectively
9 x "ESS 9.0"



→ cable lug M8
→ max. cross section
(litz wire): 50mm²
→ range of tightening
torque: 13-18Nm

5. Maintenance and cleaning

You should do a frequent short inspection of your "BAT BREAKER" for keeping a long durability and avoidance of an operational system's breakdown.

Please also consider your national standards and provisions regarding the requirements of battery- and/or PV power installations and their equipment. Potentially, you have to do an electrical test procedure once a year as it is to adduce in some european countries, e.g. Germany.

Visual inspection

Depending on the installation side and the environmental conditions you have to expect some pollution on the device's surface. Clean carefully with the help of a moist cloth! During this time do not open the case of the device under any circumstances!

6. How to stock the "BAT BREAKER"

Demands:

- ☒ dry conditions
- ☒ ambient air temperature ranges from -25°C up to +55°C
- ☒ for a maximum of 24 hours: temperature might get higher up to +70°C


7. Disposal

Disposal is due to your national/local regulations. The "BAT BREAKER" is to classify as "electronic waste" (it is no "household waste"!).

Take care of that and protect the environment!

8. Specification in detail

8.1 Tripping characteristic

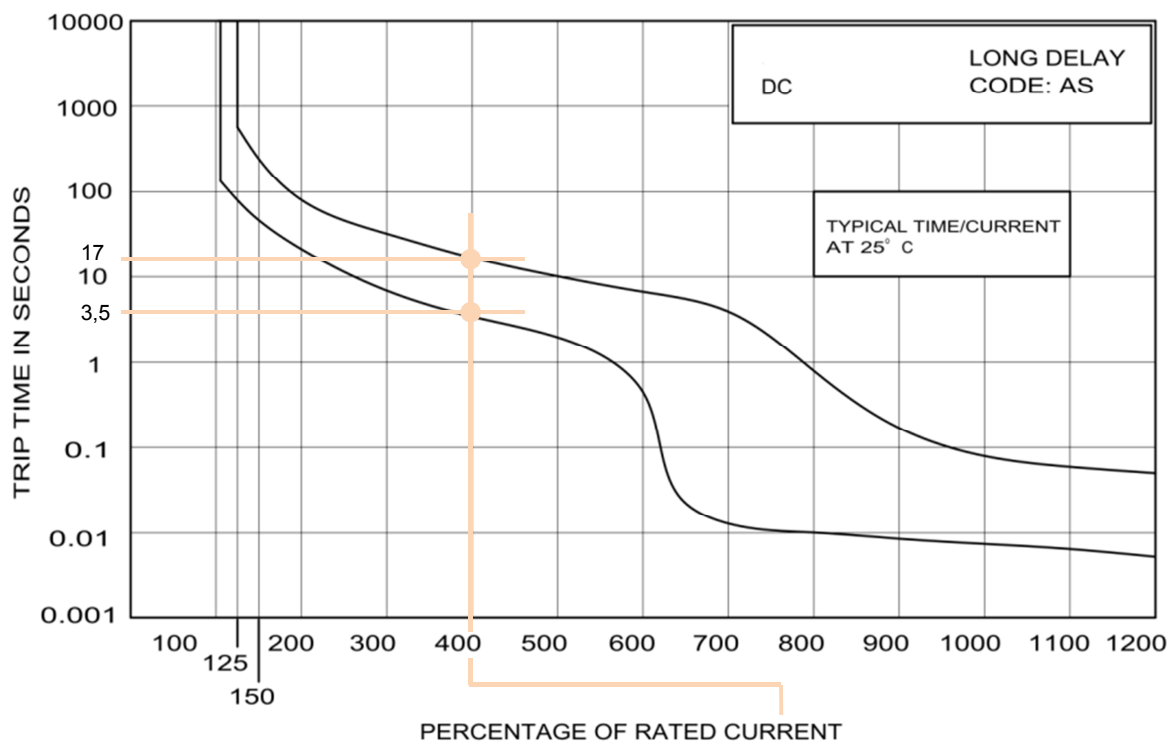

PERCENTAGE OF RATED CURRENT	100%	125%	200%	400%	600%	800%	1000%	1200%
MINIMUM TRIP TIME IN SECONDS	NO TRIP	80	21	3.5	0.45	0.01	0.0075	0.005
MAXIMUM TRIP TIME IN SECONDS	NO TRIP	560	80	17	6.8	0.8	0.08	0.05



for example: circuit breaker - rated current 200A:
 overcurrent of 800A (= 400% of rated current 200A)
 trip time between 3.5s and 17s
 (axis of ordinates: log. scale - trip time [s])

8.2 Technical data "BAT BREAKER" type 10012388

order number	10012388
designation (match-code)	BAT BREAKER-Spec. BMZ-EU -9x Accu -3x Charger
electrical data	
max.number of battery charger/inverter	max. 3
confirmed manufacturer and device-type	SMA - Sunny Island (all types except 8.0H)
max.number of accu parallel-connect	min. 7/max. 9
max. DC-voltage	75V
rated current of circuit breaker -charger/inverter-	200A per potential
rated current of circuit breaker -power storage Li 7S	150A per potential
max. permitted occurring current	compatible to "BMZ Energy Storage System"
tripping characteristic	DC - "long delay" - CBI Circuit Breaker
max. short circuit breaking capacity	10kA
electrical connection (ready for cable-lugs)	
<u>towards - charger/inverter</u>	
cable lug	1 x M10 per potential
max. cross section of litz wire	
* cable lug fits through the opening of the cable glands (cable lug is already pre-crimped)	50mm ²
* cable lug must be crimped after inserting the litz wire	70..95mm ²
<u>towards - accu (9 x)</u>	
cable-lug (caution: Do not use the cable-lugs with narrow flange for switch gear connections!)	1 x M8 per potential
max. cross section of litz wire	50mm ²
cabinet	
IP protection class	IP31
protection class against electric shock	II
dimensions (WxHxD)	2 x(!) 400x400x132(mm) - without cable glands-
plastic material	polycarbonate - base part in grey -RAL7035-; cover clear
installation type	wall mounting
cable inlets (plastic metric cable glands)	M32 (all)
environmental conditions for operation	
humidity	up to 85%, non-condensing
ambient temperature range	0°...45°C
miscellaneous	
weight	2 x(!) approx. 8,7 Kg



enwitec electronic GmbH & Co.KG
 Scherrwies 2
 84329 Rogglfing -Lower Bavaria-
 Germany
 phone +49 8725 9664-0
 fax +49 8725 9664-96
info@enwitec.eu