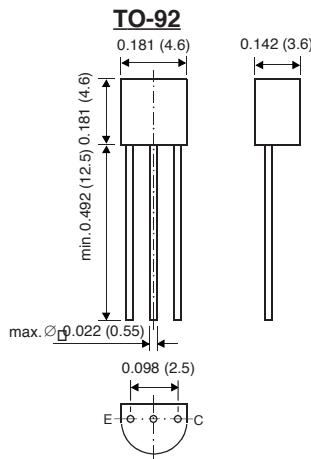


**MPS2222A****SMALL SIGNAL TRANSISTORS (NPN)**

Dimensions in inches and (millimeters)

**FEATURES**

- ◆ NPN Silicon Epitaxial Planar Transistor for switching and amplifier applications.
- ◆ On special request, this transistor is also manufactured in the pin configuration TO-18.
- ◆ This transistor is also available in the SOT-23 case with the type designation MMBT2222A

**MECHANICAL DATA****Case:** TO-92 Plastic Package**Weight:** approx. 0.18g**MAXIMUM RATINGS AND THERMAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified

	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V <sub>CBO</sub>	75	Volts
Collector-Emitter Voltage	V <sub>CEO</sub>	40	Volts
Emitter-Base Voltage	V <sub>EBO</sub>	6.0	Volts
Collector Current-Continuous	I <sub>C</sub>	600	mA
Power Dissipation at T <sub>A</sub> =25°C Derate above 25°C	P <sub>tot</sub>	625 5.0	mW mW/°C
Power Dissipation at T <sub>C</sub> =25°C Derate above 25°C	P <sub>tot</sub>	1.5 12	W mW/°C
Thermal Resistance, Junction to Ambient Air	R <sub>θJA</sub>	200	°C/W
Thermal Resistance Junction to Case	R <sub>θJC</sub>	83.3	°C/W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature Range	T <sub>s</sub>	-55 to +150	°C

# MPS2222A

## ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

	SYMBOL	MIN.	MAX.	UNIT
Collector-Base Breakdown Voltage at $I_C = 10 \mu A$ , $I_E = 0$	$V_{(BR)CBO}$	75	—	Volts
Collector-Emitter Breakdown Voltage <sup>(1)</sup> at $I_C = 10 \text{ mA}$ , $I_B = 0$	$V_{(BR)CEO}$	40	—	Volts
Emitter-Base Breakdown Voltage at $I_E = 10 \mu A$ , $I_C = 0$	$V_{(BR)EBO}$	6.0	—	Volts
Collector-Emitter Saturation Voltage <sup>(1)</sup> at $I_C = 150 \text{ mA}$ , $I_B = 15 \text{ mA}$ at $I_C = 500 \text{ mA}$ , $I_B = 50 \text{ mA}$	$V_{CEsat}$ $V_{CEsat}$	0.6 —	0.3 1.0	Volts Volts
Base-Emitter Saturation Voltage <sup>(1)</sup> at $I_C = 150 \text{ mA}$ , $I_B = 15 \text{ mA}$ at $I_C = 500 \text{ mA}$ , $I_B = 50 \text{ mA}$	$V_{BEsat}$ $V_{BEsat}$	— —	1.2 2.0	Volts Volts
Collector Cutoff Current at $V_{EB} = 3 \text{ V}$ , $V_{CE} = 60 \text{ V}$	$I_{CEX}$	—	10	nA
Collector Cutoff Current at $V_{CB} = 60 \text{ V}$ , $I_E = 0$ at $V_{CB} = 50 \text{ V}$ , $I_E = 0$ , $T_A=125^\circ\text{C}$	$I_{CBO}$	—	0.01 10	μA
Emitter Cutoff Current at $V_{EB} = 3 \text{ V}$ , $I_C = 0$	$I_{EBO}$	—	100	nA
Base Cutoff Current at $V_{CE} = 60 \text{ V}$ , $V_{EB} = 3.0 \text{ V}$	$I_{BL}$	—	20	nA
DC Current Gain at $V_{CE} = 10 \text{ V}$ , $I_C = 0.1 \text{ mA}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 1 \text{ mA}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 10 \text{ mA}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 10 \text{ mA}$ , $T_A=-55^\circ\text{C}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 150 \text{ mA}^{(1)}$ at $V_{CE} = 1.0 \text{ V}$ , $I_C = 150 \text{ mA}^{(1)}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 500 \text{ mA}^{(1)}$	$h_{FE}$ $h_{FE}$ $h_{FE}$ $h_{FE}$ $h_{FE}$ $h_{FE}$ $h_{FE}$	35 50 75 35 100 50 40	— — — — 300 — —	— — — — — — —
Input Impedance at $V_{CE} = 10 \text{ V}$ , $I_C = 1 \text{ mA}$ , $f = 1 \text{ kHz}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 10 \text{ mA}$ , $f = 1 \text{ kHz}$	$h_{ie}$	2.0 0.25	8.0 1.25	kΩ
Voltage Feedback Ratio at $V_{CE} = 10 \text{ V}$ , $I_C = 1 \text{ mA}$ , $f = 1 \text{ kHz}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 10 \text{ mA}$ , $f = 1 \text{ kHz}$	$h_{re}$	—	$8 \cdot 10^{-4}$ $4 \cdot 10^{-4}$	—
Current Gain-Bandwidth Product at $V_{CE} = 20 \text{ V}$ , $I_C = 20 \text{ mA}$ , $f = 100 \text{ MHz}$	$f_T$	300	—	MHz
Output Capacitance at $V_{CB} = 10 \text{ V}$ , $f = 1 \text{ kHz}$ , $I_E=0$	$C_{OBO}$	—	8.0	pF
Input Capacitance at $V_{EB} = 0.5 \text{ V}$ , $f = 1 \text{ kHz}$ , $I_C=0$	$C_{IBO}$	—	25	pF

### NOTES

(1) Pulse test: Pulse width  $\leq 300\mu\text{s}$  - Duty cycle  $\leq 2\%$

# MPS2222A

## ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

	SYMBOL	MIN.	MAX.	UNIT
Small Signal Current Gain at $V_{CE} = 10$ V, $I_C = 1$ mA, $f = 1$ kHz at $V_{CE} = 10$ V, $I_C = 10$ mA, $f = 1$ kHz	$h_{fe}$	50 75	300 375	— —
Output Admittance at $V_{CE} = 10$ V, $I_C = 1$ mA, $f = 1$ kHz at $V_{CE} = 10$ V, $I_C = 10$ mA, $f = 1$ kHz	$h_{oe}$	5.0 25	35 200	$\mu\text{S}$
Collector Base Time Constant at $I_E = 20$ mA, $V_{CB} = 20$ V, $f = 31.8$ MHz	$r_b' C_C$	—	150	ps
Noise Figure at $V_{CE} = 10$ V, $I_C = 100 \mu\text{A}$ , $R_S = 1 \text{k}\Omega$ $f = 1$ kHz	NF	—	4.0	dB
Delay Time (see fig.1) at $I_{B1} = 15$ mA, $I_C = 150$ mA, $V_{CC}=30$ V, $V_{BE} = -0.5$ V	$t_d$	—	10	ns
Rise Time (see fig.1) at $I_{B1} = 15$ mA, $I_C = 150$ mA, $V_{CC}=30$ V, $V_{BE} = -0.5$ V	$t_r$	—	25	ns
Storage Time (see fig. 2) at $I_{B1} = I_{B2} = 15$ mA, $I_C = 150$ mA, $V_{CC}=30$ V	$t_s$	—	225	ns
Fall Time (see fig. 2) at $I_{B1} = I_{B2} = 15$ mA, $I_C = 150$ mA, $V_{CC}=30$ V	$t_f$	—	60	ns

## SWITCHING TIME EQUIVALENT TEST CIRCUIT

FIGURE 1 - TURN-ON TIME

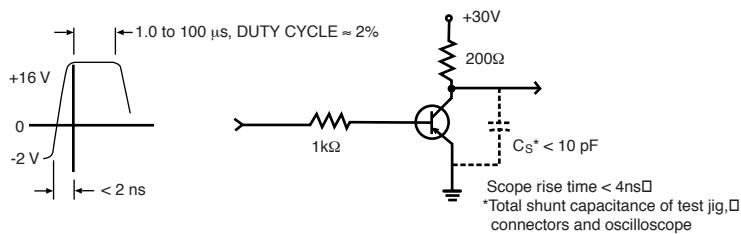


FIGURE 2 - TURN-OFF TIME

