


Send live video to a web browser anywhere in the world!

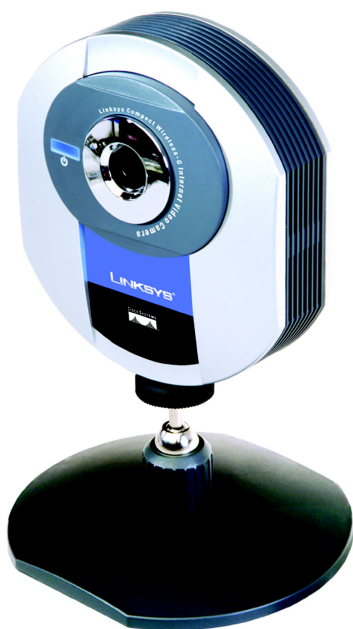

"The Linksys Compact Wireless-G Internet Video Camera sends live video through the Internet to a web browser anywhere in the world! This compact, self-contained unit lets you keep track of your home, your kids, your workplace -- whatever's important to you.

Unlike standard "web cams" that require an attached PC, the Internet Video Camera contains

its own web server, so it can connect directly to a network, either over Wireless-G (802.11g) networking, or over 10/100 Ethernet cable. The advanced MPEG-4 video compression produces a high-quality, high-framerate, up to 320x240 video stream."

The Compact Internet Video Camera's unique form-factor and wireless connectivity allows you to mount it on a wall nearly anywhere, or slip it into its included stand for desktop use. Once it's connected to your home network, you can "see what it sees" from any Windows-based PC in the house, while the video stream is secured from the outside world, hidden behind your Router. If you want the video to be visible from outside your home network, you can open an appropriate port on the Router, and then create password protected accounts to manage access to the camera, or leave it wide open for the world to see. The SoloLink domain service (trial sign-up included) lets you access your camera using an easy-to-remember "name", even if your home Internet connection uses a dynamic IP address.

"You can also turn on Security Mode, which tells the camera to send a message with a short video attached to up to three email addresses whenever it detects motion in its field of view. You can then log onto the live video stream if the situation warrants. The included Viewer & Recorder utility lets you record the audio/video stream to your local hard drive, "live" or on a predetermined schedule.

Let the Linksys Compact Wireless-G Internet Video Camera help you keep tabs on your world."

Sends high-quality live video to your network wirelessly -- viewable from Windows PCs anywhere

Built-in stand-alone web server, no PC necessary

Security Mode automatically sends email alerts with video clips upon motion detection

Supports up to four simultaneous remote users

Compact Wireless-G Internet Video Camera



Product Data

Compact Wireless-G Internet Video Camera

Features

- Integrated web server - view from most web browsers
- Access the camera from anywhere in the world via the Internet (Windows based PCs only)
- Supports enhanced MPEG-4 compression
- View video from your Wireless-G or wired ethernet network
- Includes easy to use Linksys MultiViewer & Recorder utility with Snapshot feature
- Motion Detection and E-mail notification
- Create a database for user authentication
- Supports resolution of up to 320x240 pixels
- Time Stamp & Text Overlay
- Connect up to 4 users simultaneously
- Supports Linksys SoloLink DDNS Service for dynamic IP connection
- Multi-platform support - TCP/IP, SMTP (E-Mail), HTTP, DHCP
- Windows-based Setup Wizard for easy setup
- WEP encryption and WPA-Pre-shared key

Linksys
A Division of Cisco Systems, Inc.
18582 Teller Avenue
Irvine, CA 92612 USA

E-mail: sales@linksys.com
support@linksys.com

Web: <http://www.linksys.com>

Linksys products are available in more than 50 countries, supported by 12 Linksys Regional Offices throughout the world. For a complete list of local Linksys Sales and Technical Support contacts, visit our Worldwide Web Site at www.linksys.com.

Specifications

Model	WVC54GC
Standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.3, IEEE 802.3u
Ports	One 10/100 Auto Crossover (MDI/MDI-X) port, Power port
Protocols	TCP/IP, HTTP, DHCP, NTP, SMTP, UPnP (Discovery only)
Buttons	One Reset Button
Cabling Type	RJ-45
Indicators	1 x LED
Security features	User Authentication, WEP/WPA-PSK, Motion Detection
WEP key bits	64/128 Bit
Image Sensor	CMOS
Lens	Fixed Focus
Resolution	320x240, 160x128
Effective Focus	3mm
Sensitivity	1.0V/Lux-sec
Field of View	61.48 degrees
Compression Algorithm	MPEG-4
Record File Format	ASF
Brightness	Auto/Manual Adjustment

Environmental

Dimensions (W x H x D)	3.54" x 4.02" x 1.46" 90 mm x 102 mm x 37 mm
Unit Weight	0.29 lb. (0.13 kg)
Power	External, 5V DC
Certification	FCC
Operating Temp.	0° C to 40° C (32° F to 104° F)
Storage Temp.	-10° C to 70° C (14° F to 158° F)
Operating Humidity	10% to 85% Non-Condensing
Storage Humidity	5% to 90% Non-Condensing

Minimum Requirements

- PC with 550MHz or Faster Processor
- 64 MB RAM Memory
- Internet Explorer 5.5 or higher for Web Viewing and Web-based Configuration
- Cable/DSL connection for Internet viewing
- Active-X 8.0 or higher
- CD-ROM Drive
- Windows Media Player 7 or higher
- Wired or Wireless Network Adapter with TCP/IP Protocol Installed
- Windows 98SE/ME/2000/XP

Package Contents

- Compact Wireless-G Internet Video Camera
- Camera Stand/Wallmount
- Power Adapter
- Ethernet Network Cable
- Setup CD-ROM with User Guide
- User Guide on CD
- DDNS Installation Guide
- SoloLink DDNS Free Trial Card
- Registration Card

Specifications are subject to change without notice. Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2006 Cisco Systems, Inc. All rights reserved. Other brands and product names are trademarks or registered trademarks of their respective holders.

Flexible remote controlled Wireless Video solution for your small business.

The Linksys Wireless-G Pan/Tilt/Zoom Video Camera sends live video through the Internet to a web browser anywhere in the world!

The advanced MPEG-4 video compression produces a high-quality, high-framerate, up to 640x480 video stream. MPEG-4 encoding facilitates good video quality in varying bandwidth environments. WVC200 also supports MJPEG compression for video, providing good video quality at high bandwidth rates.

The comprehensive video features include an IR filter cut which allow you to see the images in low or no light environments when an IR lamp is used. Snapshots (in JPEG format) of the image can be taken and saved. Snapshots can also be scheduled and sent to an FTP server.

If you want the video to be visible from a remote location or from the Internet, you can open an appropriate port on the Router, and then create password protected accounts to manage access to the camera, or leave it wide open for the world to see. Support for Dynamic DNS lets you access your camera using an easy-to-remember "name", even while using a dynamic IP address. The Pan/Tilt and digital zoom function allows you to remotely control the camera movement and focus, giving you maximum flexibility remotely. Up to 10 simultaneous users can have access to the camera at any point in time. Software is included for multiple camera monitoring and recording to your hard drive with advanced search by time and date. Recording can be set up to record by motion trigger, manual or schedule recording and playback on Windows Media Player without the need for a proprietary player.

You can also turn on Security Mode, which tells the camera to send a message with a short video attached to up to three email addresses whenever it detects motion in its field of view. You can then log onto the live video stream if the situation warrants. Wireless security features include WEP and WPA.

- **Sends high-quality live video to your network wirelessly. Pan/Tilt/Zoom gives flexible control remotely from a Web Browser**
- **Capacity to view images even in low light environments**
- **Automatically sends email alerts with video clips upon motion detection**
- **Supports up to ten simultaneous users**



Wireless-G PTZ Internet Camera with Audio

PRODUCT SHEET

BUSINESS SERIES

Wireless-G PTZ Internet Camera with Audio

Features

- Pan, Tilt and 2x Digital Zoom Wireless Internet Camera
- CMOS Sensor with Glass Lens
- Dual - Codec MPEG-4 or MJPEG Selectable Compression
- Capture Video and Audio (with Built-In Microphone) to Your Hard Drive
- Built-In Web Server for Remote Access with On-Screen Users Connected Information
- Supports UPnP for Easy Discovery on the Network
- DDNS support Linksys SoloLink and Other Available Free DDNS Services
- Supports up to 10 Simultaneous Users
- Motion Detection Triggered Event that Sends Out Video Clip to Up to 4 E-Mail Addresses
- LCD Screen Displays Full IP Address
- Included Software for Monitoring and Recording Up to 9 Cameras Simultaneously

Package Contents

- Wireless PTZ Internet Camera with Audio
- Setup Wizard CD-ROM
- User Guide on CD-ROM
- Network Cable
- Power Adapter
- Stand
- Registration Card

Minimum Requirements

- Wired or Wireless 802.11b, or 802.11g Network
- Network Adapter With Ethernet Network Cable and TCP/IP Protocol Installed Per PC
- Switch/Router To Support Multiple Connection Points
- Internet Explorer 5.x or above with ActiveX Support for Viewing
- Microsoft Windows XP, 2000, ME or 98SE
- 1GHz Pentium4, or AMD Athlon Class CPU with 128 MB RAM
- 32MB AGP Video Adapter

Also works with

- SRW224G4 High density expandable Ethernet switch
- WRV54G The Easy Way to Connect your Wireless-G Network to the Internet
- WAP54GP An interior Access Point that Can be Used with the WAP54GPE as a Bridge or Repeater

Specifications

Model Number	WVC200
Standards	IEEE802.11g, IEEE802.11b, IEEE802.3, IEEE802.3u, 802.11e (Wireless QoS)
Protocols Supported	TCP/IP, HTTP, DHCP, SMTP, FTP, NTP, DNS, UPnP and DDNS
Ports	Ethernet, Antenna, Microphone, Power
Buttons	Reset
Cabling Type	UTP CAT 5
LEDs	Power, Ethernet, Wireless-G

Lens

Sensor	1/5" CMOS
Illumination	2LUX@F2.0
Focal Length	500mm~Infinity
Field of View	60
Video Resolution	640 x 480, 320 x 240, 160 x 120
Frame Rate	Up to 30 fps

Camera Control

Auto Patrol	9 Definable Preset Points by User
Pan	± 67°
Tilt	-34° (down) to +30° (up)

Setup/Config

WebUI	Built in Web UI for Easy Browser-Based Configuration (HTTP)
-------	---

Model No: **WVC200**

PRODUCT SHEET

LINKSYS®
A Division of Cisco Systems, Inc.

Linksys
A Division of Cisco Systems, Inc.
18582 Teller Avenue
Irvine, CA 92612 USA

Email: sales@linksys.com
support@linksys.com

Web: <http://www.linksys.com>

Linksys products are available in more than 50 countries, supported by 12 Linksys Regional Offices throughout the world. For a complete list of local Linksys Sales and Technical Support contacts, visit our Worldwide Web Site at www.linksys.com.

Check the product package and contents for specific features supported. Specifications are subject to change without notice. Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2006 Cisco Systems, Inc. All rights reserved. Other brands and product names are trademarks or registered trademarks of their respective holders

WVC200-DS-60110NC CB

Wireless-G PTZ Internet Camera with Audio

Management

Web Browser	Internet Explorer 5.x, or Above
Event Logging	Event Logging
Web F/W upgrade	Firmware Upgradable Through Web-Browser

Video Compression

Dual Codec	MPEG-4 Simple Profile, MJPEG
Snapshot	JPEG
Modulation	NTSC and PAL
Image position	Flip and Mirror
Image Settings	Brightness and Contrast
Night Vision	IR Filter cut for low light
Motion Detection	Send Video Clip to an email address on motion detection

Audio

Compression	G.726
Sampling Rate	8 KHz
Default Bit Rate	16Kbps

Management Utility

Monitor and Recording software	Included software for multiple camera monitoring and recording to your hard drive with advanced search by time and date. Recording can be set up to record by motion trigger, manual or schedule recording and playback on Windows Media Player without the need for a proprietary player
--------------------------------	---

Security

WEP/WPA	WEP 64bit/128bit, WPA-TKIP, WPA-PSK
User List	User Rights List to View Video and/or to Camera Control Functions
Username/password	Logon authentication 20 character username and 8 character password

Network

NTP	Network Time Protocol
SMTP	Simple Mail Transfer Protocol Client allows video clips to be emailed
FTP Client	FTP Client facilitates scheduling transfer of images to an FTP server
DDNS	Dynamic DNS facilitates reaching the camera by a name irrespective of what the IP address is. Sololink, DynDNs, and TZO is supported
UPnP	Allows autodiscovery of the camera by other UPnP devices

Environmental

Device Dimensions	1.26 x 7.83 x 6.89 inches
(W x H x D)	32 x 199 x 175 mm
Weight	1.01 lbs.
Power	5DVC 2.5A Switching Power Supply
Certification	FCC, CE and UL
Operating Temp.	-32 °F ~ 113 °F (-0 °C ~ 45 °C)
Storage Temp.	-4 °F ~ 140 °F (-20 °C ~ 70 °C)
Operating Humidity	10% to 80% Non-Condensing
Storage Humidity	0% to 90% Non-Condensing

Model No: **WVC200**

PRODUCT SHEET

LINKSYS®
A Division of Cisco Systems, Inc.