


TBS299

Philips T5 Electronic Office Lighting System 飞利浦T5电子格栅灯具
Mounting instruction 安装说明

TBS299-M001a



Type Number 型号	Watt 功率	Rated Voltage 电压	Power Factor 功率因素	Luminaire Input current 灯具输入电流	Cut-out Size 开孔尺寸 (mm) L x W	Mounting Size 安装尺寸	
						Surface mounting dimension 吸顶式安装 (尺寸mm) L x W	Suspended mounting dimension 吊挂式安装 (尺寸mm) L x W
TBS299/ 214	2x14W	220-240V	0.98	0.17A	585x285	356x75	440x75
TBS299/ 221	2x21W	220-240V	0.98	0.22A	885x285	656x75	740x75
TBS299/ 228	2x28W	220-240V	0.98	0.31A	1185x285	956x75	1140x75
TBS299/ 314	2x14W	220-240V	0.95	0.245A	585x585	336x365	418x365
TBS299/ 321	2x21W	220-240V	0.95	0.29A	885x585	636x365	718x365
TBS299/ 328	2x28W	220-240V	0.95	0.46A	1185x585	936x365	1018x365
TBS299/ 414	2x14W	220-240V	0.95	0.34A	585x585	336x365	418x365

Exploded drawing 爆炸图

Labels in diagram:
Translucent panel 透光板
Ballast 镇流器
Louver 格栅组件
Reflector 反射器
Spring clip 弹簧搭扣
G5 Lamp holder G5 灯座
Housing 底盘
Emergency slot hole (optional) 应急装置安装槽(可选)
Terminal block 接线柱
Easy access connection device 铰链机构
Grommet 护线圈
Suspension clip 悬挂搭扣
Earthing 接地线

Electric specification
灯具电气规格


- Voltage/ Hz:
电压/赫兹:
220-240V~, 50/60Hz
- Suitable Lamp:
适用光源:
PHILIPS TL5 Essential
- Electrical Insulation
Classification:
电气绝缘等级: 1
- Power Factor:
功率因数:>0.9



1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
灯具应由有资格的电工安装，接线要符合IEE电气标准或国家标准。
2. The luminaire shall, under no circumstance, be covered with thermal insulation matting or similar material.
灯具不适合被隔热或类似材料覆盖。

Lamp installation (for non-combipack version)

灯管安装 (针对不含灯管的型号)

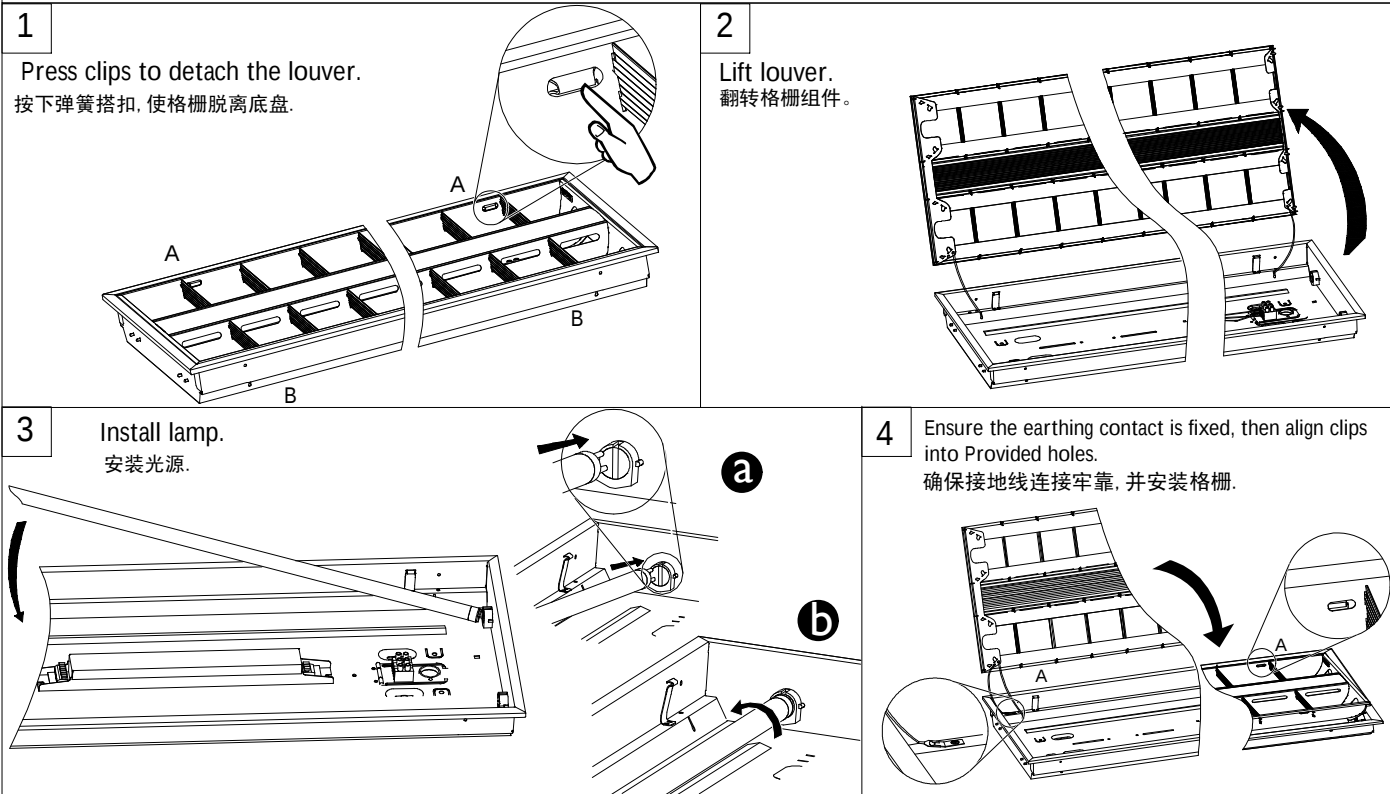

Electric connection and Mounting Luminaire 电气连接和灯具安装

