

# GYS 058309 600L Pro Inspection Lamp Instruction Manual




Contents

1 GYS 058309 600L Pro Inspection Lamp
2 ULTRA-LED COB SLIM LIGHT
3 FEATURES
4 SPECIFICATIONS
5 TECHNICAL DATA
6 OPERATING & CHARGING PROCEDURE
7 SAFETY INSTRUCTION
8 WARRANTY
9 Documents / Resources
9.1 References
10 Related Posts

## GYS 058309 600L Pro Inspection Lamp




## ULTRA-LED COB SLIM LIGHT

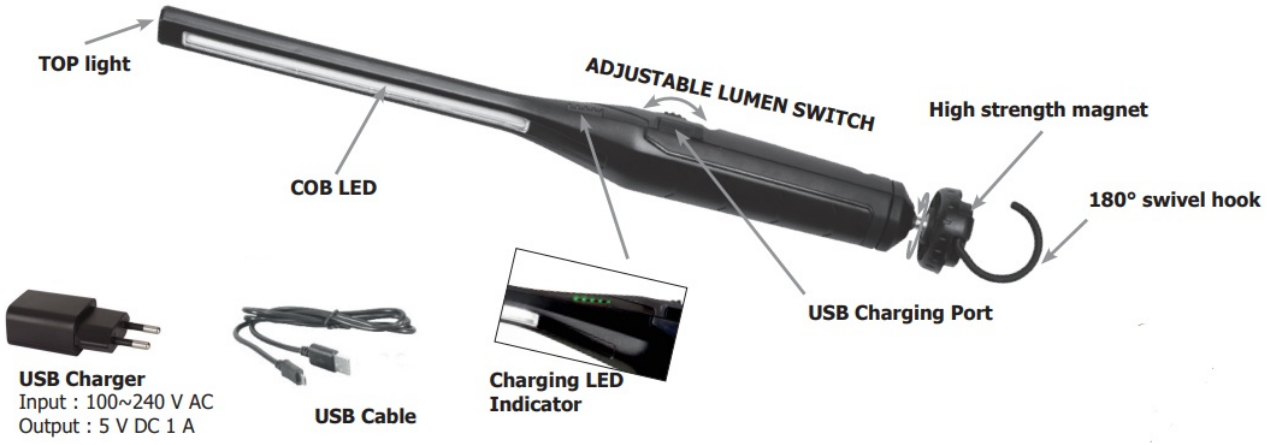


## FEATURES

1. Adjustment lumen switch
2. Foldable base with a powerful magnet
3. Swivel hanging hook
4. Build in 2600 mAh Li-ion battery
5. For full high-approx 1.5 hours working hours, for semi light-approx 16 working hours
6. 4 hours charging time
7. Comes with 5 V 1 A USB charger & USB cable

## SPECIFICATIONS

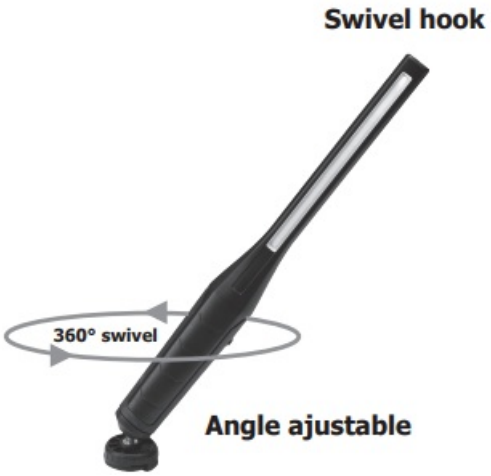


- **A. LED Max power:** 600 lm LED COB light
- **B. Li-ion Rechargeable battery:** 3.7 V 2600 mAH
- **C. Charger input:** AC 100~240 V 50/60 Hz
- **D. Power output:** 5 V 1 A
- **E. Charger time:** 4.0 hours
- **F. Active time:** 1.5 hours (full power mode)
- **G. Storage temperature :** -20°C to 50°C
- **H. Operation temperature :** -10°C to 40°C
- **I. Product Size :** 384(L) X 40(W) x 44,5(H) mm

## TECHNICAL DATA

| | |
|---|---|
| **Light Source** | high power COB LED – Main light high power SMD LED – Top light |
| **Luminous Power** | ca. 60-600 lm – Main light(Min-Max) ca. 120 lm – Top light |
| **Operating time** | ca. 16-1.5 h – Main light full power mode ca. 10 h – Top lig ht |
| **Battery Specification** | Li-ion 3.7 V 2600 mAh, 9.62 Wh |
| **Charging Time** | 4 hours |
| **Charging Input** | DC 5 V 1 A |
| **Degree of protection** | IP54 , IK07 |
| **Operating temperature** | -10ºC to +40ºC |

### WARNING

- Do not open the device.
- Do not look directly into the light-emitting lamp – Risk of eye injuries!
- Do not operate in direct sunlight or extreme temperature conditions. Operating temperature, –10°C to +40°C.
- Keep away from children! Children should be supervised in order to ensure that they do not play with the device!

## OPERATING & CHARGING PROCEDURE

1. Press the Switch first time, top light switch on.
2. Press the Switch a second time, top light switch off.
3. Adjust the stepless switch to change the brightness of the whole light. Switch the lamp off and connect with the USB charger during charging.

The battery indicator will blink during charging. All the battery indicators will stay lit up after finished the charging. If the battery indicator did not light up, please remove the charger and try again. Always only use the charger recommended by GYS to charge the lamp. The use of a NON-recommended charger can lead to a fire and destroy the lamp. Before taking the hand lamp into service for the first time charge it for 4-5 hours. Fully charge the hand lamp before it is stored for a longer period.

When the battery is running out, the light will flash 3 times to remind customers need to charge.

## SAFETY INSTRUCTION

- Do not use the device if there is damage to the housing, plug or cable. Consult your local authorized specialist!
- Do not open the device! Repair work and replacing the rechargeable battery pack may only be carried out by electricians.
- Carry out cleaning tasks only when the mains plug is removed from the mains' power!
- There is a risk of short-circuiting. Repairs on the device may only be carried out by commissioned and trained

persons. Please contact your nearest authorized branch.

- Protect the battery against heat, e. g., against continuous intense sunlight, fire, water, and moisture. Danger of explosion.
- If the battery is damaged or not used correctly. Fluids can leak from the battery. Avoid contact with these. Leaking battery fluids can lead to skin irritation or burns. Rinse off with water if you should come into contact. If the fluid gets into your eyes,make sure you get medical help.
- The lamp is not allowed to be placed on the light surface while being switched on

**ENVIRONMENTAL PROTECTION**

- The device should not be discarded in normal household waste under any circumstances.
- Dispose of the device via an authorized disposal center or your communal waste disposal facility. Observe the current applicable regulations. Contact your waste disposal facility in the event of any doubt. Dispose of all packaging materials via an environmentally friendly disposal facility. Rechargeable batteries must not be disposed of in household waste.
- Return used rechargeable batteries to your dealer or hand them into a battery collection facility.

## WARRANTY

The warranty covers faulty workmanship for 2 years from the date of purchase (parts and labor).
The warranty does not cover:

- Transit damage.
- Normal wear of parts (eg. : cables, clamps, etc..).
- Damages due to misuse (power supply error, dropping of equipment, disassembling).
- Environment-related failures (pollution, rust, dust).

In case of failure, return the unit to your distributor together with:

- The proof of purchase (receipt etc …)
- A description of the fault reported

**PICTOGRAMS**

- The device complies with European Directive. The certificate of compliance is available on our website.
- The British Declaration of Conformity is available on our website (see home page).
- The declaration C) CMIM) of conformity is available on our website (see cover page).
- Do not throw in a domestic bin.
- The recyclable product that falls within waste sorting recommendations (according to Decree n° 2014-1577).

**www.gys.fr**

## Documents / Resources

| | |
|---|---|
|  | GYS 058309 600L Pro Inspection Lamp [pdf] Instruction Manual<br>058309, 600L Pro Inspection Lamp, 058309 600L Pro Inspection Lamp, Pro Inspection Lamp, Inspection Lamp, Lamp |

## References

- Arc Welding, Battery Chargers & Body Repair | GYS

Manuals+,