
SWTA4620

DIGITAL THREE PHASE ANGLE CONTROLLER

Farnell order code	celduc® relais code
399-6281	SWTA4620

Farnell

- Allows to set the voltage applied to different sort of loads :
  - Resistive (Bulbs, UV and IR lamps, ovens, ...),
  - Inductive (inductors, transformers, ...)
  - Motor (motorfan speed control (60 to 100% from the nominal speed).
- Small housing, easy and ready to use.
- Large mains frequency and voltage range.
- Optoisolated phase angle control of the thyristors proportionnally to the analog input signal.
- Dynamic control input setting range correction according to the load power factor.
- Softstarting and softstopping functions (Increase the lifetime expectancy of the load).
- Adjustable filter of the fast input voltage changes (ramps).
- Motor softstarting functions to control its speed within the stable area.
- Input-output transfert characteristic linearization function (resistive load).
- Diagnostic features : Status given on LED and output terminals.



Proportionnal analog voltage control input

0-10V

200->480VAC

12A AC-51 12A AC-53a

Mains Voltage	Mains Frequency	Max AC-51 Current	Max AC-53a Current	Control Input	Status Ouputs	In / Out Insulation	Wire Size	Dimensions (WxHxD)	Weight
200 to 480VAC	40 to 65Hz	16A @40°C	16A @40°C	0-10VDC	0 to 24VDC 1A AC/DC	4kV	In=2.5mm² Out=10mm²	83x110x155 (mm)	1500g

Fig. 1 TYPICAL APPLICATIONS

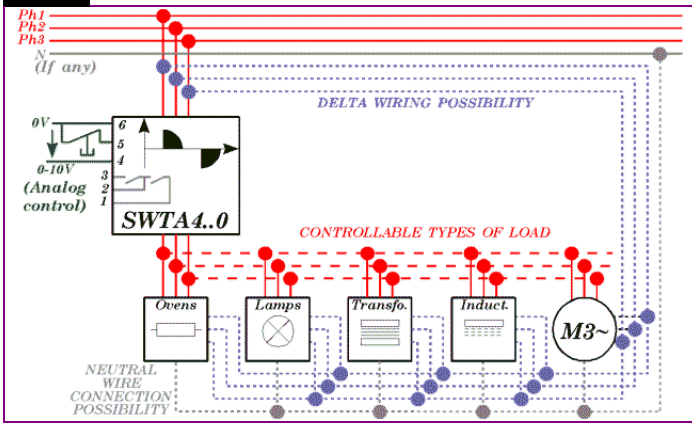


Fig. 2 WIRING DIAGRAM

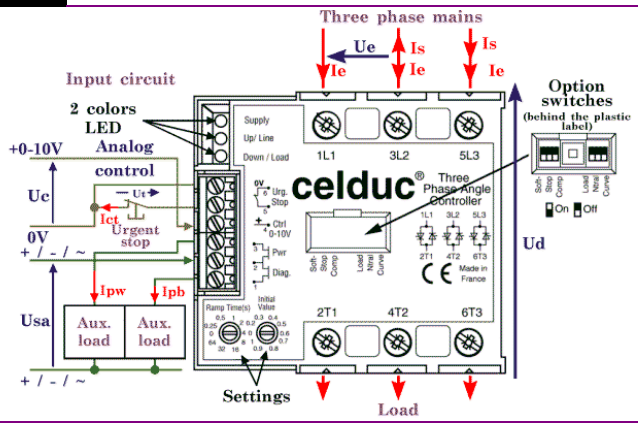


Fig. 3 PHASE ANGLE CONTROL DESCRIPTION


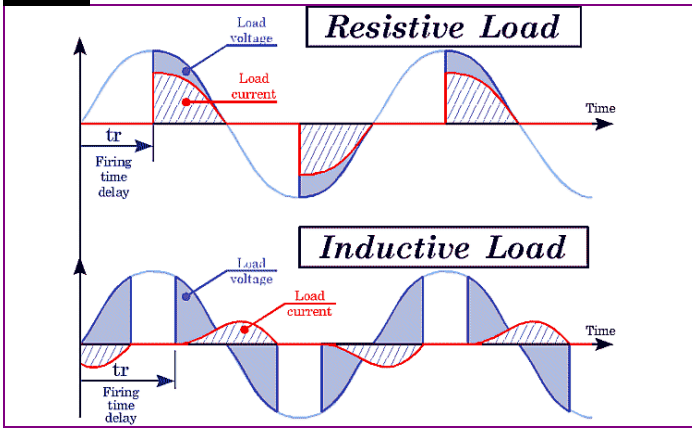


Fig. 4 INTERNAL DIAGRAM









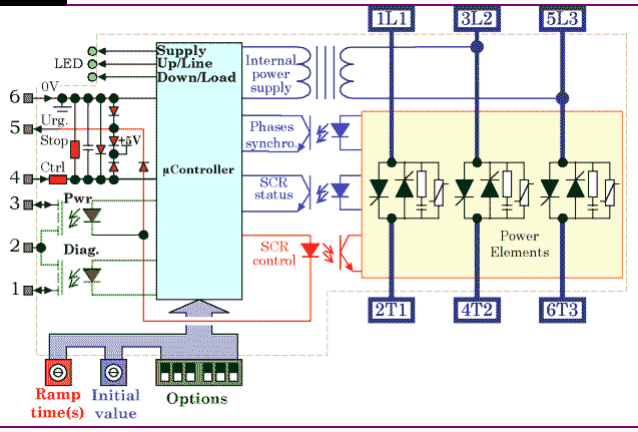


Proud to serve you

celduc® relais

SETTINGS

SETTINGS AND OPTIONS

Label	"Ramp Time (s)"	"Initial Value"	"Soft Stop"	"Comp"	"Load"	"Ntrl"	"Curve"
Description							
Function	Ramp up time (Softstart and smooth transients)	Initial load voltage (footstep)	Ramp down time	Allows to adapt the control signal range whatever the power factor of the load	Ask the unit to make a softstart up to the max. before analog control.	Tells the unit the load star point is connected to the mains neutral	Tells the unit what kind of in-out response to use (angle or RMS voltage linearity)
Setting possibilities	Ts= 0 to 64s	Vi=0 to 100 %	**0 x ts =**  **0,5 x ts =**  **ts =**  **2 x ts =** 	**Off**	**Off**	**Off**	**Off**
				Resistive load	Other loads than motors	Delta or star without neutral connection	Phase angle control
				On	**On**	**On**	**On**
				Inductive load	Motor	Star wiring with mains neutral connected	RMS voltage control

INPUT CHARACTERISTICS

INPUT CIRCUIT

CHARACTERISTIC	LABEL	VALUE		INFO.
Labels		**"0-10V"**	**"Urg. Stop"**	
Function		Analog control input	Stop the thyristor controls	
Control type		DC control voltage	Opening the connection between 5 & 6	
Terminals		4 & 6	5 & 6	
Control voltage range	**Uc**	0-10VDC	-	
Release and control threshold voltage	**Ucsmin**	0.3VDC	-	
Full power threshold control voltage	**Ucsmax**	9.7VDC	-	
Max. input voltage	**Ucmax**	30VDC	6VDC	
Max. reverse voltage	**-Ucmax**	30VDC	6VDC	
Release voltage	**Ut**		>1,5V	
Input impedance	**Re**	100kΩ	-	**See fig. 5**
Current to switch	**Ict**	-	20mADC	Ict=f(Ut)

STATUS OUTPUTS

Labels		**"Diag. "**	**"Pwr"**	
Terminals		1 & 2	2 & 3	
Function		Indicates a problem detected in the circuit configuration	Indicates the load is supplied	
Nominal operating voltage	**Usan**	24VAC/DC		
Operating voltage range	**Usa**	0->28VAC/DC		
Max. peak voltage	**Usap**	60V		
Overvoltage protection		Built-in 25V size7 varistors		
Minimum load current	**Ipw/Ipb**	0A		
Maximum load current	**Ipw/Ipb**	1A AC/DC		**See fig. 6**
Maximum overload current	**Ipw/Ipb**	2.4A AC/DC		@100ms 10% of the cycle
On and off state switch resistance	**Ron / Roff**	500mΩ / 100MΩ		**See fig. 6**
On and off time delay	**Ton / Toff**	0.5ms / 2ms		

OUTPUT CHARACTERISTICS

POWER CIRCUIT

CHARACTERISTIC	LABEL	VALUE				INFO.
Mains voltage range	Ue	200 -> 480VAC				
Non-repetitive peak voltage	Uep	1200V				
Overvoltage protection	VDR	Built-in 510V size 14 varistors				
Nominal currents	Ie	Resistive Ithmax AC51	Resistive Ith AC51	Motor Iemax AC53a	Motor Ie AC53a	@40°C See fig. 7
		16A	12A	16A	12A	
Max motor power	Pn	400VAC (Star wiring)	400VAC (Delta wiring)	230VAC (Star wiring)	230VAC (Delta wiring)	Delta wiring : See installation manual
		7.5kW	13kW	4.3kW	7.5kW	
Non-repetitive peak overload current (1 cycle of 10ms)	ITSM	1000A				See fig. 8
Melting limit for choosing the protective fuses	I²t	5000A²s				@10ms
Minimum load current	Iemin	100mA				
Maximum leakage current	Ielk	7mA				@400VAC 50Hz
Power factor	Pf	0->1				
Mains frequency range	F	40->65Hz				
Max. off-state voltage rise	dv/dt	500V/µs				
Protection against fast voltage transients		Buit-in RC network				
Max. current rise	di/dt	50A/µs				
On-state voltage drop	Ud	1.4V				@Ith
Resistive part of the voltage drop	rt	6.5mΩ				@125°C
Potential part of the voltage drop	Vto	0.9V				@125°C
Maximum junction temperature	Tjmax	125°C				
Junction/case thermal resistance per power element	Rthjc	0.4K/W				Total = 3 power elements
Case heatsink thermal resistance	Rthcs	0.05K/W				
Built-in heatsink thermal resistance vertically mounted	Rthra	1.2K/W				@ΔTra=60°C
Heatsink thermal time constant	Tthra	25min				@ΔTra=60°C
Inputs/power ouputs insulation voltage	Uimp	4kV				
Input/status outputs insulation voltage	Uied	2.5kV				
Inputs/case insulation voltage	Uimp	4kV				
Status outputs/case insulation voltage	Uimp	4kV				
Isolation resistance	Rio	1GΩ				
Isolation capacitance	Cio	<8pF				
Storage ambient temperature	Tstg	-40->+100°C				
Operating ambient temperature	Tamb	-40->+90°C				See fig. 7
Max. heatsink temperature	Tc	100°C				

INTERNAL POWER SUPPLY

	CHARACTERISTIC	LABEL	VALUE	INFO.
INTERNAL POWER SUPPLY	Terminals		3L2 & 5L3	
	Mains voltage range	Ue	200->480VAC	
	Consumption	Is	1mA typical	
	Mains frequency range	F	40-65Hz	
	Turn-on time	tm	100ms	

GENERAL INFORMATION

CONNEC-TIONS	Connections		Power	Input terminal block	
	Screwdriver advised		Posidriv 2 or 0.8 x 5.5mm	0.8 x 2mm	
	Min and max tightening torque		1.8->3N.m		
	Number and cross section of the wires		2 x 1.5->6mm^2 (10mm^2 without ferrule)	1 x 2.5mm^2	
	Screwdriver for settings		0.8 x 2mm		
MISC.	Housing		UL94V0		
	Mounting		Omega DIN rail (DIN50022) or screwed		
	Noise level		Low audible vibrations		
	Weight		1500g		

STANDARDS

GENERAL	Standards		EN60947-4-2 & EN60947-4-3	
	Protection level		IP2L0	
	Protection against direct touch		Accordin to V.D.E. 160 part 100 : Back hand and finger safety	
	CE marking		Yes	
	UL, cULUS and VDE approvals		Pending	

	TYPE OF TEST	STANDARD	LEVEL	EFFECT
E.M.C. IMMUNITY	E.S.D. (Electrostatic discharges)	EN61000-4-2	8kV (air) 4kV (touch)	No effect
	Radiated electromagnetic fields	EN61000-4-3	10V/m	No effect
	Fast transients bursts	EN61000-4-4	2kV direct coupling on the power side 2kV coupling by clamp on the input side	No effect
	Electric chocks	EN61000-4-5	1kV direct coupling differential mode (input and output) 2kV direct coupling common mode (input and output)	No effect
	Voltage drop	EN61000-4-11	-	

E.M.C. EMISSION	Radiated and conducted disturbances	NFEN55011	The conducted or radiated disturbances generated by solid state relays depend on the wiring and load configuration. The test method recommended by the European standards and concerning electromagnetic compatibility leading to results far from reality, we decided to advise our customer in order to adapt their filtering scheme to their application. **Please refer to the SVTA – SWTA installation manual.**	

CHARACTERISTIC CURVES

Fig. 5 INPUT CHARACTERISTIC

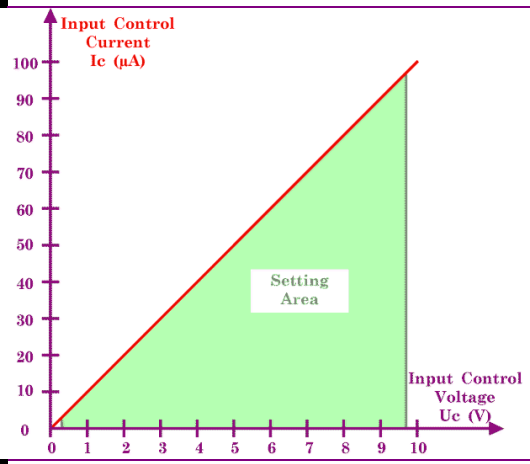


Fig. 6 CURRENT AND ON RESISTANCE VS TEMPERATURE

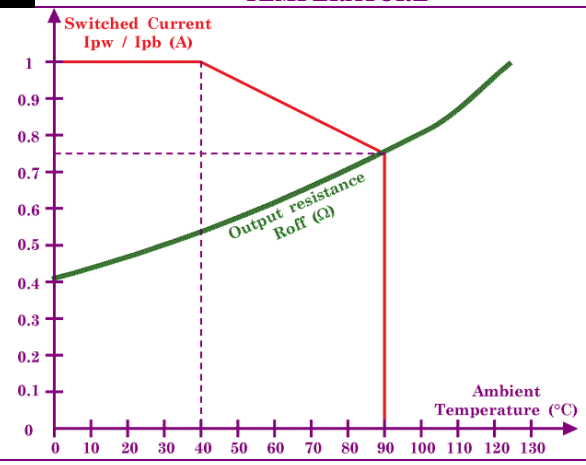


Fig. 7 POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE



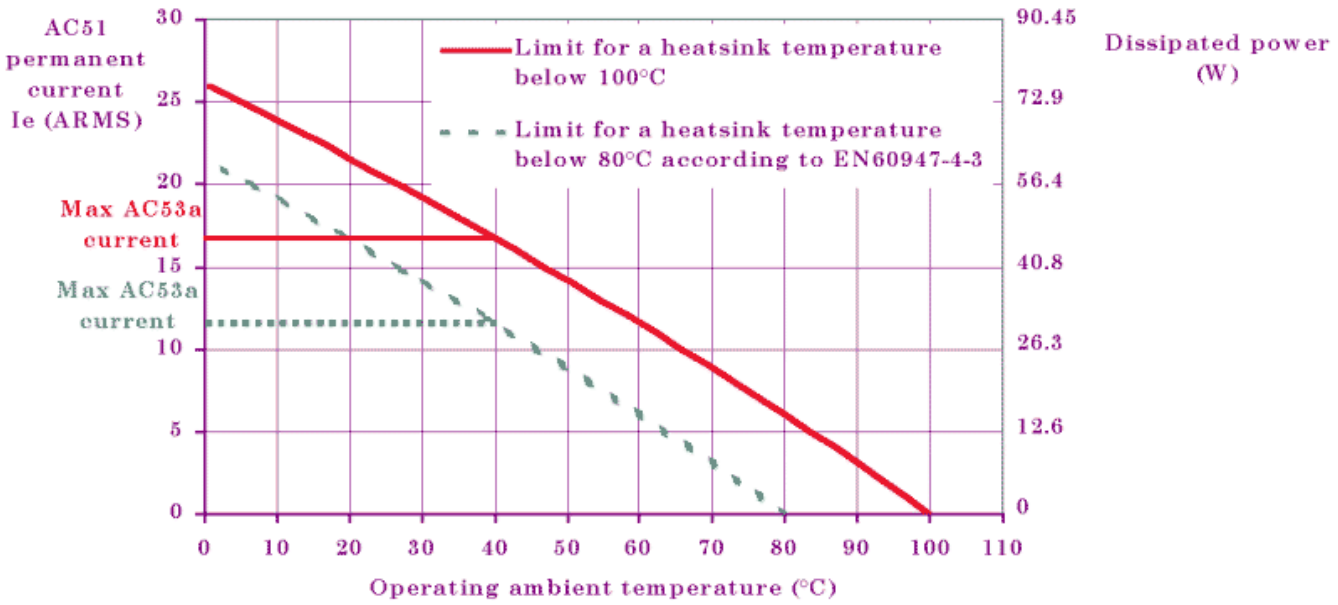


Fig. 8 CURRENT OVERLOAD CHARACTERISTIC (ITSM PER POWER ELEMENT)

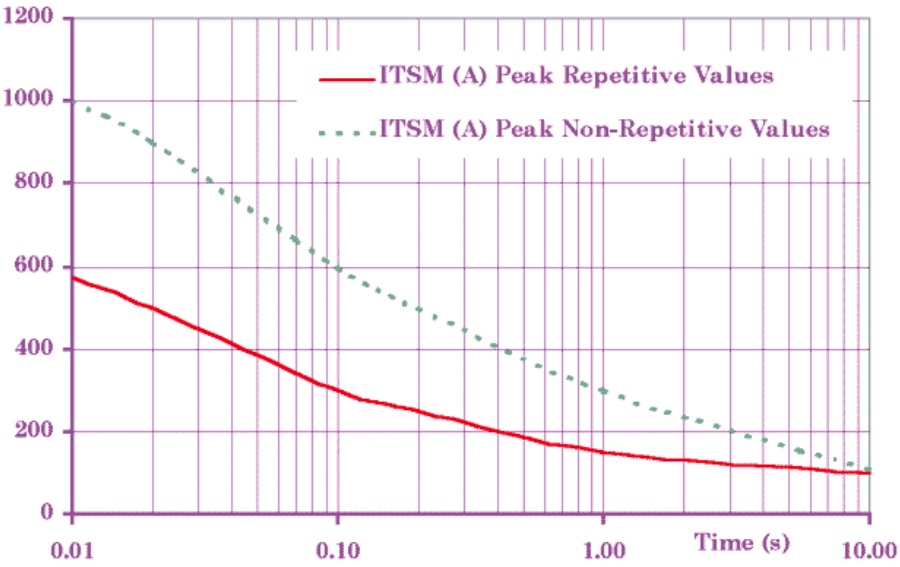

DIMENSIONS AND ACCESSORIES

Fig. 9 DIMENSIONS

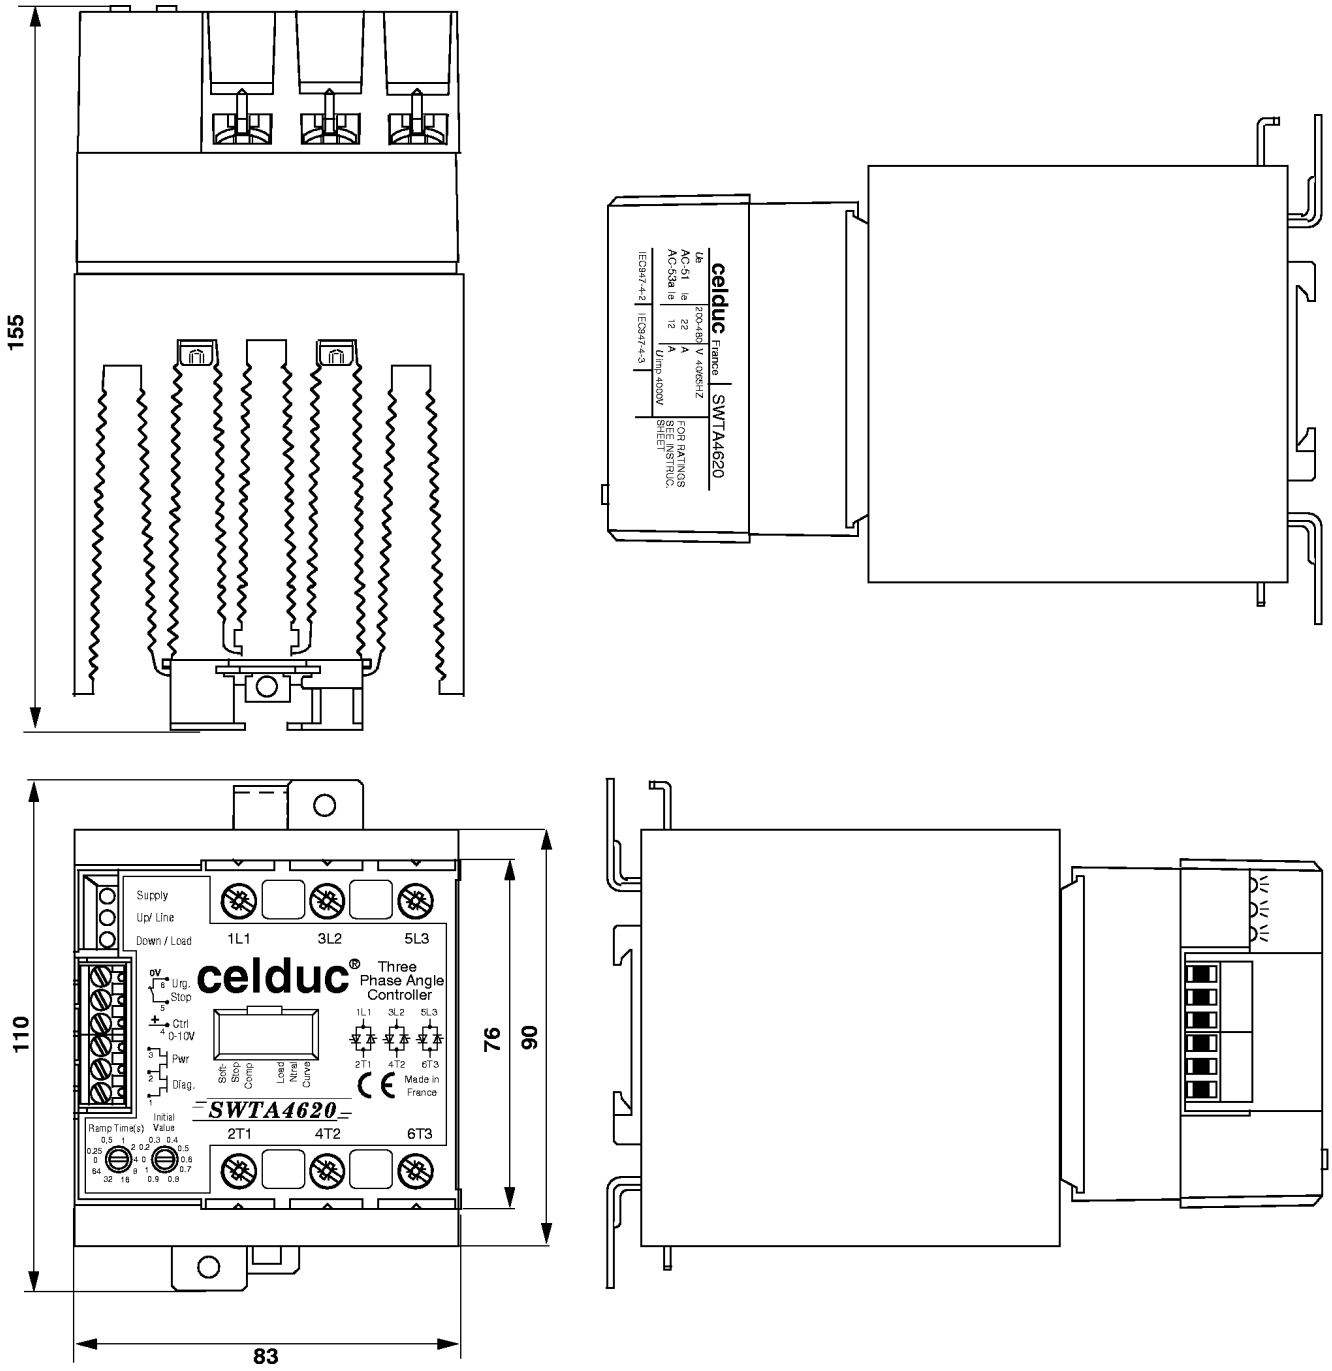

Rue Ampère B.P. 4 42290 SORBIERS - France
Phone : 33 (0) 4 77 53 90 21 Fax : 33 (0) 4 77 53 85 51 Email : celduc-relais@celduc.com