

SONY

DVS-7250

Product Guide



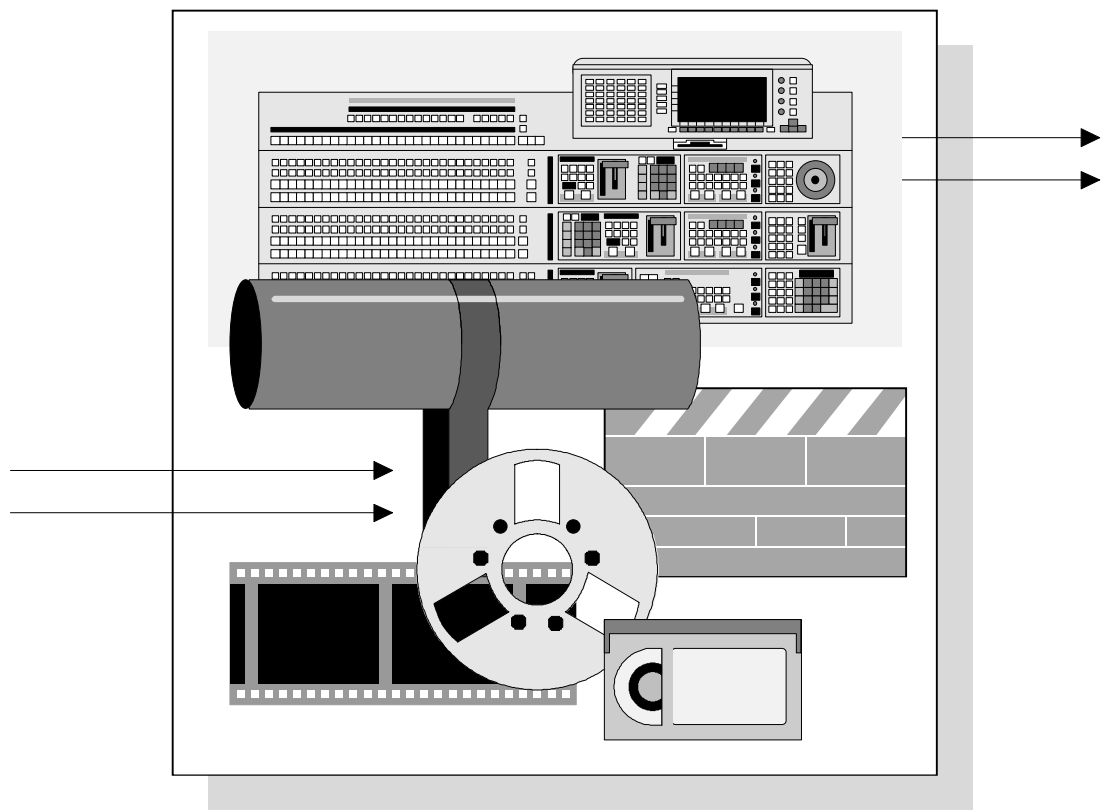

DVS-7250 • Product Guide

Part Number BC-00639

Revision A, October 1997

Printed in U.S.A.

Copyright

© 1997 Sony Electronics Inc. All rights reserved.

Neither this guide nor the software described herein, in whole or in part, may be reproduced, translated or reduced to any machine readable form without prior written approval from Sony Electronics Inc.

- Sony is a registered trademark of Sony Electronics Inc.
- Betacam, Betacart, Jumbotron, and Umatic are registered trademarks of Sony Electronics Inc.
- FineChroma, FlexiPad, Digital BETACAM, E-File, DME-LINK and Library Management System are trademarks of Sony Electronics Inc.
- ISR (Interactive Status Reporting) is an equipment management system developed by Sony Electronics Inc.
- Abekas is a registered trademark of Scitex Digital Video. Dveous is a trademark of Scitex Digital Video.
- GVG is a registered trademark of The Grass Valley Group Inc.

Notice to Users

SONY PROVIDES NO WARRANTY WITH REGARD TO THIS GUIDE, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN, AND HEREBY EXPRESSLY DISCLAIMS ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE WITH REGARD TO THIS GUIDE, THE SOFTWARE OR SUCH OTHER INFORMATION. IN NO EVENT SHALL SONY BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, WHETHER BASED ON TORT, CONTRACT, OR OTHERWISE, ARISING OUT OF OR IN CONNECTION WITH THIS GUIDE, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN OR THE USE THEREOF.

Sony reserves the right to make any modification to this guide or the information contained herein at any time without notice.

The software described herein may also be governed by the terms of a separate end use license agreement.

All features, functions, and specifications are subject to change without notice.

Contents

Introduction	1
About This Guide.....	1
Features and Benefits	3
DVS-7250 Feature Overview.....	3
Making Complex Tasks Simple.....	4
Basic Tools	5
Control Panel	5
Input Flexibility.....	5
V-Proc.....	6
Output Flexibility	6
Effect Keyers and DSK.....	6
Key Edge Adjustment.....	7
Enhanced Wipe Generator.....	7
Snapshot, Effects Memory, and Storage.....	7
Superior Editor Interface	8
Router Interface.....	8
Switchable System Standard.....	9
Redundant Power Supplies	9
Power Tools.....	9
Timeline Effects	9
Integrated DME Control.....	10
Key Modifiers.....	10
Advanced Chroma Keyer — FineChroma™	10
Dual Matte Generators with Color Mix Capability.....	11
Frame Memory.....	11
Auxiliary Buses	12
Processed Key	12
DME-LINK™	12
Bus Link Mode.....	13
GPI Link Mode	13
Configuration Guide	15
DVS-7250 Configuration	15
Basics	16
Video Effects Processor	16
Control Panel — Euro Style	16
Control Panel — American Style.....	17
Operation Software with Manual	17
Input Configuration	18
12 Input Serial Digital Board.....	18

Input “Mother Board”	18
Analog Composite “Daughter Board”	18
Serial Digital “Daughter Board”	18
Chroma Key Analog Component Input Board	18
Output Configuration	19
Analog Composite Output Module	19
Digital Output Module	19
Control Panel Options	20
Memory Recall Control Panel	20
Key Frame Control Panel	20
DME Control Panel	20
Operation Software and Manual (DME-3000)	20
Operation Software and Manual (DME-7000)	21
Control Panel Remote Adaptor	21
Remote Key Control Panel	21
Remote Key Control Software	21
Remote Panel Interface	22
Shot Box Control Unit	22
Auxiliary Control Panel	22
M/E Auxiliary Control Panel	23
Auxiliary Panel Operation Software	23
Switcher Control Panel Configuration	23
Options and Upgrades	24
Basic Chroma Key Board	24
Chroma Key Upgrade Board	24
Basic Frame Memory Board	24
Frame Memory Adaptor Board	24
Enhanced Wipe Option	24
Program/Preset DSK Board (Required)	25
Key Border Option	25
M/E Key Signal Preview Board	25
Control Port Expansion Board	25
Redundant Power Supply — Control Panel	25
Redundant Power Supply — Processor	25
Tally Interface Unit	26
Tally Interface Software	26
Expansion Module	26
Redundant Power Supply — Tally	26
Spare Parts Kit — Video Processor	26
Spare Parts Kit — Control Panel	27
System Cables, RS-422	27
System Cables, Interconnect	27
Rack Mount Kit — Switcher	27
Rack Mount Kit — Tally	27
Extender Cards	27
Training	28
Training — General Product	28
Order Guide — DVS-7250	29
Instructions	29
Request Forms	30
DVS-7250 Input Configuration Chart	30
DVS-7250 Output Configuration Chart	31
DVS-7250 System Components Chart	32

Installation Guide**35**

DVS-7250 Installation	35
DVS-7250 Control Panel	36
Control Panel Top View — American Style	36
Control Panel Top View — Euro Style	41
Sub Panel Remote Installation with BKDS-7075	42
Control Panel External Dimensions.....	43
Control Panel Specifications.....	44
Control Panel Rear View	45
Control Panel Connectors.....	46
RS-422A Switcher Connector Specifications.....	46
RS-422A DSK Connector Specifications.....	47
RS-422A DME Connector Specifications.....	47
RS-232C Terminal 1, 2 Connector Specifications	48
RS-422A Remote 1-5 Connector Specifications.....	48
GPI Connector Specifications	49
Option Panel Connector Specifications	50
AUX Panel Connector Specifications.....	51
Display Panel Connector Specifications	52
Additional Control Panels	53
BKDS-2010 — M/E Auxiliary Control Panel	54
BKDS-2010 Control Panel Top View.....	54
BKDS-2010 Control Panel Rear View	55
BKDS-2010 Control Panel External Dimensions	55
BKDS-2010 Control Panel Specifications	56
BKDS-2010 Control Panel Connectors	56
BKDS-7060 — Remote Key Control Panel.....	58
BKDS-7060 Control Panel Top View.....	58
BKDS-7060 Control Panel External Dimensions	58
BKDS-7060 Control Panel Specifications	59
BKDS-7060 Control Panel Rear View	59
BKDS-7060 Control Panel Connectors	60
BKDS-7060 Power Supply Front View	60
BKDS-7060 Power Supply External Dimensions	61
BKDS-7060 Power Supply Specifications	61
BKDS-7060 Power Supply Rear View.....	62
BKDS-7060 Power Supply Connectors	62
BKDS-8060 — Remote Panel Interface	64
BKDS-8060 Front View.....	64
BKDS-8060 Rear View.....	64
BKDS-8060 External Dimensions.....	65
BKDS-8060 Specifications.....	65
BKDS-8060 Connectors.....	66
BKDS-8061 — Shot Box Control Unit	68
BKDS-8061 Front View.....	68
BKDS-8061 Rear View.....	68
BKDS-8061 External Dimensions.....	69
BKDS-8061 Specifications.....	69
BKDS-8061 Connectors.....	70
BKDS-8062 — Auxiliary Control Panel.....	71
BKDS-8062 Front View.....	71
BKDS-8062 Rear View.....	71
BKDS-8062 External Dimensions.....	72

BKDS-8062 Specifications	72
BKDS-8062 Connectors	73
DVS-7200 Chassis	74
Chassis Front View	74
Chassis Rear View	75
Chassis External Dimensions	77
Chassis Specifications	77
System Timing Requirements	80
Chassis Connectors	81
RS-422A DSK Connector Specifications	81
RS-232C Terminal Connector Specifications	82
RS-422A Serial Tally Connector Specifications	82
RS-422A Matrix Connector Specifications	83
RS-422A DME Connector Specifications	83
RS-422A Panel 1 Connector Specifications	84
RS-422A Panel 2/Remote 3 Connector Specifications	84
RS-422A Editor A/Remote 1 Connector Specifications	85
RS-422A Editor B/Remote 2 Connector Specifications	85
GPI Connector Specifications	86
BKDS-7700 Chassis	87
BKDS-7700 Chassis Front View	87
BKDS-7700 Chassis Rear View	88
BKDS-7700 Chassis External Dimensions	89
BKDS-7700 Chassis Specifications	89
BKDS-7700 Chassis Connectors	90
BKDS-7700 Terminal Connector Specifications	90
BKDS-7700 Switcher Connector Specifications	91
BKDS-7700 Through Out Connector Specifications	91
BKDS-7700 Serial Tally 1, 2 Connector Specifications	92
BKDS-7700 Tally In/GPI Connector Specifications	93
BKDS-7700 Tally Enable Connector Specifications	94
BKDS-7700 Tally Out 1-9 Connector Specifications	95
System Interconnection Charts	97
DVS-7250 System Interconnection Chart — Video	98
DVS-7250 System Interconnection Chart — Control	99
DVS-7250 Control Panel Connections Chart	100
DVS-7250 Video Paths with Router Chart	101
DVS-7250 Switcher - Router Interface Chart	102
DVS-7250 with ScitexDV (Abekas) Dveous A-5100	103

Appendix A. Feature List 105

DVS-7250 — Feature Review	105
DVS-7250 Features	105

Appendix B. Related Resources 109

Related Resources	109
Printed Media	109
Audio/Video Media	110

Appendix C. Sales and Service **111**

General Information and Reference..... 111

Regional Sales Offices..... 112

Regional Service Centers 113

National Parts Centers 114

Emergency Response System..... 115

SUPPORTNETSM..... 116


SOFTWAREPLUSM 116

Glossary **117**

Index **123**

Introduction

About This Guide

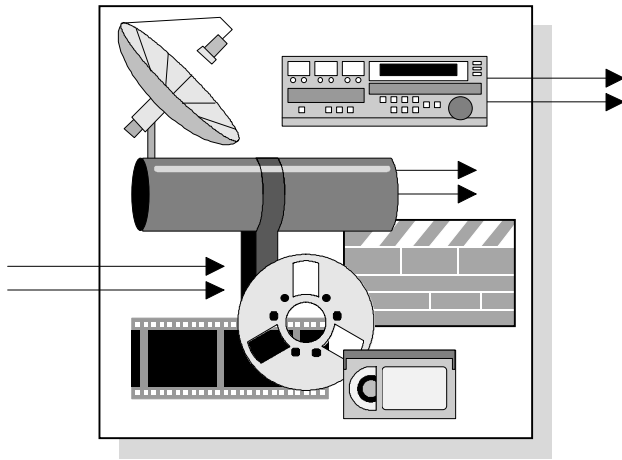

Based on the successful DVS-7000 series platform, Sony's new DVS-7250 switcher configuration adds a dynamic and powerful *mid-range* switcher to the product line.

The DVS-7250's image quality, superb keying, timeline control, and overall versatility pinpoints a broad range of applications, including studio production, post production, and remote broadcast requirements. Above all, the DVS-7250 delivers its broad range of features in a full-featured two M/E format (with Program/Preset) — with all the input flexibility, customization capability, integrated performance, and ease of use that you've come to expect from Sony digital switchers.

To assist you with configuring the *optimum* mid-range SDI switcher for your customer's needs, this guide is divided into the following chapters:

- **Chapter 1 — Features and Benefits**

This chapter provides detailed descriptions and concise explanations of the DVS-7250's basic and "power" features.

- **Chapter 2 — Configuration Guide**

This chapter describes the DVS-7250's system components to assist with configuration planning. A convenient quotation request form is also included to simplify the ordering process.

- **Chapter 3 — Installation Guide**

This chapter offers information and diagrams to assist with facility engineering and equipment integration requirements.

- **Appendix A — Feature List**

This appendix provides a category-based description of DVS-7250 features and modes.

- **Appendix B — Related Resources**

This appendix lists additional written and visual reference material available for further reading and research on the DVS-7250.

- **Appendix C — Sales and Service**

This appendix provides basic information about Sony sales, service, emergency response, and software support.


- **Glossary**

The glossary provides a reference list of important video terms used throughout this guide.

A comprehensive “**Index**” is also provided for your reference.

Features and Benefits

DVS-7250 Feature Overview

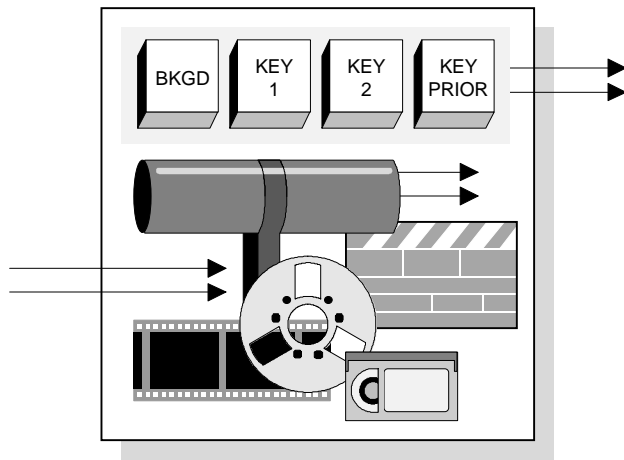

This chapter outlines the DVS-7250's features, and includes discussions of the functionality and benefits of the switcher's basic and "power" tools. Concise explanations relating to the *importance* of each feature are provided.

The following sections are included:

- The **"Making Complex Tasks Simple"** section discusses the overall theme under which the DVS-7250 is designed.
- The **"Basic Tools"** section discusses a variety of important *fundamental* DVS-7250 features.
- The **"Power Tools"** section outlines the features that producers, editors and technical directors value *the most* on the DVS-7250.

For a finely focused approach to the switcher's features, refer to Appendix A, **"Feature List."** This appendix provides item-by-item feature descriptions.

Note that some features described in the following sections may apply only when Sony peripheral equipment is used.

Making Complex Tasks Simple

Regardless of the task, Sony has the *right digital switcher* for the application at hand. And whether the switcher is large-scale, mid-range, or compact in size, one important factor is constant across the product line — Sony switchers have the power to make *complex tasks simple*.

That benchmark principle holds true with the new DVS-7250. Here are just a few examples:

- **DME-LINK™** — the ability to run the DME-3000 or DME-7000 effects timeline from the switcher. This function simplifies operations with a simple push of the fader or the triggering of an E-File™.
- **Processed Key** — the ability to compose a key within the DVS-7250, route it to an external device (such as the DME) for processing, and re-enter it in the *same* DVS-7250 keyer. This feature reduces complex patching to a simple button press.
- **System Integration** — provides powerful production and editing tools in conjunction with the BVE-9100, BVE-2000, and DME-series effects devices. Through status reporting and the editing system's ability to *learn* switcher functions, this high level "system" function greatly simplifies the editor's day-to-day requirements.
- **Fingertip Menus** — an extremely simple and logical method of accessing menus. Simply double-press any control panel button that has an associated menu, and the system *instantly* jumps to that location on the display. Functions with associated menus such as keying, color background, frame memory, and timeline control are at your fingertips, without time-consuming menu navigation.
- **Router Interface** — the ability to control a Sony DVS-B Series routing switcher *directly* through the switcher's integral display. This feature places up to 128 sources at your fingertips, with the superb (and ultra-efficient) capability of storing router information along with switcher setups and snapshots.
- **Peripheral Interface** — using a widely adopted industry standard (Grass Valley Peripheral II), the DVS-7250 can control digital effects devices, still stores, and character generators with convenience.
- **Familiarity** — the DVS-7250's operating style simplifies the learning curve and enhances creativity at every turn.

As you review the DVS-7250 feature descriptions that follow, keep in mind how Sony's overall digital switcher principle rings true — *making complex tasks simple*.

Basic Tools

This section describes basic DVS-7250 features used in day-to-day production and post-production.

Control Panel

The DVS-7250 offers two different control panels. Each is compact and modular, and similar in design and layout to the larger DVS-7000 series, but with *two* M/E (mix-effects) banks rather than three, *plus* a powerful program/preset bus.

- The “American Style” panel (BKDS-7026) features staggered FlexiPad control for each M/E, in a layout familiar to all freelance and staff technical directors. The compact FlexiPad allows quick learning and recall of snapshots, user DME functions, and user wipe functions.
- The “Euro Style” control panel (BKDS-7025) provides a source name display plus in-line FlexiPad control on each M/E.

Regardless of the selected panel, the DVS-7200’s streamlined architecture includes two keyers and a color background generator on *each* M/E and the program/preset bus. As a fully-loaded system, six simultaneous key layers are possible.

Like all Sony digital switchers, the DVS-7250’s control panel is engineered for simplicity and ease-of-use. A large-scale display screen offers easy access to operational parameters, adjustments, and setup functions. Dedicated controls (with associated displays) are provided on each M/E plus program/preset, offering convenient access for keyer adjustments.

The control panel also supports a variety of optional sub-panels for memory recall control, DME control, DSK control, and E-File control. All sub-panels are identical in size, allowing their in-panel locations to be customized as required. Optional sub-panels can also be mounted *external* to the panel, using a BKDS-7075 Remote Adaptor.

The control panel’s benefits are as clear as the design — familiar streamlined operations, comfort, and flexibility.

Input Flexibility

The DVS-7250 can be equipped with 12, 24, or 36 primary inputs and up to four component analog chroma key inputs. For flexibility, all SDI inputs can be switched (from the panel) between component digital (4:2:2) and composite digital (4fsc) operations. This versatile system allows you to edit, for example, with component DVW-500’s in one session and composite DVR-20’s in the next — seamlessly.

By adding the BKDS-7110 “Mother Board,” you can also *customize* your input configuration with a mix of analog composite and serial digital input modules — up to three BKDS-7110 boards can be installed, and up to 12 input modules can be installed per board, in *any* combination. Even though the switcher’s internal processing is *fully digital*, the analog composite input modules provide a convenient gateway for existing composite equipment.

Note that with the hybrid composite analog/digital configuration, when you switch to *component* digital operations, all composite analog inputs are temporarily disabled.

The bottom line is that the DVS-7250 is not restricted to one or two input configurations. You have the flexibility to configure the precise system to suit the customer's *current* requirements — and expand when future needs arise.

V-Proc

Because input configurations change from day-to-day, all inputs have an auto-timing window with an adjustment range of $\pm .4H$. For simplicity and convenience, the “V-Proc” (Video Processing) feature allows adjustment of each input to compensate for common errors in image acquisition. Adjustments are provided for the following parameters:

- $\pm 200\%$ adjustment range for video (4:2:2 / 4fsc)
- $\pm 200\%$ adjustment range for luminance (4:2:2)
- $\pm 200\%$ adjustment range for chrominance (4:2:2)
- -7.31 to +109.64 IRE adjustment range for black level (4:2:2)
- -42.86 to +140.00 IRE adjustment range for black level (4fsc)
- $\pm 180^\circ$ adjustment range for hue (4:2:2)

V-Proc actually provides a greater control range than a TBC.

Output Flexibility

The DVS-7250 offers an impressive array of outputs:

- Four Program
- One Preview
- One Clean
- Fourteen Auxiliary outputs, including one Edit Preview
- Two M/E 1
- Two M/E 2

Best of all, by selecting the desired combination of output modules (BKDS-7161 Analog Composite or BKDS-7162 Digital Output), you can customize the format of *each* output listed above.

Whether you need a mix of composite analog and digital Aux bus outputs, or an all-digital system, the DVS-7250 makes it easy. Compared to switchers with *fixed* output configurations, the DVS-7250's flexibility literally adapts to the production or post production situation at hand.

Effect Keyers and DSK

In the DVS-7250, two powerful effect keyers are standard (per M/E). Up to two DSKs (Down Stream Keyers) can also be added. A variety of creative key “types” can be selected, as follows:

- **Luminance** — a high-gain key that derives the “hole-cutting” information from the full range of source luminance values.
- **Chroma** — a key in which the hole-cutting information is derived from a *color* rather than from a video level.

- **Linear** — a key that takes advantage of independent key signals provided by external devices such as character generators. Linear keyers have increased sensitivity to the key signal gain.
- **Clean** — a key that takes advantage of “shaped” video provided by devices such as digital video effects. Whereas a linear key is *multiplicative* in its ability to cut a hole, a “clean” key is *additive*.
- **Pattern** — a key that uses a wipe pattern (and all active pattern modifiers) to generate a key signal.

Keyers truly make the difference in switchers. There’s rarely a production or commercial today that doesn’t involve multi-layer keys — it’s a requirement that can’t be overlooked in switcher design. The DVS-7250’s key processing capability is powerful, yet it’s also simple to understand and operate. You can express your creativity and make a storyboard come true — without getting lost in menus.

Key Edge Adjustment

One aspect of the DVS-7250’s high quality key processing is the ability to fine tune and optimize the key signal — independent of the “fill.” Through the use of over-sampling, the key signal’s width can be modified in sub-pixel units. Edges can be trimmed to add dimension and overall realism, and adjustments can be performed *independently* to the left and right key edges. Furthermore, because the process follows the *edge* itself, even irregularly shaped key signals benefit from Key Edge processing.

From simple mattes to complex chroma keys, the DVS-7250’s Key Edge processing is another simple tool that yields visually powerful results.

Enhanced Wipe Generator

With the BKDS-2070 option, additional patterns (including matrix wipes) are added. These include Star, Heart, and the popular “Diamond Dust” wipe. The enhanced patterns can also be combined with the *primary* patterns — enabling you to create new custom wipes.

Snapshot, Effects Memory, and Storage

As the natural by-product of computer controlled switchers, the ability to *store and recall* control panel snapshots has become a fundamental production requirement. Clients come back to change things — sometimes more than once! Producers like their keys set up just one way — and *always* that way. And TDs (technical directors) like to work with special and often highly customized setups — even if the previous TD had a *completely* different control panel setup.

These typical situations are a breeze with the DVS-7250. TDs can store and recall up to 99 “snapshot” memories from the Master E-File panel or M/E FlexiPad, and recall up to 32 snapshots as dedicated functions from the optional Shot Box panel. You can even transition *between* snapshots. The snapshot data (as well as *setup* and *effects* data) can be archived on an integral floppy disk for long term storage. For live use or post, snapshots are directly accessible through the Master E-File panel, the Memory Recall panel or the Shot Box panel.

Superior Editor Interface

The DVS-7250 communicates with editing systems from most major manufacturers via serial interface, including Sony's BVE-2000 and BVE-9100. With most editors, a variety of basic editor-switcher control modes are available, including:

- Crosspoint assignment.
- Pattern selection.
- Transition and duration control.
- Basic switcher "learn" capability, with storage in the editor's EDL.
- GPI control for auto-transition and memory recall functions.

With the BVE-9100 specifically, Sony's superb *status reporting* adds many advanced modes:

- Precise Jog/Shuttle positioning of the switcher timeline.
- Advanced switcher timeline learn functions, with switcher status and transition data stored in the editor's EDL.
- Control of both switcher and DME keyframe data.
- Using the BKE-9402 Programmable Control Panel, virtually everything that can be controlled or adjusted in the switcher can be adjusted from the editor.

It's another aspect of Sony's system integration that contributes to the *simplicity* of working with a Sony system — *making complex tasks simple*.

Router Interface

Switchers like the DVS-7250 typically have a *limited* group of inputs available on the panel — facilities, however, typically have a *very large* pool of input sources controlled by a routing switcher. Depending on the daily requirements of a production, the TD is *constantly* called upon to change the array of switcher inputs.

In the past, this function was performed by manually operating external control panels. Now, with the DVS-7250, you can control a Sony DVS-B Series routing switcher *directly* from the DVS-7250's display — allowing *complete flexibility* with crosspoints, input assignments, and the switcher's 14 auxiliary buses.

Depending on routing switcher's configuration, up to 128 sources can be assigned to the switcher's 36 primary inputs and four analog component inputs. Router information is also stored with switcher setups and snapshots — which in turn provides operator convenience, efficiency, and highly precise effect recall functions. And when the DVS-B Series router and DVS-7250 switcher are married to the BVE-9100 (with its ability to store switcher setups in the EDL), effect recall achieves yet another level of convenience and precision.

In the time it *used to take* to manually re-patch a switcher's input configuration, on the DVS-7250 you can recall a snapshot that re-maps crosspoints, sets up the M/Es and initiates a transition — all with one button — *making complex tasks simple*.

Switchable System Standard

In addition to *feature* flexibility, the DVS-7250 also provides *standard and format* flexibility, as follows:

- When configured for component digital operation (4:2:2), you can operate in the 525 or 625 line standard. The appropriate system reference is required.
- When configured for composite digital operation (4fsc), you can operate in the 525 line standard.
- You can switch aspect ratios between 4:3 and 16:9.

Achieving this level of flexibility is equally easy — all standard and format switching is performed on the integral display screen.

Redundant Power Supplies

Power supplies just sit there and work — no moving parts, no trouble ever, and no need for a backup, right? Hindsight is wonderful, but *not* when the feed to Telco is black! A little redundancy goes a *long way*.

To this end, Sony offers optional redundant power supplies for both the switcher processor unit and the control panel. When a power supply problem is detected by the system's diagnostics, an operator warning appears and the automatic back-up system switches power supplies — with no signal interruption or loss of output.

The DVS-7250 offers superb features, and a little peace-of-mind, too.

Power Tools

This section outlines the features that operators value *the most* on the DVS-7250. Power tools not only simplify the daily job, but they add to that all-important category of *creativity* — the area in which a switcher's artistic and aesthetic capabilities are greater than the sum of its parts.

Timeline Effects

The only thing better than creating a beautiful switcher event — is creating a *series of events* along a timeline, and *editing* each event with exacting precision. The DVS-7250's timeline feature allows you to create and run switcher timelines for each M/E — *plus* the DSK — *plus* user functions such as auxiliary bus control.

In much the same way that you program effects on the DME, switcher timeline effects give you control over the path of wipe pattern position (including spline), the duration of individual events (or “keyframes”), and the relative timing between the various M/E and DSK timelines.

Up to 99 key frame registers are available. The feature allows you to copy, modify, and delete events, save and recall timelines, and preview the completed effects (individually or in combination) on the switcher's display panel. With timeline control, complex sequences that could *not* be performed live (nor repeated accurately) can now be programmed, edited and used in a production with ease.

Integrated DME Control

Console space is *definitely* at a premium in modern control rooms. With each new device taking up space, it seems that there's barely enough room for the director's script, let alone a DME control panel. The DVS-7250 reverses this trend with the addition of two optional switcher panels: the BKDS-7030 Key Frame Control Panel and the BKDS-7031 DME Control Panel.

These switcher "insert" panels *completely replace* the DME's own control panel. Together, they eliminate unnecessary console footprints, and provide an economical and highly convenient method of effects creation and control. In addition, the switcher's floppy drive can store DME setups, snapshots, and effects files — as well as switcher data. (Tell the director there's finally enough room for the script!)

In addition to Sony DME products, a wide variety of digital effects devices from other manufacturers such as Scitex DV (Abekas) and Tektronix-GVG can be controlled directly from the DVS-7250 control panel. This interface utilizes a widely adopted industry standard protocol (Grass Valley Peripheral II), and requires the BKDS-7001 control port expansion for the switcher's control panel.

Key Modifiers

A keyer that simply *keys* isn't good enough! When the client says "show me what you can do with this key," the technical director needs a creative toolbox from which to offer as many visual options as possible — far beyond basic borders and shadows.

To address this requirement, the DVS-7250 provides *extensive* key modifiers:

- Each keyer can access the M/E's wipe pattern generator, and a *separate* internal pattern generator for mask.
- Each keyer has an optional *dual* matte generator for border fill. This dual matte generator in turn has its own pattern generator.
- With the optional Key Border Generator installed, Border, Drop Border, Soft Edge, Shadow and Drop Shadow capabilities are added to the effect keyer. The option also provides continuous color, position, width, density and softness adjustments. The key border can be filled with the dual matte generator, or a live video source from the integrated M/E bank utility bus.
- Powerful "copy" functions allow you to transfer settings between keyers and matte generators with ease.

Now, with the DVS-7250, when the client says "nice, but let's see something else," the operator will never run out of creative ideas.

Advanced Chroma Keyer — FineChroma™

Sony's FineChroma technology, available with the optional BKDS-2031 and BKDS-2032 boards together, provides an advanced level of chroma key processing typically found in external chroma key devices only.

Each M/E can be equipped with a chroma keyer that delivers full 4:4:4:4 video and key processing, auto and manual modes, color cancellation, spot color correction, shadow and density control, *plus* a dual clip and gain feature that allows two separate clips in a single image.

You can also generate a dedicated key source for up to two cameras, providing a constant and convenient matte source as required.

Although the feature list is impressive, it's the *visual results* that make the difference. Whether you're keying transparent glass or working with an unevenly lit background, the DVS-7250's FineChroma technology delivers clear edges and a remarkable degree of visual realism on screen.

Dual Matte Generators with Color Mix Capability

Switchers stopped being *just* switchers (in the precise definition of the word) many years ago. They've evolved into a combination *switching device* and *artist's palette*, with the ability to mix sources, colors, and patterns as *required* to bring a storyboard or a production to life.

To this creative end, the DVS-7250 has provision for up to eight internal dual color matte generators — for Key-1 edge and Key-2 edge (for each M/E plus DSK), in addition to Wipe border and Color background (for each M/E). *Each of these matte generators* has color mix and wash capability, its own dedicated pattern generator, and extensive pattern modifiers. Rembrandt would be jealous.

Frame Memory

The highly versatile Frame Memory function provides storage and playback for two individual frames, divided *as needed* between video only, or video and key signals. A dedicated internal routing system is provided for *each frame*, independent of Aux bus operation.

Frame memories can be used for the following creative applications:

- Grabbing fields or frames.
- Layering.
- Creating custom masks.
- Storing matte and fill signals.
- Painting from a *user-supplied* graphics tablet.
- Re-positioning live or frozen images as a snapshot or animated as a keyframe effect. A mask can also be applied a live image using an internal dedicated wipe generator.
- Storing and manipulating *frozen* z-axis images (in conjunction with a DME's Depth Key processing).
- Keying and mixing between frames, filling with video from an internal auxiliary bus or matte generator, then routing the results to any desired internal or external switcher destination.

In much the same way that audio boards allow you to create *sub-mixes* upstream of the main mix, Frame Memories provide *video* sub-mix functions upstream of the buses, with the resulting capability — and creativity.

Auxiliary Buses

There's nothing special about Aux buses, right? Not true with the DVS-7250! Fourteen auxiliary buses are available, with the standard set of primary and M/E crosspoints as you might expect. Using a simple assignment menu, you can place the Frame Memories, Key mattes and fills, and even the clean chroma composited image on the Aux buses.

In fact, *every signal* that enters the switcher or is *internally generated* — can be placed on an Aux bus.

The DVS-7250's Aux bus feature is simple and logical. You can *sometimes* predict the signals you'll need before an edit session or production, but once you're in the midst of it, there's a confidence in knowing that *everything* is accessible via the Aux buses — on demand. Whether you're routing to DMEs, monitors, recorders or an Edit Preview feed, the DVS-7250 offers a total Aux bus delegation package.

Processed Key

The DVS-7250's Processed Key function is an “effects pathway” that solves the problem of routing signals to and from a DME digital effects system or color corrector, without complex patching. You can compose a chroma key for example, clip and adjust it, route it to the DME for manipulation, and then re-enter it in the *same* DVS-7250 keyer — with the simple press of a button.

Whether you're flying logos or re-sizing graphics, the Processed Key approach clearly illustrates the benefits of Sony's system integration concept. Best of all, the feature works with most other major manufacturer's DVEs that are equipped with a key channel.

DME-LINK™

For live field production and studio production, the DVS-7250's DME-LINK feature controls up to four Sony Digital Multi Effect systems through the switcher's control panel. Operators can run specified DME-3000 and DME-7000 effects by the switcher's fader or transition button — just like wipes and dissolves.

In post, it's easy — the BVE-9100 editing system sends out serial commands to initiate DME effects. But in *live* production, you simply don't have enough hands to trigger all the necessary devices.

With DME-LINK in the path, however, running the DME timeline is easy, and the switcher's internal transition rate overrides the rate programmed locally on the DME. Over 30 basic effects are available for single and multi-channel DME systems, and on the DME-7000 specifically, up to 12 user-defined digital effects can be used.

DME-LINK once again underscores the DVS-7250's benchmark principle — *making complex tasks simple*.

Bus Link Mode

The Bus Link Mode allows you to establish a relationship between the crosspoints of different switcher buses. The mode has valuable applications in both live and post production situations:

- With a link established in a live broadcast, for example, selecting camera one on M/E 2 could automatically select camera one on an Aux bus. Offsets can also be established through the use of up to five “link relationship tables” — allowing you to select the *same source* or a *different source* on another bus, as required.
- In post production, for example, the Bus Link Mode would allow you to automatically select M/E 2 key matte on Aux 13, each time M/E 2 is used as the program output source.


GPI Link Mode

The GPI Link Mode allows you to establish a relationship between switcher crosspoints and the switcher’s GPI output ports. A variable timing relationship can be established between the crosspoint selection and GPI outputs. For a virtual studio application, for example, selecting a camera (on a switcher bus) would trigger a GPI pulse that in turn switches computer-generated virtual backgrounds. This action also delays the actual video switch by a certain number of fields — allowing the background and foreground to switch in sync.

In operation, the GPI Link can be advanced or delayed from the initial “press” of the switcher crosspoint.

Configuration Guide

DVS-7250 Configuration

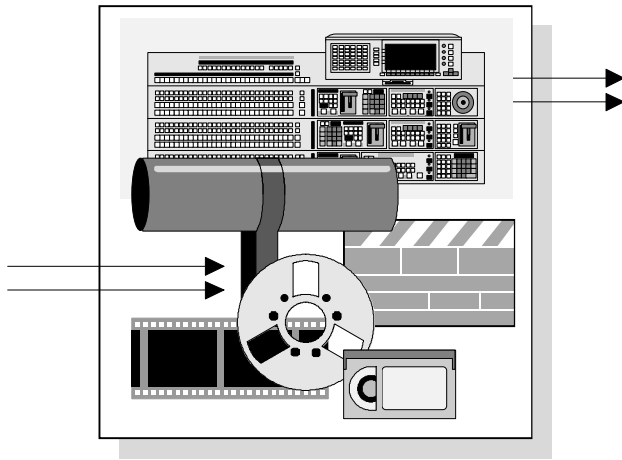

To assist with configuration planning, this chapter describes the DVS-7250's system components. In addition, a convenient quotation request form is included to assist with pre-sales planning and to simplify the DVS-7250 ordering process.

The following sections are included:

- Basics
- Input Configuration
- Output Configuration
- Control Panel Options
- Options and Upgrades
- Training
- Order Guide
- Request Form

Basics

This section describes the basic components that comprise a DVS-7250 system.

DVS-7200



Video Effects Processor

The **DVS-7200** chassis houses the main video processing electronics, communication ports, and all input/output connectors. Multiple slots are provided for system options and upgrades. The processor can be equipped with up to 36 primary inputs and up to four component analog inputs for chroma key. In addition, by adding the **BKDS-7110** Input “Mother Board,” a customer-defined portion of the 36 available inputs may be configured as composite analog. Refer to the “**Input Configuration**” section below for details.

In the “**Installation Guide**” chapter, refer to the “**DVS-7200 Chassis**” section for a chassis diagram and list of chassis specifications.

Note that RS-422 interconnect cables are *not* provided. In the “**Options and Upgrades**” section, see the “**System Cables, RS-422**” heading for part numbers and information. RS-422 interconnect cables have a maximum length of 100 meters.

BKDS-7025



Control Panel — Euro Style

The **BKDS-7025** Control Panel presents all switcher functions, crosspoints, auxiliary buses, and adjustments in a compact 2.5 M/E panel layout — easy to use and easy to master. Standard features include the integral display screen, source name display on each M/E (including program/preset and Aux bus), top menu control panel, floppy disk drive, and in-line FlexiPad control for each M/E. Three positions are provided for modular optional sub-panels such as the Shot Box and the DME Control Panel.

In the “**Installation Guide**” chapter, refer to the “**DVS-7250 Control Panel**” section for a control panel diagram and list of specifications.

Note that RS-422 interconnect cables are *not* provided. In the “**Options and Upgrades**” section, see the “**System Cables, RS-422**” heading for part numbers and information. RS-422 interconnect cables have a maximum length of 100 meters.

A 90-day delivery schedule applies to this panel (from receipt of order).

BKDS-7026**Control Panel — American Style**

The **BKDS-7026** American style control panel features staggered FlexiPad control for each M/E, in a layout familiar to all freelance and staff technical directors. The panel presents all switcher functions, crosspoints, auxiliary buses, and adjustments in a compact 2.5 M/E panel layout — easy to use and easy to master. Standard features include the integral display screen, top menu control panel, floppy disk drive, and source name displays on the Aux bus. Three positions are provided for modular optional sub-panels such as the Shot Box and the DME Control Panel.

In the “**Installation Guide**” chapter, refer to the “**DVS-7250 Control Panel**” section for a control panel diagram and list of specifications.

Note that RS-422 interconnect cables are *not* provided. In the “**Options and Upgrades**” section, see the “**System Cables, RS-422**” heading for part numbers and information. RS-422 interconnect cables have a maximum length of 100 meters.

BZS-7060**Operation Software with Manual**

The **BZS-7060** operation software is required to initiate the DVS-7250. The software also drives the switcher’s logical array of system, setup, and configuration menus.

Input Configuration

This section describes the input boards that can be added to a DVS-7250 system.

- Three slots are provided for primary input boards (select any combination of the **BKDS-7102** and **BKDS 7110** boards). Up to three boards can be installed, for a maximum of 36 inputs.
- Two slots are provided for Chromakey Analog Component input boards (**BKDS-7133**).

In the “**Request Forms**” section, refer to the “**DVS-7250 Input Configuration**” chart for a more detailed view of the switcher’s input configurations.

BKDS-7102

12 Input Serial Digital Board



The **BKDS-7102** 12 Input Serial Digital Board provides 12 serial digital SMPTE 259M input signals. The board can be used for Composite (4fsc) or Component (4:2:2) signals, with all configuration performed from the control panel display.

BKDS-7110

Input “Mother Board”



The **BKDS-7110** is a *blank* adaptor board that accepts up to 12 analog composite or serial digital “Daughter Boards” — in any combination. The board is required if you wish to operate with a mixture of analog composite and digital input signals.

BKDS-7111

Analog Composite “Daughter Board”



The **BKDS-7111** Analog Composite Daughter Board provides one analog composite color or monochrome input signal. The board installs onto the **BKDS-7110** (which accepts up to 12 Daughter Boards, maximum).

BKDS-7112

Serial Digital “Daughter Board”



The **BKDS-7112** Serial Digital Daughter Board provides one digital composite or digital component input signal. The board installs onto the **BKDS-7110** (which accepts up to 12 Daughter Boards, maximum).

BKDS-7133

Chroma Key Analog Component Input Board



The **BKDS-7133** Chroma Key Analog Component Input Board provides two analog component inputs. The system accepts up to two boards, for a maximum four analog component inputs. Inputs are software-switchable between 4 formats:

- **B-CAM (0)**: Betacam without setup
- **B-CAM (7.5)**: Betacam with setup
- **SMPTE**: SMPTE standard for component
- **RGB**: RGB plus sync, or sync on green

Output Configuration

This section describes the output boards that can be added to a DVS-7250. The switcher has a total of 19 outputs (comprised of individual outputs and “groups”) that can be configured *individually*:

- One Program group (four individual outputs, configured as one)
- One Preview
- One Clean
- Thirteen Auxiliary
- One Edit Preview/Aux 14
- One M/E 1 group (two individual outputs, configured as one)
- One M/E 2 group (two individual outputs, configured as one)

Configuration is accomplished by installing the desired output module (either Analog Composite or SDI) on the standard **OUT-9** Mother Board included with the DVS-7200 electronics. Output module options are described below.

BKDS-7161

Analog Composite Output Module



The **BKDS-7161** Analog Composite Output Module provides one analog composite output. The board installs onto the **OUT-9** Mother Board (which is standard with the DVS-7200 chassis).

BKDS-7162

Digital Output Module



The **BKDS-7162** Digital Output Module provides one SDI output. The board installs onto the **OUT-9** Mother Board (which is standard with the DVS-7200 chassis).

Control Panel Options

This section describes the control panel options that can be added to a DVS-7250. In the “**System Interconnection Charts**” section, refer to the “**DVS-7250 Control Panel Connections Chart**” for an illustration of DVS-7250 control panel connections.

BKDS-7033

Memory Recall Control Panel



The **BKDS-7033** Memory Recall Panel (with mounting hardware and interconnect cables) can be installed in the DVS-7250 panel or in a **BKDS-7075** Remote Adaptor. The panel allows you to recall 32 snapshots, switcher setups, DME timelines or switcher timelines. See the “**Installation Guide**” section for a panel illustration.

BKDS-7030

Key Frame Control Panel



The **BKDS-7030** Key Frame Control Panel (with mounting hardware and interconnect cables) installs in the DVS-7250 panel or in a **BKDS-7075** Remote Adaptor. It provides keyframe timeline control for single and multi-channel DME systems. The **BZDM-3720** software is required to run the DME-3000; the **BZDM-7720** software is required to run the DME-7000. See “**Switcher Control Panel Configuration**” for software details. See the “**Installation Guide**” section for a panel illustration.

BKDS-7031

DME Control Panel



The **BKDS-7031** DME Control Panel (with mounting hardware and interconnect cables) installs in the DVS-7250 panel or in a **BKDS-7075** Remote Adaptor. It allows direct timeline control of both single and multi-channel DME systems. The **BZDM-3720** software is required to operate the DME-3000; the **BZDM-7720** software is required to run the DME-7000. See “**Switcher Control Panel Configuration**” for software details. See the “**Installation Guide**” section for a panel illustration.

BZDM-3720

Operation Software and Manual (DME-3000)



(DME-3000 only)

The **BZDM-3720** Operation Software and Manual (English) is required for operating the **BKDS-7030** and **BKDS-7031** sub-panels. See the “**Switcher Control Panel Configuration**” section below for important information.

BZDM-7720**Operation Software and Manual (DME-7000)**

(DME-7000 only)

The **BZDM-7720** Operation Software and Manual (English) is required for operating the **BKDS-7030** and **BKDS-7031** sub-panels. See “**Switcher Control Panel Configuration**” below for important software information.

BKDS-7075**Control Panel Remote Adaptor**

The **BKDS-7075** Control Panel Remote Adaptor allows you to locate the switcher’s sub-panels (for example, the **BKDS-7033**, **BKDS-7031**, and **BKDS-7030**) in remote locations near the main switcher control panel. A five meter interconnect cable is required (P/N 1-574-993-11). The longest cable length that can be connected with the Adaptor is ten meters (user supplied).

BKDS-7060**Remote Key Control Panel**

The **BKDS-7060** Remote Key Control Panel provides remote control for the M/E keys, chroma keys, and downstream keys. Adjustment parameters for key source, key fill, clip, gain, and edge modifiers may be accessed with the BKDS-7060. The **BZS-7360** software is required to operate the BKDS-7060.

Note that RS-422 interconnect cables are *not* provided. In the “**Options and Upgrades**” section, see the “**System Cables, RS-422**” heading for part numbers and information. RS-422 interconnect cables have a maximum length of 100 meters.

BZS-7360**Remote Key Control Software**

The **BZS-7360** Remote Key Control Software is required for operating the **BKDS-7060** Remote Key Control Panel.

BKDS-8060



Remote Panel Interface

The **BKDS-8060** Remote Panel Interface is the support interface and electronics for the **BKDS-8061** Shot Box Control unit and **BKDS-8062** Auxiliary Control Panel.

The **BKDS-8060** provides an RS-422 interface that can be used with several connectors on the DVS-7200 electronics chassis and control panel. The following configurations are possible with a single **BKDS-8060**:

- Two **BKDS-8061** units.
- One **BKDS-8061** and one **BKDS-8062** units.
- Up to four **BKDS-8062** units.
- Several **BKDS-8060** units may be connected in series via RS-422A looping connectors.

In the “**Installation Guide**” chapter, refer to the “**System Interconnection Charts**” section for a diagram of several control panel connection examples.

Note that RS-422 interconnect cables are *not* provided. In the “**Options and Upgrades**” section, see the “**System Cables, RS-422**” heading for part numbers and information. RS-422 interconnect cables have a maximum length of 100 meters.

BKDS-8061



Shot Box Control Unit

The **BKDS-8061** Shot Box Control Unit installs with the **BKDS-8060** Remote Panel Interface unit. Up to two BKDS-8061 panels can be housed (side-by-side) in one rack unit. A single BKDS-8061 provides 20 buttons for recalling switcher snapshots and effects. When two units are installed, 40 functions can be recalled. Note that a one-meter 15-pin interconnect cable is provided (RCC-5A).

BKDS-8062



Auxiliary Control Panel

The **BKDS-8062** Auxiliary Control panel installs with the **BKDS-8060** Remote Panel Interface unit. Up to 14 combined BKDS-8062 plus BKDS-8060 units can be connected to the DVS-7200 chassis for remote control of Aux buses 1 through 14.

The DVS-7250 system supports five different configurations of crosspoint assignments for the BKDS-7025/7026 control panel and BKDS-8062 — allowing multiple users to have unique crosspoint configurations. A single BKDS-8062 can access 20 dedicated crosspoints, or up to 38 dedicated crosspoints (via **SHIFT** button). Note that a one-meter 15-pin interconnect cable is provided (RCC-5A).

BKDS-2010**M/E Auxiliary Control Panel**

The **BKDS-2010** M/E Auxiliary Control Panel effectively turns the DVS-7250 into *two* switchers (a one-M/E switcher and a 1.5 M/E switcher). The Auxiliary Control Panel (same as the DVS-2000C's Control Panel) connects to the processor chassis using an RS-422 interconnect. Note that RS-422 interconnect cables are *not* provided. In the “**Options and Upgrades**” section, see the “**System Cables, RS-422**” heading for part numbers and information. RS-422 interconnect cables have a maximum length of 100 meters.

In addition to providing redundancy, this option makes several valuable production configurations possible:

- For post production, you could run two edit bays — one controlling M/E 1 and the other using M/E 2 plus program/preset.
- In a remote truck configuration, the director and TD could pre-tape with M/E 1, while the graphics area could perform pre-production tasks using M/E 2 plus program/preset.

The **BKDS-2010** option requires the **BZS-7220** operation software.

BZS-7220**Auxiliary Panel Operation Software**

The **BZS-7220** operation software is required to initiate the BKDS-2010 M/E 1 Auxiliary Control Panel. An operations manual is included.

Switcher Control Panel Configuration

Note the following important points regarding the installation configurations with the **BKDS-7030** and **BKDS-7031** sub-panels:

- The **BKDS-7030** and **BKDS-7031** panels are recommended to be installed as a set.
- The **BKDS-7030** and **BKDS-7031** panels eliminate the need for the DME's **BKDM-3010** control panel (and associated software). However, the **BKDM-3010** may be included for greater flexibility.
- When the **BZDM-3720** operation software is installed to control the DME-3000, the **BZDM-3020** software is not required in your DME-3000 system — whether or not a **BKDM-3010** panel is included in the overall system configuration.
- When the **BZDM-7720** operation software is installed to control the DME-7000 system, the **BZDM-7020** software is not required in your DME-7000 — whether or not a **BKDM-3010** panel is included in the overall system configuration.
- In a system that includes *both* a DME-7000 and a DME-3000, the **BZDM-7020** software will function for both effects systems.

Options and Upgrades

This section describes the optional boards and system upgrades that can be added to a DVS-7250 switcher.

BKDS-2031

Basic Chroma Key Board



The **BKDS-2031** Basic Chroma Key Board offers 4:4:4 over-sampling of Chroma Key signals for high quality FineChroma effects, including auto-adjust, color window, color cancellation, and foreground video adjustment. The system accepts one board per M/E.

BKDS-2032

Chroma Key Upgrade Board



The **BKDS-2032** Chroma Key Upgrade Board adds enhanced capability to the BKDS-2031 in each M/E. When installed, two basic chroma keys may be performed (one per keyer per M/E). The BKDS-2031 and BKDS-2032 may also be used in an enhanced mode that handles uneven backgrounds with varying luminance levels. Enhancements for shadows and spot color correction are provided. The system accepts one **BKDS-2032** Chroma Key Upgrade board per M/E. *Note that the BKDS-2031 Basic Chroma Key Board is required.*

The option also provides **Clean Chroma Keys**, which are composited signals generated from a background and foreground signal. A Clean Chroma Key may be assigned as a direct switcher crosspoint *without* the use of an M/E Keyer. The Clean Chroma Key feature requires the **BKDS-7133** Analog Component Input Board.

BKDS-2041

Basic Frame Memory Board



The **BKDS-2041** Basic Frame Memory Board provides two full color frame memories. The option includes Frame/Field freeze capability (GPI controllable), live picture placement, key mode for layering, last freeze recall, “paint” mode, and dedicated routing for each frame memory. Requires the **BKDS-7445** Frame Memory Adaptor Board.

BKDS-7445

Frame Memory Adaptor Board



The **BKDS-7445** Frame Memory Adaptor Board works in conjunction with the **BKDS-2041** Basic Frame Memory Board to provide two frames of storage. The adaptor board permits the BKDS-2041 to be installed in the DVS-7200 chassis.

BKDS-2070

Enhanced Wipe Option



The **BKDS-2070** Enhanced Wipe Option provides additional wipe patterns such as the Matrix, Heart, Star, and Diamond Dust wipes.

BKDS-7250**Program/Preset DSK Board (Required)**

The **BKDS-7250** Program/Preset DSK Board provides processing electronics for program/preset and DSK operations. This board is required to enable these DVS-7250 functions.

BKDS-7270**Key Border Option**

The **BKDS-7270** Key Border Option provides key enhancements such as Shadow, Drop Shadow, Border, Soft Edge and Outline. Each option also includes an independent Dual Color Matte and Wipe generator that allows you to place a color wash into the key's edge. The system accepts one board per M/E plus the DSK.

BKDS-7280**M/E Key Signal Preview Board**

The **BKDS-7280** M/E Key Signal Preview Board provides selectable output of the M/E mixed key preview signal to the Aux and Utility buses. The system accepts one board per M/E plus the DSK.

BKDS-7001**Control Port Expansion Board**

The **BKDS-7001** Control Port Expansion Board (with mounting hardware and interconnect cables) adds an additional four RS-422 control ports to the DVS-7250 system. The board is required if you wish to control two or more channels of DME effects from the switcher panel, and is also required for the Peripheral II interface.

BKDS-7090**Redundant Power Supply — Control Panel**

The **BKDS-7090** Redundant Power Supply for the Control Panel (with mounting hardware and interconnect cables) provides an auto-switching power source for the DVS-7250 control panel.

BKDS-7690**Redundant Power Supply — Processor**

The **BKDS-7690** Redundant Power Supply for the Processor (with mounting hardware and interconnect cables) provides an auto-switching power source for the DVS-7250 electronics.

BKDS-7700

Tally Interface Unit



The **BKDS-7700** Tally Interface Unit provides 72 standard programmed tally relay outputs for the following switcher components:

- All 36 primary inputs
- 4 Analog Chroma Key inputs
- Up to 6 DME/DVE inputs
- Up to 48 External Devices

The unit can also be used to set conditional tallies for ISO record and other switcher functions. Up to 4 relay states may be set for each tally function. The BKDS-7700 also provides an “S-Bus” interface to the Sony DVS “B” series routing switchers. In this configuration, the “B” series is accessed directly from the DVS-7250’s display for changing primary switcher crosspoints. Input labels and tally information automatically follows all routing switcher changes.

Note that the **BKDS-7700** is a separate rack mount chassis (3 RU) with power, and connects to the DVS-7250 via RS-422. Note that RS-422 interconnect cables are *not* provided. In the “**Options and Upgrades**” section, see the “**System Cables, RS-422**” heading for part numbers and information. RS-422 interconnect cables have a maximum length of 100 meters.

BZS-7720

Tally Interface Software



The **BKDS-7720** Tally Interface Software is required for the **BKDS-7700** Tally Interface Unit and router interface. Note that this software is installed with a PC, using an RS-232C interconnect cable (both items user-supplied).

BKDS-7701

Expansion Module



The **BKDS-7701** Expansion Module option, when installed in the BKDS-7700, increases the number of relay (tally) outputs from 72 to 216.

BKDS-7790

Redundant Power Supply — Tally



The **BKDS-7790** Redundant Power Supply (with mounting hardware and interconnect cables) provides an auto-switching power source for the BKDS-7700 Tally Interface Unit.

RPK-S7000K1

Spare Parts Kit — Video Processor



The **RPK-S7000K1** Spare Parts Kit provides spare parts for the DVS-7200 chassis, including replacement boards for the CPU, crosspoint control and M/E processors.

RPK-S7000K2 Spare Parts Kit — Control Panel



The **RPK-S7000K2** Spare Parts Kit provides spare parts for the DVS-7250 control panel (BKDS-7025 or BKDS-7026), including replacement boards and sub-assemblies.

RCC- System Cables, RS-422

5G, 10G, 30G



The RCC-series cables provide RS-422 interconnects for serial controlled devices. Three lengths are available:

- RCC-5G, 5 meters
- RCC-10G, 10 meters
- RCC-30G, 30 meters

RCC cables are required to connect the switcher chassis to RS-422 devices. Note that some devices include RS-422 cables as standard.

RCC-5A System Cables, Interconnect



The RCC-5A cable (5-meter) provides a 15-pin interconnect for the BKDS-8060, BKDS-8061, and BKDS-8062.

BKD-RS15A Rack Mount Kit — Switcher

RMM-18DV

The **BKD-RS15A** or **RMM-18DV** Rack Mount Kits allows the DVS-7200 chassis to be rack-mounted in a standard 19" rack. Either kit can be used.

RMM-30 Rack Mount Kit — Tally

The RMM-30 Rack Mount Kit allows the **BKDS-7700** Tally Interface Unit to be rack-mounted in a standard 19" rack.

J-6189-230 Extender Cards


J-6189-960

Extender cards are available through Sony Service. Refer to “**Appendix C, Sales and Service**” for the location of your nearest Sony Service Center.

Training

This section describes training courses that are available for the DVS-7250 system.

NN-TRNG/GEN1C Training — General Product



This class provides one day (8 hours) of general BVE, DVS, or DME training at the customers location. The class is limited to 3 students, and is a pre-requisite for any additional DVS-7250 training. Additional training can be arranged by your local Sony Account Manager, or your regional Product Specialist.

Note: Includes instructor travel and accommodations.

Order Guide — DVS-7250

Fax Cover

To: _____
Fax #: _____
From: _____
Date: _____
Pages: _____
Message: _____

Customer Information

Company Name: _____
Address: _____

Phone: _____
Fax: _____
Contact: _____
Title: _____

Instructions

The **Request Form** on the following page includes a table of all DVS-7250 system components. Use the table to configure the customer's optimum DVS-7250 switcher system.

Please perform the following steps:

- As a prerequisite, review the information in the “**Installation Guide**” chapter:
- Complete the customer information section above.
- In the **Request Forms** section, use the two charts as follows:
 - In the “**DVS-7250 Input Configuration**” chart, check off the *one* input configuration required (both quantity and format), then transfer the information and quantities to the “**DVS-7250 System Components**” chart.
 - In the “**DVS-7250 System Components**” chart, check off the basic and optional items required. *Recommended* items for a basic DVS-7250 system are marked with an **X** in the “**Rec**” column. Mark quantities (where appropriate), exceptions, and comments in the “**Notes**” column.
- Send the completed forms to your local Sony Sales Representative to receive a detailed DVS-7250 proposal. Refer to “**Appendix C. Sales and Service**” for a list of Sony Regional Sales Offices.
- For submitting the completed proposal, the area at the top of this page can be used as a convenient fax cover sheet.

Request Forms

This section includes the **DVS-7250 Input Configuration** chart, the **DVS-7250 Output Configuration** chart, and the **DVS-7250 System Components** chart.

DVS-7250 Input Configuration Chart

Check off the *one* input configuration required, note the quantity and format of input boards that support the desired configuration, then transfer the information (and quantities) to the “**DVS-7250 System Components**” chart.

Input Configuration Required	√	BKDS-7102 12 SDI Inputs	BKDS-7110* Input Mother Board	BKDS-7111** BKDS-7112***	BKDS-7133 2 Component Analog Inputs
12 SDI		1	—	—	—
12 SDI + 2 Analog Component		1	—	—	1
12 SDI + 4 Analog Component		1	—	—	2
12 SDI + up to 12 composite Analog / SDI		1	1	select up to 12 total 7111: ___ 7112: ___	—
12 SDI + up to 12 composite Analog / SDI + 2 Analog Component		1	1	select up to 12 total 7111: ___ 7112: ___	1
12 SDI + up to 12 composite Analog / SDI + 4 Analog Component		1	1	select up to 12 total 7111: ___ 7112: ___	2
12 SDI + up to 24 composite Analog / SDI		1	2	select up to 24 total 7111: ___ 7112: ___	—
12 SDI + up to 24 composite Analog / SDI + 2 Analog Component		1	2	select up to 24 total 7111: ___ 7112: ___	1
12 SDI + up to 24 composite Analog / SDI + 4 Analog Component		1	2	select up to 24 total 7111: ___ 7112: ___	2
24 SDI		2	—	—	—
24 SDI + 2 Analog Component		2	—	—	1
24 SDI + 4 Analog Component		2	—	—	2
24 SDI + up to 12 composite Analog / SDI		2	1	select up to 12 total 7111: ___ 7112: ___	—
24 SDI + up to 12 composite Analog / SDI + 2 Analog Component		2	1	select up to 12 total 7111: ___ 7112: ___	1
24 SDI + up to 12 composite Analog / SDI + 4 Analog Component		2	1	select up to 12 total 7111: ___ 7112: ___	2
36 SDI		3	—	—	—
36 SDI + 2 Analog Component		3	—	—	1
36 SDI + 4 Analog Component		3	—	—	2
Up to 36 composite Analog / SDI		0	3	select up to 36 total 7111: ___ 7112: ___	—

Notes:

- * One BKDS-7110 Input Mother Board accepts up to 12 daughter boards, in any combination of formats.
- ** Analog Composite “Daughter Board” installs on BKDS-7110 Board. One input provided per daughter board.
- *** SDI “Daughter Board” installs on BKDS-7110 Board. One input signal provided per daughter board.

DVS-7250 Output Configuration Chart

For each of the 19 configurable DVS-7250 outputs (comprised of individual outputs and “groups”), select the desired output format, either composite analog (**BKDS-7161**) or SDI (**BKDS-7162**). Then transfer the information (and quantities) to the “**DVS-7250 System Components**” chart. Output modules are installed on the **OUT-9** Mother Board.

DVS-7250 Output Configuration

System Output Select <i>one board</i> for each system output:	BKDS-7161 Analog Composite Output Module ✓	BKDS-7162 Digital Output Module ✓
Program group (four outputs, configured as one)		
Preview output		
Clean output		
Edit Preview output / Auxiliary 14 output		
Auxiliary 1 output		
Auxiliary 2 output		
Auxiliary 3 output		
Auxiliary 4 output		
Auxiliary 5 output		
Auxiliary 6 output		
Auxiliary 7 output		
Auxiliary 8 output		
Auxiliary 9 output		
Auxiliary 10 output		
Auxiliary 11 output		
Auxiliary 12 output		
Auxiliary 13 output		
M/E 1 group (two outputs, configured as one)		
M/E 2 group (two outputs, configured as one)		
	Total BKDS-7161: ____	Total BKDS-7162: ____

Note: The total number of **BKDS-7161** plus **BKDS-7162** output modules are not to exceed 19.

DVS-7250 System Components Chart

Check off the basic and optional items required. *Recommended* items for a basic DVS-7250 system are marked with an **X** in the “**Rec**” column. Mark quantities (where appropriate), exceptions, and comments in the “**Notes**” column.

DVS-7250 System Components

Part #	Description	Rec	√	Notes
Basics				
DVS-7200	Processor (Required)	X		
BKDS-7025	Control Panel (Euro style)			
BKDS-7026	Control Panel (American style)	X		
BKDS-7250	Program/Preset DSK Board (Required)	X		
BZS-7060	Operation Software with Manual	X		Required to initiate the DVS-7250
Input Configuration				
BKDS-7102	12 Input Serial Digital Board	X		
BKDS-7110	Input “Mother Board”			
BKDS-7111	Analog Composite “Daughter Board”			One input signal per board
BKDS-7112	Serial Digital “Daughter Board”			One input signal per board
BKDS-7133	Chromakey Analog Component Input Board			
Output Configuration				
BKDS-7161	Analog Composite Output Module			Quantity:
BKDS-7162	Digital Output Module			Quantity:
Control Panel Options				
BKDS-7033	Memory Recall Control Panel			
BKDS-7030	Key Frame Control Panel			Sold as a set with BKDS-7031
BKDS-7031	DME Control Panel			Sold as a set with BKDS-7030
BZDM-3720	Operation Software and Manual (DME-3000)			Required for operating the BKDS-7030 and BKDS-7031
BZDM-7720	Operation Software and Manual (DME-7000)			Required for operating the BKDS-7030 and BKDS-7031
BKDS-7075	Control Panel Remote Adaptor			
BKDS-7060	Remote Key Control Panel			BZS-7360 software is required
BZS-7360	Remote Key Control Software			Required for operating BKDS-7060
BKDS-8060	Remote Panel Interface			
BKDS-8061	Shot Box Control Unit			Requires BKDS-8060
BKDS-8062	Auxiliary Control Panel			Requires BKDS-8060
BKDS-2010	M/E Auxiliary Control Panel			Requires BZS-7220
BZS-7220	Auxiliary Panel Operation Software			

continued ...

DVS-7250 System Components (continued)


Part #	Description	Rec	√	Notes
Options and Upgrades				
BKDS-2031	Basic Chroma Key Board			System accepts 1 per M/E
BKDS-2032	Chroma Key Upgrade Board			System accepts 1 per M/E. BKDS-2031 is required
BKDS-2041	Basic Frame Memory Board			Requires BKDS-7445
BKDS-7445	Frame Memory Adaptor Board			
BKDS-2070	Enhanced Wipe Option			System accepts 1 per M/E.
BKDS-7270	Key Border Option			System accepts 1 per M/E and P/P
BKDS-7280	M/E Key Signal Preview Board			System accepts 1 per M/E and P/P
BKDS-7001	Control Port Expansion Board			Required for P-II Interface
BKDS-7090	Redundant Power Supply — Control Panel			
BKDS-7690	Redundant Power Supply — Processor			
BKDS-7700	Tally Interface Unit			Requires BZS-7720
BZS-7720	Software for BKDS-7700			
BKDS-7701	Tally Relay Expansion Board for BKDS-7700			
BKDS-7790	Redundant Power Supply — BKDS-7700			
RPK-S7000K1	Spare Parts Kit — Video Processor			
RPK-S7000K2	Spare Parts Kit — Control Panel			
RCC-5G RCC-10G RCC-30G	5 meter RS-422 cable 10 meters RS-422 cable 30 meters RS-422 cable	User select		Select one per RS-422 control device interface
RCC-5A	5 meter interconnect cable for BKDS-8060, BKDS-8061, and BKDS-8062.			
1-574-993-11	5 meter interconnect cable (25-pin) for BKDS-7075			
BKD-RS15A RMM-18DV	Rack Mount Kit for Switcher			Either kit can be used.
RMM-30	Rack Mount Kit for Tally Interface Unit			
J-6189-230 J-6189-960	Extender Cards			
Training				
NN-TRNG/GEN1C	1 day general BVE, DVS, or DME training at the customers location. Class limited to 3 students.	X		Includes instructor travel and accommodations.

Note: Refer to “**Appendix B, Related Resources**” for details on ordering additional DVS-7250 operations and maintenance manuals.

SONY

Installation Guide

DVS-7250 Installation

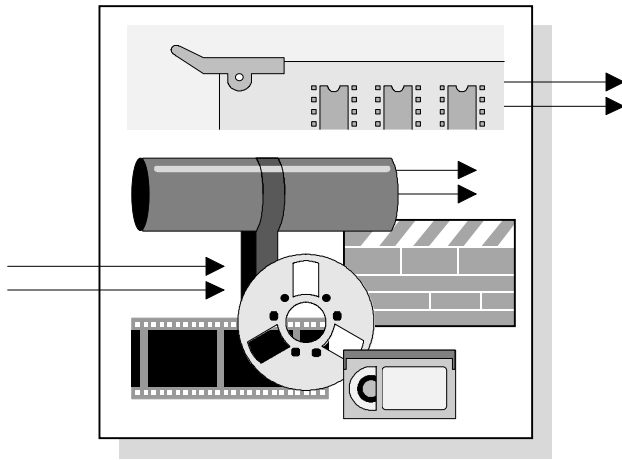

This chapter provides information and diagrams to assist with facility engineering and equipment integration requirements. The following sections are included:

- The “**DVS-7250 Control Panel**” section provides detailed control panel diagrams (for both American and Euro models), external dimensions, specifications, and detailed tables of connector pinouts.
- The “**DVS-7200 Chassis**” section provides detailed chassis diagrams, external dimensions, specifications, system timing requirements, and detailed tables of connector pinouts.
- The “**BKDS-7700 Chassis**” section provides detailed Tally Interface Unit diagrams, external dimensions, specifications, and detailed tables of connector pinouts.

At the end of this chapter, several detailed diagrams are also provided in the “**System Interconnection Charts**” section.


DVS-7250 Control Panel

This section includes the following areas:

- Control Panel Top View (American Style) and Sub-Panels
- Control Panel Top View (Euro Style)
- Sub Panel Remote Installation with BKDS-7075
- Control Panel External Dimensions
- Control Panel Specifications
- Control Panel Rear View
- Control Panel Connectors

Control Panel Top View — American Style

The figure below illustrates a top view of the DVS-7250 American Style Control Panel (BKDS-7026).

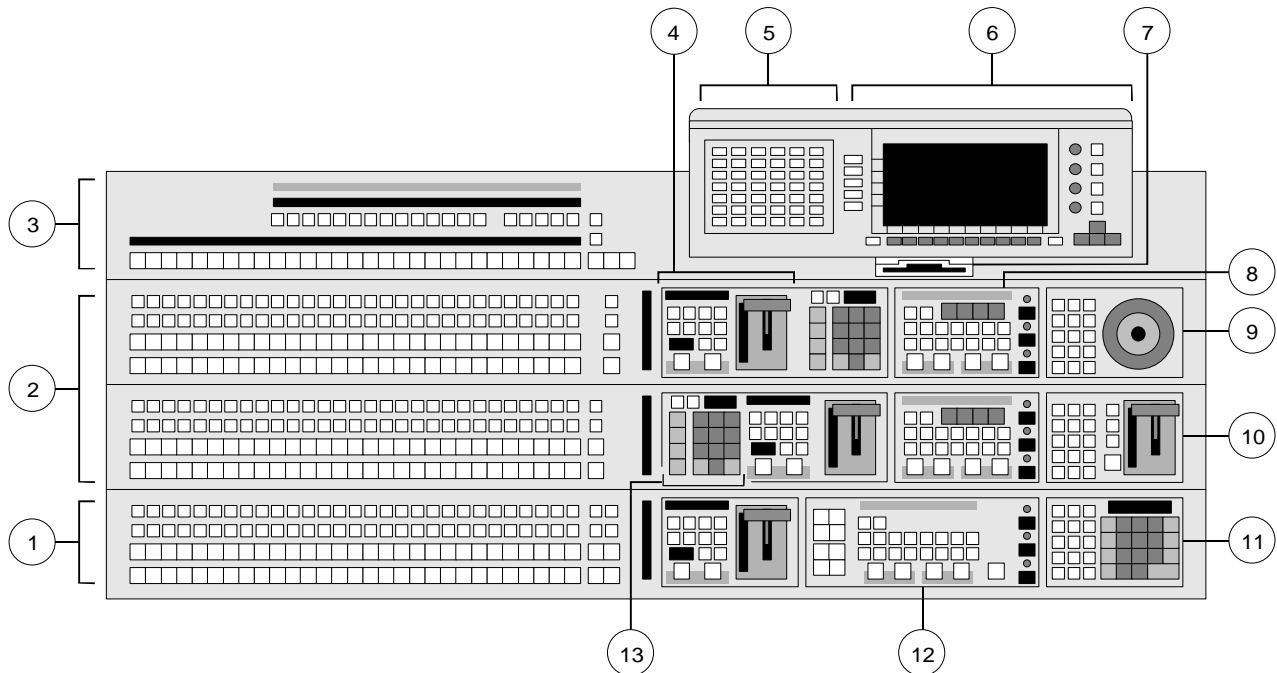


DVS-7250 Control Panel (American Style) Top View

- | | | |
|-------------------------------|-----------------------------|------------------------------|
| 1) Program/Preset Bus | 6) Menu Control Section | 11) Master E-File Section |
| 2) M/E Banks 1 and 2 | 7) Floppy Disk Drive | 12) Downstream Keyer Section |
| 3) Aux Bus Bank | 8) M/E Keyer Section | 13) FlexiPad |
| 4) Transition Control Section | 9) DME Control Panel | |
| 5) Top Menu Section | 10) Key Frame Control Panel | |


Front Control Panel components and sub-panels are listed (and illustrated) below:

1. Program/Preset Bus

- American Style (BKDS-7026)

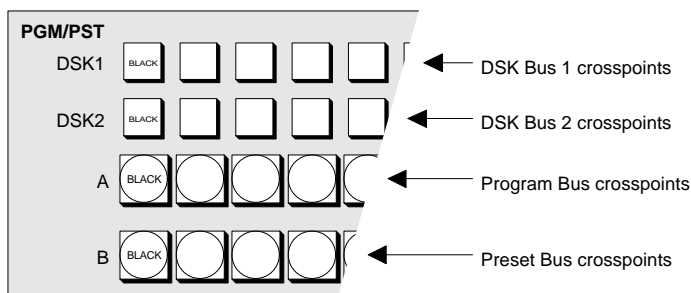


- Euro Style (BKDS-7025)

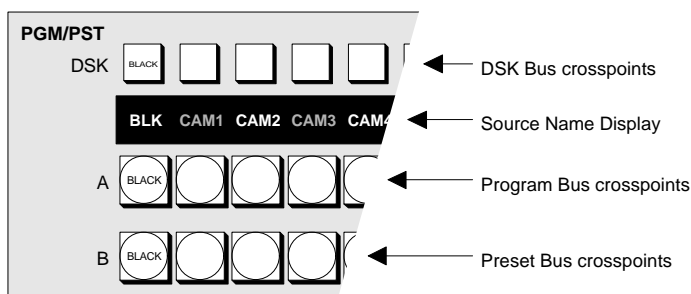


2. M/E (Mix/Effects) Banks 1 and 2


- American Style (BKDS-7026)

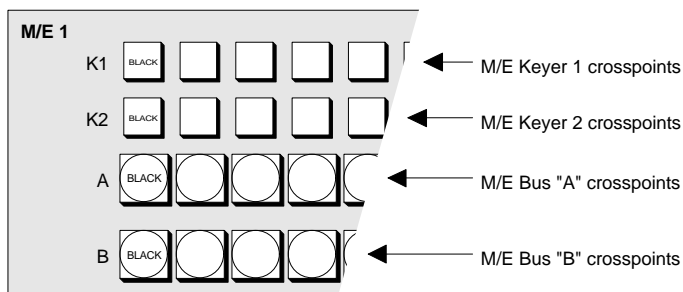


- Euro Style (BKDS-7025)

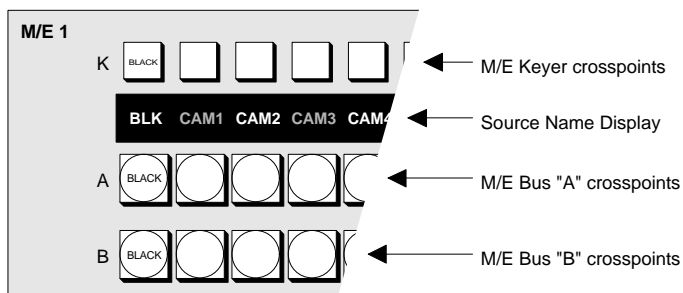


3. Aux (Auxiliary) Bus Bank

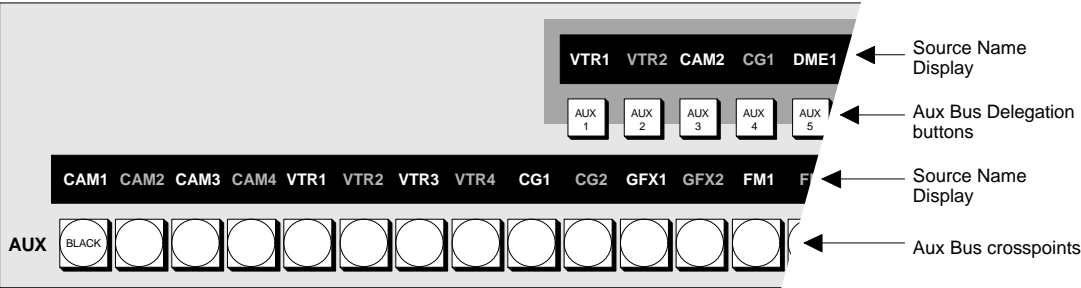


4. Transition Control Section

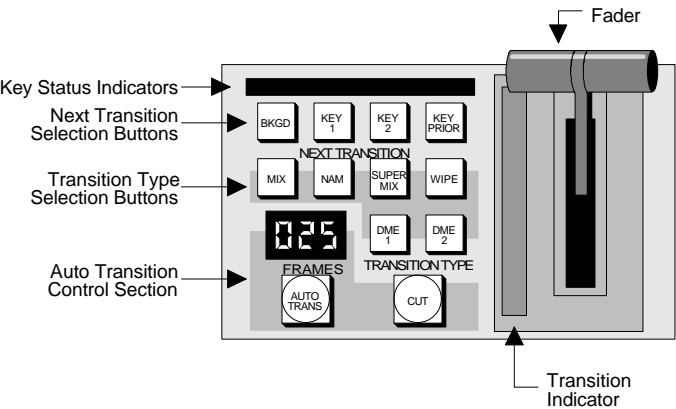

5. Top Menu Section

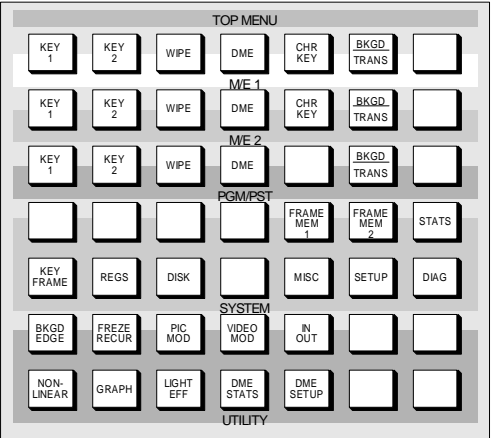


6. Menu Control Section

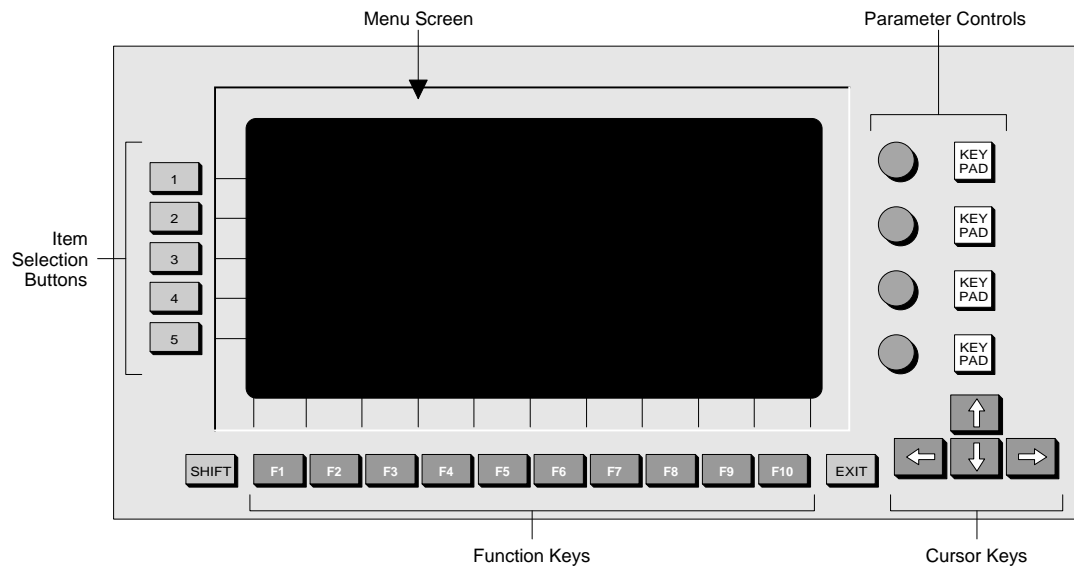


7. Floppy Disk Drive




8. M/E Keyer Section

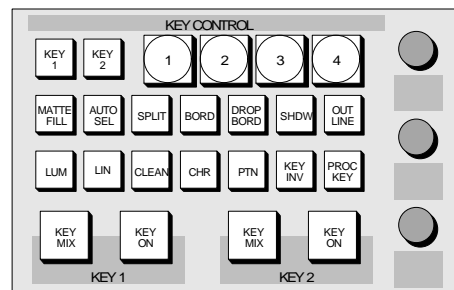


9. DME Control Panel (BKDS-7031)

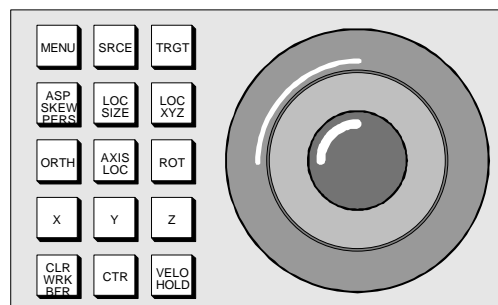


10. Key Frame Control Panel (BKDS-7030)

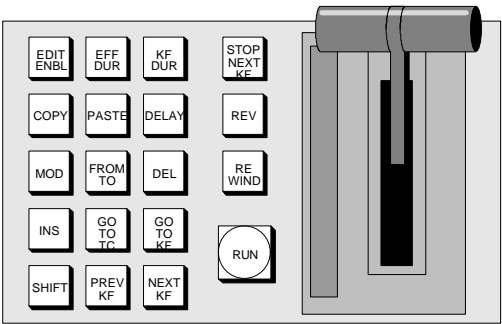

11. Master E-File Section with Numeric Keypad

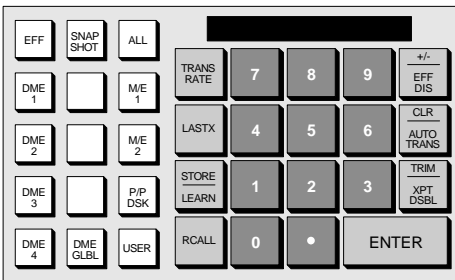

12. Downstream Keyer Section (BKDS-7340)

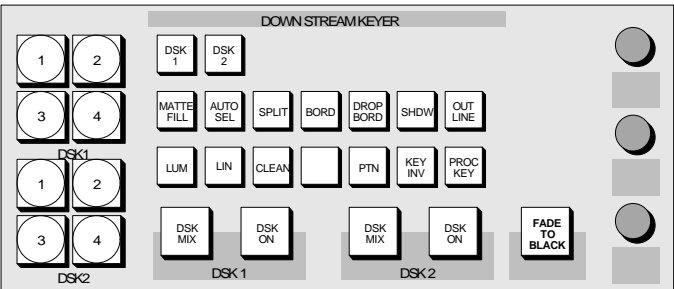


13. FlexiPad



Control Panel Top View — Euro Style

The figure below illustrates a top view of the DVS-7250 Euro Style Control Panel (BKDS-7025).

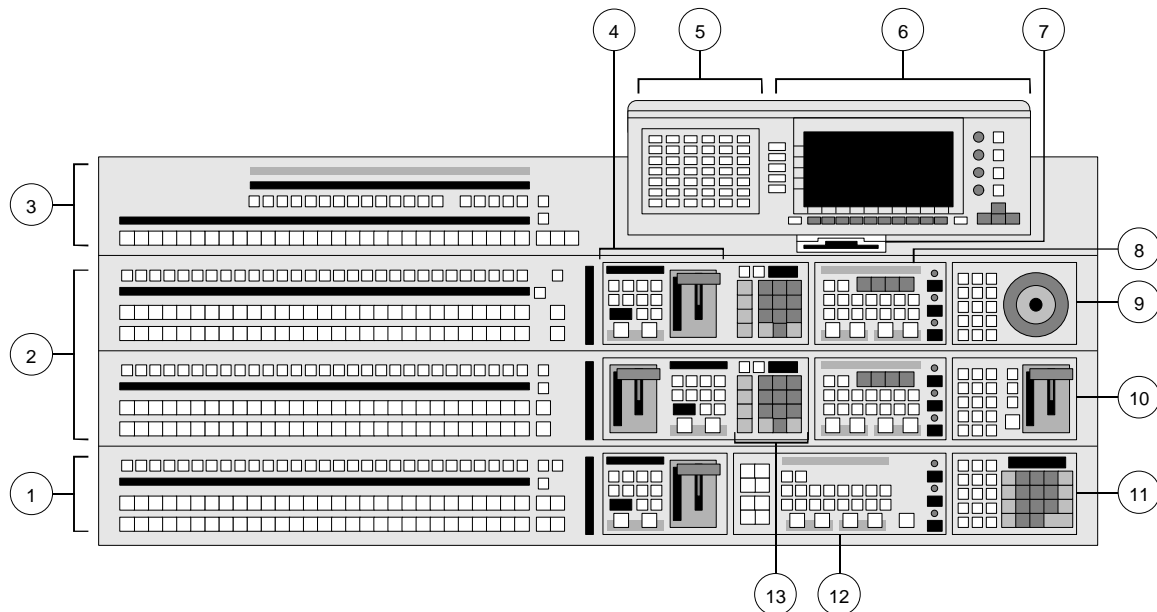


DVS-7250 Control Panel (Euro Style) Top View

- | | | |
|-------------------------------|-----------------------------|------------------------------|
| 1) Program/Preset Bus | 6) Menu Control Section | 11) Master E-File Section |
| 2) M/E Banks 1 and 2 | 7) Floppy Disk Drive | 12) Downstream Keyer Section |
| 3) Aux Bus Bank | 8) M/E Keyer Section | 13) FlexiPad |
| 4) Transition Control Section | 9) DME Control Panel | |
| 5) Top Menu Section | 10) Key Frame Control Panel | |


For illustrations of Euro Style switcher sections and sub panels, refer to the previous “Control Panel Top View — American Style” section.

Sub Panel Remote Installation with BKDS-7075

The figure below illustrates BKDS-7075 Remote Adaptor external dimensions and cutout dimensions (in millimeters).

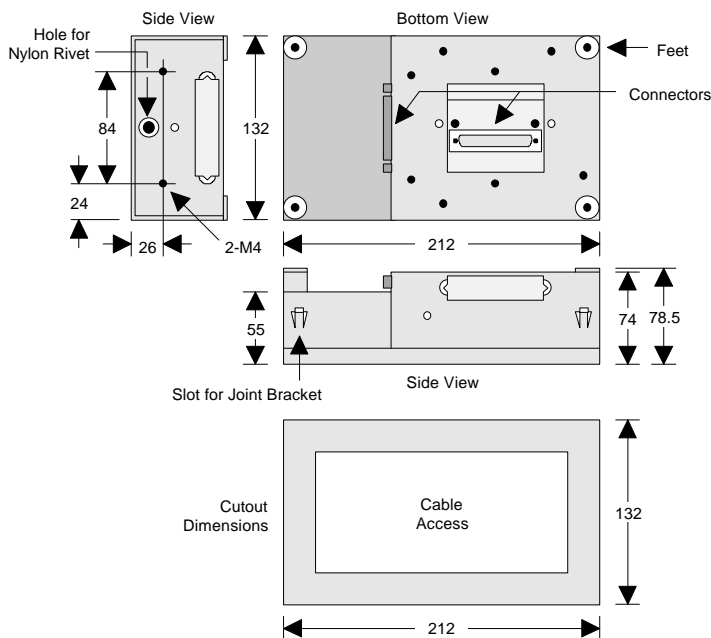


Note that the BKDS-7075 Control Panel Remote Adaptor can be used to install switcher sub panels in both horizontal and vertical configurations. Two examples are illustrated below, and larger arrays can be configured:

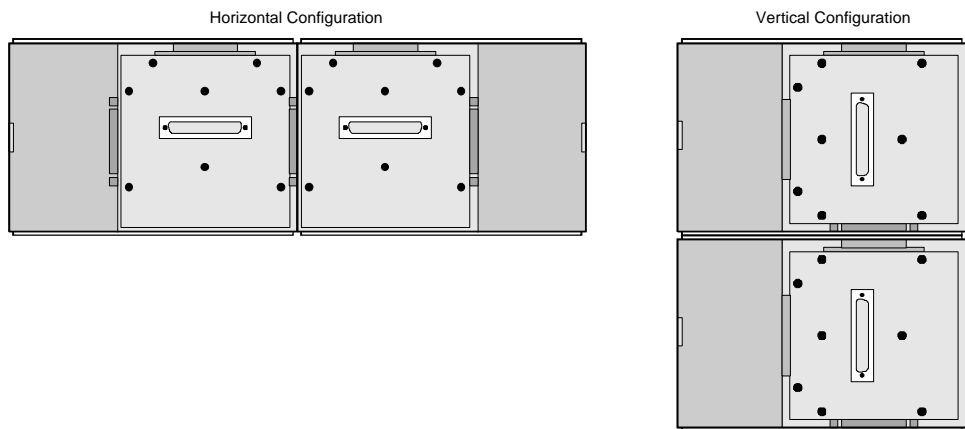

To accommodate the desired configuration, the BKDS-7075 remote adaptor's internal IF-629 board can be mounted in a variety of orientations. Refer to the *DVS-7000/7200 E1 Installation Guide* for IF-629 board mounting instructions.

Control Panel External Dimensions

The figure below illustrates external control panel dimensions and control panel cutout dimensions (in millimeters). Note that the illustrations shows all control panel options installed.

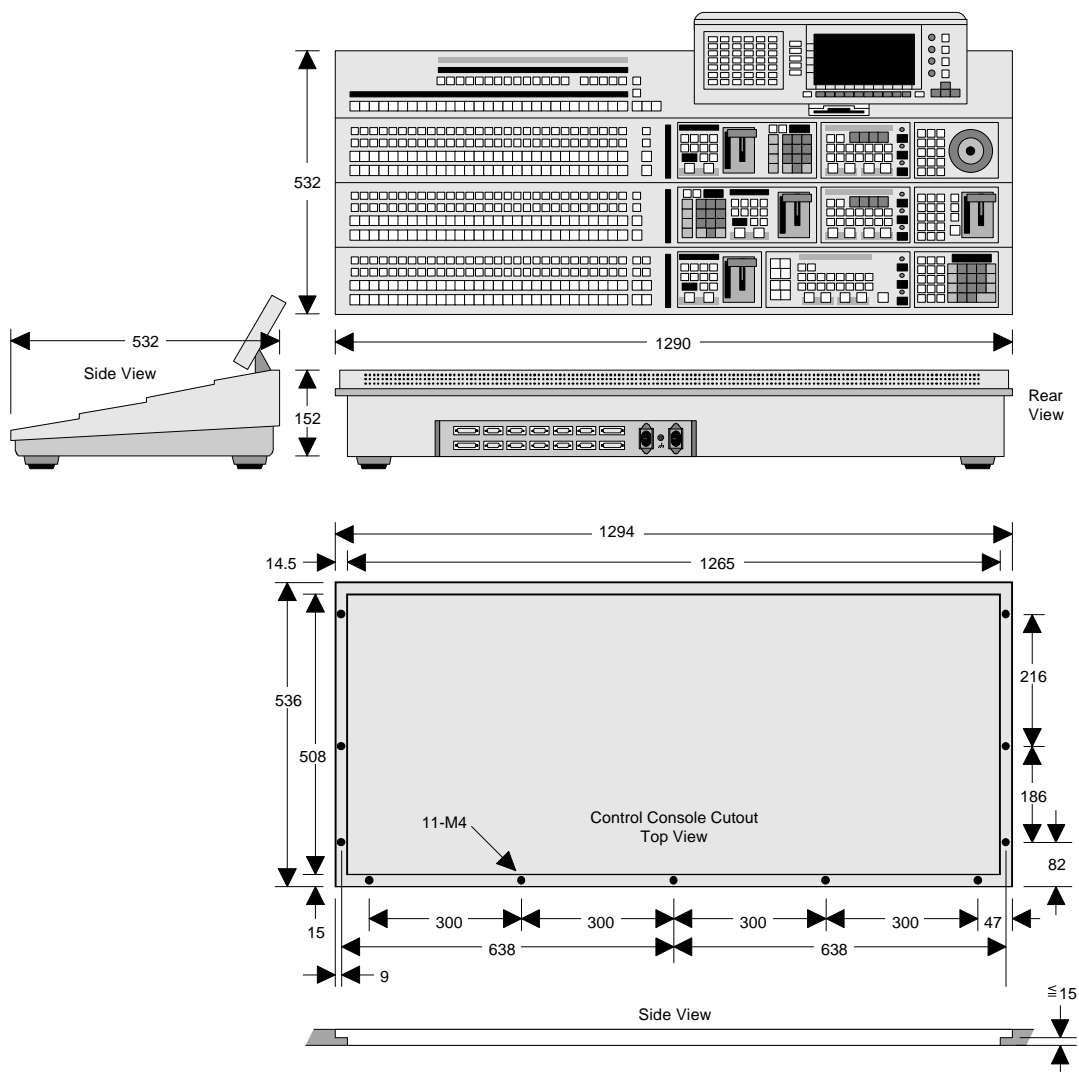

DVS-7250 External Control Panel Dimensions

Control Panel Specifications


The following table lists Control Panel specifications:

DVS-7250 Control Panel Specifications

Parameter		Specification
Control Panel Dimensions	mm: inches:	1290 (w) x 532 (h) x 152 (d) 50.79 (w) x 20.94 (h) x 5.98 (d)
EL Display Dimensions	mm: inches:	499 (w) x 197 (h) x 45 (d) 19.65 (w) x 7.76 (h) x 1.77 (d)
Cutout Dimensions	(Outer) mm:	1294 (w) x 536 (d)
	inches:	50.94 (w) x 21.10 (d)
	(Inner) mm:	1265 (w) x 15 (h) x 508 (d)
	inches:	49.80 (w) x 0.59 (h) x 20.00 (d)
Weight		40 kg 88 lbs. 2 oz.
Operating temperature		+5°C to +40°C
Power requirements		AC 100 - 240V \pm 10%, 50/60 Hz
Power consumption		7 to 3.5A
Connectors		
GPI		25-pin D-sub connector, female
Option Panel		25-pin D-sub connector, female
Switcher		9-pin D-sub connector (RS-422A), female
DSK		9-pin D-sub connector (RS-422A), female
DME		9-pin D-sub connector (RS-422A), female
Terminal 1		9-pin D-sub connector (RS-232C), female
Terminal 2		9-pin D-sub connector (RS-232C), female
Remote 1		9-pin D-sub connector (RS-422A), female
Remote 2		9-pin D-sub connector (RS-422A), female
Remote 3		9-pin D-sub connector (RS-422A), female
Remote 4		9-pin D-sub connector (RS-422A), female
Remote 5		9-pin D-sub connector (RS-422A), female
AUX Panel		25-pin D-sub connector, female
Display Panel		25-pin D-sub connector, female

Control Panel Rear View

The figure below illustrates a rear view of the DVS-7250 Control Panel.

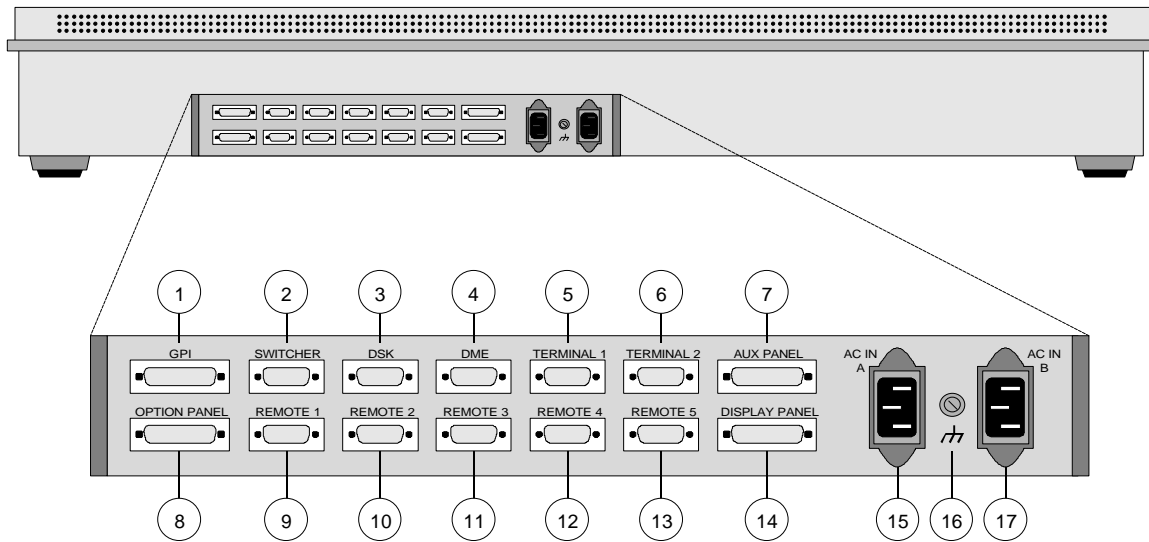

DVS-7250 Control Panel Rear View

Rear Control Panel components are listed below:

1. **GPI** (25-pin D-sub, female)
2. **Switcher** (9-pin D-sub, female) RS-422A
3. **DSK** (9-pin D-sub, female) RS-422A
4. **DME** (9-pin D-sub, female) RS-422A
5. **Terminal 1** (9-pin D-sub, female) Wacom IV tablet or RS-232C
6. **Terminal 2** (9-pin D-sub, female) Wacom IV tablet or RS-232C
7. **AUX Panel** (25-pin D-sub, female)
8. **Option Panel** (25-pin D-sub, female)
9. **Remote 1** (9-pin D-sub, female) RS-422A
10. **Remote 2** (9-pin D-sub, female) RS-422A
11. **Remote 3** (9-pin D-sub, female) RS-422A
12. **Remote 4** (9-pin D-sub, female) RS-422A
13. **Remote 5** (9-pin D-sub, female) RS-422A
14. **Display Panel** (25-pin D-sub, female)
15. **AC In A**, 3-pin AC connector (Main Power Supply)
16. **Ground Terminal**
17. **AC In B**, 3-pin AC connector (Optional Backup Power Supply)


Control Panel Connectors

The following control panel connectors are listed in this section:

- Switcher
- DSK
- DME
- Terminal 1, 2
- Remote 1 - 5
- GPI (25-pin D-sub, female)
- Option Panel (25-pin D-sub, female)
- AUX Panel (25-pin D-sub, female)
- Display Panel (25-pin D-sub, female)

RS-422A Switcher Connector Specifications

The table below lists specifications for the control panel RS-422A **Switcher** connector:




RS-422A Switcher Connector specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	RX-A	Received data (–)
3	TX-B	Transmitted data (+)
4	GND	Common ground
5	Field (+)	Field signal input (+)
6	GND	Common ground
7	RX-B	Received data (+)
8	TX-A	Transmitted data (–)
9	Field (–)	Field signal input (–)

Note that RS-422 interconnect cables are *not* provided. In the “**Options and Upgrades**” section, see the “**System Cables, RS-422**” heading for part numbers and information. RS-422 interconnect cables have a maximum length of 100 meters.

RS-422A DSK Connector Specifications

The table below lists specifications for the control panel RS-422A **DSK** connector:




RS-422A DSK Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	RX-A	Received data (–)
3	TX-B	Transmitted data (+)
4	GND	Common ground
5	—	—
6	GND	Common ground
7	RX-B	Received data (+)
8	TX-A	Transmitted data (–)
9	—	—

RS-422A DME Connector Specifications

The table below lists specifications for the control panel RS-422A **DME** connector:




RS-422A DME Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	RX-A	Received data (–)
3	TX-B	Transmitted data (+)
4	GND	Common ground
5	—	NC
6	GND	Common ground
7	RX-B	Received data (+)
8	TX-A	Transmitted data (–)
9	—	—

RS-232C Terminal 1, 2 Connector Specifications

The following table lists control panel RS-232C **Terminal 1, 2** connector specifications:




RS-232C Terminal 1, 2 Connector Specifications (Female)

Pin #	Signal	Function
1	DCD	Received line detector signal *
2	RX	Received data
3	TX	Transmitted data
4	DTR	Data terminal ready signal *
5	GND	Signal ground
6	DSR	Data set ready signal *
7	RTS	Request to send signal **
8	CTS	Clear to send signal **
9	—	—

Note: * Pins 1, 4, and 6 are shorted together on the **CN-1143** board.
 ** Pins 7 and 8 are shorted together on the **CN-1143** board.

RS-422A Remote 1-5 Connector Specifications

The table below lists specifications for the control panel RS-422A **Remote 1-5** connectors: *




RS-422A Remote 1 - 4 Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	RX-A	Received data (–)
3	TX-B	Transmitted data (+)
4	GND	Common ground
5	—	—
6	GND	Common ground
7	RX-B	Received data (+)
8	TX-A	Transmitted data (–)
9	—	—

Note: * Remote connectors 2, 3, 4, and 5 are active only if the **BKDS-7001** board is installed.

GPI Connector Specifications


The following table lists control panel **GPI** connector specifications.



GPI Control Panel Connector Specifications (Female)


Pin #	Signal	Function
1	GND	Ground
2	GND	Ground
3	GPI In 2	General purpose relay input
4	GPI In 4	
5	GPI In 6	
6	GPI In 8	
7	GPI Out 1B	General purpose relay output (B) *
8	GPI Out 2B	
9	GPI Out 3B	
10	GPI Out 4B	
11	GPI Out 6	General purpose open collector output **
12	GPI Out 8	
13	GPI Out Com	Ground
14	GND	Ground
15	GPI In 1	General purpose input
16	GPI In 3	
17	GPI In 5	
18	GPI In 7	
19	GPI Out 1A	General purpose relay output (A) *
20	GPI Out 2A	
21	GPI Out 3A	
22	GPI Out 4A	
23	GPI Out 5	General purpose open collector output **
24	GPI Out 7	
25	GPI Out Com	Ground

Note: A and B of the same number constitute a pair of relay contacts.

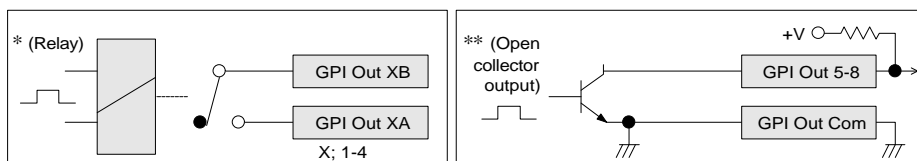

Option Panel Connector Specifications

The following table lists control panel **Option Panel** connector specifications.




Option Panel Connector Specifications (Female)

Pin #	Signal	Function
1	GND	Ground
2	+12 V	Power supply +12 V
3	SCLK	Serial clock for switch read and LED light
4	GND	Ground
5	WDT	LED light data
6	IWLD	Control signal for switch read and LED light
7	GND	Ground
8	TCLK	Serial clock for character display
9	TWDT	Indicate data for character display
10	GND	Ground
11	TBLANK	Disable signal for character display
12	GND	Ground
13	GND	Ground
14	+12 V	Power supply +12 V
15	+12 V	Power supply +12 V
16	BLANK	LED light disable signal
17	GND	Ground
18	SEQ	Control signal for switch read and LED light
19	RDT	Switch read data
20	GND	Ground
21	TSEQ	Control signal for character display
22	TQCLK	Control signal for character display
23	+12 V	Power supply +12 V
24	+12 V	Power supply +12 V
25	GND	Ground

AUX Panel Connector Specifications

The following table lists control panel **AUX Panel** connector specifications.




AUX Panel Connector Specifications (Female)

Pin #	Signal	Function
1	GND	Ground
2	+12 V	Power supply +12 V
3	SCLK	Serial clock for switch read and LED light
4	GND	Ground
5	WDT	LED light data
6	IWLD	Control signal for switch read and LED light
7	GND	Ground
8	TCLK	Serial clock for character display
9	TWDT	Indicate data for character display
10	GND	Ground
11	TBLANK	Disable signal for character display
12	GND	Ground
13	GND	Ground
14	+12 V	Power supply +12 V
15	+12 V	Power supply +12 V
16	BLANK	LED light disable signal
17	GND	Ground
18	SEQ	Control signal for switch read and LED light
19	RDT	Switch read data
20	GND	Ground
21	TSEQ	Control signal for character display
22	TQCLK	Control signal for character display
23	+12 V	Power supply +12 V
24	+12 V	Power supply +12 V
25	GND	Ground

Display Panel Connector Specifications

The following table lists control panel **Display Panel** connector specifications.



Display Panel Connector Specifications (Female)

Pin #	Signal	Function
1	GND	Ground
2	+12 V	Power supply +12 V
3	SCLK	Serial clock for switch read and LED light
4	GND	Ground
5	WDT	LED light data
6	IWLD	Control signal for switch read and LED light
7	GND	Ground
8	ELCK	EL display indicate clock
9	EL DATA 0	EL display indicate data
10	GND	Ground
11	ELVD	EL display vertical sync signal
12	GND	Ground
13	GND	Ground
14	+12 V	Power supply +12 V
15	+12 V	Power supply +12 V
16	BLANK	LED light disable signal
17	GND	Ground
18	SEQ	Control signal for switch read and LED light
19	RDT	Switch read data
20	GND	Ground
21	ELHD	EL display horizontal sync signal
22	EL DATA 1	EL display indicate data 1
23	+12 V	Power supply +12 V
24	+12 V	Power supply +12 V
25	GND	Ground

Additional Control Panels

This section discusses the following additional control panels that can be added to the DVS-7250 system:

- BKDS-2010 — M/E Auxiliary Control Panel
- BKDS-7060 — Remote Key Control Panel
- BKDS-8060 — Remote Panel Interface
- BKDS-8061 — Shot Box Control Unit
- BKDS-8062 — Auxiliary Control Panel

BKDS-2010 — M/E Auxiliary Control Panel

This section includes four areas:

- BKDS-2010 Control Panel Top View
- BKDS-2010 Control Panel Rear View
- BKDS-2010 Control Panel External Dimensions
- BKDS-2010 Control Panel Specifications
- BKDS-2010 Control Panel Connectors

BKDS-2010 Control Panel Top View


The figure below illustrates a top view of the BKDS-2010 Control Panel.



BKDS-2010 Control Panel Top View

BKDS-2010 Control Panel Rear View

The figure below illustrates a rear view of the BKDS-2010 Control Panel.

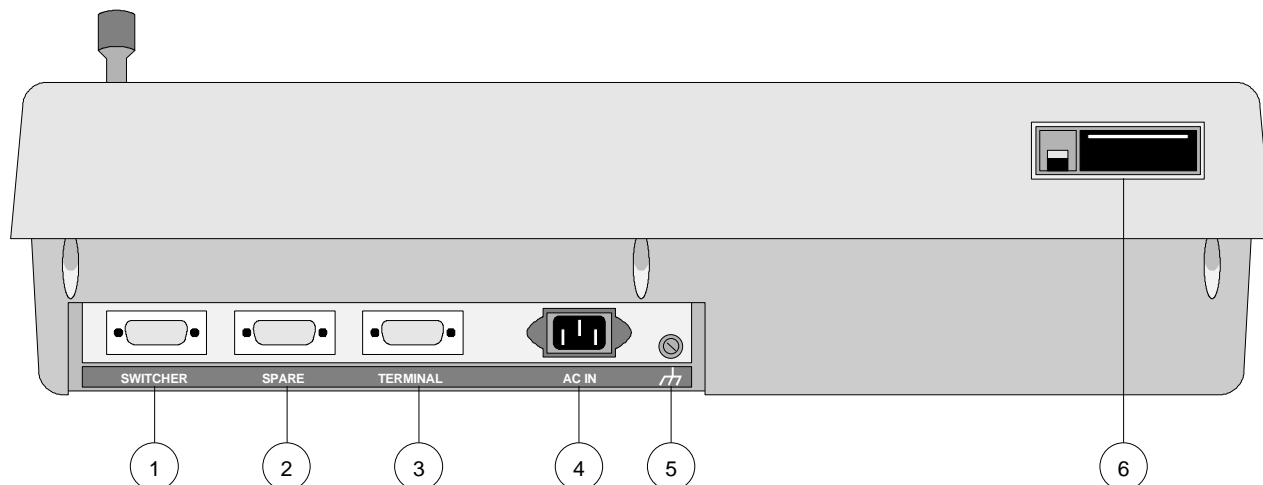


BKDS-2010 Control Panel Rear View

Rear Control Panel components are listed below:

1. Switcher (D-sub 9-pin) RS-422A
2. Spare (D-sub 9-pin) RS-422A. Not active.
3. Terminal (D-sub 9-pin) Wacom IV tablet or RS-232C
4. AC In, 3-pin AC connector
5. Ground terminal
6. Slot for optional Memory Pack

BKDS-2010 Control Panel External Dimensions

The figure below illustrates external BKDS-2010 dimensions (in millimeters):

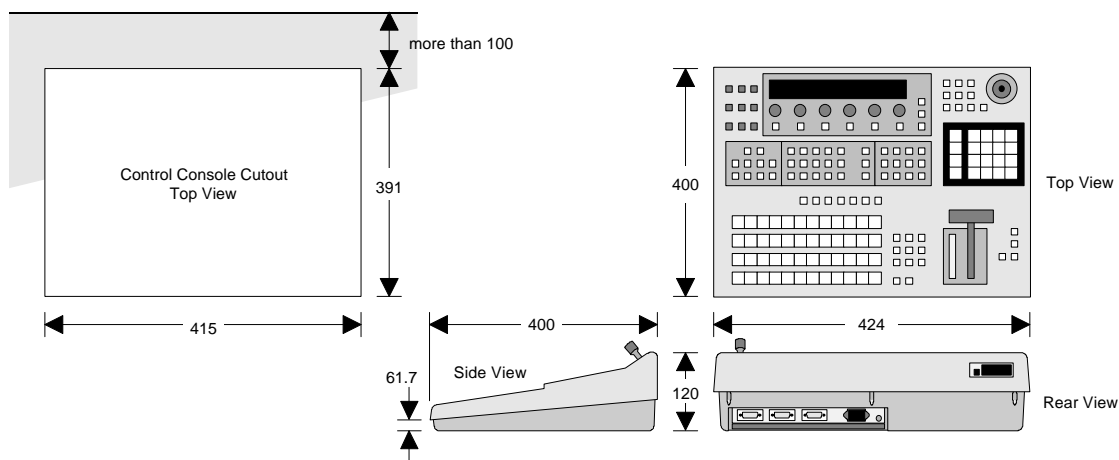

BKDS-2010 External Control Panel Dimensions

BKDS-2010 Control Panel Specifications

The following table lists BKDS-2010 Control Panel specifications:

BKDS-2010 Control Panel Specifications


Parameter	Specification
Dimensions	mm: 424 (w) x 120 (h) x 400 (d) inches: 16.75 (w) x 4.75 (h) x 15.75 (d)
Cutout Dimensions	mm: 415 (w) x 391 (d) inches: 16.34 (w) x 15.39 (d)
Weight (approximate)	10.0 kg 22 lb. 1 oz.
Processor connector	9-pin D-sub connector (RS-422A)
Terminal connector	9-pin D-sub connector (RS-422A or RS-232C)
AC In	3-pin AC connector
Operating temperature	+5° to +40°C +41° to +104°F
For operation within specifications	+10° to +35°C 50° to +95°F
Power consumption	Max. 0.5A/0.3A (100-120V/200-240V)

BKDS-2010 Control Panel Connectors

The following BKDS-2010 control panel connectors are listed in this section:

- Switcher Connector
- Terminal Connector


The table below lists specifications for the BKDS-2010 control panel RS-422A **Switcher** connector:



BKDS-2010 RS-422A Control Panel Switcher Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	RX-A	Received data (–) from Processor
3	TX-B	Transmitted data (+) to Processor
4	TX-COM	Signal Ground
5	VD (+)	VD signal input (+) from Processor
6	RX-COM	Signal Ground
7	RX-B	Received data (+) from Processor
8	TX-A	Transmitted data (–) to Processor
9	VD (–)	VD signal input (–) from Processor

The table below lists specifications for the BKDS-2010 control panel RS-422A or RS-232C **Terminal** connector:



BKDS-2010 RS-422A or RS-232C Control Panel Terminal Connector Specifications (Female)

Pin #	Signal	Function
1	DCD	Received line signal detector signal
2	RX	Received data
3	TX	Transmitted data
4	DTR	Data terminal ready signal
5	GND	Signal ground
6	DSR	Data set ready signal
7	RTS	Request to send signal
8	CTS	Clear to send signal
9	—	—


BKDS-7060 — Remote Key Control Panel

This section includes the following areas:

- BKDS-7060 Control Panel Top View
- BKDS-7060 Control Panel External Dimensions
- BKDS-7060 Control Panel Specifications
- BKDS-7060 Control Panel Rear View
- BKDS-7060 Control Panel Connectors
- BKDS-7060 Power Supply Front View
- BKDS-7060 Power Supply External Dimensions
- BKDS-7060 Power Supply Specifications
- BKDS-7060 Power Supply Rear View
- BKDS-7060 Power Supply Connectors

BKDS-7060 Control Panel Top View


The figure below illustrates a top view of the BKDS-7060 Keyer Control Panel.

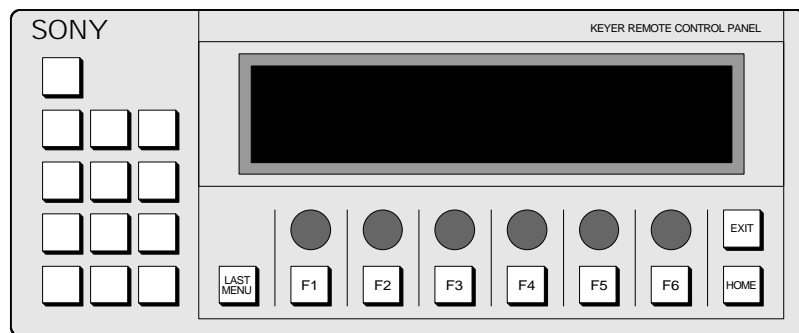

BKDS-7060 Control Panel Top View

BKDS-7060 Control Panel External Dimensions

The figure below illustrates external BKDS-7060 dimensions (in millimeters):

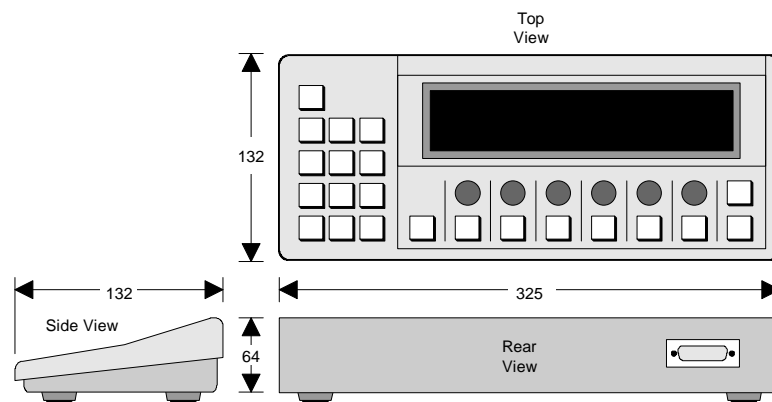

BKDS-7060 External Control Panel Dimensions

BKDS-7060 Control Panel Specifications

The following table lists BKDS-7060 Control Panel specifications:

BKDS-7060 Control Panel Specifications

Parameter		Specification
Dimensions	mm:	325 (w) x 64 (h) x 132 (d)
	inches:	12.80 (w) x 2.52 (h) x 5.20 (d)
Weight (approximate)		1.2 kg 2 lb. 11 oz.
Pig Tail Connector		15-pin D-sub connector (RS-232C) Male
Operating environment		+5°C to +40°C
Power consumption		Supplied by BKDS-7060 Power Supply

BKDS-7060 Control Panel Rear View

The figure below illustrates a rear view of the BKDS-7060 Keyer Control Panel.




BKDS-7060 Control Panel Rear View

Rear Control Panel components are listed below:

1. Control Panel Connector (D-sub 15-pin male) RS-232C

BKDS-7060 Control Panel Connectors

The table below lists specifications for the BKDS-7060 Control Panel RS-232C **Pig Tail Connector**:




BKDS-7060 Control Panel RS-232C Pig Tail Connector Specifications (Male)

Pin #	Signal	Function
1	TX0	Transmitted data 0
2	TX1	Transmitted data 1
3	TX2	Transmitted data 2
4	VD	Transmitted VD signal
5	—	—
6	—	—
7	GND	Ground
8	+ 12V	Power supply
9	RX0	Received data 0
10	RX1	Received data 1
11	RX2	Received data 2
12	GND	Ground
13	—	—
14	GND	Ground
15	+ 12V	Power supply

BKDS-7060 Power Supply Front View

The figure below illustrates a front view of the Power Supply for the BKDS-7060.

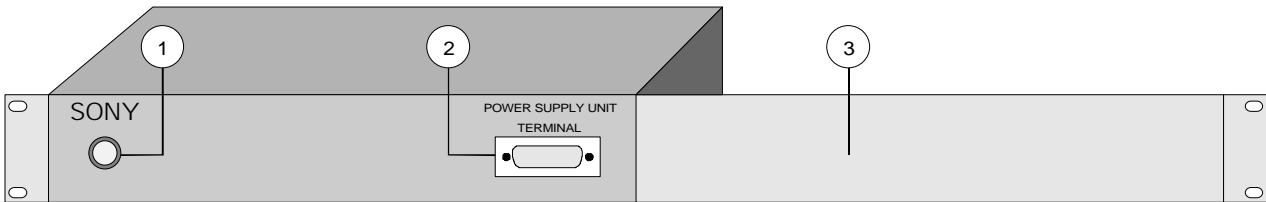


BKDS-7060 Power Supply Front View

Front Power Supply components are listed below:

- 1. Power Indicator
- 2. Terminal Connector (D-sub 9-pin female) RS-232C
- 3. Blank Panel for rack mounting

BKDS-7060 Power Supply External Dimensions

The figure below illustrates external Power Supply dimensions (in millimeters):

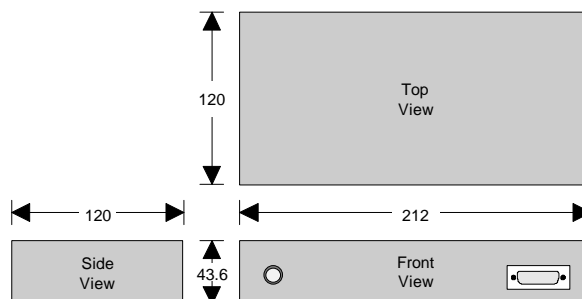

BKDS-7060 External Power Supply Dimensions

BKDS-7060 Power Supply Specifications


The following table lists BKDS-7060 Power Supply specifications:

BKDS-7060 Power Supply Specifications

Parameter		Specification
Dimensions	mm: inches:	212 (w) x 43.6 (h) x 120 (d) 8.35 (w) x 1.72 (h) x 4.72 (d)
Weight (approximate)		1.2 kg 2 lb. 11 oz.
Terminal Connector (front panel)		9-pin D-sub connector (RS-232C) Female
Control Panel Connector (rear panel)		15-pin D-sub connector (RS-232C) Female
Control Out 1 Connector (rear panel)		9-pin D-sub connector (RS-422A) Female
Control Out 2 Connector (rear panel)		9-pin D-sub connector (RS-422A) Female
Operating environment		+5°C to +40°C
Power requirements		100 to 240 V AC \pm 10%, 50/60 Hz
Current consumption		0.4 A (max.)

BKDS-7060 Power Supply Rear View

The figure below illustrates a rear view of the BKDS-7060 Power Supply.

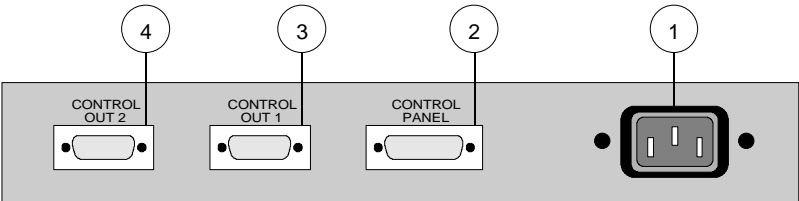

BKDS-7060 Power Supply Rear View

Rear Power Supply components are listed below:


1. AC Input
2. Control Panel Connector (D-sub 15-pin female) RS-232C
3. Control Out 1 Connector (D-sub 9-pin female) RS-422A
4. Control Out 2 Connector (D-sub 9-pin female) RS-422A

BKDS-7060 Power Supply Connectors

The following BKDS-7060 Power Supply connectors are listed in this section:

- Terminal Connector
- Control Panel Connector
- Control Out 1, 2 Connector


The table below lists specifications for the BKDS-7060 Power Supply RS-232C **Terminal** connector:



BKDS-7060 Power Supply RS-232C Terminal Connector Specifications (Female)

Pin #	Signal	Function
1	DCD	Data carrier detect
2	RXD	Received data
3	TXD	Transmitted data
4	DTR	Data terminal ready
5	SG	Signal ground
6	DSR	Data set ready data
7	RTS	Request to send data
8	CTS	Clear to send data
9	—	—


The table below lists specifications for the BKDS-7060 Power Supply RS-232C **Control Panel** connector:



BKDS-7060 Power Supply RS-232C Control Panel Connector Specifications (Female)

Pin #	Signal	Function
1	RX0	Received data 0
2	RX1	Received data 1
3	RX2	Received data 2
4	VD	Transmitted VD signal
5	—	—
6	—	—
7	GND	Ground
8	+ 12V	Power supply
9	TX0	Transmitted data 0
10	TX1	Transmitted data 1
11	TX2	Transmitted data 2
12	GND	Ground
13	—	—
14	GND	Ground
15	+ 12V	Power supply

The table below lists specifications for the BKDS-7060 Power Supply RS-422A **Control Out 1, 2** connectors:



BKDS-7060 Power Supply RS-422A Control Out 1, 2 Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	RX-A	Received data (–)
3	TX-B	Transmitted data (+)
4	GND	Common ground
5	VD-B	Received VD signal (+)
6	GND	Common ground
7	RX-B	Received data (+)
8	TX-A	Transmitted data (–)
9	VD-A	Received VD signal (–)


BKDS-8060 — Remote Panel Interface

This section includes the following areas:

- BKDS-8060 Front View
- BKDS-8060 Rear View
- BKDS-8060 External Dimensions
- BKDS-8060 Specifications
- BKDS-8060 Connectors

BKDS-8060 Front View

The figure below illustrates a front view of the BKDS-8060 Remote Panel Interface.

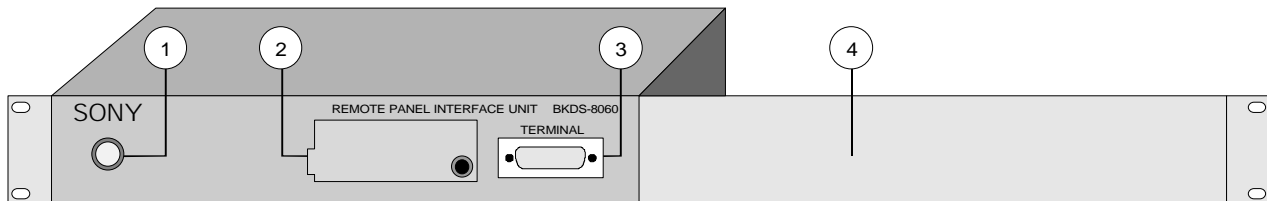


BKDS-8060 Remote Panel Interface Front View

Front BKDS-8060 components are listed below:

1. Power Indicator.
2. Switch Cover (for access to DIP switches).
3. Terminal Connector (D-sub 9-pin female) RS-232C.
4. Blank Panel for rack mounting. Note that two BKDS-8060 units can be rack-mounted together, side-by-side.

BKDS-8060 Rear View

The figure below illustrates a rear view of the BKDS-8060 Remote Panel Interface.

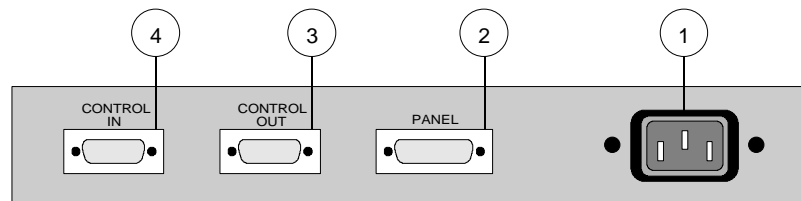


BKDS-8060 Remote Panel Interface Rear View

Rear BKDS-8060 components are listed below:

1. AC Input
2. Panel Connector (D-sub 15-pin female)
3. Control Out Connector (D-sub 9-pin female)
4. Control In Connector (D-sub 9-pin female)

BKDS-8060 External Dimensions

The figure below illustrates external Remote Panel dimensions (in millimeters):

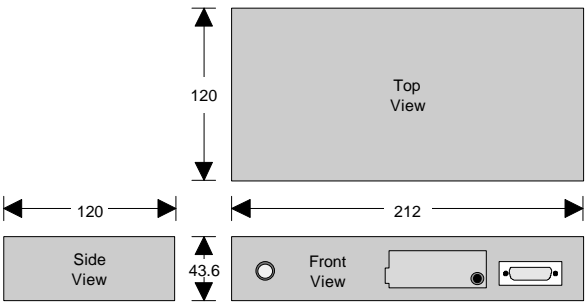

BKDS-8060 External Remote Panel Interface Dimensions

BKDS-8060 Specifications

The following table lists BKDS-8060 Remote Panel Interface specifications:

BKDS-8060 Remote Panel Interface Specifications


Parameter		Specification
Dimensions	mm: inches:	212 (w) x 43.6 (h) x 120 (d) 8.35 (w) x 1.72 (h) x 4.72 (d)
Weight (approximate)		1.2 kg 2 lb. 11 oz.
Terminal Connector (front panel)		9-pin D-sub connector (RS-232C) Female
Panel Connector (rear panel)		15-pin D-sub connector (Control) Female
Control In Connector (rear panel)		9-pin D-sub connector (RS-422A) Female
Control Out Connector (rear panel)		9-pin D-sub connector (RS-422A) Female
Operating temperature		+5°C to +40°C
Storage temperature		-20°C to +70°C
Humidity		10% to 90%
Power requirements		100 to 240 V AC \pm 10%, 50/60 Hz
Current consumption		5 W (max.)

BKDS-8060 Connectors

The following BKDS-8060 Remote Panel Interface connectors are listed:

- Terminal Connector
- Control In Connector
- Panel Connector
- Control Out Connector


The table below lists specifications for the BKDS-8060 RS-232C **Terminal** connector:



BKDS-8060 Remote Panel Interface Terminal Connector Specifications (Female)

Pin #	Signal	Function
1	NC	No connection
2	TXD	Transmit data
3	RXD	Request to send signal
4	NC	No connection
5	GND	Signal ground
6	NC	No connection
7	CTS	Clear to send signal
8	RTS	Receive data
9	NC	No connection


The table below lists specifications for the BKDS-8060 **Panel** control connector:



BKDS-8060 Remote Panel Interface Panel Connector Specifications (Female)

Pin #	Signal	Function
1	L; SCLK	Clock (negative logic)
2	GND	Signal ground
3	L; LOAD	Data latch signal (negative logic)
4	GND	Signal ground
5	L; RST	Reset signal (negative logic)
6	GND	Signal ground
7	+5 V	+5 V Power supply
8	+5 V	+5 V Power supply
9	L; LED	LED data (negative logic)
10	GND	Signal ground
11	L; SW	SW data (negative logic)
12	GND	Signal ground
13	GND	Signal ground
14	+5 V (LED)	+5 V Power supply (for LED lighting)
15	+5 V (LED)	+5 V Power supply (for LED lighting)


The table below lists specifications for the BKDS-8060 RS-422A **Control In** connector (controlled device):



BKDS-8060 Remote Panel Interface Control In Connector Specifications (Female)

Pin #	Signal	Function
1	GND	Signal ground
2	TX0 (-)	Transmit data (-) to switcher
3	RX0 (+)	Receive data (+) from switcher
4	GND	Signal ground
5	NC	No connection
6	GND	Signal ground
7	TX0 (+)	Transmit data (+) to switcher
8	RX0 (-)	Receive data (-) from switcher
9	GND	Signal ground

The table below lists specifications for the BKDS-8060 RS-422A **Control Out** connector (controlling device):



BKDS-8060 Remote Panel Interface Control Out Connector Specifications (Female)

Pin #	Signal	Function
1	GND	Signal ground
2	RX1 (-)	Receive data (-) from cascade connecting unit
3	TX1 (+)	Transmit data (+) to cascade connecting unit
4	GND	Signal ground
5	NC	No connection
6	GND	Signal ground
7	RX1 (+)	Receive data (+) from cascade connecting unit
8	TX1 (-)	Transmit data (-) to cascade connecting unit
9	GND	Signal ground


BKDS-8061 — Shot Box Control Unit

This section includes the following areas:

- BKDS-8061 Front View
- BKDS-8061 Rear View
- BKDS-8061 External Dimensions
- BKDS-8061 Specifications
- BKDS-8061 Connectors

BKDS-8061 Front View

The figure below illustrates a front view of the BKDS-8061 Shot Box Control Unit.

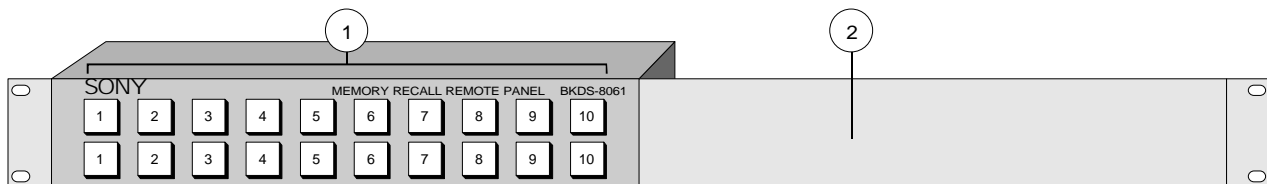

BKDS-8061 Shot Box Control Unit Front View

Front BKDS-8061 components are listed below:

1. Memory recall buttons
2. Blank Panel for rack mounting. Note that two BKDS-8061 units can be rack-mounted together, side-by-side.

BKDS-8061 Rear View

The figure below illustrates a rear view of the BKDS-8061 Shot Box Control Unit.




BKDS-8061 Shot Box Control Unit Rear View

Rear BKDS-8061 components are listed below:

1. Cascade In Connector (D-sub 15-pin male)
2. Cascade Out Connector (D-sub 15-pin female)

BKDS-8061 External Dimensions

The figure below shows external Shot Box Control Unit dimensions (in millimeters):

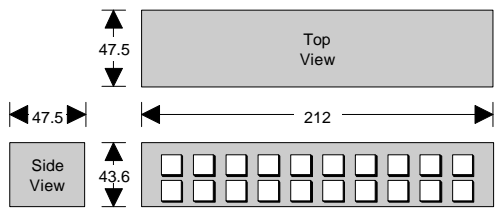

BKDS-8061 External Shot Box Control Unit Dimensions

BKDS-8061 Specifications

The following table lists BKDS-8061 Shot Box Control Unit specifications:

BKDS-8061 Shot Box Control Unit Specifications


Parameter		Specification
Dimensions	mm: inches:	212 (w) x 43.6 (h) x 47.5 (d) 8.35 (w) x 1.72 (h) x 1.87 (d)
Weight (approximate)		0.6 kg 1 lb. 5 oz.
Cascade In Connector		15-pin D-sub connector (Control) Male
Cascade Out Connector		15-pin D-sub connector (Control) Female
Operating temperature		+5°C to +40°C
Storage temperature		-20°C to +70°C
Humidity		10% to 90%
Power requirements		Supplied by BKDS-8060

BKDS-8061 Connectors


The following BKDS-8061 Shot Box Control Unit connectors are listed:

- Cascade In Connector
- Cascade Out Connector

The table below lists specifications for the BKDS-8061 Shot Box **Cascade In** and **Cascade Out** control connectors. Pinouts are identical.



Cascade In — Male



Cascade Out — Female

BKDS-8061 Shot Box Control Unit Cascade In, Out Connector Specifications

Pin #	Signal	Function
1	L; SCLK	Clock (negative logic)
2	GND	Signal ground
3	L; LOAD	Data latch signal (negative logic)
4	GND	Signal ground
5	L; RST	Reset signal (negative logic)
6	GND	Signal ground
7	+5 V	+5 V Power supply
8	+5 V	+5 V Power supply
9	L; LED	LED data (negative logic)
10	GND	Signal ground
11	L; SW	SW data (negative logic)
12	GND	Signal ground
13	GND	Signal ground
14	+5 V (LED)	+5 V Power supply (for LED lighting)
15	+5 V (LED)	+5 V Power supply (for LED lighting)


BKDS-8062 — Auxiliary Control Panel

This section includes the following areas:

- BKDS-8062 Front View
- BKDS-8062 Rear View
- BKDS-8062 External Dimensions
- BKDS-8062 Specifications
- BKDS-8062 Connectors

BKDS-8062 Front View

The figure below illustrates a front view of the BKDS-8062 Auxiliary Control Unit.

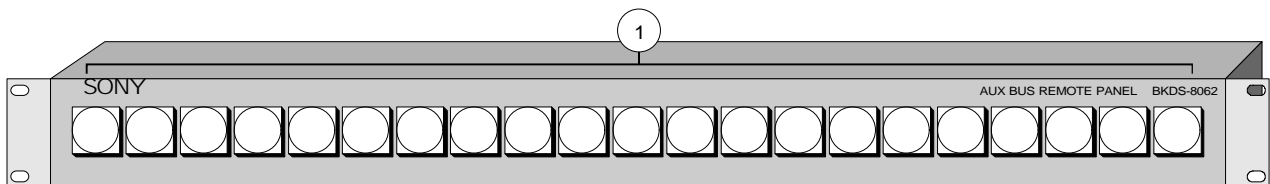


BKDS-8062 Auxiliary Control Unit Front View

Front BKDS-8062 components are listed below:

1. Auxiliary Bus Crosspoints

BKDS-8062 Rear View

The figure below illustrates a rear view of the BKDS-8062 Auxiliary Control Unit.

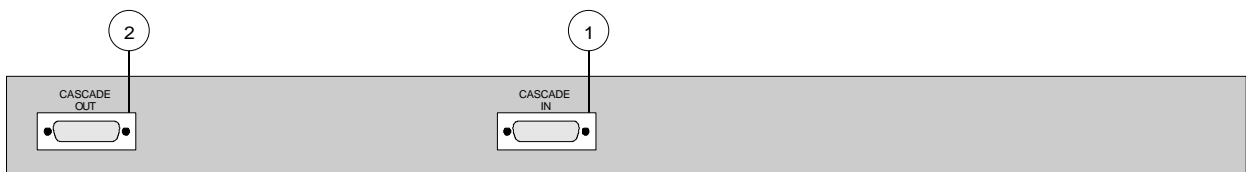


BKDS-8062 Auxiliary Control Unit Rear View

Rear BKDS-8062 components are listed below:

1. Cascade In Connector (D-sub 15-pin male)
2. Cascade Out Connector (D-sub 15-pin female)

BKDS-8062 External Dimensions

The figure below shows external Auxiliary Control Unit dimensions (in millimeters):

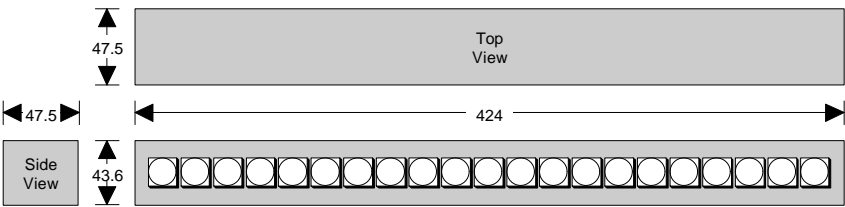

BKDS-8062 External Auxiliary Control Unit Dimensions

BKDS-8062 Specifications

The following table lists BKDS-8062 Auxiliary Control Unit specifications:

BKDS-8062 Auxiliary Control Unit Specifications


Parameter		Specification
Dimensions	mm: inches:	424 (w) x 43.6 (h) x 47.5 (d) 16.69 (w) x 1.72 (h) x 1.87 (d)
Weight (approximate)		1.0 kg 2 lb. 3 oz.
Cascade In Connector		15-pin D-sub connector (Control) Male
Cascade Out Connector		15-pin D-sub connector (Control) Female
Operating temperature		+5°C to +40°C
Storage temperature		-20°C to +70°C
Humidity		10% to 90%
Power requirements		Supplied by BKDS-8060

BKDS-8062 Connectors


The following BKDS-8062 Auxiliary Control Unit connectors are listed:

- Cascade In Connector
- Cascade Out Connector

The table below lists specifications for the BKDS-8062 Auxiliary Control Unit **Cascade In** and **Cascade Out** control connectors. Pinouts are identical.



Cascade In — Male



Cascade Out — Female

BKDS-8062 Auxiliary Control Unit Cascade In, Out Connector Specifications

Pin #	Signal	Function
1	L; SCLK	Clock (negative logic)
2	GND	Signal ground
3	L; LOAD	Data latch signal (negative logic)
4	GND	Signal ground
5	L; RST	Reset signal (negative logic)
6	GND	Signal ground
7	+5 V	+5 V Power supply
8	+5 V	+5 V Power supply
9	L; LED	LED data (negative logic)
10	GND	Signal ground
11	L; SW	SW data (negative logic)
12	GND	Signal ground
13	GND	Signal ground
14	+5 V (LED)	+5 V Power supply (for LED lighting)
15	+5 V (LED)	+5 V Power supply (for LED lighting)


DVS-7200 Chassis

This section includes the following areas:

- Chassis Front View
- Chassis Rear View
- Chassis External Dimensions
- Chassis Specifications
- System Timing Requirements
- Chassis Connectors

Chassis Front View

The figure below illustrates a front view of the DVS-7200 chassis.

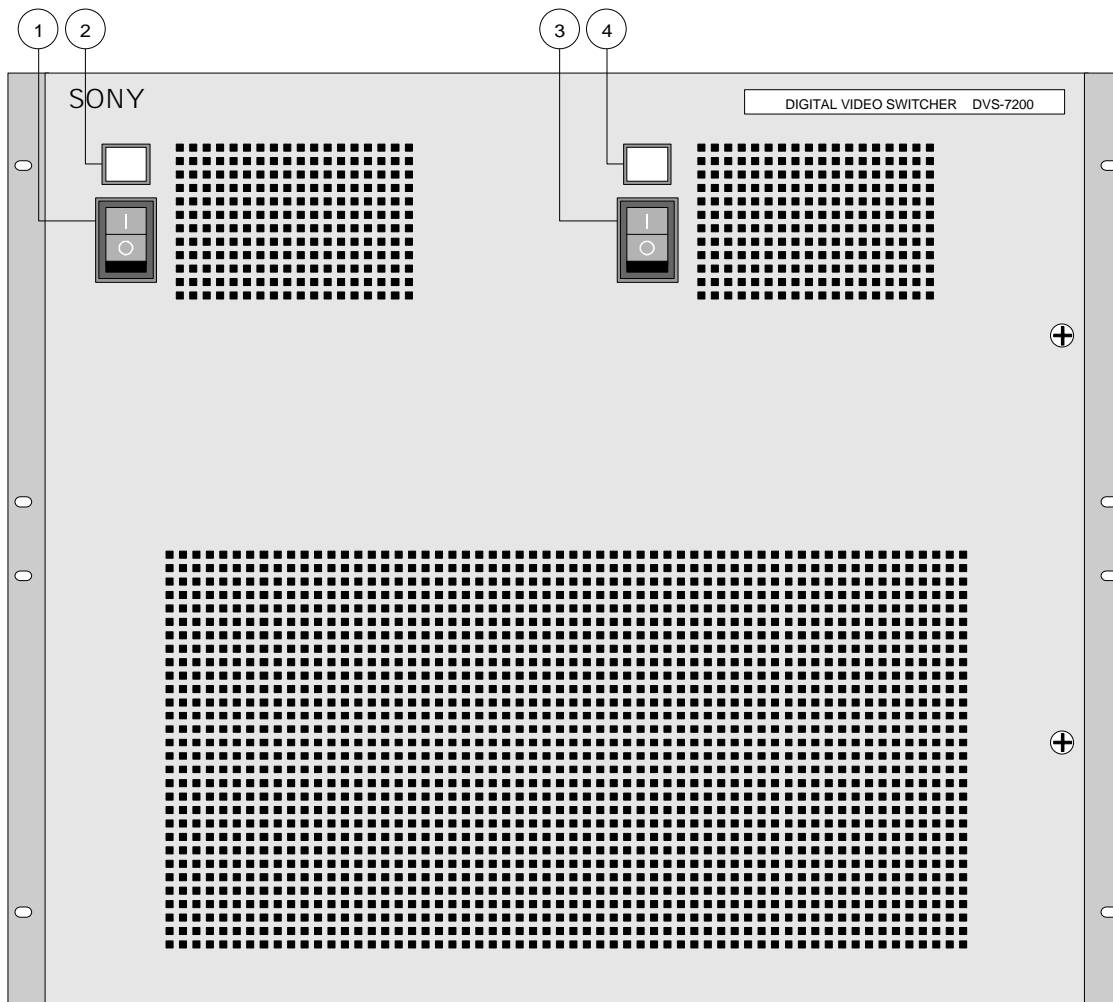


DVS-7200 Chassis — Front View

Front chassis components are listed below:

- | | |
|--------------------------------------|--|
| 1. Power Switch (Supply 1) | 3. Power Switch (Supply 2, Backup) |
| 2. Power Indicator (Supply 1) | 4. Power Indicator (Supply 2, Backup) |

Chassis Rear View

The figure below illustrates a rear view of the DVS-7200 chassis.

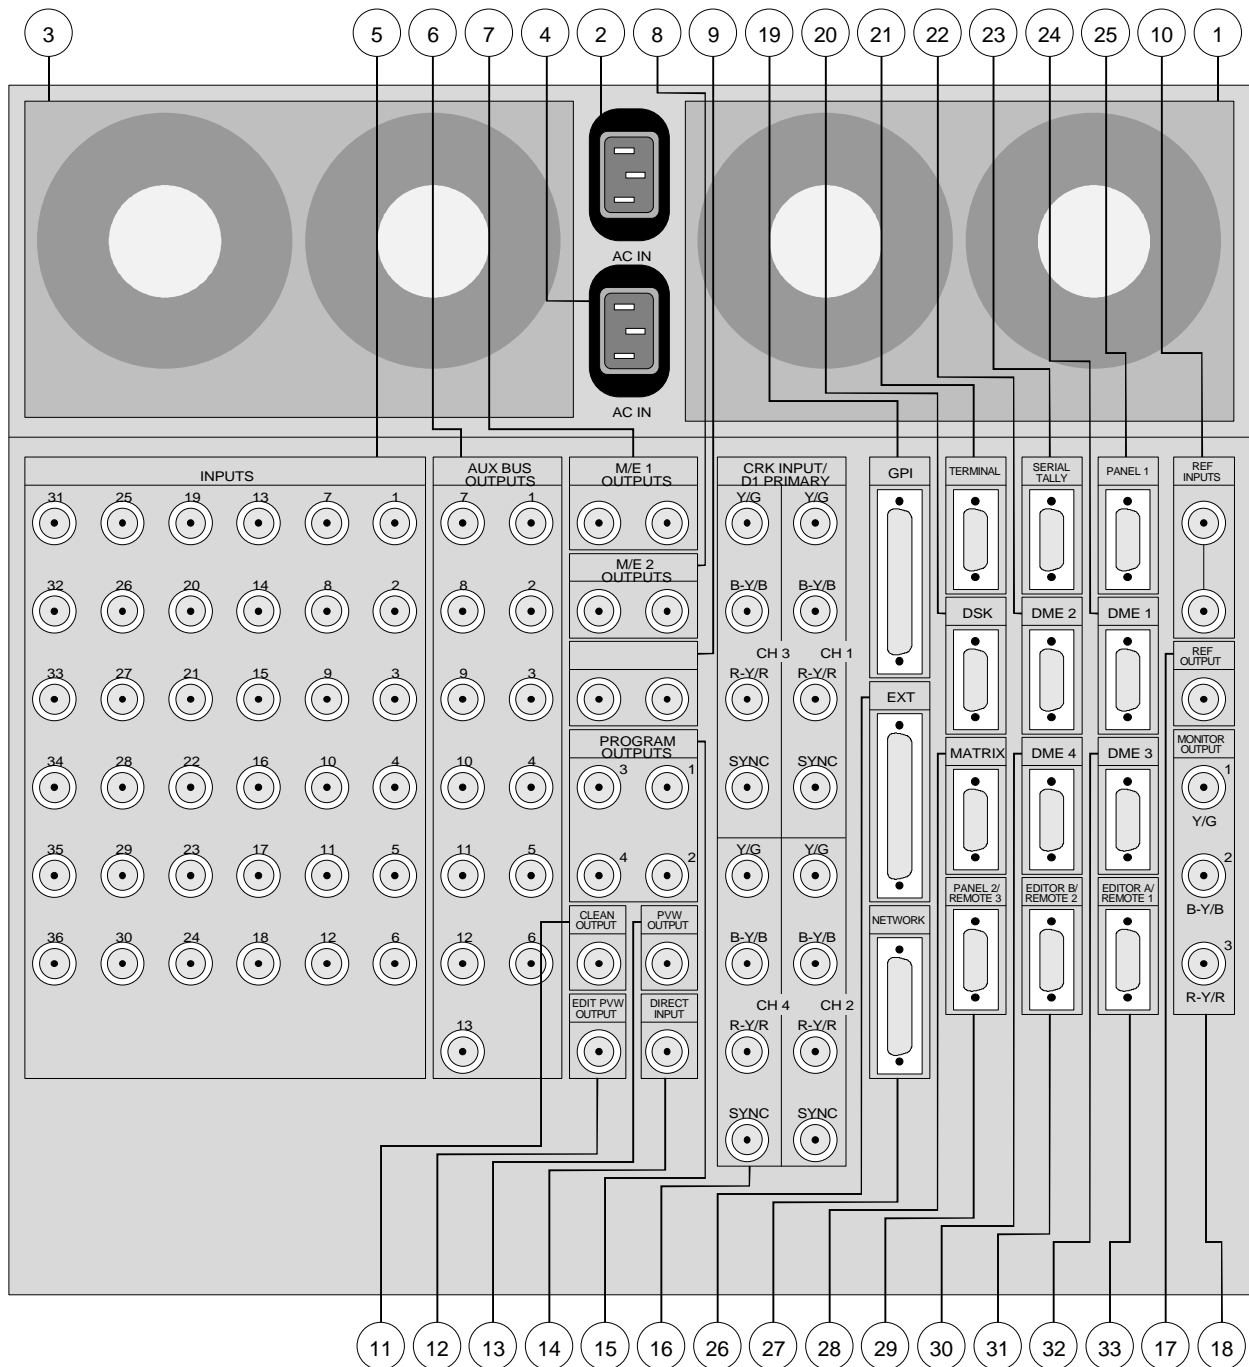

DVS-7200 Chassis — Rear View


Rear chassis components are listed below:

1. **Cooling Fans** (Supply 1)
2. **AC In** (Supply 1)

3. **Cooling Fans** (Supply 2, Backup)
4. **AC In** (Supply 2, Backup)
5. **Primary Inputs** (1 - 36)
6. **Auxiliary Bus Outputs** (1 - 13)
7. **M/E 1 Outputs** (2, identical)
8. **M/E 2 Outputs** (2, identical)
9. Not active
10. **Reference Video Input, Reference Loop**
11. **Clean Output**
12. **Edit Preview / Auxiliary Bus 14 Output**
13. **Preview Output**
14. **Direct Input**
15. **Program Outputs** (4, identical)
16. **Chroma Key Inputs** (1 - 4), **D1 Primary Inputs**
17. **Reference Video Output**
18. **Monitor Output.** Not Active.
19. **GPI** (25-pin D-sub, female)
20. **DSK** (9-pin D-sub, female) RS-422A
21. **Terminal** (9-pin D-sub, female) RS-232C
22. **DME 2** (9-pin D-sub, female) RS-422A
23. **Serial Tally** (9-pin D-sub, female) RS-422A
24. **DME 1** (9-pin D-sub, female) RS-422A
25. **Panel 1** (9-pin D-sub, female) RS-422A
26. **EXT** (25-pin D-sub, female). Not Active.
27. **Network** (15-pin D-sub, female). Not Active.
28. **Matrix** (9-pin D-sub, female) RS-422A
29. **Panel 2 / Remote 3** (9-pin D-sub, female) RS-422A
30. **DME 4** (9-pin D-sub, female) RS-422A
31. **Editor B / Remote 2** (9-pin D-sub, female) RS-422A
32. **DME 3** (9-pin D-sub, female) RS-422A
33. **Editor A / Remote 1** (9-pin D-sub, female) RS-422A

Chassis External Dimensions

The figure below illustrates external chassis dimensions (in millimeters):

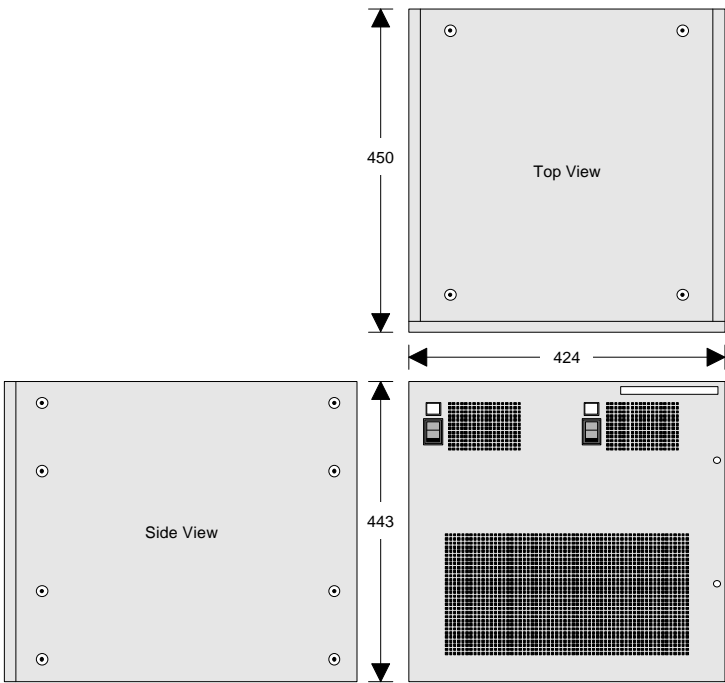

DVS-7250 External Chassis Dimensions

Chassis Specifications

The following table lists chassis specifications:

DVS-7200 Chassis Specifications

Parameter		Specification
Dimensions	mm: inches:	424 (w) x 443 (h) x 450 (d) 16.69 (w) x 17.44 (h) x 17.72 (d)
Weight		56 kg 123 lbs. 7 oz.
Operating temperature		+5°C to +40°C
Power requirement		AC 100 - 240V ± 10%, 50/60 Hz
Power consumption		7 to 3.5A
Connectors		
Primary Inputs	Signal level: Return loss:	Serial digital video, BNC (x36), 75 ohms. Conforms to the SMPTE specification PN-259M. 800 mV ±10% 15 dB min. (5 - 270 MHz)
Chroma Key Inputs	Signal type: Signal level:	Analog component video signal input, BNC (x16) Y/B-Y/R-Y 9 (Betacam, SMPTE) / sync or G/B/R/sync 0 ±3 dB

DVS-7200 Chassis Specifications (continued)


Parameter	Specification
Connectors (continued)	
Direct Input With BKDS-7162 for EDIT PVW output Signal level: With BKDS-7161 for EDIT PVW output Signal level:	Configurable, analog composite or digital Serial digital video signal output, BNC (x1), 75 ohms 800 mV \pm 10% Analog composite video signal output, BNC (x1), 75 ohms 0 \pm 3 dB
Auxiliary Bus Outputs With BKDS-7162 Signal level: Transmission rate: With BKDS-7161 Signal level:	Configurable, analog composite or digital Serial digital video signal output, BNC (x13), 75 ohms 800 mV \pm 10% 270 Mbps (component)/143 Mbps (composite) Analog composite video signal output, BNC (x13), 75 ohms 1 Vp-p \pm 5%
Program Outputs With BKDS-7162 Signal level: Transmission rate: With BKDS-7161 Signal level:	Configurable, analog composite or digital Serial digital video signal output, BNC (x4), 75 ohms 800 mV \pm 10% 270 Mbps (component)/143 Mbps (composite) Analog composite video signal output, BNC (x4), 75 ohms 1 Vp-p \pm 5%
M/E 1, M/E 2 Outputs With BKDS-7162 Signal level: Transmission rate: With BKDS-7161 Signal level:	Configurable, analog composite or digital Serial digital video signal output, BNC (x2), 75 ohms 800 mV \pm 10% 270 Mbps (component)/143 Mbps (composite) Analog composite video signal output, BNC (x2), 75 ohms 1 Vp-p \pm 5%
Reference Video Input, Loop Signal level: SCH phase:	Analog black burst or analog sync signal input, BNC (x2), 75 ohms, with loop-through. 0 \pm 3 dB 0° \pm 30°
Reference Video Output Signal level - Sync: Burst: SCH phase: Signal level:	Analog black burst signal output, BNC (x1), 75 ohms. 285 mVp-p \pm 14 mV 285 mVp-p \pm 14 mV 0° \pm 30° Analog sync signal output, BNC (x1), 75 ohms. 2 V \pm 0.5 V
Clean Output With BKDS-7162 Signal level: Transmission rate: With BKDS-7161 Signal level:	Configurable, analog composite or digital Serial digital video signal output, BNC (x1), 75 ohms 800 mV \pm 10% 270 Mbps (component)/143 Mbps (composite) Analog composite video signal output, BNC (x1), 75 ohms 1 Vp-p \pm 5%
Edit Preview Output With BKDS-7162 Signal level: Transmission rate: With BKDS-7161 Signal level:	Configurable, analog composite or digital Serial digital video signal output, BNC (x1), 75 ohms 800 mV \pm 10% 270 Mbps (component)/143 Mbps (composite) Analog composite video signal output, BNC (x1), 75 ohms 1 Vp-p \pm 5%
Preview Output With BKDS-7162 Signal level: Transmission rate: With BKDS-7161 Signal level:	Configurable, analog composite or digital Serial digital video signal output, BNC (x1), 75 ohms 800 mV \pm 10% 270 Mbps (component)/143 Mbps (composite) Analog composite video signal output, BNC (x1), 75 ohms 1 Vp-p \pm 5%
GPI	25-pin D-sub, female
DSK	9-pin D-sub, female, RS-422A

DVS-7200 Chassis Specifications (continued)

Parameter		Specification
Connectors (continued)		
Matrix		9-pin D-sub, female, RS-422A
Terminal		9-pin D-sub, female, RS-232C
Serial Tally		9-pin D-sub, female, RS-422A
DME 1		9-pin D-sub, female, RS-422A
DME 2		9-pin D-sub, female, RS-422A
DME 3		9-pin D-sub, female, RS-422A
DME 4		9-pin D-sub, female, RS-422A
Panel 1		9-pin D-sub, female, RS-422A
Panel 2 / Remote 3		9-pin D-sub, female, RS-422A
Editor A / Remote 1		9-pin D-sub, female, RS-422A
Editor B / Remote 2		9-pin D-sub, female, RS-422A
Adjustable Parameters		
Key Edge	Left / Right Key Edges:	± 2 clock pulses
V-Proc	Video Gain:	-200 to +200 IRE (4:2:2 / 4fsc)
	Luminance Gain:	-200 to +200 IRE (4:2:2)
	Chrominance Gain:	-200 to +200 IRE (4:2:2)
	Black Level:	-7.31 to +109.64 IRE (4:2:2)
	Hue:	-42.86 to +140.00 IRE (4fsc)
		-180 degrees to + 180 degrees (4:2:2)
Analog Composite Video Characteristics		
Dynamic Phase		$< 1^\circ$
Dynamic Gain		$< 1.5 \%$
Sampling Frequency		14.32 MHz
Frequency Response		$\pm .5$ dB (5 Hz to 5 MHz)
K Factor		$< 1 \%$
SN Ratio		-55 dB minimum
Quantization		10-bit

System Timing Requirements

The chart below shows input and output timing for the DVS-7250.

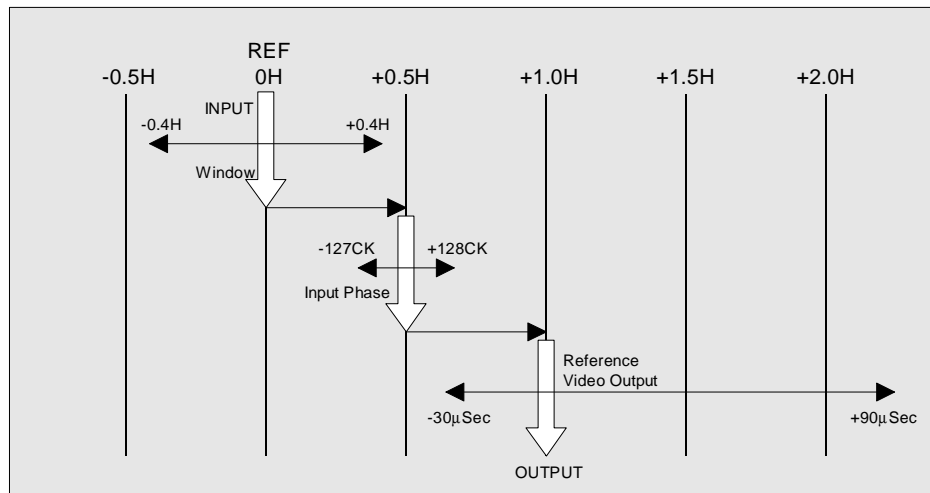

DVS-7250 System Phase Timing Chart

Please note the following important points:

- Values apply to input video, input key, and external input signals.
- Switcher video outputs are delayed by 1H to the reference signal. Note that 1H = one horizontal line. One horizontal line = 63.5 µSec.
- Reference video output phase control is provided in the setup menu within a range of -30 µSec to +90 µSec from input video reference.
- The input video signals can be automatically corrected for a range of $\pm 0.4H$ relative to input video reference.
- Fine adjustment is possible for independent input channels from -127 clocks to +128 clocks relative to input video reference. Note that one clock = 74 nSec.


Chassis Connectors

The following chassis connectors are listed in this section:

- DSK
- Terminal
- Serial Tally
- Matrix
- DME 1 - 4
- Panel 1
- Panel 2 / Remote 3
- Editor A / Remote 1
- Editor B / Remote 2
- GPI

RS-422A DSK Connector Specifications

The following table lists DVS-7200 Chassis RS-422A **DSK** connector specifications:




RS-422A DSK Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	DSK TX-A	Transmitted data (–)
3	DSK RX-B	Received data (+)
4	GND	Common ground
5	—	—
6	GND	Common ground
7	DSK TX-B	Transmitted data (+)
8	DSK RX-A	Received data (–)
9	FG	Frame Ground

RS-232C Terminal Connector Specifications

The following table lists DVS-7200 Chassis RS-232C **Terminal** connector specifications:




RS-232C Terminal Connector Specifications (Female)

Pin #	Signal	Function
1	DCD	Data Carrier detect *
2	RXD	Received data
3	TXD	Transmitted data
4	DTR	Data terminal ready *
5	SG	Signal ground
6	DSR	Data set ready *
7	RTS	Request to send
8	CTS	Clear to send
9	—	—

Note: * Pins 1, 4, and 6 are shorted together on the **CN-1146** board.

RS-422A Serial Tally Connector Specifications

The following table lists DVS-7200 Chassis RS-422A **Serial Tally** connector specifications:




RS-422A Serial Tally Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame ground
2	Serial Tally RX-A	Received data (–)
3	Serial Tally TX-B	Transmitted data (+)
4	GND	Common ground
5	—	—
6	GND	Common ground
7	Serial Tally RX-B	Received data (+)
8	Serial Tally TX-A	Transmitted data (–)
9	FG	Frame ground

RS-422A Matrix Connector Specifications

The following table lists DVS-7200 Chassis RS-422A **Matrix** connector specifications:




RS-422A Matrix Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	MTX TX-A	Received data (–)
3	MTX RX-B	Transmitted data (+)
4	GND	Common ground
5	—	—
6	GND	Common ground
7	MTX TX-B	Received data (+)
8	MTX RX-A	Transmitted data (–)
9	FG	Frame Ground

RS-422A DME Connector Specifications

The following table lists specifications for the DVS-7200 Chassis RS-422A **DME** connectors 1 - 4:




RS-422A DME Connectors (1 - 4) Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	DME 1 - 4 TX-A	Transmitted data (–)
3	DME 1 - 4 RX-B	Received data (+)
4	GND	Common ground
5	—	—
6	GND	Common ground
7	DME 1 - 4 TX-B	Transmitted data (+)
8	DME 1 - 4 RX-A	Received data (–)
9	FG	Frame Ground

RS-422A Panel 1 Connector Specifications

The following table lists specifications for the DVS-7200 Chassis RS-422A **Panel 1** connector:




RS-422A Panel 1 Connector Specifications (Female)

Pin #	Signal	Function
1	GND	Frame Ground
2	CON TX-A	Transmitted data (–)
3	CON RX-B	Received data (+)
4	GND	Common ground
5	VD-B	Transmitted VD signal (+)
6	GND	Common ground
7	CON TX-B	Transmitted data (+)
8	CON RX-A	Received data (–)
9	VD-A	Transmitted VD signal (–)

RS-422A Panel 2/Remote 3 Connector Specifications

The following table lists DVS-7200 Chassis RS-422A **Panel 2/Remote 3** connector specifications:




RS-422A Panel 2/Remote 3 Connector Specifications (Female)

Pin #	Signal	Function
1	GND	Frame Ground
2	CON TX-A	Transmitted data (–)
3	CON RX-B	Received data (+)
4	GND	Common ground
5	VD-B	Transmitted VD signal (+)
6	GND	Common ground
7	CON TX-B	Transmitted data (+)
8	CON RX-A	Received data (–)
9	VD-A	Transmitted VD signal (–)

RS-422A Editor A/Remote 1 Connector Specifications

The table below lists specifications for the DVS-7200 Chassis RS-422A **Editor A/Remote 1** connector:




RS-422A Editor A/Remote 1 Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	Edit A TX-A	Transmitted data (–)
3	Edit A RX-B	Received data (+)
4	GND	Common ground
5	—	—
6	GND	Common ground
7	Edit A TX-B	Transmitted data (+)
8	Edit A RX-A	Received data (–)
9	FG	Frame Ground

RS-422A Editor B/Remote 2 Connector Specifications

The table below lists specifications for the DVS-7200 Chassis RS-422A **Editor B/Remote 2** connector:




RS-422A Editor B/Remote 2 Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	Edit B TX-A	Transmitted data (–)
3	Edit B RX-B	Received data (+)
4	GND	Common ground
5	—	—
6	GND	Common ground
7	Edit B TX-B	Transmitted data (+)
8	Edit B RX-A	Received data (–)
9	FG	Frame Ground

GPI Connector Specifications


The following table lists DVS-7200 Chassis **GPI** connector specifications.



GPI Connector Specifications (Female)

Pin #	Signal	Function
1	GND	Ground
2	GND	Ground
3	GPI In 2	General purpose relay input
4	GPI In 4	
5	GPI In 6	
6	GPI In 8	
7	GPI Out 1B	General purpose relay output (B) *
8	GPI Out 2B	
9	GPI Out 3B	
10	GPI Out 4B	
11	GPI Out 6	General purpose open collector output **
12	GPI Out 8	
13	GPI Out Com	Ground for open collector output
14	GND	Ground
15	GPI In 1	General purpose input
16	GPI In 3	
17	GPI In 5	
18	GPI In 7	
19	GPI Out 1A	General purpose relay output (A) *
20	GPI Out 2A	
21	GPI Out 3A	
22	GPI Out 4A	
23	GPI Out 5	General purpose open collector output **
24	GPI Out 7	
25	GPI Out Com	Ground for open collector output

Note: A and B of the same number constitute a pair of relay contacts.

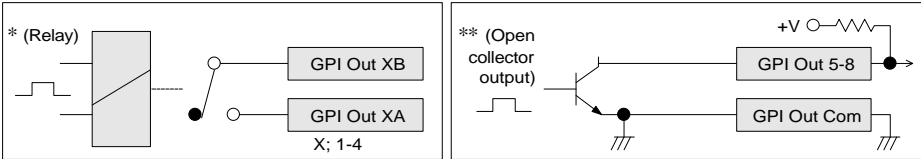


BKDS-7700 Chassis

This section includes the following areas:

- BKDS-7700 Chassis Front View
- BKDS-7700 Chassis Rear View
- BKDS-7700 Chassis External Dimensions
- BKDS-7700 Chassis Specifications
- BKDS-7700 Chassis Connectors

BKDS-7700 Chassis Front View

The figure below illustrates a front view of the BKDS-7700 chassis.

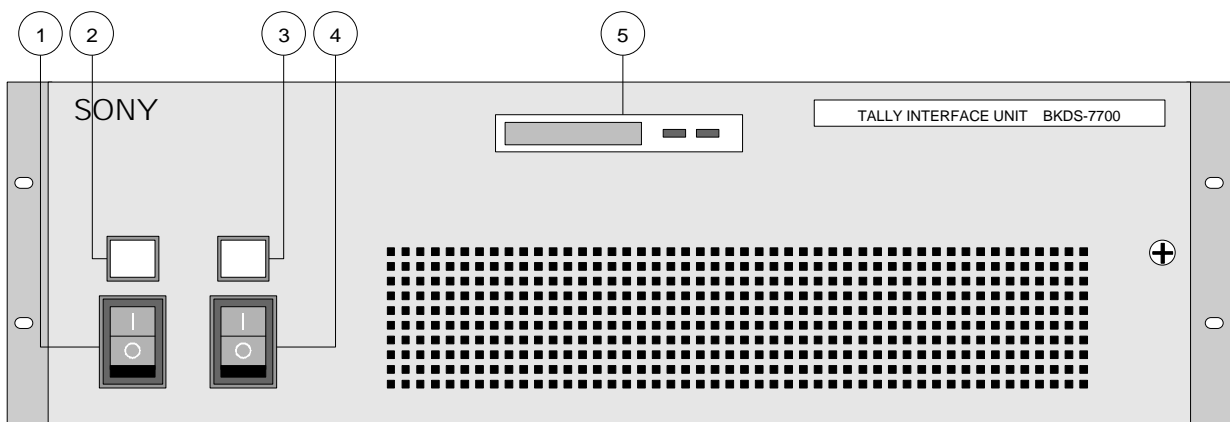


BKDS-7700 Chassis — Front View

Front chassis components are listed below:

1. **Power Switch** (Supply 1)
2. **Power Indicator** (Supply 1)
3. **Power Switch** (Supply 2, Backup)
4. **Power Indicator** (Supply 2, Backup)
5. **Operations Status and Program Selector Button**

BKDS-7700 Chassis Rear View

The figure below illustrates a rear view of the BKDS-7700 chassis.

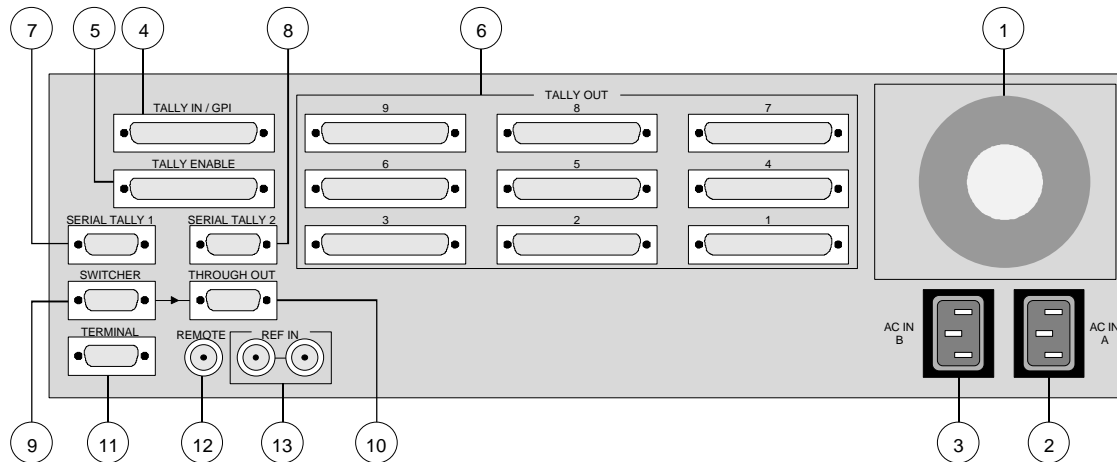


BKDS-7700 Chassis — Rear View

Rear chassis components are listed below:

1. **Cooling Fans**
2. **AC In** (Supply 1)
3. **AC In** (Supply 2, Backup)
4. **Tally In / GPI** (50-pin D-sub, female)
5. **Tally Enable** (50-pin D-sub, female)
6. **Tally Out (1 - 9)** 50-pin D-sub, female
7. **Serial Tally 1** (9-pin D-sub, female) RS-422A
8. **Serial Tally 2** (9-pin D-sub, female) RS-422A
9. **Switcher** (9-pin D-sub, female) RS-422A
10. **Through Out** (9-pin D-sub, female) RS-422A
11. **Terminal** (9-pin D-sub, female) RS-232C
12. **Remote** (BNC)
13. **Reference In, Loop** (BNC)

BKDS-7700 Chassis External Dimensions

The figure below illustrates external BKDS-7700 chassis dimensions (in millimeters):

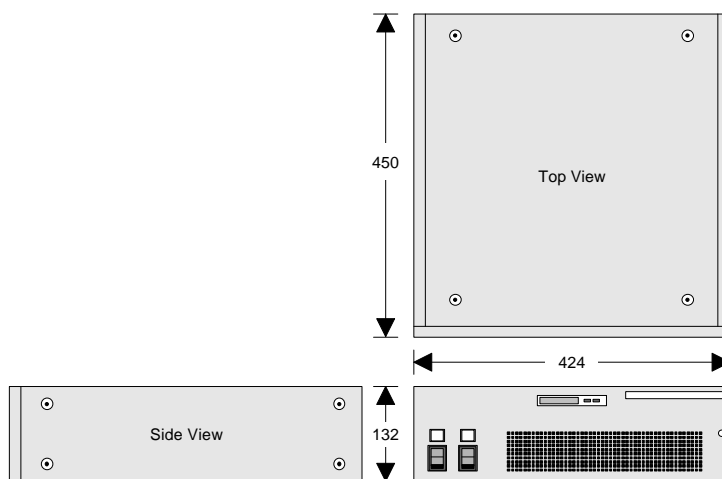

BKDS-7700 External Chassis Dimensions

BKDS-7700 Chassis Specifications

The following table lists BKDS-7700 chassis specifications:

BKDS-7700 Chassis Specifications

Parameter		Specification
Dimensions	mm: inches:	424 (w) x 132 (h) x 450 (d) 16.69 (w) x 5.20 (h) x 17.72 (d)
Weight		13 kg (28 lbs. 11 oz.) with all option boards installed
Operating temperature		+5°C to +40°C
Power requirement		AC 100 - 240V \pm 10%, 50/60 Hz
Power consumption		1.0 Amps (maximum) with all option boards installed
Connectors		
Reference In		BNC
Remote		BNC
Tally In / GPI		50-pin D-sub, female, RS-422A
Tally Enable		50-pin D-sub, female, RS-422A
Tally Out (1 - 9)		50-pin D-sub, female, RS-422A
Terminal		9-pin D-sub, female, RS-232C
Switcher		9-pin D-sub, female, RS-422A
Through Out		9-pin D-sub, female, RS-422A
Serial Tally 1		9-pin D-sub, female, RS-422A
Serial Tally 2		9-pin D-sub, female, RS-422A


BKDS-7700 Chassis Connectors

The following BKDS-7700 chassis connectors are listed in this section:

- Terminal
- Switcher
- Through Out
- Serial Tally 1, 2
- Tally In / GPI
- Tally Enable
- Tally Out 1 - 9

BKDS-7700 Terminal Connector Specifications

The following table lists BKDS-7700 RS-232C **Terminal** connector specifications:




RS-232C Terminal Connector Specifications (Female)

Pin #	Signal	Function
1	DCD	Data carrier detect
2	RXD	Receive data
3	TXD	Transmitted data
4	DTR	Data terminal ready
5	GND	Ground
6	DSR	Data set ready
7	RTS	Request to send
8	CTS	Clear to send
9	—	—

BKDS-7700 Switcher Connector Specifications

The following table lists BKDS-7700 RS-422A **Switcher** connector specifications:




RS-422A Switcher Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	TX-A	Transmitted data (–)
3	RX-B	Received data (+)
4	GND	Common ground
5	VD-B	VD signal (+)
6	GND	Common ground
7	TX-B	Transmitted data (+)
8	RX-A	Received data (–)
9	VD-A	VD signal (–)

BKDS-7700 Through Out Connector Specifications

The following table lists BKDS-7700 RS-422A **Through Out** connector specifications:




RS-422A Through Out Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	RX-A	Received data (–)
3	TX-B	Transmitted data (+)
4	GND	Common ground
5	VD-B	Transmitting VD signal (+)
6	GND	Common ground
7	RX-B	Received data (+)
8	TX-A	Transmitted data (–)
9	VD-A	Transmitting VD signal (–)

BKDS-7700 Serial Tally 1, 2 Connector Specifications

The following table lists BKDS-7700 RS-422A **Serial Tally 1, 2** connector specifications:




RS-422A Serial Tally 1, 2 Connector Specifications (Female)

Pin #	Signal	Function
1	FG	Frame Ground
2	RX-A	Received data (–)
3	TX-B	Transmitted data (+)
4	GND	Common ground
5	—	—
6	GND	Common ground
7	RX-B	Received data (+)
8	TX-A	Transmitted data (–)
9	FG	Frame Ground

BKDS-7700 Tally In/GPI Connector Specifications

The following table lists BKDS-7700 RS-422A Tally In/GPI connector specifications:

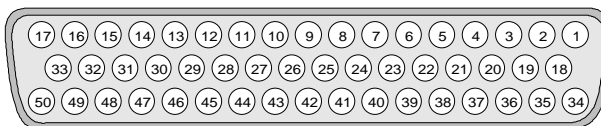


RS-422A Tally In/GPI Connector Specifications (Female)

Pin #	Signal	Function	Pin #	Signal	Function
1	Tally In 1	Parallel Tally Inputs	26	P-In 10	Parallel Inputs
2	Tally In 2		27	P-In 11	
3	Tally In 3		28	P-In 12	
4	Tally In 4		29	P-In 13	
5	Tally In 5		30	P-In 14	
6	Tally In 6		31	P-In 15	
7	Tally In 7		32	P-In 16	
8	Tally In 8		33	P-In 17	
9	Tally In 9		34	P-In 18	
10	Tally In 10		35	P-In 19	
11	Tally In 11		36	P-In 20	
12	Tally In 12		37	P-In 21	
13	Tally In 13		38	P-In 22	
14	Tally In 14		39	P-In 23	
15	Tally In 15		40	P-In 24	
16	Tally In 16		41	P-In 25	
17	P-In 1	Parallel Inputs	42	P-In 26	
18	P-In 2		43	P-In 27	
19	P-In 3		44	P-In 28	
20	P-In 4		45	P-In 29	
21	P-In 5		46	P-In 30	
22	P-In 6		47	P-In 31	
23	P-In 7		48	P-In 32	
24	P-In 8		49	GND	Ground
25	P-In 9		50	GND	Ground

BKDS-7700 Tally Enable Connector Specifications

The following table lists BKDS-7700 RS-422A **Tally Enable** connector specifications:

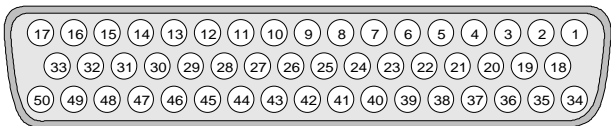


RS-422A Tally Enable Connector Specifications (Female)

Pin #	Signal	Function	Pin #	Signal	Function
1	Enable 1	Tally Enable Inputs	26	Enable 26	Tally Enable Inputs
2	Enable 2		27	Enable 27	
3	Enable 3		28	Enable 28	
4	Enable 4		29	Enable 29	
5	Enable 5		30	Enable 30	
6	Enable 6		31	Enable 31	
7	Enable 7		32	Enable 32	
8	Enable 8		33	Enable 33	
9	Enable 9		34	Enable 34	
10	Enable 10		35	Enable 35	
11	Enable 11		36	Enable 36	
12	Enable 12		37	Enable 37	
13	Enable 13		38	Enable 38	
14	Enable 14		39	Enable 39	
15	Enable 15		40	Enable 40	
16	Enable 16		41	Enable 41	
17	Enable 17		42	Enable 42	
18	Enable 18		43	Enable 43	
19	Enable 19		44	Enable 44	
20	Enable 20		45	Enable 45	
21	Enable 21		46	Enable 46	
22	Enable 22		47	Enable 47	
23	Enable 23		48	Enable 48	
24	Enable 24		49	GND	Ground
25	Enable 25		50	GND	Ground

BKDS-7700 Tally Out 1-9 Connector Specifications

The following table lists BKDS-7700 RS-422A **Tally Out 1-9** connector specifications:

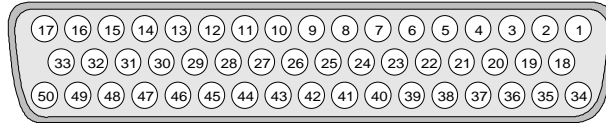

RS-422A Tally Out 1-9 Connector Specifications (Female)


Pin #	Signal Name	Tally Out Connector #									Function
		1	2	3	4	5	6	7	8	9	
1	Tally Out:	1A	25A	49A	73A	97A	121A	145A	169A	193A	Tally Outputs
2	Tally Out:	1B	25B	49B	73B	97B	121B	145B	169B	193B	
3	Tally Out:	4A	28A	52A	76A	100A	124A	148A	172A	196A	
4	Tally Out:	4B	28B	52B	76B	100B	124B	148B	172B	196B	
5	Tally Out:	7A	31A	55A	79A	103A	127A	151A	175A	199A	
6	Tally Out:	7B	31B	55B	79B	103B	127B	151B	175B	199B	
7	Tally Out:	10A	34A	58A	82A	106A	130A	154A	178A	202A	
8	Tally Out:	10B	34B	58B	82B	106B	130B	154B	178B	202B	
9	Tally Out:	13A	37A	61A	85A	109A	133A	157A	181A	205A	
10	Tally Out:	13B	37B	61B	85B	109B	133B	157B	181B	205B	
11	Tally Out:	16A	40A	64A	88A	112A	136A	160A	184A	208A	
12	Tally Out:	16B	40B	64B	88B	112B	136B	160B	184B	208B	
13	Tally Out:	19A	43A	67A	91A	115A	139A	163A	187A	211A	
14	Tally Out:	19B	43B	67B	91B	115B	139B	163B	187B	211B	
15	Tally Out:	11A	46A	70A	94A	118A	142A	166A	190A	214A	
16	Tally Out:	22B	46B	70B	94B	118B	142B	166B	190B	214B	
17		GND	GND	GND	GND	GND	GND	GND	GND	GND	Ground
18	Tally Out:	2A	26A	50A	74A	98A	122A	146A	170A	194A	Tally Outputs
19	Tally Out:	2B	26B	50B	74B	98B	122B	146B	170B	194B	
20	Tally Out:	5A	29A	53A	77A	101A	125A	149A	173A	197A	
21	Tally Out:	5B	29B	53B	77B	101B	125B	149B	173B	197B	
22	Tally Out:	8A	32A	56A	80A	104A	128A	152A	176A	200A	
23	Tally Out:	8B	32B	56B	80B	104B	128B	152B	176B	200B	
24	Tally Out:	11A	35A	59A	83A	107A	131A	155A	179A	203A	
25	Tally Out:	11B	35B	59B	83B	107B	131B	155B	179B	203B	

RS-422A Tally Out 1-9 Connector Specifications (continued)

Pin #	Signal Name	Tally Out Connector #									Function
		1	2	3	4	5	6	7	8	9	
26	Tally Out:	14A	38A	62A	86A	110A	134A	158A	182A	206A	Tally Outputs
27	Tally Out:	14B	38B	62B	86B	110B	134B	158B	182B	206B	
28	Tally Out:	17A	41A	65A	89A	113A	137A	161A	185A	209A	
29	Tally Out:	17B	41B	65B	89B	113B	137B	161B	185B	209B	
30	Tally Out:	20A	44A	68A	92A	116A	140A	164A	188A	212A	
31	Tally Out:	20B	44B	68B	92B	116B	140B	164B	188B	212B	
32	Tally Out:	23A	47A	71A	95A	119A	143A	167A	191A	215A	
33	Tally Out:	23B	47B	71B	95B	119B	143B	167B	191B	215B	
34	Tally Out:	3A	27A	51A	75A	99A	123A	147A	171A	195A	
35	Tally Out:	3B	27B	51B	75B	99B	123B	147B	171B	195B	
36	Tally Out:	6A	30A	54A	78A	102A	126A	150A	174A	198A	
37	Tally Out:	6B	30B	54B	78B	102B	126B	150B	174B	198B	
38	Tally Out:	9A	33A	57A	81A	105A	129A	153A	177A	201A	
39	Tally Out:	9B	33B	57B	81B	105B	129B	153B	177B	201B	
40	Tally Out:	12A	36A	60A	84A	108A	132A	156A	180A	204A	
41	Tally Out:	12B	36B	60B	84B	108B	132B	156B	180B	204B	
42	Tally Out:	15A	39A	63A	87A	111A	135A	159A	183A	207A	
43	Tally Out:	15B	39B	63B	87B	111B	135B	159B	183B	207B	
44	Tally Out:	18A	42A	66A	90A	114A	138A	162A	186A	210A	
45	Tally Out:	18B	42B	66B	90B	114B	138B	162B	186B	210B	
46	Tally Out:	21A	45A	69A	93A	117A	141A	165A	189A	213A	
47	Tally Out:	21B	45B	69B	93B	117B	141B	165B	189B	213B	
48	Tally Out:	24A	48A	72A	96A	120A	144A	168A	192A	216A	
49	Tally Out:	24B	48B	72B	96B	120B	144B	168B	192B	216B	
50		GND	GND	GND	GND	GND	GND	GND	GND	GND	Ground

Notes:

- Relay contact 30V 0.1 A
- A and B of the same number constitute a pair of relay contacts.

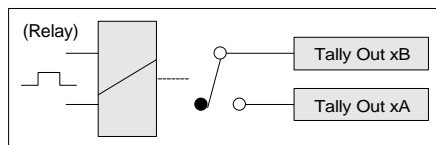


System Interconnection Charts

This section includes a variety of detailed system interconnection charts, as follows:

- DVS-7250 System Interconnection Chart — Video
- DVS-7250 System Interconnection Chart — Control
- DVS-7250 Control Panel Connections Chart
- DVS-7250 Video Paths with Router Chart
- DVS-7250 Switcher - Router Interface Chart
- DVS-7250 with ScitexDV (Abekas) Dveous A-5100

DVS-7250 System Interconnection Chart — Video

The simplified diagram below illustrates a *typical* DVS-7250 system. Video connections only are shown.

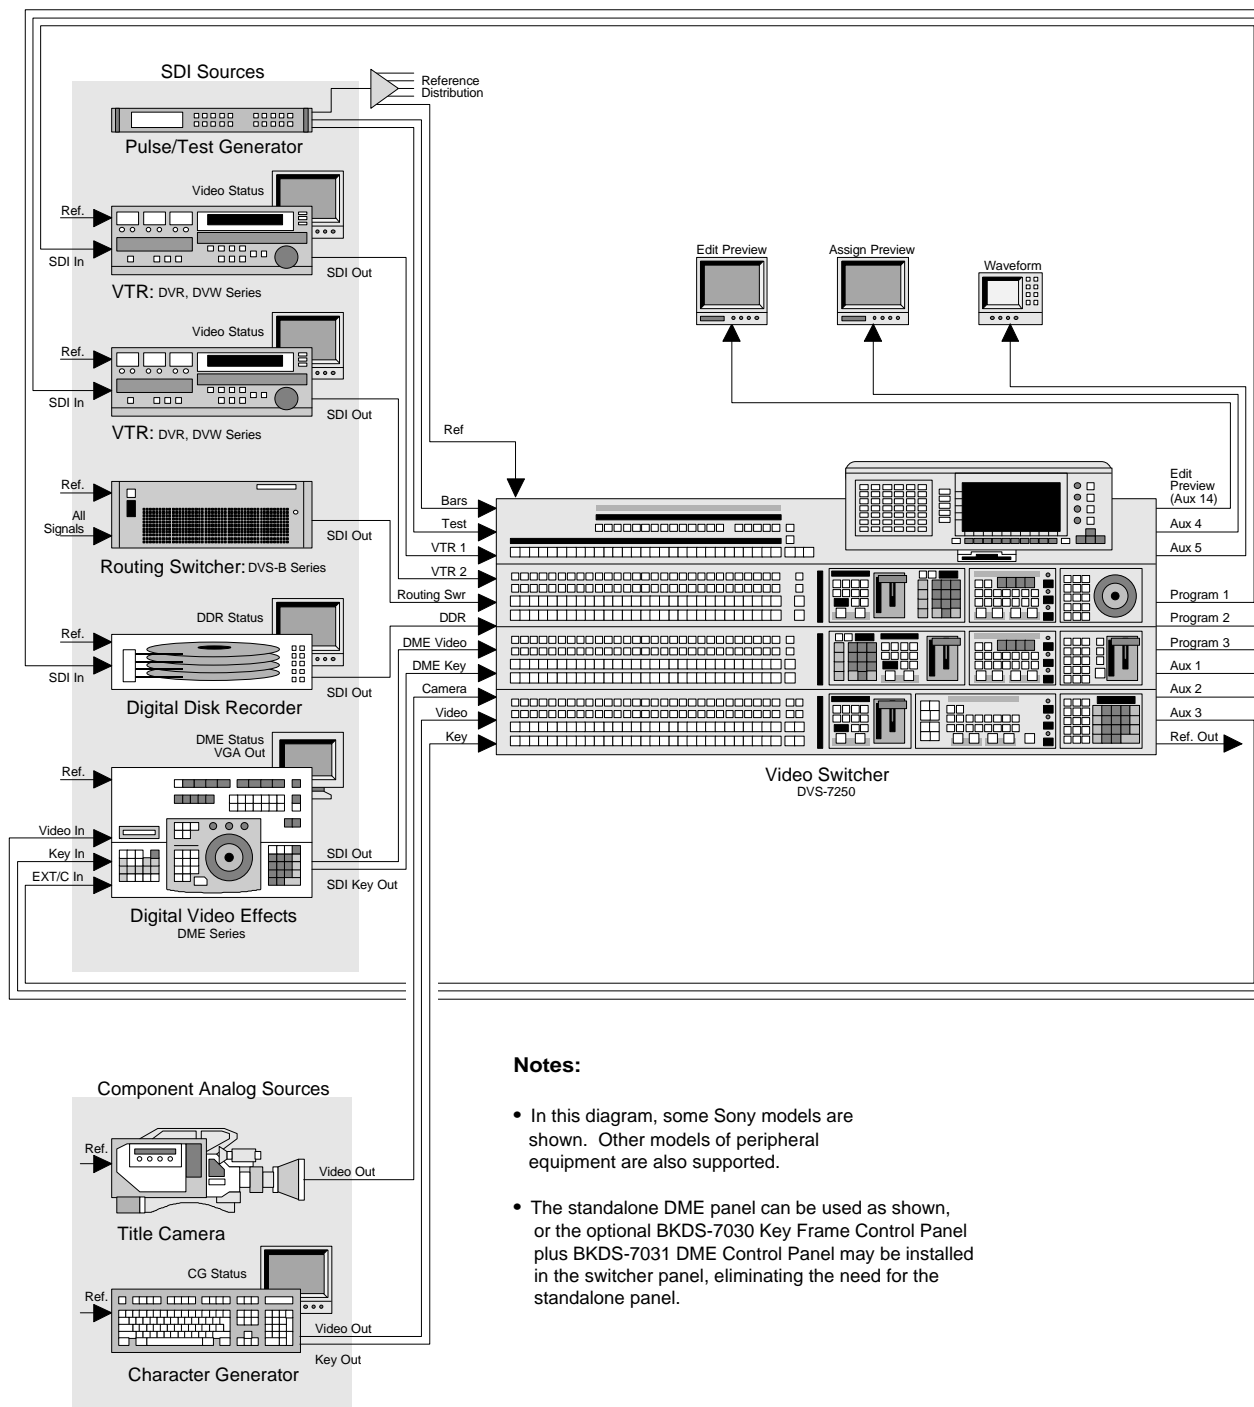


Notes:

- In this diagram, some Sony models are shown. Other models of peripheral equipment are also supported.
- The standalone DME panel can be used as shown, or the optional BKDS-7030 Key Frame Control Panel plus BKDS-7031 DME Control Panel may be installed in the switcher panel, eliminating the need for the standalone panel.


DVS-7250 System Interconnection Chart — Control

The simplified diagram below illustrates a *typical* DVS-7250 system. Control, GPI, and S-Bus connections are shown.

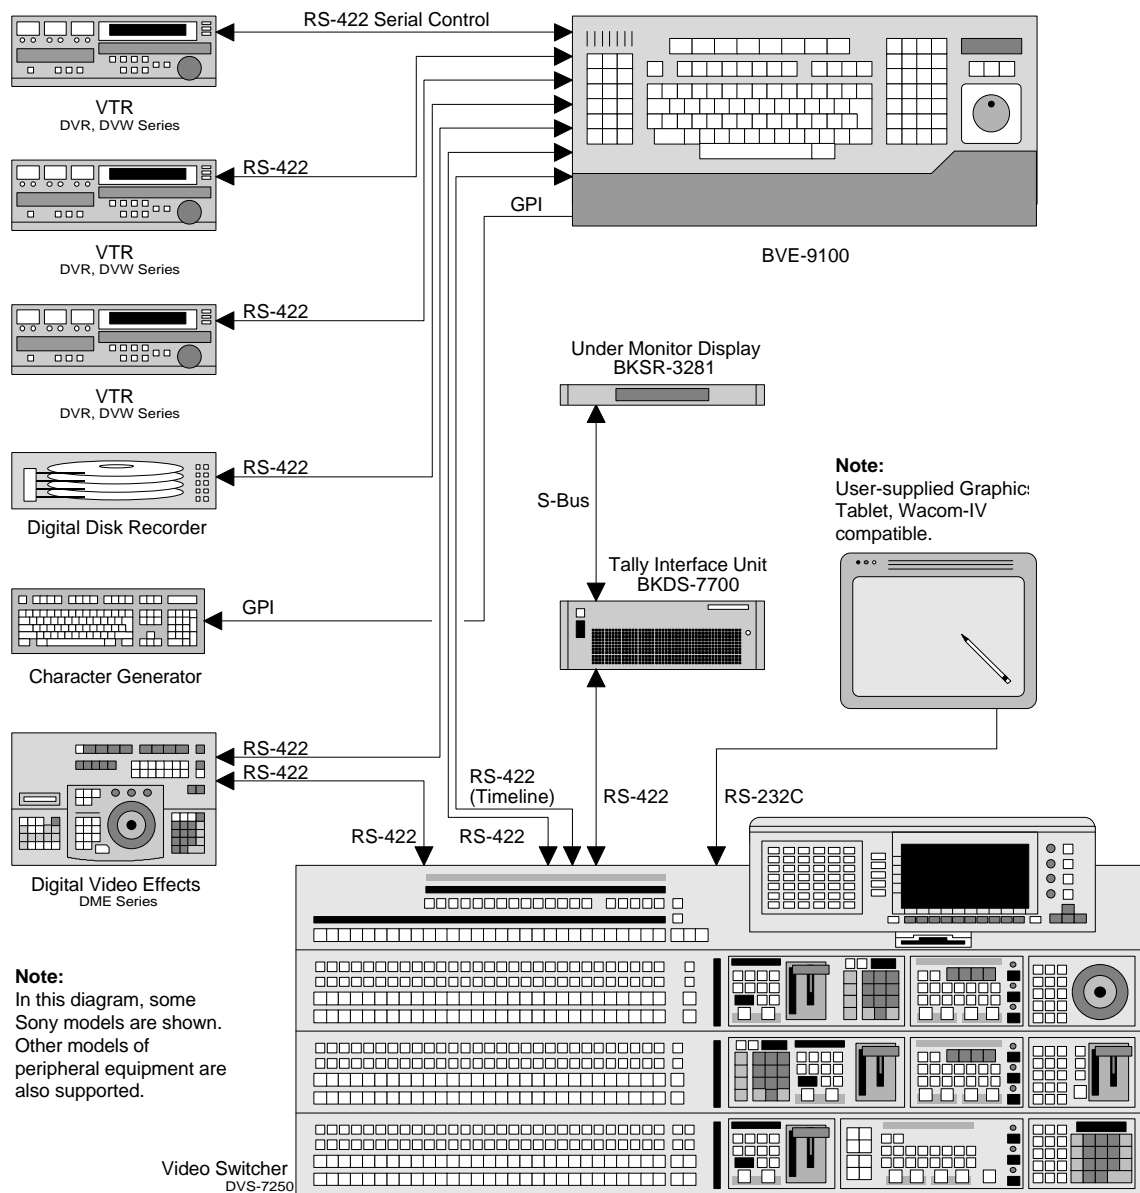


DVS-7250 Control Panel Connections Chart

The simplified diagram below illustrates a variety of DVS-7250 control panel connections, using RS-422 connectors on both the chassis and control panel. Note the use of loops to extend the system's capabilities.

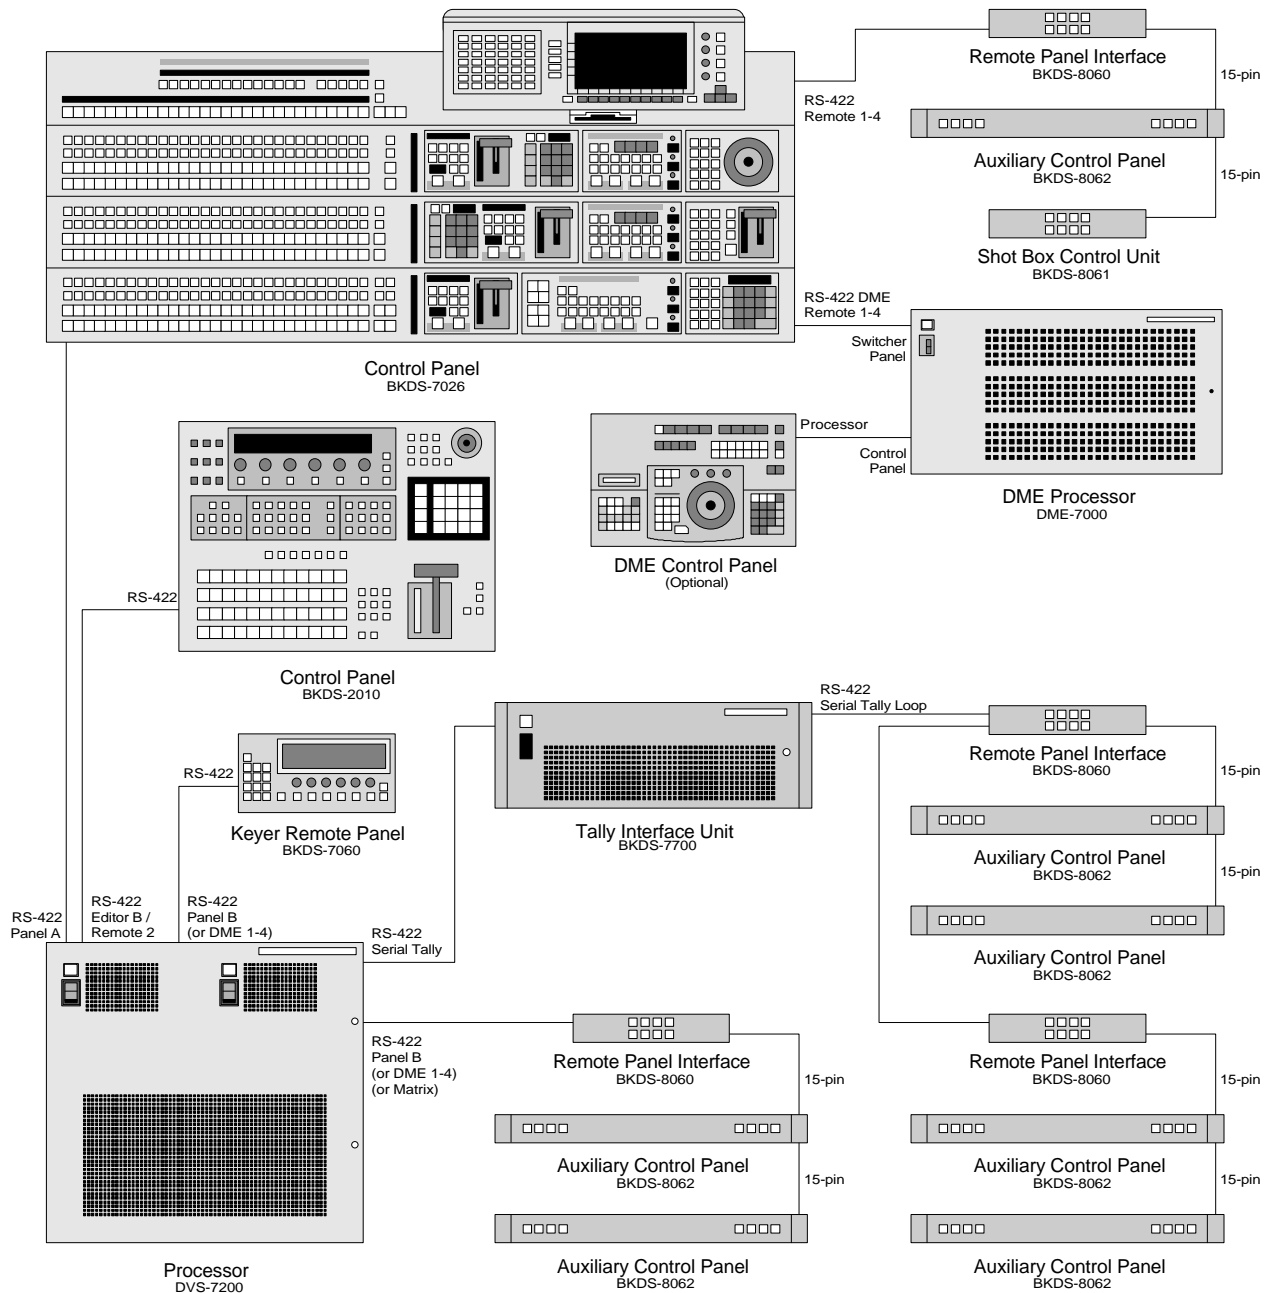


DVS-7250 Video Paths with Router Chart

The simplified diagram below shows the interconnection between a DVS-V6464B routing switcher and a variety of typical video sources, *including* the DVS-7250.

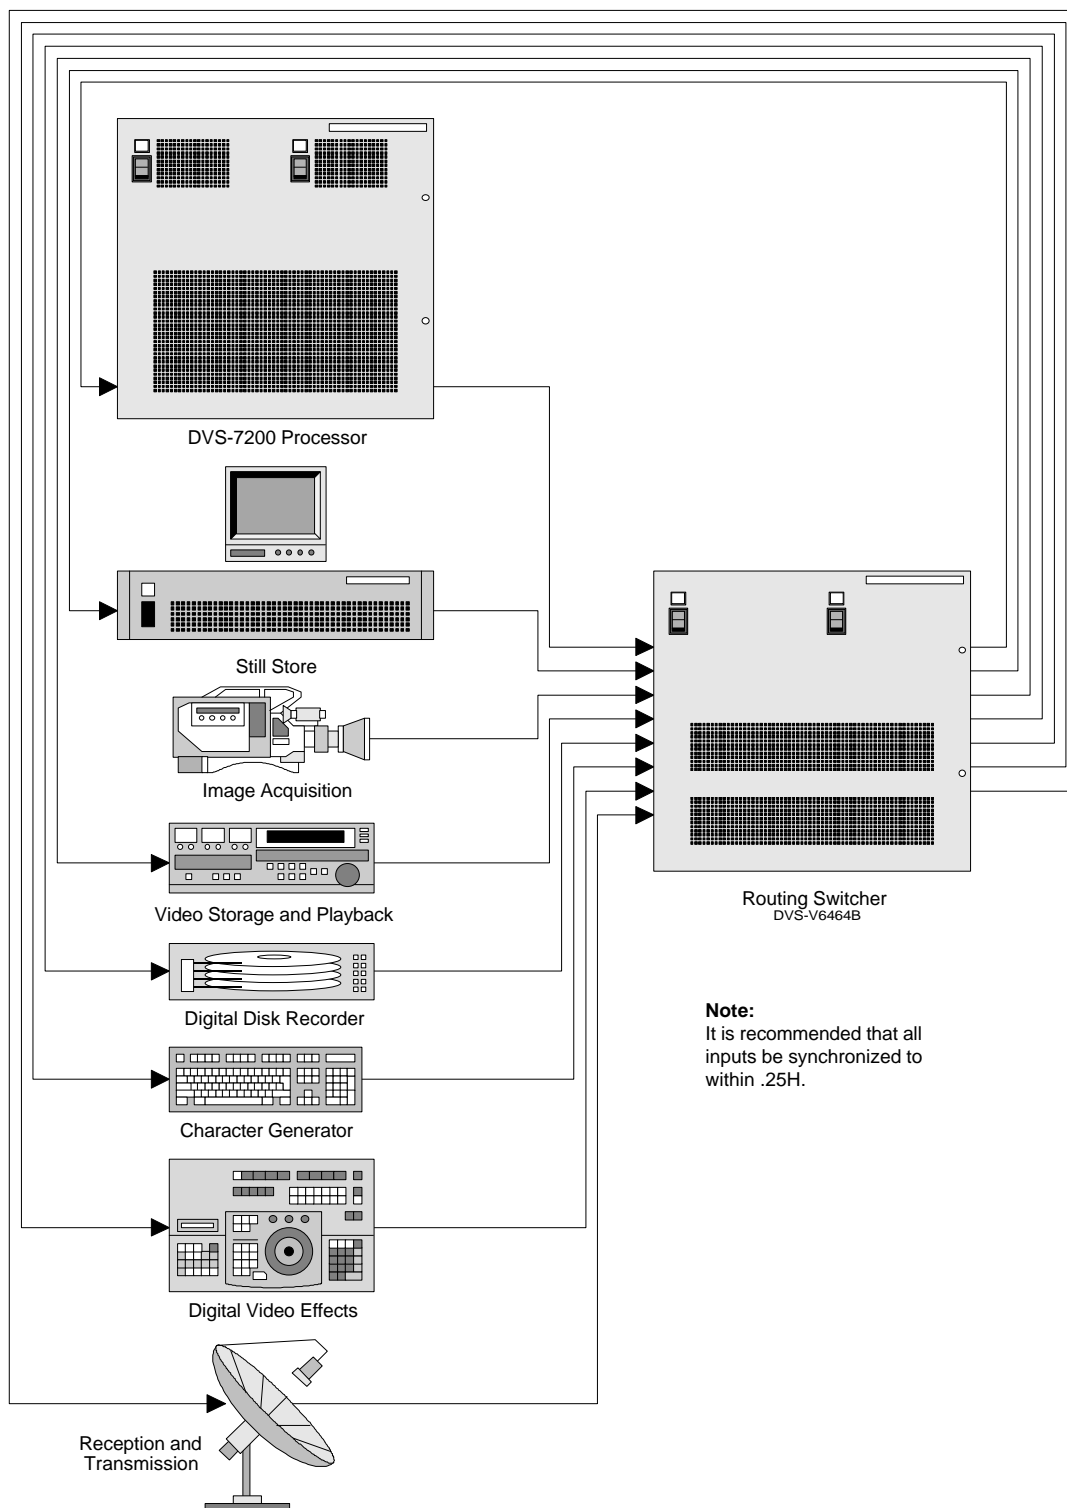


DVS-7250 Switcher - Router Interface Chart

The simplified diagram below illustrates the S-Bus and RS-422 interconnection between a DVS-V6464B routing switcher and the DVS-7250.

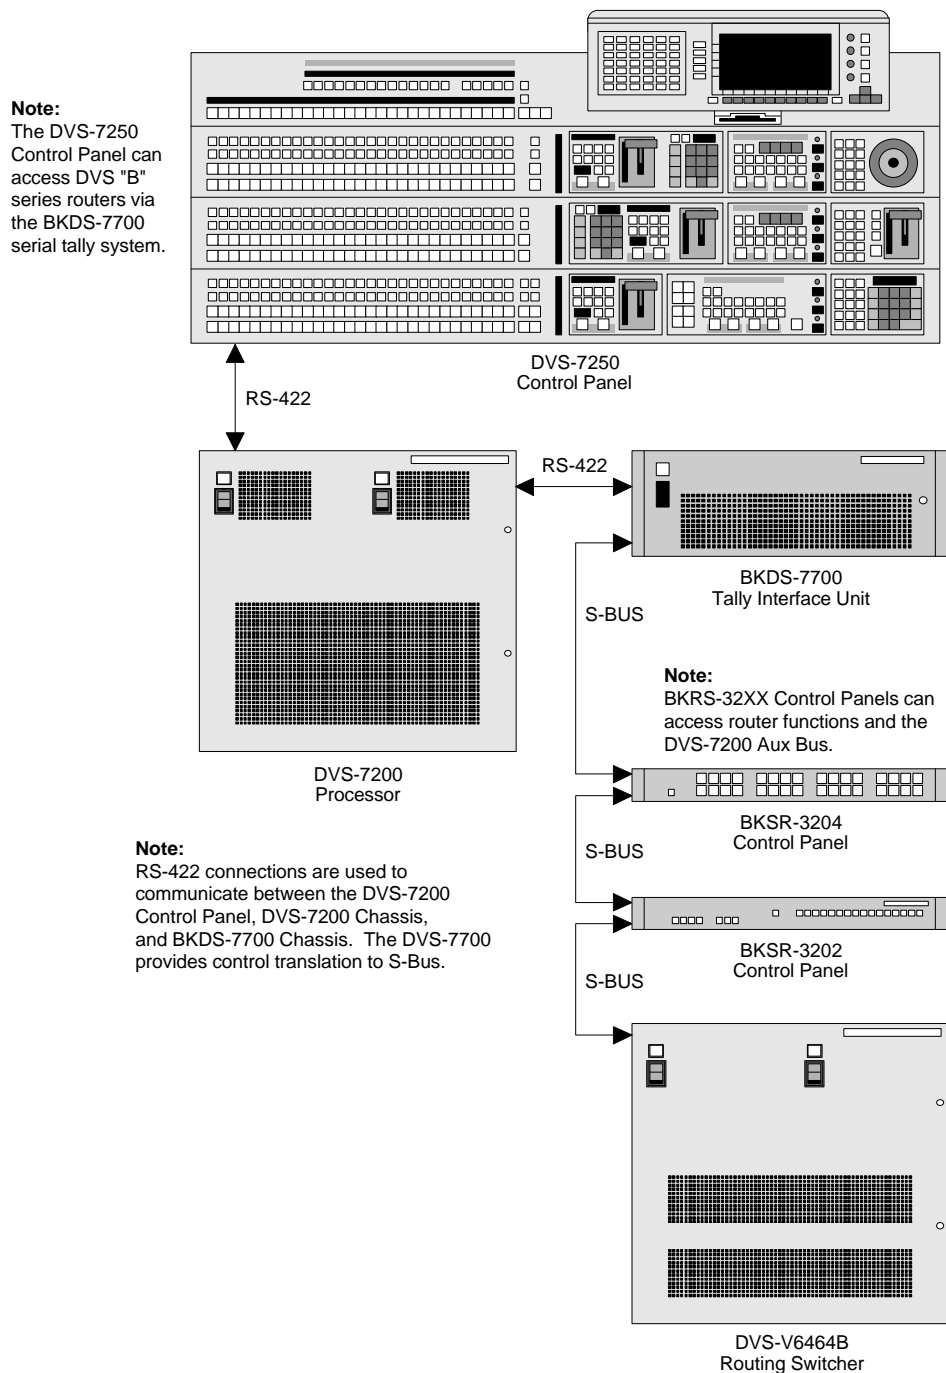

DVS-7250 with ScitexDV (Abekas) Dveous A-5100

The simplified diagram below shows a typical interconnection between a DVS-7250 and a ScitexDV Dveous A-5100.

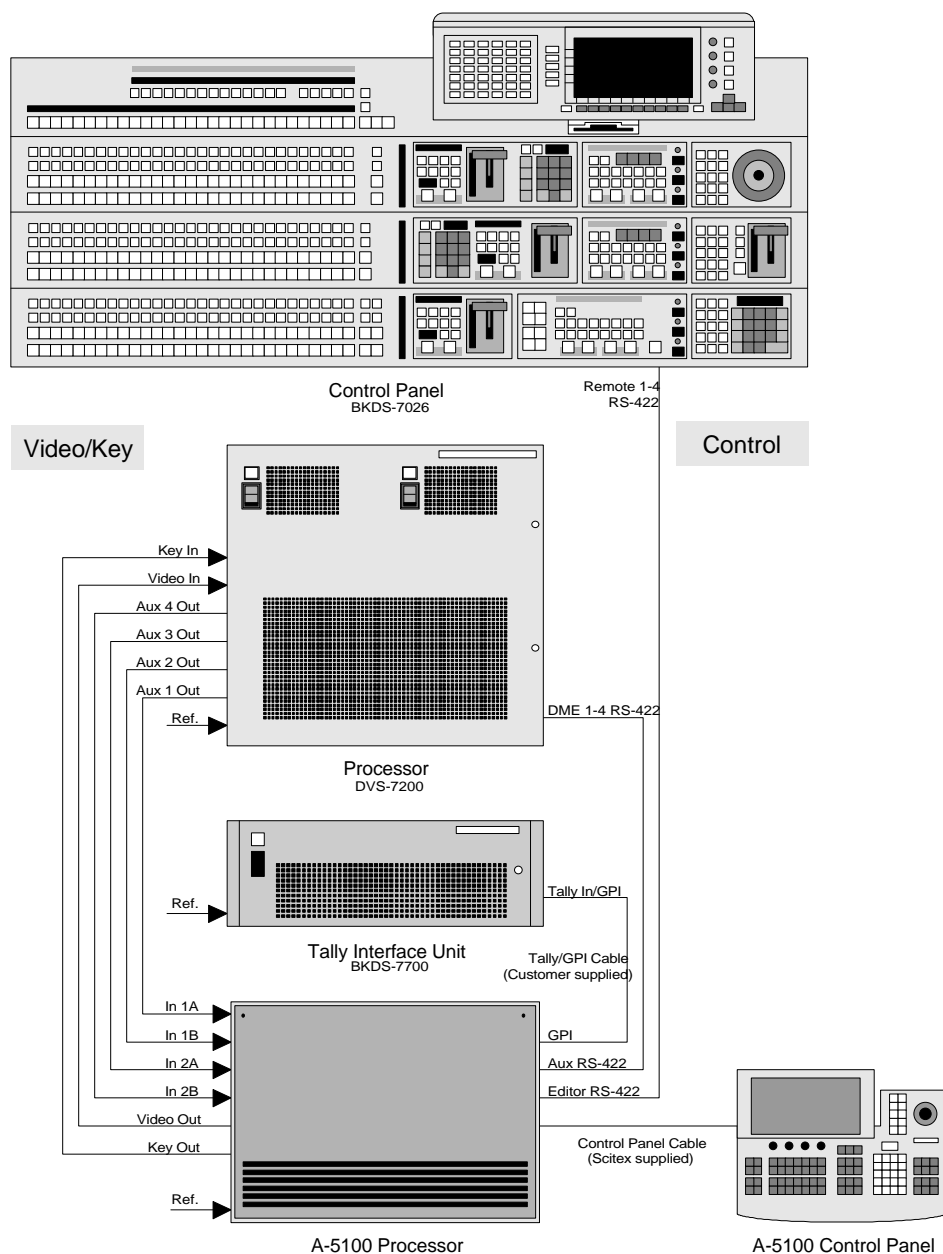


Note the following important points regarding the system shown above:

- The DVS-7250 control panel remote port is configured for P-II protocol.
- The Dveous editor port is configured for P-II protocol. Refer to the *Dveous User's Guide* for details.
- The Dveous Aux port is configured for Sony Aux bus protocol. Refer to the *Dveous User's Guide* for details.

SONY

Appendix A. Feature List

DVS-7250 — Feature Review

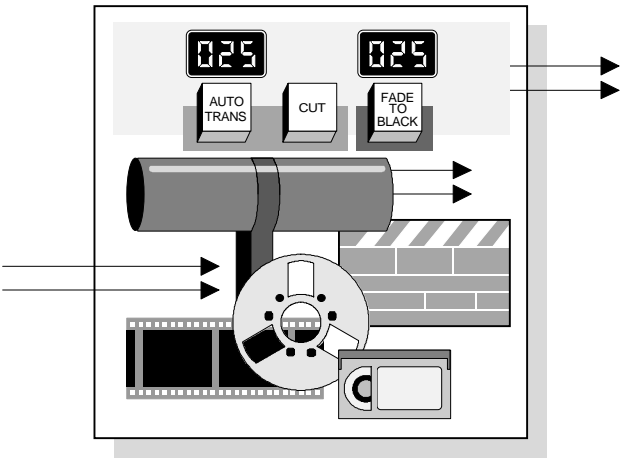

This Appendix provides a table of DVS-7250 features, along with brief descriptions of each. All features are cross-referenced in the index.

Note that all features discussed in this section use Sony terminology.

DVS-7250 Features

The following features are available with the DVS-7250 switcher.

DVS-7250 Features

Feature	Description
Compact Control Panel	The DVS-7250 offers two control panel models — an American Style (BKDS-7026) with a layout and style familiar to most TDs, and a Euro Style panel (BKDS-7025) that’s tailor-made for the international market. Each panel is compact and modular, offering streamlined operations, comfort, and flexibility in a 2.5 M/E configuration. Additional space savings can also be achieved through fully-integrated DME operation, eliminating the need for an additional control panel.
Convenient FlexiPad	The compact FlexiPad allows quick learning and recall of snapshots, user DME functions, and user wipe functions.

Feature	Description
4fsc / 4:2:2 operation	When configured for component digital operation (4:2:2), you can operate in the 525 or 625 line standard (with the appropriate reference). When configured for composite digital operation (4fsc), you can operate in the 525 line standard. You can switch aspect ratios between 4:3 and 16:9.
Optional input capability	Thirty-six optional inputs can be configured using a combination of SDI and/or composite analog formats. Optional input boards are required.
Component Analog Chromakey	Up to four Component Analog Chromakey Inputs can be added. Optional input boards are required.
4 Program outputs	Four identical program video outputs are provided.
2 Effects Keyers per M/E	Two standard effects keyers are provided per M/E, each of which has the capability of Linear, Luminance, Clean (self-key), Pattern Key, and Priority keys.
DSK	Two DSKs (Downstream Keyers) are provided. This feature includes the required BKDS-7025 PP/DSK board — providing the same capabilities as the effects keyers.
EL Panel (Electro Luminescent)	A clear, bright screen provides easy access to operational parameters, adjustments, and setups.
Master E-File Panel	The Master E-File panel allows the user to enter wipe patterns, enter transition rates, and store and recall effects and panel snapshots from one convenient location.
Editor Interface	The switcher communicates with the BVE-2000 and BVE-9100 editing systems via serial interface, and Sony's <i>status reporting</i> feature. When used with BVE-9100, switcher timelines may be recalled and manipulated for motion, search, and jog functions.
DME Interface	The DME interface (DME-LINK) enables specified DME-3000 and DME-7000 effects to be run by the switcher's fader — just like wipes and dissolves. You can also control the Auxiliary bus from the DME.
Integrated DME Control	For effects creation with Sony DMEs, two optional panels (BKDS-7030 and BKDS-7031) can be added to the switcher panel. These panels completely replace the DME's control panel, eliminating unnecessary control room footprints, saving space, and providing an economical and convenient method of effects creation and control. In addition, the switcher's floppy drive can store DME setups, snapshots, and effects files — as well as switcher data.
18 Wipe/Pattern Generators	Eighteen independent wipe/pattern generators are provided, for the primary mix/effects bus (plus program/preset bus), as well as the switcher's keyers, border generators, color background mattes, key mask and sub mask.
24 Basic Wipe Patterns	A basic set of 24 wipe patterns are included. Extensive pattern modifiers are provided.
11 Enhanced Wipe Patterns	An additional set of 11 patterns are included with the BKDS-2070 option (star, heart, matrix and diamond dust), and can be added to each M/E's processor. Extensive pattern modifiers are provided.

DVS-7250 Features (continued)


Feature	Description
10 dual color matte generators	Ten independent dual color matte generators are provided for primary color backgrounds, pattern borders, and key border — with the M/E and DSK border generator options installed. Each includes a dedicated pattern generator for creating washes.
Utility Bus	This feature allows you to insert a separate video signal inside wipe and key borders.
Snapshot memories	This feature provides the ability to store and recall 99 control panel snapshots through the Master E-File panel.
Effect memories	When the BKDS-7030 is installed, effects memories are enabled for the creation of switcher timelines. You can create and run switcher timelines for each M/E — <i>plus</i> the DSK — <i>plus</i> user functions such as auxiliary bus control. DME effects may be combined with switcher effects and recalled using the Master E-File panel and the Shot Box option.
Router Interface	This option controls a Sony DVS-B Series routing switcher <i>directly</i> through the switcher's EL display. You can control up to 128 sources, and store router information along with switcher setups and snapshots.
V-Proc	A video processing system that allows you to adjust each input's levels to compensate for errors in image acquisition.
Clean Chroma plus FineChroma	When the BKDS-2031 plus the BKDS-2032 options are installed into any M/E processor, several advanced chroma key capabilities are enabled. These capabilities emulate several of the functions found in external chroma key systems.
Process Key	The standard Processed Key function provides an “effects pathway” to and from a DME or color corrector. Keys can be routed to the DME for manipulation, and then re-entered in the <i>same</i> switcher keyer. The feature works with most other major manufacturer's DVEs that are equipped with a key channel.
Key Priority	The Key Priority function allows you to dynamically change which key appears <i>over</i> (visually in front), and which appears <i>under</i> (visually behind) in the M/E keyers and DSK. In addition, Key Priority transitions can be applied as a mix, wipe, super mix, or non-additive mix (NAM).
Source Name Display	The BKDS-7002 Source Name Display Unit provides the electronics and displays for M/E 1, M/E 2, and Aux crosspoints. When installed, all panel crosspoints are labeled with alpha-numeric characters.
Preview Functions	Rather than limit you to a single preview function, the DVS-7250 allows you to preview any key (over a constant background), the clean M/E or Program/Preset feed (without keys), the key matte signal, the process key, the key preview itself, and auto preview.
User Utility	In the control panel's Utility Section, any button can be assigned to perform a variety of “direct access” functions for speed and user convenience. These functions include single-button menu retrieval (from any switcher menu level), DME menu assignment (with the BKDS-7030 and BKDS-7031), and instant triggering of any menu driven function (such as frame-memory freeze).

DVS-7250 Features (continued)

Feature	Description
Multiple Control Panel Crosspoint Assignment	When the BKDS-2010 (M/E Auxiliary Control Panel) option is included, you can assign any of five different crosspoint configurations for control panels — allowing you to work with completely different sets of crosspoints simultaneously, and change crosspoint sets as required for your production.
Frame Memory	This function provides storage for two individual frames, divided <i>as needed</i> between video only, or video and key signals. Frame memories can be used for grabbing fields or frames, layering, creating custom masks, storing matte and fill signals, painting, and re-positioning live or frozen images.

Appendix B. Related Resources

Related Resources

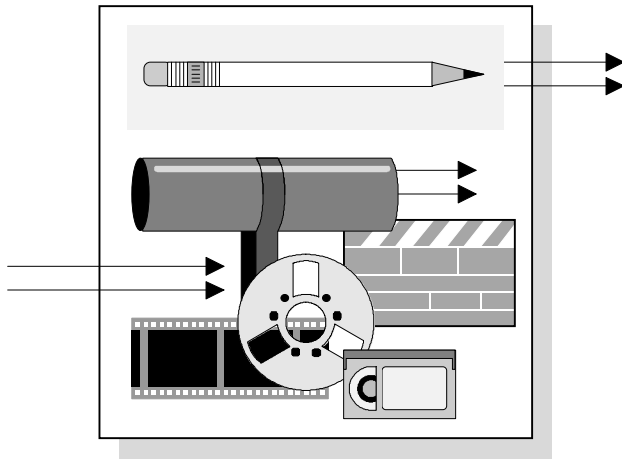

The following resource information is included in this Appendix:

- Printed Media
- Audio/Video Media

Printed Media

One set of Installation, Operation, and Maintenance (Part 1) Manuals are provided with each DVS-7250 system. If you wish to order additional manuals (or, if you wish to order manuals *prior* to the hardware shipment), the following list provides all required part numbers.

Use the following printed publications for more information on the DVS-7250:

- Refer to the ***DVS-7200/7250 Product Brochure*** for an overall discussion of the product's features, configurations, and specifications.
P/N: **BC-00640**
- Refer to the ***DVS Series Family Brochure*** for a description of related products in the DVS and DME product lines.
P/N: **BC-00638**
- Refer to the ***DVS-7250 User's Guide E1*** for a discussion of all operating issues.
P/N: **3-860-700-01**

- Refer to the *DVS-7250 E1 Installation Guide* for a discussion of all installation issues.
P/N: **3-192-660-02**
- Refer to the *DVS-7250 Operations Manual* for a discussion of operating procedures.
P/N: **3-859-590-02**
- Refer to the *DVS-7250 E1 Part 1 Maintenance Guide* for a discussion of maintenance issues.
P/N: **3-192-659-02**
- Refer to the *DVS-7000/7200 Vol. 1 E1 Part 2 Maintenance Guide* for a discussion of maintenance issues.
P/N: **9-967-615-01**
- Refer to the *DVS-7000/7200 Vol. 2 E1 Part 2 Maintenance Guide* for a discussion of maintenance issues.
P/N: **9-967-616-01**
- Refer to the *DVS-7000/7200 Vol. 3 E1 Part 2 Maintenance Guide* for a discussion of maintenance issues.
P/N: **9-967-617-01**
- Refer to the *DVS-7000/7200 Vol. 4 E1 Part 2 Maintenance Guide* for a discussion of maintenance issues.
P/N: **9-967-618-01**
- Refer to the *DVS-7000/7200 Vol. 5 E1 Part 2 Maintenance Guide* for a discussion of maintenance issues.
P/N: **9-967-624-01**
- Refer to the *BVE-9100 Product Guide* for a discussion of the BVE-9100's features, benefits, configuration and installation requirements.
P/N: **BC-00583**
- Refer to the *DME-7000 DME-3000 Product Guide* for a comprehensive discussion of the DME system's features, benefits, configuration and installation requirements.
P/N: **BC-00584**
- Refer to the *DVS Series Interface Protocol* document for a discussion of switcher protocol issues.
P/N: **9-967-262-21**


Audio/Video Media

Use the following audio/video publications for additional reference information on the DVS-7250:

- Refer to the *DVS-7000 Demonstration Videotape* for a comprehensive introduction to the DVS-7000 series' capabilities.
P/N: **BC-00559**
- Refer to the *BVE-9100 Demonstration Videotape* for an in-depth demonstration of the BVE-9100 system.
P/N: **BC-00556**

Appendix C. Sales and Service

General Information and Reference

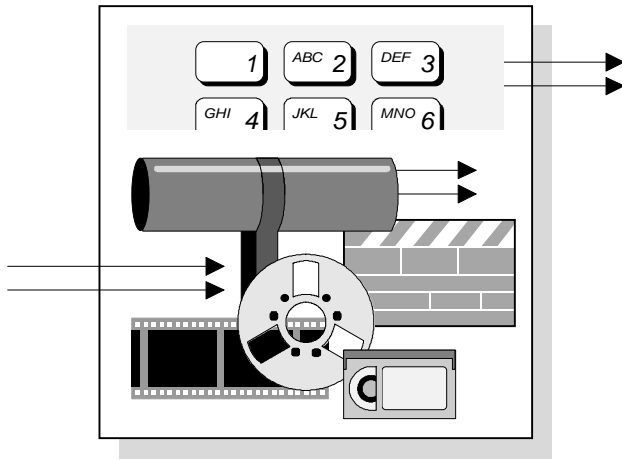

The following information is included in this Appendix:

- Regional Sales Offices
- Regional Service Centers
- National Parts Centers
- Emergency Response System
- SUPPORTNETSM
- SOFTWAREPLUSSM

Regional Sales Offices

Sony Regional Sales Offices are located in the following areas:

- **Northeast Regional Sales Office**

123 W. Tryon Ave.
Teaneck, NJ 07666
Main Number: (201) 833-5300
Fax Number: (201) 833-5850

- **Southeast Regional Sales Office**

3175 A. Northwoods Parkway
Norcross, GA 30071
Main Number: (770) 263-9888
Fax Number: (770) 441-8870

- **Midwest Regional Sales Office**

1200 North Arlington Heights Road
Itasca, IL 60143
Main Number: (630) 773-6000
Fax Number: (630) 773-7623

- **Southwest Regional Sales Office**

8400 Esters Blvd., Suite 500
Irving, TX 75063-2214
Main Number: (972) 915-3100
Fax Number: (972) 915-3235

- **West Regional Sales Office**

10833 Valley View Street
Cypress, CA 90630-0016
Main Number: (714) 220-9100
Fax Number: (714) 229-4159

Regional Service Centers

Sony Regional Service Centers are located in the following areas:

- **Northeast Regional Service Center**

123 W. Tryon Ave.
Teaneck, NJ 07666
Main Number: (201) 833-5300

- **Southeast Regional Service Center**

3175 A. Northwoods Parkway
Norcross, GA 30071
Main Number: (770) 263-8016

- **Midwest Regional Service Center**

1200 North Arlington Heights Road
Itasca, IL 60143
Main Number: (630) 773-6037

- **Southwest Regional Service Center**

8400 Esters Blvd., Suite 500
Irving, TX 75063-2214
Main Number: (972) 915-3220

- **West Regional Service Center**

10833 Valley View Street
Cypress, CA 90630-0016
Main Number: (714) 229-4100

National Parts Centers

Sony National Parts Centers are located in the following cities:

- **San Jose, CA**

For Broadcast parts:
(800) 538-7550

- **Kansas City, MO**

For Professional Audio parts:
(800) 331-6679, (800) 654-0962 (in MO)

For Business/Industrial parts:
(816) 891-7550, (816) 891-7435 (after-hours)

Emergency Response System

Use Sony's Emergency Response System for after-hours technical support.

1. Call (408) 435-8910
2. Using a touch-tone phone, select the desired primary category from the four (4) menu selections, then the appropriate secondary category. If a selection is not made from a touch-tone phone, the system will terminate the call.

Menu 1: Technical Assistance for Broadcast and Audio/Video
Production Products

- 1 Digital Video or Type C Recorders
- 2 Betacam® or Umatic® Products
- 3 Video Editors or Switchers
- 4 Library Management System™ or Betacart® Systems
- 5 Professional Audio
- 6 Camera or Monitor Products
- 7 High Definition Video Systems
- 8 Repeat Primary Menu Selections

Menu 2: Technical Assistance for Other Business and Professional
Products

- 1 Videoconferencing Systems
- 2 Jumbotron® Systems
- 3 Medical Systems
- 4 Repeat Primary Menu Selections

Menu 3: Emergency Parts System

Menu 4: Repeat Primary Menu Selections

3. When prompted, leave your name, company, a telephone number where you can be reached, model number, and a brief description of the problem. A Sony product specialist will return your call within 60 minutes.

SUPPORTNETSM

The SUPPORTNETSM program brings all the expertise, responsiveness, and commitment of the company together in a comprehensive package to ensure continued customer satisfaction. In addition to Time and Materials (T&M) service, which is available to customers who require support on a per-call basis, a variety of programs are available to meet varying needs:

- **UpTime APS**

Improves uptime and ease of care, thanks to professional on-site hardware support by Sony engineers and optional application support.

- **Technical Education**

Sony technical training enhances the customer's knowledge of the Sony products and their maintenance. This enables the customer to take a more active role in maximizing the potential of the product.

- **Technical Publications**

Technical Bulletins are published monthly with timely information regarding the servicing and maintenance of Sony products. A CD ROM is available with all Technical Bulletins, parts pricing, and selected exploded diagram views. Tech manuals are also available.

Optional software Application Support provides the following:

- Maintenance and enhancement releases. This item does *not* include software sold separately or product options.
- Telephone support for software and application issues.
- Discounts on selected new and optional software products.
- Automatic enrollment in SOFTWAREPLUSSM service program.

SOFTWAREPLUSSM

Purchasers of Sony Production Systems products are automatically enrolled into the SOFTWAREPLUSSM program. This service includes the following:

- Notification of software releases
- Tracking of each customer's unique system configuration and software requirements.
- Access to the latest software release information, including current versions, features, and pricing.
- Product registration for warranty software upgrades.
- Authorized upgrade pricing.

The telephone number for SOFTWAREPLUSSM is **(408) 955-6300**.

Glossary

4:2:2

The ratio between the digital component video sampling frequencies, specified in CCIR-601, for main digital studio equipment. The frequencies are 13.5 MHz for Luminance, and 6.75 MHz for each of the two Chrominance signals.

4:2:2:4

A signal which consists of a 4:2:2 signal for Luminance and Chrominance information plus a key signal sampled at the same rate as the luminance signal.

4:4:4:4

A digital video signal which has identical sampling rates for the luminance, chrominance, and key signals.

Archive Recorder

Also known as “cache” recorder. Special designation for a recorder in which all events are recorded sequentially, without overlaps. Used to preserve each layer during complex multi-layer sequences.

Auxiliary Bus

Also called “Aux” buses, auxiliary buses are extra switching buses that allow video signals connected to the switcher to be routed to external equipment such as digital effects systems and VTRs. Some switchers such as the DVS-7250 have multiple Aux buses as an option.

B-roll

Essentially a copy of a clip or a sequence. Without the availability of pre-read, the “to” and “from” sources in a transition must be on separate reels. If they are not, a B-roll must be made in order to perform the transition.

Background

One of the video sources involved in keying. Specifically, the background video is the signal which has portions of it *replaced* with the key (or foreground) signal. Using chroma key as an example in a weathercast, the background is the weather map and the foreground is the weathercaster. The foreground signal is often referred to as cutting a “hole” in the background video signal.

Border

In switcher terminology, a thickened edging, similar to a picture frame, placed around a key signal, a digital effect, or the edges of a wipe pattern. Typically, the thickness, softness, and color of the border are completely adjustable.

Bus

A means by which one input can be selected from among several different inputs. The output of the bus is then sent to a specific destination, either internal or external to the switcher. A minimum of two buses are required to perform a simple mix, wipe, or key operation.

CCIR-601

CCIR Recommendation 601, “Encoding Parameters of Digital Television for Studios,” is a recommendation adopted in 1986 by the CCIR (Comite Consultatif International des Radio-communications) which concerned digital component video systems in the 525 and 625 line standards. The document specifies sampling rates for digital video.

Chroma Key

A type of key where the hole-cutting information is derived from a *color* rather than from a video level. A common example of chroma key is when the weathercaster appears to be standing in front of a map. The map is an electronic signal, and the weathercaster is in fact standing in front of a solid blue or green screen. The Chroma Key process electronically subtracts the color from the foreground image, and replaces it with video from the background image to form a *composite* image.

Cleanup

A list management tool that cleans up problems in the EDL, including overlaps and gaps. Cleanup is used to streamline the auto-assembly and re-edit process for maximum efficiency, guaranteeing that the *numeric* EDL matches the *visual* program as recorded on tape.

Clip

Also known as a “segment” or “scene.” Describes a continuous length of source footage, long or short, the duration of which is defined by an inpoint (head frame) and an outpoint (tail frame).

Crosspoint

The video switch which selects the source required on a particular switcher bus.

Depth Key

A DVS-7250 option that permits keys in the *third dimension*, using the “Z” axis or *depth* axis in XYZ coordinate space. Depth information can be derived from a full-screen video source, a key source, the main mask, a subsidiary mask, or by using “Z-data” from the DME-3000 or DME-7000. The feature allows you to perform *visually* complex keys without the need for complex masks, timelines, and repeated priority switching.

Digital Video

Video which is described by discrete voltage levels (represented by numbers) as opposed to the infinite range of values possible with analog video. Among its advantages, Digital Video may be copied with little or no change from one generation to the next.

Distributed Processing

A software technique whereby the master processor (Main CPU) delegates lesser tasks to other CPU's in the system, thereby freeing its time for more important work.

DMC Motion Memory

Also called Dynamic Motion Control. The ability for the BVE-9100 editing system to learn (and repeat) the precise playback speed and direction of a VTR during a slow motion sequence. Both simple events, with a single slow-motion speed, and complex events, with ramping speed, freezes, and direction changes fall into the DMC category.

DME

Sony's term for Digital Multi-Effects.

Downstream Keyer

Also called a DSK, a downstream keyer electronically appears after all other switcher functions — visually on top of all other layers and buses. Any operations performed on the switcher M/Es will not affect the downstream key video.

E-File™

The Sony trademarked system for switcher effects memory. One E-File contains a “snapshot” of the switcher control panel, including all settings and crosspoint selections.

Edit Data Page

Also known as the Edit Screen, the BVE-9100's main operating menu in which the editor sets up events and transitions, marks timecode, and manages the EDL.

Editor

An electronic device for controlling and synchronizing a variety of broadcast production components with frame accuracy. Used to produce television programs. Also called an “editing system.”

EDL

Edit Decision List. A single file stored on the editing system's hard disk that contains information for each event used in a video program. When re-editing is required, this information is used to re-create events, exactly as they were initially recorded. EDL events are comprised of data fields, such as source and record VTR

inpoints, outpoints, reel numbers, mode (V, A1, A2), transitions (Cut, Dissolve, Wipe), and peripheral device effects data. There can be multiple EDL files on disk.

Effects Pathway

A switcher feature in which video from a keyer is routed to external devices (for example, a DME), and then returned to the switcher for additional processing. Sony's term for the Effects Pathway is Processed Key.

Ethernet

A computerized network (and system of protocols and commands) for transferring data between electronic devices.

Fader Arm

The lever on a switcher that manually controls the progress of an effect. The position of the level typically controls the amount of the A-Bus signal and the B-Bus signal that contributes to the mix, wipe, or key. On the DVS-7250, the Fader Arm also controls the DME timeline.

GPI (General Purpose Interface)

A communications port that controls “triggering” with frame-accuracy. Typically used with devices that do not have serial control capability. On an editing system, the GPI port typically *sends* trigger pulses to peripheral devices. On devices such as switchers and digital effects, the GPI port typically *receives* triggers from the editor.

GUI

Graphical User Interface. A term that describes a status display based on graphics and icons, rather than strictly on numbers and letters.

Initialization Menu

A secondary BVE-9100 menu used to set up EDL specifications and overall system “preferences” such as preroll and color framing.

Interface

A set of software instructions that allows the editing system to control a peripheral device such as a VTR, ATR, DVE or switcher. The better the interface, the greater the ease with which the operator can assemble a program.

Key Clip, Gain, Density

Also called “Clip,” in switcher terminology, the process of fine-tuning a key — of any type (luminance, linear, or chroma). Clipping sets the threshold for the hole-cutting circuitry, while “gain” defines the range and sensitivity of adjustment. The “density” is the transparency or opacity of the key, as revealed over a background. A hole will be cut in the Background video in any location where the Foreground luminance level is greater than the clip level. “Fill” video replaces the holes.

Key Fill

The video which fills the hole cut by the keying circuitry. Typically, switchers provide a variety of choices for the fill source — internal mattes, external video, or “self” fill are several examples.

Key Mask

A key modification system that protects a portion of the foreground video from being keyed. Most switchers allow you to mask keys with the internal pattern system and associated modifiers.

Key Signal

The signal that electronically cuts the hole in the Background video signal. Key signals can be switcher-generated or originate from external sources such as the DME or character generators.

Keyframe

In a digital effects device, a point along a timeline where an action or change occurs. In a DVE, such as the DME-7000, keyframes occur at specific points of image manipulation. The BVE-9100 controls keyframe timelines for a variety of devices including the DME-series digital effects units and DVS-series switchers.

Keying

The process of superimposing video from one source (the Foreground) on top of another source (the Background). A variety of key “types” are available in most switchers, including Self Key, Linear Key, Chroma Key, and Key Mask.

List management

A set of software tools for manipulating EDL timecode numbers. Tools include the ability to move, copy, and renumber events (and blocks of events), clean overlaps and sort the list.

M/E

Mix/Effects or Mix Effects Amplifier. The portion (or “bank”) of a video switcher where video signals are processed to select sources and create mixes, fades, wipes, keys, and other special effects.

Master/Slave Mode

Also known as “Sync Jog.” A method for locking two or more source devices together in an edit event. Typically used in situations where the matte is on one reel, and the fill is on another.

Peripheral device

Any device connected to the BVE-9100 via serial communications or GPI. Category includes VTRs, ATRs, Video Switchers, Audio Mixers, Color Correctors, DVEs, and DDRs.

Pre-Read

Also known as “read before write.” The ability for a digital VTR to read digital information (audio and video) off tape - prior to writing the data back on tape.

Preset Bus

The switcher bus that selects the video that will appear *next* on-line or on-air.

Program Bus

The switcher bus that selects the on-line or on-air output signal.

Serial Digital Video

Also called SDI, a digital representation of the video signal that is distributed via a single coaxial cable with BNC connectors. This format is more desirable and cost-effective than a parallel interface which requires multi-conductor cable.

Setup Menu

A secondary BVE-9100 menu used to set up devices, crosspoint assignments and I/O (input/output) communications.

Status reporting

A system of bi-directional communications that allows the panel status of peripheral devices to be reported to (and stored in) the BVE-9100's EDL in real-time.

TBC

Time Base Corrector. A device used to stabilize a VTR's unstable image. Includes controls for adjusting the brightness, black level, color hue, and color saturation of the video playback.

Time Track

A powerful, software-based feature for finding matching video frames in the EDL. Match frames enable you to synchronize machines and perform clean, seamless transitions in a program. The BVE-9100 has a variety of Time Track modes.

Timecode

A numeric method for identifying video frames with precision. Each frame of video is assigned an unique 8-digit number (hours, seconds, minutes, frames). Enables precise match-frame editing transitions.

Trace

A list management tool that traces back to “original” source reel timecode numbers across multiple EDLs. Let's say that master tape #1 is a rough cut. If master tape #1 is next used as a source in the second cut (producing master tape #2), the original source reel timecodes are *one EDL generation back*. If the process is repeated again, the original numbers get farther away, but they're not lost. If you

want to assemble the show using the original source reels, the trace program is used to “recover” the original source in and outpoints.

Index

4

422 5
4fsc 5
4fsc/422 operation 106

A

Abekas A-5100 103
Adjustable timing window 6
Advanced Chroma Keyer 10
American style control panel 5, 17
Analog component
 formats 18
 input Board 18
Analog composite
 daughter board 18
 input 18
 output module 19
Aspect ratio 9
Assignable outputs 6
Audio/Video Media 110
AUX Panel Connector specifications 51
Auxiliary
 BKDS-2010 control panel 54
 bus bank 38
 buses 12
 control panel 22, 23, 71
 panel operation software 23

B

B-CAM
 (0) 18
 (7.5) 18
Basic
 chroma key board 24
 components 16
 frame memory board 24
 tools 5
BKD-RS15A 27
BKDS-2010 23
 control panel connectors 56
 control panel external dimensions 55

 control panel rear view 55
 control panel specifications 56
 control panel top view 54
BKDS-2031 10, 24
BKDS-2032 10, 24
BKDS-2041 24
BKDS-2070 7, 24
BKDS-7001 25
BKDS-7025 16
BKDS-7026 17
BKDS-7030 10, 20, 40
BKDS-7031 10, 20, 39
BKDS-7033 20
BKDS-7060 21, 58
 control panel connectors 60
 control panel external dimensions 58
 control panel rear view 59
 control panel specifications 59
 control panel top view 58
BKDS-7060 Power Supply
 connectors 62
 external dimensions 61
 front view 60
 rear view 62
 specifications 61
BKDS-7075 21, 42
BKDS-7090 25
BKDS-7102 18
BKDS-7110 5, 16, 18
BKDS-7111 18
BKDS-7112 18
BKDS-7133 18
BKDS-7161 6, 19, 31
BKDS-7162 6, 19, 31
BKDS-7250 25
BKDS-7270 25
BKDS-7280 25
BKDS-7340 40
BKDS-7445 24
BKDS-7690 25
BKDS-7700 26
 chassis front view 87
 chassis rear view 88
 chassis specifications 89
 connectors 90
 external dimensions 89
 serial tally connector specifications 92
 switcher connector specifications 91
 tally enable connector specifications 94
 tally in/GPI connector specifications 93
 tally out 1-9 connector specifications 95
 terminal connector specifications 90
 through out connector specifications 91
BKDS-7701 26

SONY

- BKDS-7790 26
- BKDS-8060 22, 64
 - connectors 66
 - dimensions 65
 - external dimensions 65
 - front view 64
 - rear view 64
 - specifications 65
- BKDS-8061 22, 68
 - connectors 70
 - dimensions 69
 - external dimensions 69
 - front view 68
 - rear view 68
 - specifications 69
- BKDS-8062 22, 71
 - connectors 73
 - dimensions 72
 - external dimensions 72
 - front view 71
 - rear view 71
 - specifications 72
- BKE-9402 8
- Board
 - basic frame memory 24
 - control port expansion 25
 - frame memory adaptor 24
 - M/E key signal preview 25
- Brochure
 - family 109
 - product 109
- Bus
 - auxiliary 12
 - link mode 13
- BVE-2000 4, 8
- BVE-9100 4, 8
 - demonstration video tape 110
 - product guide 110
- BZDM-3720 20
- BZDM-7720 21
- BZS-7060 17
- BZS-7220 23
- BZS-7360 21
- BZS-7720 26

C

- Cable 27
- Chassis
 - connectors 81
 - dimensions 77
 - dimensions, BKDS-7700 89
 - DVS-7250, front view 74
 - DVS-7250, rear view 75

- external dimensions 77
- front components 74
- front components, BKDS-7700 87
- front view, BKDS-7700 87
- power 77
- power, BKDS-7700 89
- rear components 75
- rear components, BKDS-7700 88
- rear view, BKDS-7700 88
- weight 77
- weight, BKDS-7700 89
- Chroma Key 6
 - advanced 10
 - board 24
 - input board 18
 - upgrade board 24
- Clean
 - chroma 24, 107
 - key 7
- Color
 - matte generators 11, 107
 - mix 11
- Component Analog Chromakey 106
- Configuration
 - guide 15
 - input 5, 18
 - output 19
 - switcher control panel 23
- Connectors 81
 - BKDS-7700 90
 - control panel 46
- Control Panel 5
 - American style 5, 17
 - American style, top view 36
 - assignment 108
 - BKDS-2010 dimensions 56
 - BKDS-7060 dimensions 59
 - compact 105
 - connectors 46
 - diagram 36
 - dimensions 44
 - DME 10, 20
 - Euro style 5, 16
 - external dimensions 43
 - interconnection chart 100
 - key frame 10, 20
 - memory recall 20
 - options 20, 32
 - rear view 45
 - remote adaptor 21
 - remote key 21, 58
 - specifications 44
 - top view, Euro style 41
- Control port expansion board 25

D

- Daughter board
 - analog composite 18
 - serial digital 18
- Demonstration Videotape
 - BVE-9100 110
 - DVS-7000 110
- Digital output module 19
- Dimensions
 - BKDS-2010 control panel 56
 - BKDS-2010 cutout 56
 - BKDS-7060 control panel 59
 - BKDS-7060 power supply 61
 - BKDS-8060 65
 - BKDS-8061 69
 - BKDS-8062 72
 - chassis 77
 - chassis, BKDS-7700 89
 - chassis, external 77
 - control panel 44
 - control panel, external 43
 - DVS-7250 cutout 44
 - EL Display 44
- Display Panel Connector specifications 52
- DME
 - control 10, 106
 - control panel 20, 39
 - interface 106
 - timeline 12
- DME-7000/DME-3000 product guide 110
- DME-LINK 4, 12
- Downstream Keyer 40
- DSK 6, 106
- Dual matte generator 10
- DVS
 - family brochure 109
 - series interface protocol 110
- DVS-2000C Control Panel 23
- DVS-7000 demonstration videotape 110
- DVS-7200
 - maintenance guide 110
 - processor 16
 - product brochure 109
- DVS-7250
 - basic components 16
 - chassis 74
 - chassis connectors 81
 - chassis rear view 75
 - chassis specifications 77
 - control panel connections chart 100
 - control panel diagram 36
 - features 105
 - input configuration chart 30

- installation 35
 - installation guide 110
 - operations manual 110
 - output configuration chart 31
 - product brochure 109
 - router interface chart 102
 - system components chart 32
 - system interconnection chart, control 99
 - system interconnection chart, video 98
 - user guide 109
 - video paths, router chart 101
 - with ScitexDV Dveous A-5100 103
- DVS-B series 4, 8

E

- E-File 7, 106
 - master 40
- Edge adjustment 7
- Editor Interface 8, 106
- EDL 8
- Effect
 - keyers 6, 106
 - loop 12, 107
 - memories 107
 - memory 7
 - timeline 4, 9
- EL
 - display dimensions 44
 - panel 106
- Emergency Response System 115
- Enhanced wipe
 - generator 7
 - option 24
- Euro style control panel 5, 16
- Expansion module 26
- Extender Cards 27

F

- Features 105
 - review 105
- Field/Frame grab 11
- FineChroma 10, 107
- Fingertip Menus 4
- FlexiPad 5, 40, 105
- Floppy Disk Drive 39
- Frame Memory 11
 - adaptor board 24

G

- GPI
 - application 13

- connector specifications 86
- control panel connector specifications 49
- control panel pinouts 49
- link mode 13
- link, advance or delay 13
- pinouts 86

I

Input

- 422 5
- 4fsc 5
- analog composite 18
- boards 18
- capability 106
- component analog 5
- configuration 5, 18, 32
- configuration chart 30
- mother board 5, 18
- primary 5
- SDI 5

Input Board

- analog component 18
- serial digital 12 channel 18

Installation

- guide 35, 110
- sub panel remote 42

Integrated

- DME control 10, 106
- system 4

Interconnection chart

- control 99
- control panel connections 100
- router interface 102
- video 98

Interface

- DME 106
- editor 8, 106
- Grass Valley Peripheral II 4
- peripheral 4
- protocol 110
- remote panel 22, 64
- router 4, 8

J

- J-6189-230 27
- J-6189-960 27

K

Key

- border generator 10
- border option 25

- chroma 6, 10
- clean 7
- copy functions 10
- dual matte generator 10
- edge adjustment 7
- linear 7
- luminance 6
- modifiers 10
- pattern 7
- priority 107
- processed 4, 12

Key Frame

- control panel 20, 40
- registers 9

L

Layering 11

Linear key 7

Link mode

- bus 13
- GPI 13

Luminance key 6

M

M/E

- auxiliary BKDS-2010 control panel 54
- auxiliary control panel 23
- banks, American style 37
- banks, Euro style 37
- key signal preview board 25
- keyer section 39

Maintenance Guide 110

Making Complex Tasks Simple 4

Masks 11

Master E-File

- panel 7, 106
- section 40

Matrix wipes 7

Matte Generators 10, 11

Memory 11

- recall control panel 20

Menu

- control section 39
- fingertip control 4

Modify keys 10

Mother board 5, 18

- OUT-9 19

N

National Parts Centers 114

NN-TRNG/GEN1C 28

Numeric Keypad 40

O

Operating Style 4

Operations manual 110

Option Panel Connector specifications 50

Options 24

and Upgrades 33

control panel 20

Order guide 29

OUT-9 Mother Board 19

Output

analog composite 6

assignable 6

boards 19

configuration 19, 32

configuration chart 31

digital 6

modules 6

Output module

analog composite 19

digital 19

P

Panel

Master E-File 7

Shot Box 7

Parts 114

Pattern key 7

Peripheral II 4, 25, 103

Pinouts

AUX Panel Connector 51

BKDS-7700 Serial Tally 1, 2 Connector 92

BKDS-7700 Switcher Connector 91

BKDS-7700 Tally Enable Connector 94

BKDS-7700 Tally In/GPI Connector 93

BKDS-7700 Tally Out 1-9 Connector 95

BKDS-7700 Terminal Connector 90

BKDS-7700 Through Out Connector 91

Display Panel Connector 52

GPI connector 86

GPI control panel connector 49

Option Panel Connector 50

RS-232C Terminal 1, 2 Connector 48

RS-232C Terminal Connector 82

RS-422A DME Connector 47

RS-422A DME Connectors 83

RS-422A DSK Connector 47, 81

RS-422A Editor A/Remote 1 Connector 85

RS-422A Editor B/Remote 2 Connector 85

RS-422A Matrix Connector 83

RS-422A Panel 1 Connector 84

RS-422A Panel 2/Remote 3 Connector 84

RS-422A Remote 1-5 Connector 48

RS-422A Serial Tally Connector 82

RS-422A Switcher Connector 46

Power

chassis 77

chassis, BKDS-7700 89

supplies, redundant 9

supply, BKDS-7060 dimensions 61

tools 9

Preview functions 107

Printed Media 109

Priority 107

Processed Key 4, 12, 107

Processor 16

Product brochure 109

Product training 28

Program outputs 106

Program/Preset Bus

American style 37

Euro style 37

Program/Preset DSK Board 25

Protocol, interface 110

Publications 109

R

Rack Mount Kit

switcher processor 27

tally interface 27

RCC-10G 27

RCC-30G 27

RCC-5A 27

RCC-5G 27

Redundant power supply 9

control panel 25

processor 25

tally 26

Regional

sales offices 112

service centers 113

Related Resources 109

Remote

control panel adaptor 21

key control panel 21, 58

key control software 21

panel interface 22, 64

Request Forms 29, 30

Response System 115

RGB 18

RMM-18DV 27

RMM-30 27

Router

chart 101

SONY

- DVS-B series 4, 8
 - interface 4, 8, 107
 - interface chart 102
- RPK-S7000K1 26
- RPK-S7000K2 27
- RS-232C
 - terminal 1, 2 connector specifications 48
 - terminal connector specifications 82
- RS-422A
 - DME connector specifications 47, 83
 - DSK connector specifications 47, 81
 - editor A/remote 1 connector specifications 85
 - editor B/remote 2 connector specifications 85
 - matrix connector specifications 83
 - panel 1 connector specifications 84
 - panel 2/remote 3 connector specifications 84
 - remote 1-5 connector specifications 48
 - serial tally connector specifications 82
 - switcher connector specifications 46

S

- Sales and Service 112
 - offices 112
- ScitexDV Dveous A-5100 103
- SDI input Board, 12 channel 18
- Serial digital
 - daughter board 18
 - inputs 18
- Service Centers 113
- Shot Box
 - control unit 22, 68
 - panel 7
- SMPTE 259M 18
- Snapshots 7, 107
- Software
 - auxiliary panel operation 23
 - BZDM-3720 operation 20
 - BZDM-7720 operation 21
 - DVS-7250 operation 17
 - remote key control 21
 - tally interface 26
- SOFTWAREPLUS 116
- Source Name Display 107
- Spare Parts Kit
 - control panel 27
 - video processor 26
- Specifications
 - AUX panel connector 51
 - BKDS-2010 control panel 56
 - BKDS-7700 chassis 89
 - BKDS-7700 Serial Tally 1, 2 Connector 92
 - BKDS-7700 Switcher Connector 91
 - BKDS-7700 Tally Enable Connector 94

- BKDS-7700 Tally In/GPI Connector 93
- BKDS-7700 Tally Out 1-9 Connector 95
- BKDS-7700 Terminal Connector 90
- BKDS-7700 Through Out Connector 91
- BKDS-8060 65
- BKDS-8062 72
- chassis 77
- control panel 44
- Display panel connector 52
- GPI connector 86
- GPI control panel connector 49
- option panel connector 50
- RS-232C Terminal 1, 2 Connector 48
- RS-232C Terminal Connector 82
- RS-422A DME Connector 47, 83
- RS-422A DSK Connector 47, 81
- RS-422A Editor A/Remote 1 Connector 85
- RS-422A Editor B/Remote 2 Connector 85
- RS-422A Matrix Connector 83
- RS-422A Panel 1 Connector 84
- RS-422A Panel 2/Remote 3 Connector 84
- RS-422A Remote 1-5 Connector 48
- RS-422A Serial Tally Connector 82
- RS-422A Switcher Connector 46
- Status reporting 8
- Storage 7
- Sub panel remote installation 42
- SUPPORTNET 116
- Switchable system standard 9
- Switcher Control Panel Configuration 23
- System
 - basics 32
 - cables 27
 - components chart 32
 - integration 4
 - interconnection chart, control 99
 - interconnection chart, video 98
 - standard 9
 - timing requirements 80

T

- Tally interface unit 26
- Technical
 - education 116
 - publications 116
- Time and Materials 116
- Timeline 4
 - DME 12
 - effects 9
 - learn 8
- Timing
 - adjustable 6
 - requirements 80

Tools

- basic 5

- power 9

Top Menu Section 38**Training 33**

- general product 28

Transition Control Section 38**U****Upgrades 24****UpTime APS 116****User Guide 109****User utility 107****Utility bus 107****V****V-Proc 6, 107****Video**

- effects processor 16

- paths chart 101

Virtual studio 13**W****Wipe**

- enhanced 7, 24

- generators 106

- patterns 106

- patterns, enhanced 106

Z**Z-data 118**

SONY

SONY

DVS-7250 • Product Guide

Part Number BC-00639
Revision A