



1N4001G THRU 1N4007G, BY133G

GLASS PASSIVATED JUNCTION RECTIFIER


Reverse Voltage - 50 to 1300 Volts

Forward Current - 1.0 Ampere

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- Glass passivated cavity-free junction
- Capable of meeting environmental standards of MIL-S-19500
- 1.0 ampere operation at $T_A=75^\circ\text{C}$ with no thermal runaway
- Typical I_R less than $0.1 \mu\text{A}$
- High temperature soldering guaranteed:
350°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3Kg) tension

DO-41

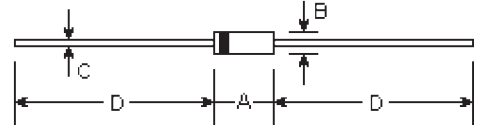

Mechanical Data

- **Case:** DO-41 molded plastic over glass body
- **Terminals:** Plated axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any
- **Weight:** 0.012 ounce, 0.335 gram

| DIMENSIONS | | | | | Note |
|------------|--------|-------|-------|------|------|
| DIM | inches | | mm | | |
| | Min. | Max. | Min. | Max. | |
| A | 0.165 | 0.205 | 4.2 | 5.2 | |
| B | 0.079 | 0.106 | 2.0 | 2.7 | φ |
| C | 0.028 | 0.034 | 0.71 | 0.86 | φ |
| D | 1.000 | - | 25.40 | - | |

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

| | Symbols | 1N 4001G | 1N 4002G | 1N 4003G | 1N 4004G | 1N 4005G | 1N 4006G | 1N 4007G | BY 133G | Units |
|--|------------------------------------|--------------|----------|----------|----------|----------|----------|----------|---------|--------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | 1300 | Volts |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | 910 | Volts |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | 1300 | Volts |
| Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$ | $I_{(AV)}$ | 1.0 | | | | | | | | Amp |
| Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (MIL-STD-750D 4066 method) | I_{FSM} | 30.0 | | | | | | | | Amps |
| Maximum instantaneous forward voltage at 1.0A | V_F | 1.1 | | | | | | | | Volts |
| Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$ | I_R | 5.0 50.0 | | | | | | | | μA |
| Typical reverse recovery time (Note 1) | T_{rr} | 2.0 | | | | | | | | μS |
| Typical junction capacitance (Note 2) | C_J | 8.0 | | | | | | | | μF |
| Typical thermal resistance (Note 3) | $R_{\theta JA}$ $R_{\theta JL}$ | 55.0 25.0 | | | | | | | | $^\circ\text{C/W}$ |
| Operating junction and storage temperature range | T_J, T_{STG} | -65 to +175 | | | | | | | | $^\circ\text{C}$ |

Notes:

- (1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
- (2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts
- (3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD CURRENT DERATING CURVE

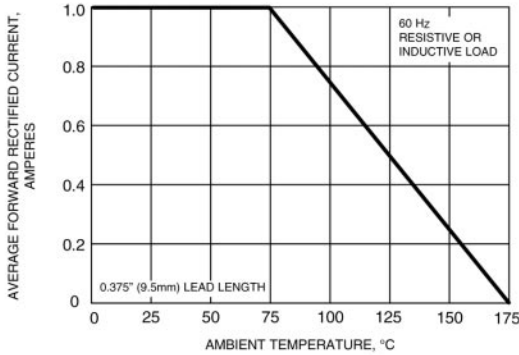


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

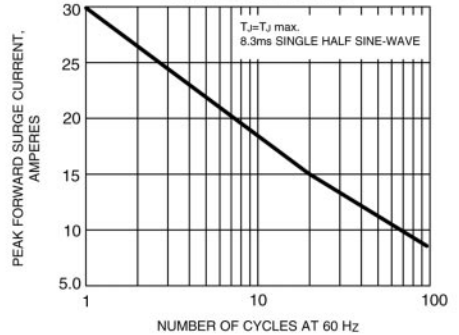


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

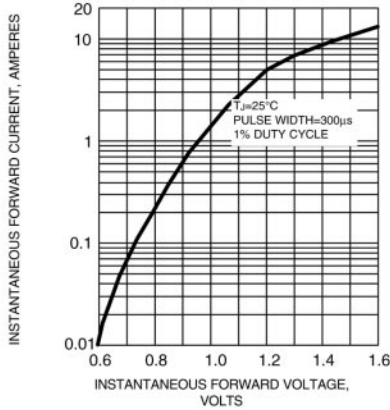


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

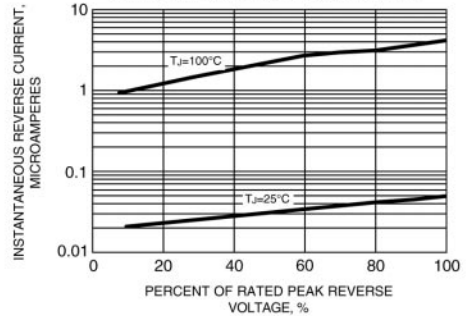


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

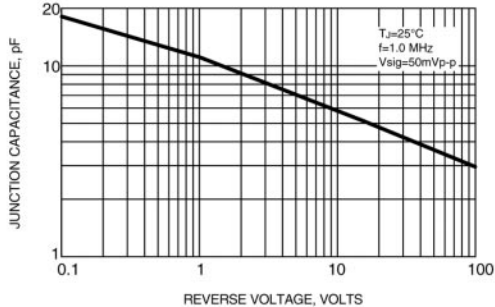


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

