




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1906	A	RELEASED	EO	04/17/06	TL	05/25/06	HO	05/25/06

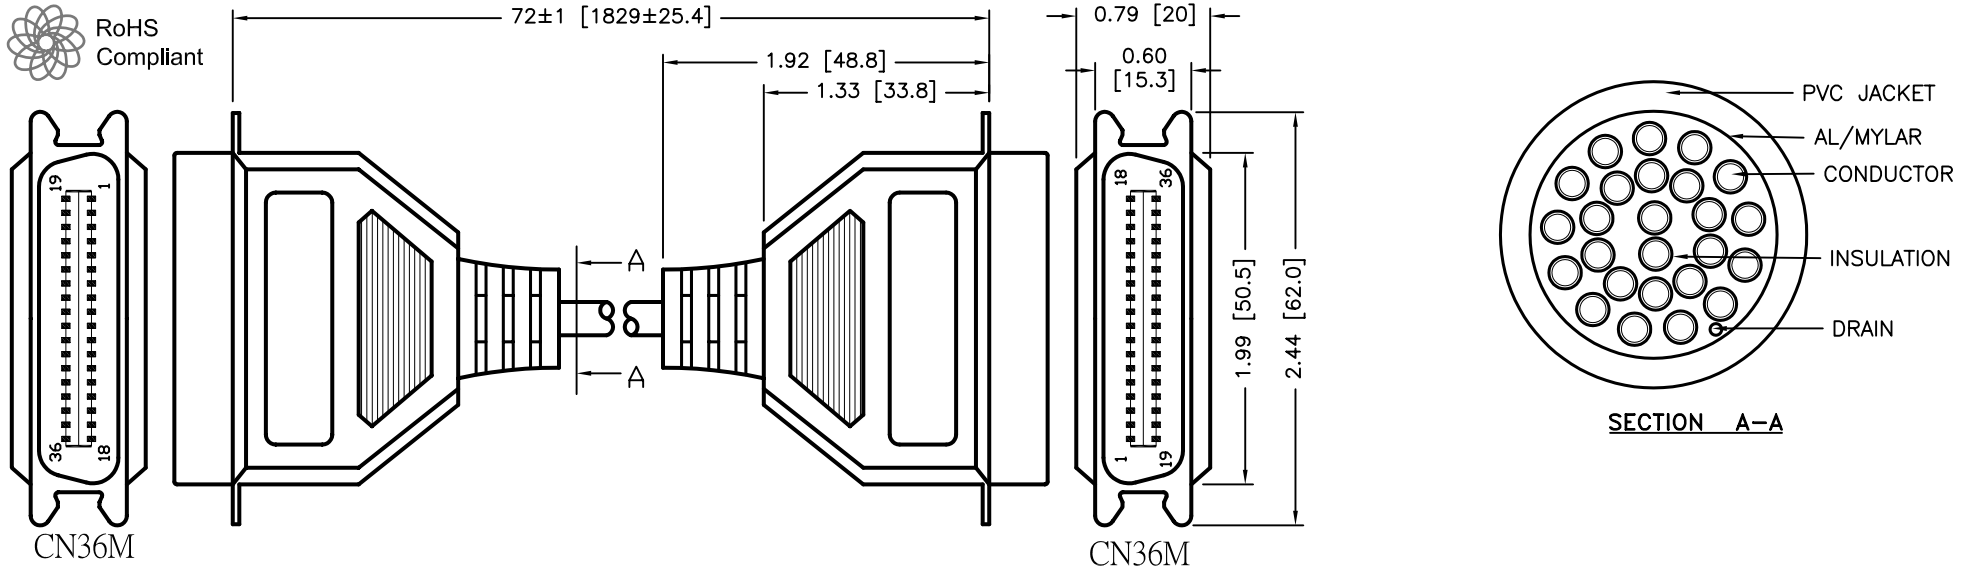

Specifications:

1. Molded connector end requirements:

- A) Inner mold using PE
- B) Aluminum foil wrap to connector
- C) PVC - 45P, Platinum gray

2. Cable:

[28AWG (7/0.12)*25C+AL/MY+DW(7/0.16)]TIN
 Insulation: PP, OD=ø0.78±0.03MM
 Color: COLOR CODE
 Jacket: PVC, OD = ø7.0±0.15mm
 Color: Platinum gray

3. Connectors: CN36P Male Nickel plating, Insulator Color: Blue

SPC TYPE No.	LENGTH
SPC19923	72±1 [1829±25.4]
SPC19922	120±2 [3048±50.8]

PIN OUTS								
C36 MALE	WIRE COLOR	C36 MALE	C36 MALE	WIRE COLOR	C36 MALE	C36 MALE	WIRE COLOR	C36 MALE
1	BLACK	1	10	GRAY	10	22	LIGHT-GREEN	22
2	BROWN	2	11	BLACK/WHITE	11	23	PINK	23
3	RED	3	12	BROWN/WHITE	12	24	PINK/BLACK	24
4	ORANGE	4	13	RED./WHITE	13	25	GRAY/BLACK	25
5	YELLOW	5	14	ORANGE/WHITE	14	31	ORANGE/BLACK	31
6	GREEN	6	16	YELLOW/BLACK	16	32	RED/BLACK	32
7	BLUE	7	19	GREEN/WHITE	19	36	GREEN/BLACK	36
8	PURPLE	8	20	BLUE/WHITE	20	Shell		Shell
9	WHITE	9	21	PURPLE/WHITE	21			

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
EKLAS ODISH	04/17/06
CHECKED BY:	DATE:
THOMAS LEE	05/25/06
APPROVED BY:	DATE:
HISHAM ODISH	05/25/06

DRAWING TITLE: Centronics Data Cable, Centronics 36 Pin M/M			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-744	TA-744.DWG	A
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	