





## Step 1 Checking the Package Contents

Make sure your cordless phone's packaging includes the following items (the number of items may vary depending on model number within the series). If any of these items are missing or damaged, contact the Uniden Parts Department.

- Base Unit
- Handset(s)
- AC Adapter(s)
- Wall Mount Adapter
- Rechargeable Battery Pack(s)
- Telephone Cord
- Belt Clip(s)
- Owner's Manual
- Other Printed Materials

Uniden Parts Department at (800) 554-3988  
Hours: M-F 8:00 a.m. to 5:00 p.m. CST.  
or visit our website at [www.uniden.com](http://www.uniden.com) for  
replacement parts.


## Step 2 Install and Charge the Handset Battery

### TO INSTALL THE HANDSET BATTERY


(see page 12 for details)

**Charge the handset battery pack for at least 15-20 hours before using your new cordless telephone for the first time! Use only the Uniden rechargeable battery pack supplied with your new phone.**


**A** Remove the cover.



**B** Connect the battery pack connector with the correct polarity and listen for a click to insure connection.




**C** Replace the cover.



**Use only the Uniden AC adapter supplied with your new phone.**


**D** Plug the AC adapter cord into the base unit and then into a 120V AC outlet.

**E** Place the handset in the base and charge continuously for 15 - 20 hours before using the phone.



### Step 3 Connect to Phone Line

When the handset battery pack is fully charged (after 15-20 hours of charging), plug the telephone cord into the base unit and then into a telephone wall jack.




Your phone is set for tone dialing. If your local network requires pulse dialing, refer to page 25.

### Step 4 Setting Caller ID & Language Display Options

#### TO SET CALLER ID ON CALL WAITING AND CALL WAITING DELUXE

For all Handset Menu Setup options, refer to page 17.



**A** Press **menu/del** in standby mode.

**B** Press **ring/vol/∧** or **ring/vol/∨** to select **Global Setup** and then **select/☒**.

**C** Press **ring/vol/∧** or **ring/vol/∨** to select **CIDCW** and then **select/☒**.

**D** Press **ring/vol/∧** or **ring/vol/∨** to select **CW On/CWDX On**, **CW On/CWDX Off**, **CW Off/CWDX Off** and then **select/☒** (see page 24 for details).

#### TO SET LANGUAGE

**A** Press **menu/del** in standby mode.

**B** Press **ring/vol/∧** or **ring/vol/∨** to select **Handset Setup** and then **select/☒**.

**C** Press **ring/vol/∧** or **ring/vol/∨** to select **Language** and then **select/☒**.

**D** Press **ring/vol/∨** to choose a language and then **select/☒**.

### Step 5 Adjusting Ringer Level

In standby mode, press **ring/vol/∧** or **ring/vol/∨** on the handset or **ring/volume/∧** or **ring/volume/∨** on the base to select the desired volume.

## 1° Paso Inspección del contenido del embalaje

Asegúrese de que haya recibido los siguientes artículos en el paquete (la cantidad de artículos puede variar dependiendo del número del modelo dentro de la serie). Si alguno de estos artículos falta o está dañado, comuníquese con el departamento de partes de Uniden.

- Base
- Receptor(es)
- Adaptador(es) CA
- Adaptador de montaje de pared
- Paquete(s) de pilas recargable(s)
- Cable telefónico
- Pinza(s) para la correa
- Manual para el usuario
- Otros impresos

Uniden Parts Department  
Teléfono: (800)554-3988  
Horas: de Lunes a Viernes desde las 8 a.m. hasta las 5:00 p.m., hora central O visítenos en nuestra página Web en [www.uniden.com](http://www.uniden.com) para conseguir las partes de reemplazo.

## 2° Paso Instalación y carga de la pila para el receptor

### Para instalar la pila del receptor

(Consulte la página 12 para más detalles)

**Cargue el paquete de batería to pila por lo menos de 15 a 20 horas antes de conectarlo a una línea telefónica.**

**Use solamente el paquete de pilas recargable de Uniden suministrado con su nuevo teléfono.**

**A** Quite la tapa.





Conecte el enchufe del paquete de las pilas con la polaridad correcta y escuche por un clic para asegurar la conexión.

**C** Reponga la tapa.

**Use solamente el adaptador CA de Uniden suministrado con su nuevo teléfono.**

**D** Conecte el cable del adaptador CA en la base y luego en una toma CA de 120 V.

**E** Antes de usar el teléfono, coloque el receptor en la base y cárguelo continuamente por 15-20 horas.



### 3º Paso Conexión a la línea telefónica

Cuando el paquete de pilas del receptor esté totalmente cargado, después de una carga de 15-20 horas, conecte el cable telefónico en la base y luego en el enchufe telefónico de la pared.




Su teléfono está programado para marcar por tono. Si su red local requiere la marcación por pulso, consulte la página 25.

### 4º Paso Programación de las opciones de identificación de llamadas y del lenguaje en la pantalla

**Para programar las opciones de identificación de llamadas de llamadas en espera y llamada en espera de lujo**

Para todas las demás opciones de programación en el menú, consulte la página 17.



**A** Oprima *menu/del* en el modo de espera.

**B** Oprima *ring/vol/∧* o *ring/vol/∨* para seleccionar la Progr global, y luego *select/☒*.

**C** Oprima *ring/vol/∧* o *ring/vol/∨* para seleccionar CIDCW, y luego *select/☒*.

**D** Oprima *ring/vol/∧* o *ring/vol/∨* para seleccionar CW Act/CWDX Act, CW Act/CWDX A9, o CW A9/CWDX A9, y luego *select/☒* (consulte la página 24 para más detalles).

### Para programar el lenguaje

**A** Oprima *menu/del* en el modo de espera.

**B** Oprima *ring/vol/∧* o *ring/vol/∨* para seleccionar la Progr receptor, y luego *select/☒*.

**C** Oprima *ring/vol/∧* o *ring/vol/∨* para seleccionar el Lenguaje, y luego *select/☒*.

**D** Oprima *ring/vol/∨* para escoger el lenguaje, y luego *select/☒*.

### 5º Paso Ajuste del nivel del timbre

En el modo de espera, oprima *ring/vol/∧* o *ring/vol/∨* en el receptor o *ring/volume/∧* o *ring/volume/∨* en la base para seleccionar el volumen deseado.

# Contents

<b>QUICK REFERENCE GUIDE</b>	<b>1</b>	Speed Dialing	<b>42</b>
<b>WELCOME/FEATURES/TERMINOLOGY</b>	<b>6</b>	Editing or Erasing a Stored Name, Phone Number, Distinctive Ring, and Speed Dial	<b>43</b>
<b>CONTROLS AND FUNCTIONS</b>	<b>8</b>	Memory Dialing (base only)	<b>44</b>
<b>DISPLAY AND ICONS</b>	<b>10</b>		
<b>GETTING STARTED</b>	<b>11</b>	<b>CALLER ID</b>	<b>45</b>
Setting up the Phone	11	Caller ID and CIDCW (Caller ID on Call Waiting)	45
Mounting the Base Unit on a Wall	15	Viewing the Caller ID List	46
About the Menu Options	17	Deleting a Caller ID Message	47
Setting Menu Options	20	Using the Caller ID Message List	48
<b>BASICS</b>	<b>27</b>	Call Waiting Deluxe Features	<b>49</b>
Making and Receiving Calls	27	<b>EXPANDING YOUR PHONE</b>	<b>50</b>
Placing a Call on Hold	28	Expanding Your Phone	50
Redialing a Call	28	Connecting the Charger	50
Adjusting the Handset Ringer, Earpiece and Speaker Volume	29	Register the Handset to the Base	51
Adjusting the Base Ringer Volume and Speaker Volume	30	Using the DirectLink Mode	52
Do Not Disturb (DND)	31	4-Way Conferencing	53
Mute Microphone	31	Intercom/Call Transfer Feature	53
Tone Dialing Switch-over	32	Replacing the Base	55
Traveling Out-of-Range	32	<b>ADDITIONAL INFORMATION</b>	<b>56</b>
Clarity Booster	33	Changing the Digital Security Code	56
Privacy Mode	33	Installing the Beltclip	56
3-Way Conferencing	34	Headset Installation	56
Find Handset	35	Note on Power Sources	57
Flash and Call Waiting	35	Maintenance	57
Using One Touch Voice Mail Access	36	General Information	58
<b>PHONEBOOK</b>	<b>37</b>	<b>TROUBLESHOOTING</b>	<b>59</b>
Phonebook	37	Liquid Damage	61
Storing Phone Numbers, Names, Distinctive Rings, and Speed Dial	37	<b>PRECAUTIONS &amp; WARRANTY</b>	<b>62</b>
Chain Dialing	38	<b>I.C. NOTICE</b>	<b>64</b>
Steps for Entering Names and Special Characters	39	<b>INDEX</b>	<b>65</b>
Viewing the Phonebook	41	<b>MEMORY LIST</b>	<b>66</b>
Making Calls Using the Phonebook	42		

# Welcome

Congratulations on your purchase of the Uniden Expandable Cordless System telephone. This unit is different from conventional cordless telephones. When the base unit is connected to AC power and a telephone line, it can support up to 4 handsets. Using extra handsets, you can establish a 4-way conference call (2 handsets - Base Speaker Phone - an outside line). Additionally, with 4-way conference using 2 handsets, another 2 handsets can establish an intercom call. You can now place a fully featured cordless handset anywhere in your home or office where AC power is available to connect the handset chargers.

**Note:** Some illustrations in this manual may differ from the actual unit for explanation purposes.



As an Energy Star® Partner, Uniden has determined that this product or product models meets the Energy Star® guidelines for energy efficiency. Energy Star® is a U.S. registered mark.

**Note:** Energy Star® applies to DCT6465 only.

# Features

- 2.4GHz Digital Expandable System
- 4 Handsets Expandability
- Hands Free Speakerphone in the Handset and Base
- Caller ID/Caller ID on Call Waiting
- Call Waiting Deluxe
- 100 Programmable Memory Locations (Phonebook or Caller ID)
- Trilingual Handset Display Menus (English, French, and Spanish)
- Call Transfer and/or Intercom between Handsets, or Handset and Base
- 20 Distinctive Ring Options (10 ringer tones and 10 melody ringers)
- Mute Feature
- 88 Channel Auto Scan
- DirectLink™ Mode
- Voice Mail Waiting Indicator and Access
- Room/Baby Monitoring Capability
- Battery Level Indicator
- Clock Display
- 10 Memory Dial Location at Base
- Dual Keypad at Base



This series features include **AutoTalk™** and **AutoStandby™**. AutoTalk allows you to answer a call by just removing the handset from the cradle so you don't have to waste time pushing buttons. AutoStandby allows you to hang up by simply returning the handset to the cradle.

To protect you against mis-billed calls, which might result from your phone being activated by other equipment, this series has **Random Code™** digital security, which automatically selects one of over approx. 130,000 digital security codes for the handset and base.

Frequency Hopping Spread Spectrum (FHSS) technology improves calling range and clarity, and eliminates cross talk. Because it rapidly changes transmission frequencies within the 2.4GHz bandwidth, this cordless phone helps reduce the possibility of eavesdropping.

**DirectLink™** mode is used when you have 2 or more handsets. You can use your handsets as transceivers.

**IntegriSound™** Built in sound quality which provides lifelike conversations.

**Be sure to visit our web site: [www.uniden.com](http://www.uniden.com)**


Uniden® is a registered trademark of Uniden America Corporation.

AutoTalk, AutoStandby, DirectLink, Random Code, and IntegriSound are trademarks of Uniden America.



## Terminology

- **Standby Mode** - The handset is not in use and **talk/flash** has not been pressed.
- **Talk Mode** - The handset is not in the cradle and **talk/flash** or **speaker** has been pressed enabling a dial tone. Talk appears on the display.

# Controls & Functions

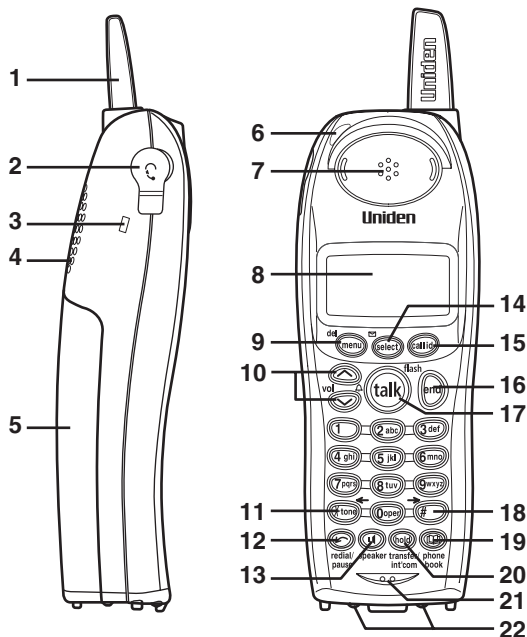

1. Handset Antenna
2. Headset Jack Cover
3. Beltclip Hole
4. Hands-Free Speaker
5. Handset Battery Compartment
6. New Message LED
7. Handset Earpiece
8. LCD Display
9. **Menu/del** (delete) Key (P. 20 / P. 29, 43, 47)
10. **△ (ring)/vol (volume) and ↕/↕** (P. 22/P. 29)
  - a. ringer and volume control
  - b. scroll keys for display screen
11. **\*/tone/←** Key (P. 23 / P. 32 / P. 40)
12. **↩ redial/pause** Key (P. 28 / P. 27)
13. **🔊 speaker** Key (P. 27)
14. **Select/☑** (voice mail) Key (P. 20 / P. 36)
15. **Call id** (Caller ID) key (P. 46)
16. **End** Key (P. 27)
17. **Talk/flash** Key (P. 27 / P. 35)
18. **#/→** Key (P. 23 / P. 40)
19. **📖** (Phonebook) Key (P. 37)
20. **Hold/transfer/int'com** (Intercom) Key (P. 28 / P. 54 / P. 53)
21. Handset Microphone
22. Handset Charging Contacts

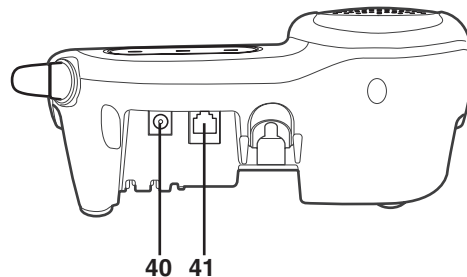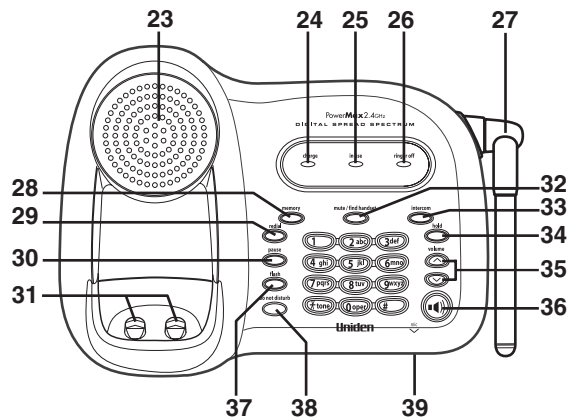

23. Base Speaker

24. **Charge** LED

25. **In use** LED

26. **Ringer off** LED

27. Base Antenna

28. **Memory** Key (P. 44)

29. **Redial** Key (P. 29)

30. **Pause** Key (P. 27)

31. Base Charging Contacts

32. **Mute/find handset** Key (P. 31/35)

33. **Intercom** Key (P. 53)

34. **Hold** Key (P. 28)

35.  $\Delta$  (ring)/**volume** and  $\wedge/\vee$  (P. 30)

36.  $\bullet$  (speaker) Key (P. 27)


37. **Flash** Key (P. 35)

38. **Do not disturb** Key (P. 31)

39. Microphone

40. **DC IN 9V** Jack

41. **TEL LINE** Jack

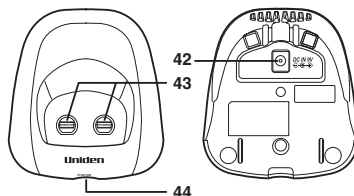

**For DCT6465 only**


42. **DC IN 9V** Jack

43. Charging Contacts

44. **Charge** LED

# Display and Icons

Example of the standby mode display



ICON	STATUS	DESCRIPTION
	Standby/Talk	<b>Battery</b> icons indicate the handset battery status. This icon cycles depending on the battery status (empty, low, medium, and full).
	Standby	<b>Ringer off</b> icon indicates that ringer is turned off.
	Talk	<b>Mute</b> icon appears when you mute the handset.
	Talk	<b>Speaker</b> icon appears when the handset speaker phone is used.
	Talk	<b>Booster</b> icon appears when the Clarity Booster feature is in use.
	Talk	<b>Privacy</b> icon appears when the Privacy Mode is turned on.


# Setting up the Phone

## Do the following steps:

- Choose the best location.
- Install the rechargeable battery pack into the handset.
- Connect the base unit.

## A. Choose the best location

Before choosing a location for your new phone, read "Installation Considerations" on page 63. Here are some important guidelines you should consider:

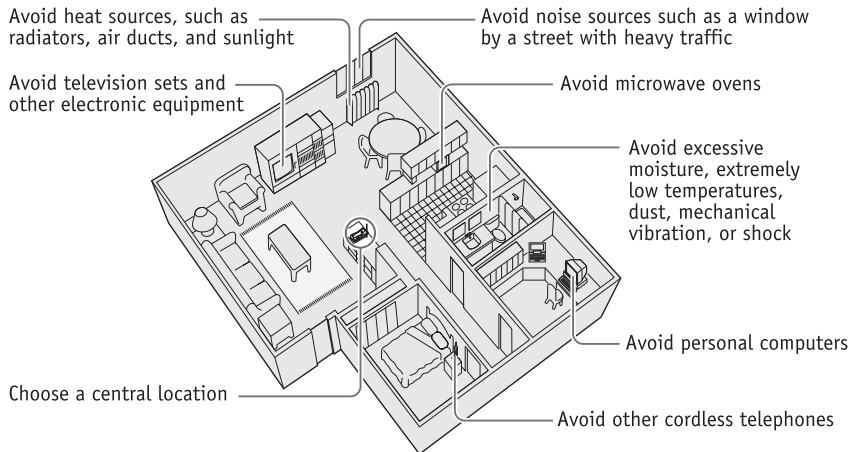

If your home has specially wired alarm equipment connected to the telephone line, be sure that installing the system does not disable your alarm equipment.

If you have questions about what will disable alarm equipment, contact your telephone company or a qualified installer.




- **Use only the Uniden (BT-446) rechargeable battery pack supplied with your cordless telephone.**

- Replacement battery packs are also available through the Uniden Parts Department at (800) 554-3988, Monday thru Friday from 8:00 a.m. to 5:00 p.m. or online at [www.uniden.com](http://www.uniden.com)

## B. Install the rechargeable battery pack into the handset

**Charge the handset battery pack for at least 15-20 hours before using your new cordless telephone for the first time!** The handset is powered by a rechargeable battery pack. The battery recharges automatically when the handset is placed in the base unit. To maximize the charge capacity of your battery pack, **DO NOT** plug the telephone cord into the base unit and wall jack until the battery is fully charged.

- 1) Press down on the handset battery case cover (use the finger indentation for a better grip) and slide the cover downward to remove.
- 2) Plug the battery pack connector (red & black wires) into the jack inside the battery compartment (the connector notches fit into the grooves of the jack only one-way). Match the wire colors to the polarity label in the battery compartment, connect the battery, and listen for a click to insure connection.
- 3) Make sure you have a good connection by slightly pulling on the battery wires. If the connection is secure, the battery jack will remain in place.
- 4) Place the battery case cover back on the handset by sliding it upwards until it clicks into place.
- 5) Place the handset in the base unit for 15-20 hours without interruption. The base unit's LED light (labeled **charge**) illuminates once the handset is placed in the base. The LED light will illuminate whether the battery pack is connected or not.

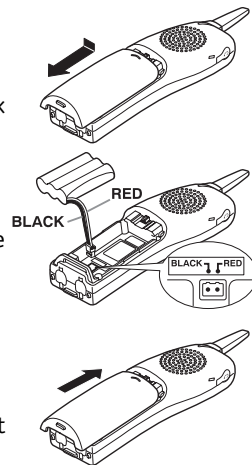

If the base **charge** LED light does not illuminate:

- Check to see if the AC adapter is plugged into the base unit and the electrical wall outlet properly (use only the supplied AC adapter. Do not use any other AC adapter.)
- Check to see if the handset is sitting correctly in the base and making good contact with the base unit's charging contacts.

## Low battery alert

When the battery pack is very low and need to be charged, the phone is programmed to eliminate functions in order to save power.

The battery pack needs to be charged when:



- The empty battery icon appears.
- Low Battery appears in the display.

If the phone is in standby mode, none of keys will operate. If you are on a call, complete your conversation as quickly as possible, and return the handset to the cradle.

## Cleaning the battery charging contacts

To maintain a good charge, it is important to clean the charging contacts on both the handset and the base unit once a month. Using water only, dampen a cloth to clean the charging contacts. Then make sure to go back over the charging contacts with a dry cloth before returning the handset to the base to charge.

**Caution:** Do not use paint thinner, benzene, alcohol, or other chemical products. Doing so may discolor the surface of the telephone and damage the finish.

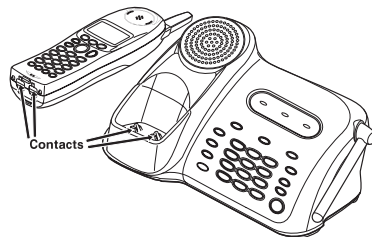

## note

- Even when the battery pack is not being used, it will gradually discharge over a long period of time. For optimum performance, be sure to return the handset to the base unit after a telephone call.
- **Standby Mode** - The handset is not in use and **talk/flash** has not been pressed.
- **Talk Mode** - The handset is not in the cradle and **talk/flash** or **speaker** has been pressed enabling a dial tone. **Talk** appears on the display.

## note

• Use only the supplied AD-830 AC adapter. Do not use any other AC adapter.

• Place the power cord so that it does not create a trip hazard or where it could become chafed and create a fire or electrical hazard.

## C. Connect the base unit

- 1) Connect the AC adapter to the **DC IN 9V** jack and to a standard 120V AC wall outlet.
- 2) Set the base on a desk or tabletop, and place the handset in the base unit.
- 3) Raise the antenna to a vertical position.
- 4) Make sure that the **charge** LED illuminates.




If the LED does not illuminate, check to see that the AC adapter is plugged in and the handset makes good contact with the base charging contacts.

- Connect the AC adapter to a continuous power supply.
- Place the base unit close to the AC outlet so that you can unplug the AC adapter easily.

- After installing the battery pack in the handset, charge your handset at least **15-20 hours before plugging into the phone line.**

- 5) Once the handset battery pack is fully charged, connect the telephone line cord to the **TEL LINE** jack and to a telephone outlet.

**tip** If your telephone outlet isn't modular, contact your telephone company for assistance.

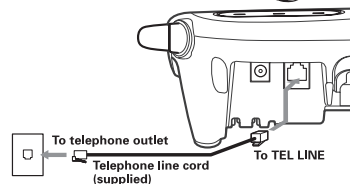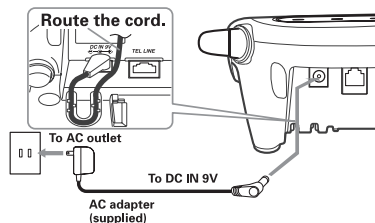




# Mounting the Base Unit on a Wall


## Standard wall plate mounting

This phone can be mounted on any standard wall plate.

- 1) Snap the wall mount adapter into the notches on the base top.
- 2) Plug the AC adapter into the **DC IN 9V** jack.
- 3) Wrap the AC adapter cord inside the molded wiring channel as shown.
- 4) Plug the AC adapter into a standard 120V AC wall outlet.
- 5) Plug the telephone line cord into the **TEL LINE** jack. Wrap the cord inside the molded wiring channel as shown.
- 6) Plug the telephone line cord into the telephone outlet.
- 7) Raise the antenna to a vertical position.
- 8) Align the mounting slots on the base with the mounting posts on the wall. Then push in and down until the phone is firmly seated.



Wall plate

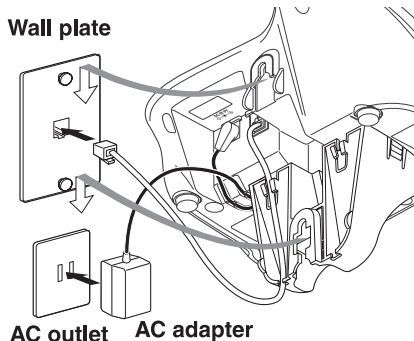

AC outlet

AC adapter




DO NOT use an AC outlet controlled by a wall switch.

## Direct wall mounting

If you don't have a standard wall plate, you can mount your phone directly to the wall. Before doing this, consider the following:

- Avoid electrical cables, pipes, or other items behind the mounting location that could cause a hazard when inserting screws into the wall.
  - Try to mount your phone within 5 feet of a working phone jack to avoid excessive lengths.
  - Make sure the wall material is capable of supporting the weight of the base and handset.
  - Use #10 screws (minimum length of 1-3/8 inches) with anchoring devices suitable for the wall material where the base unit will be placed.
- 1) Insert two mounting screws into the wall (with their appropriate anchoring device), 3-15/16 inches apart. Allow about 1/8 of an inch between the wall and screw heads for mounting the phone.
  - 2) Refer to steps 1 through 8 on page 15 to mount the telephone.

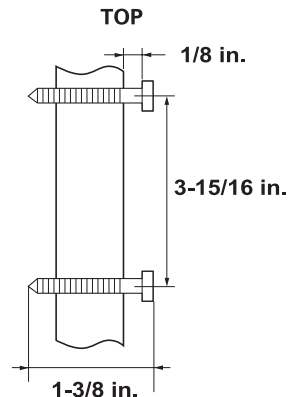

# About the Menu Options

There are 5 main menu options, (**DirectLink Mode**, **Room/Baby Monitor**, **Handset Setup**, **Global Setup** and **System Reset**) and 16 submenu options.

## Summary of Main Menu and Submenu Options

### DirectLink Mode

DirectLink Mode allows a pair of handsets to work without the base unit, for direct handset-to-handset communication. Use them at sporting events or while shopping to stay in contact with family members or friends. You must set the two handsets to DirectLink Mode to utilize this feature.

### Room/Baby Monitor

This feature allows you to monitor sounds in another room (see page 21 for setup). One handset (or the base) is placed in the desired room to monitor (acts as remote mic), and the other is placed near listener (remote speaker). This is useful for monitoring child activities.



- During Global Setup and System Reset, make sure your cordless phone is in standby mode (not in use), and all handsets are within range of the main base unit.
- If an incoming call is received during room monitor mode, the user's handset will receive incoming tones or beeps. To cancel room/baby monitor and receive the call, press **talk/flash** or **speaker**. If monitoring from base unit, press **speaker**. The handset or the base that's placed in the room being monitored, will NOT sound or receive incoming tones.

## Handset Setup

The following submenu options must be set separately for each handset.

Submenu option	Description
Edit Voice Mail	Program or delete the voice mail access number (see page 21).
Ringer Tones (Default is <i>Flicker</i> )	Adjusting the ringer tone (tone your phone makes when ringing) (see page 22).
Distinct. Ring (Default is <i>on</i> )	Set the distinctive ring (see page 22). "Distinctive Ringer" allows you to preset memory locations with a designated ring tone. When an incoming call is received and the Caller ID information matches the information in one of the memory locations, the distinctive ring that has been stored for that particular Caller will sound. If you have set multiple memory locations with distinctive rings, switching the setting to "Distinctive Off" will result in no distinctive ringing. All incoming calls will have a normal ring tone. Switching to "Distinctive On" will activate all programmed distinctive ring memory locations.
AutoTalk (Default is <i>off</i> )	Allows you to answer the phone without pressing <b><i>talk/flash</i></b> or <b><i>speaker</i></b> . When the AutoTalk is set to on, simply remove the handset from the cradle and the phone automatically answers the call (see page 22).
Anykey Answer (Default is <i>off</i> )	Allows you to answer the phone without pressing <b><i>talk/flash</i></b> or <b><i>speaker</i></b> . When the Anykey Answer is on, you can answer a call by pressing any number key, <b><i>*/tone/←</i></b> , or <b><i>#/→</i></b> on the handset (see page 23).
Banner (True <i>Banner</i> )	Customize your handset(s) by giving it a banner name. The name will be displayed on the LCD screen during standby mode, Intercom, Transfer, Room Monitor and Copy Phonebook operation. The banner name will be displayed on the receiving handset as well (see page 23).
Language (Default is <i>English</i> )	The menu display options can be set to English, French or Spanish for easy setup use (see page 23).
Key Touch Tone (Default is <i>on</i> )	Allows you to set your phone's key touch-tone to on or off (tone your keypad makes when keys are pressed) (see page 23).

## Global Setup

If you change one of the Global settings, you change the setting for all additional handsets. Only one handset can change Global settings at a time.

Submenu option	Description
Day & time	Set the day and time of your display (see page 24).
CIDCW (Default is CW on/CWDX off)	Set the Caller ID on Call Waiting (CIDCW) setting. CIDCW performs the same as regular Caller ID on a call waiting number (see page 24). Call Waiting Deluxe allows you to handle call waiting calls in seven different ways (see page 49).
Area Code	Store or edit the area code. If you enter a 3-digit area code number in the "Area Code" option, your local area code does not appear in the Caller ID message. For calls received from outside your local area code, you will see a full 10-digit number (see page 24). Note: If your calling area requires 10-digit dialing, do not program this option.
Dial Mode (Default is <i>tone</i> )	Set the dial mode to tone or pulse (see page 25). Most phone systems use tone dialing, which send DTMF tone through phone line. The default is tone dialing. Depends on your dialing system, set the dial mode.
Copy Phonebook	Allow you to transfer the phonebook data stored in one handset to another handset (see page 25).
Voice Mail Tone (Default is <i>on</i> )	If your service does not support SDT message signal, set your VMWI (Visual Message Waiting Inculcator) not to detect SDT message signal (see page 26).

## System Reset

System Reset is used to clear the handset's ID from the main base unit, or the base ID from the handset.

Submenu option	Description
Deregister HS	Clear the handset ID from the base. Use this option, for example, when you change the digital security code (see page 26).
Replacing Base	Clear the base ID. Use this option, for example, if you wish to deregister the base to use the handset with another base of the DCT series (DCT646/DCT6465/DCT648/DCT6485 series) (see page 26).

# Setting Menu Options

## Entering the Menu

- 1) Press the **menu/del** key in standby mode.
- 2) Use **ring/vol/∧** or **ring/vol/∨** to move the pointer to a desired main menu (DirectLink Mode, Room Monitor, Handset Setup, Global Setup, and System Reset).
- 3) Press **select/☒** to select the desired main menu.
- 4) Use **ring/vol/∧** or **ring/vol/∨** to select a desired submenu, and then press **select/☒** to enter.  
In the submenu, use **ring/vol/∧** or **ring/vol/∨** to select an item.  
Press **select/☒** to confirm your selection. For detailed instructions, see the following sections for the desired submenu.
- 5) To exit the menu, press **end** or place the handset to the cradle.

▶DirectLink Mode  
Room Monitor  
Handset Setup

## DirectLink Mode


### Using the DirectLink Mode

- 1) Enter the DirectLink Mode menu (see "Entering the Menu" on page 20). To enter DirectLink mode press [SELECT] appears.
- 2) Press **select/☒** to enter the DirectLink mode. You will hear a confirmation tone, and DirectLink Mode Complete appears.
- 3) To return back to the normal mode, exit the DirectLink mode. To exit the DirectLink mode, press **menu/del**, and then **select/☒**, or return the handset to the cradle.


To enter  
DirectLink mode  
press [SELECT]

## Room/Baby Monitor

### Using Room Monitor

- 1) Enter the Room Monitor menu (see "Entering the Menu" on page 20). To Room Monitor appears.
- 2) Select the handset or base you want to monitor by using *ring/vol/▲* or *ring/vol/▼*.
- 3) Press **select**/.  
RoomMonitor appears, and you hear sounds in the room where the handset or base is installed.
- 4) To finish the Room Monitor, press **end** or return the handset to the cradle.

```
To Room Monitor
▶Handset   #2
Base
```


```
RoomMonitor▶ 
↔ Handset #2
```




Room monitoring can be between handsets or base unit and handset.

## Handset Setup

### Programming your Voice Mail Access Number

- 1) Enter the Handset Setup menu, and then the Edit Voice Mail submenu (see "Entering the Menu" on page 20).  
Edit V\_mail No. appears.
- 2) Enter your personal access number using the number keypad (**0-9**), *\*/tone/←*, *#/→*, *menu/del*, or *redial/pause* (up to 20 digits).
- 3) Press **select**/. You will hear a confirmation tone.

```
Edit V_mail No.
1234567890■
```

To delete the current Voice Mail Access Number, delete all numbers in step 2 using *menu/del* and **select**/.

## Selecting a Ringer Tone

- 1) Enter the Handset Setup menu, and then the Ringer Tones submenu (see "Entering the Menu" on page 20).

There are 10 ringer tones or 10 melodies to choose from.

- Ringers [Flicker, Clatter, Soft Alert, Wake Up, Light Bug, Beep Boop, Tone Board, Chip Chop, Party Clap, Reminder]
- Melodies [Beethoven's Symphony #9 (Beethoven9), For Elise (Elise), We Wish You A Merry Christmas (Merry-Xmas), Home Sweet Home (Hm Swt Hm), Lorri Song #6 (Lorri Song), When the Irish Eyes Are Smiling (Irish Eyes), Aura Lee, Let Me Call You Sweet Heart (Sweetheart), Star Spangled Banner (Star Spngl), Old MacDonald (Old MacDld)]

```
DirectLink Mode
Room Monitor
▶Handset Setup
```

```
Ringer Tones
▶Flicker
Clatter
```

- 2) Press **ring/vol/▲** or **ring/vol/▼** to move the pointer. You will hear the ringer or melody as you scroll through the options.
- 3) Press **select/☒**. You will hear a confirmation tone.

## Distinctive Ringer Setup

- 1) Enter the Handset Setup menu, and then the Distinctive Ring submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/▲** or **ring/vol/▼** to select On or Off.
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Distinctive Ring
▶On
Off
```

## Setting the AutoTalk

- 1) Enter the Handset Setup menu, and then the Auto Talk submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/▲** or **ring/vol/▼** to select On or Off.
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Auto Talk
On
▶Off
```



## Setting the Anykey Answer

- 1) Enter the Handset Setup menu, and then the Anykey Answer submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/▲** or **ring/vol/▼** to select On or Off.
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Anykey Answer
On
▶ Off
```

## Setting the True Banner

- 1) Enter the Handset Setup menu, and then the Banner submenu (see "Entering the Menu" on page 20).
- 2) Use the number keypad (**0-9**), **\*/tone/←**, **#/→**, or **menu/del** to enter or edit the name.
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Banner
Mom'sPhone #1
```

## Selecting a Language

- 1) Enter the Handset Setup menu, and then the Language submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/▲** or **ring/vol/▼** to choose English, Français (French), or Español (Spanish).
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Language
▶ English
Français
```

## Setting the Key Touch Tone

- 1) Enter the Handset Setup menu, and then the Key Touch Tone submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/▲** or **ring/vol/▼** to select On or Off.
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Key Touch Tone
▶ On
Off
```



- When a Global setting is changed from one handset, this affects all registered handsets.
- For setting the day and time, the idle time-out is extended to 2 minutes.

- When the area code has already been stored in memory, the stored area code will be displayed. To change it, use **menu/del** and number keys to enter the new area code.

## Global Setup (All Registered Handsets)

### Setting Day and Time

- 1) Enter the Global Setup menu, and then the Day & Time submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/Λ** or **ring/vol/∇** to select the day of the week, and then press **select/☒**.
- 3) Press **ring/vol/Λ** or **ring/vol/∇** to set hour and then press **select/☒**.
- 4) Press **ring/vol/Λ** or **ring/vol/∇** to set minute and then press **select/☒**.
- 5) Press **ring/vol/Λ** or **ring/vol/∇** to choose AM or PM, and then press **select/☒**.  
You will hear a confirmation tone.

```
Day & Time
SUN 12:00 AM
[←/↑/↓/→/SELECT]
```

### Setting CIDCW (Caller ID on Call Waiting)

- 1) Enter the Global Setup menu, and then the CIDCW submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/Λ** or **ring/vol/∇** to select CW On/CWDX On, CW On/CWDX Off, or CW Off/CWDX Off, and then press **select/☒**. You will hear a confirmation tone.

```
CIDCW
▶CW On /CWDX On
CW On /CWDX Off
```

### Setting the Area Code

- 1) Enter the Global Setup menu, and then the Area Code submenu (see "Entering the Menu" on page 20).
- 2) Press the number keypad (**0-9**) to enter a 3-digit area code.
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Area Code
■__
```

## Setting the Dial Mode

- 1) Enter the Global Setup menu, and then the Dial Mode submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/▲** or **ring/vol/▼** to change the select, Tone or Pulse (the initial setting is Tone).
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Dial Mode
▶ Tone
Pulse
```



- If you are not of your dialing system, set the unit to tone dialing. Make a trial call. If the call connects, leave the setting as is, otherwise set the unit to pulse dialing.
- If your phone system requires pulse dialing and you need to send DTMF tones in certain situations during a call, you may Switch Over to tone dialing (refer to "Tone Dialing Switch-over" on page 32)

## Copy Phonebook

- 1) Enter the Global Setup menu, and then the Copy Phonebook submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/▲** or **ring/vol/▼** to choose One Memory or All Memory, and then press **select/☒**.  
If you choose All Memory, go to step 4.
- 3) Press **ring/vol/▲** or **ring/vol/▼**, or the number keypad (**0-9**) to select the phonebook location you want to export, and then press **select/☒**.
- 4) Press **ring/vol/▲** or **ring/vol/▼** to select the handset to which you want transfer the phonebook locations, and then press **select/☒**.

```
Copy Phonebook
▶ One Memory
All Memory :xxx
```

If you choose All Memory in the step 2, Are you sure? appears.  
Press **ring/vol/▲** or **ring/vol/▼** to select Yes, and then press **select/☒**.

The phonebook locations will be transferred to the handset. On the receiving handset, Receiving and the handset name appear. When the transfer complete, Done! appears on the handset.

note

- If you receive a call or set up the Global Setup menu, the transfer will be canceled.
- If an error occurs, the phonebook locations transferred before the error were stored in the receiving handset. Unavailable appears on the display.
- When the memory of the receiving handset is full, Not enough memory in Receiving Handset appears. You cannot transfer the phonebook location.



Make sure to perform the Replacing Base after de-register the handset.

## Voice Mail Tone

- 1) Enter the Global Setup menu, and then the Voice Mail Tone submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/Λ** or **ring/vol/∇** to set the voice message indication (SDT message signal) to On or Off.
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Voice Mail Tone
▶ On
  Off
```

## System Reset

### De-register the Handset

- 1) Enter the System Reset menu, and then the Deregister HS submenu (see "Entering the Menu" on page 20).
- 2) Press **ring/vol/Λ** or **ring/vol/∇** to select the handset ID to be de-registered from the list, and then press **select/☒**. Deregister HS? appears.
- 3) Press **ring/vol/Λ** or **ring/vol/∇** to select Yes, and then press **select/☒**. You will hear a confirmation tone. When de-registration is complete, Deregistration Complete appears.
- 4) After de-registering the handset, move to "Replacing the Base Setting" below.

```
Which Handset?
▶ Handset      #1
  Handset      #2
```

```
Deregister HS?
  Yes
▶ No
```


### Replacing the Base Setting

- 1) Enter the System Reset menu, and then the Replacing Base submenu (see "Entering the Menu" on page 20). Replace base? appears.
- 2) Press **ring/vol/Λ** or **ring/vol/∇** to select Yes, and then Press **select/☒**. You will hear a confirmation tone. The base information will be deleted.

```
Replace base?
  Yes
▶ No
```

When replacing the base is complete, Place handset on main base to register appears, register the handset to the new base (see page 51).

## Making and Receiving Calls

This handset has a built-in speakerphone that allows you to have a hands-free conversation. This feature allows you to communicate easily while performing other tasks, such as cooking.  appears during hands-free conversations.



You can easily switch a call from normal conversation to hands-free conversation. To switch a call, press **speaker** during the call.

	From the Handset		From the Base
	Normal conversation	Hands-free conversation	
To answer a call	<b>Handset On the Cradle</b> Pick up the handset (AutoTalk) or pick up the handset and press <b><i>talk/flash.</i></b> <b>Handset Off the Cradle</b> Press any number key, <b><i>*/tone/</i></b> ←, or <b><i>#/→</i></b> (Any Key Answer), or press <b><i>talk/flash.</i></b>	<b>Handset Off the Cradle</b> Press <b><i>speaker.</i></b>	Press <b><i>Ⓜ</i></b> (speaker).
To make a call	<b>Handset Off the Cradle</b> 1) Press <b><i>talk/flash.</i></b> 2) Listen for the dial tone. 3) Dial the number. <b>OR</b> Dial the number, and then press <b><i>talk/flash.</i></b>	<b>Handset Off the Cradle</b> 1) Press <b><i>speaker.</i></b> 2) Listen for the dial tone. 3) Dial the number. <b>OR</b> Dial the number and then press <b><i>speaker.</i></b>	1) Press <b><i>Ⓜ</i></b> (speaker). 2) Listen for the dial tone. 3) Dial the number.
To hang up	Press <b><i>end</i></b> or return the handset to the cradle (AutoStandby).		Press <b><i>Ⓜ</i></b> (speaker).
To enter a pause within the dialing sequence	When you dial the number in standby mode, press <b><i>redial/pause.</i></b> P appears in the display, which represents a pause.		Press <b><i>Ⓜ</i></b> (speaker). When you dial the number press <b><i>pause.</i></b>

note

- To set Autotalk, see page 22 or to set Anykey Answer see page 23.
- The handset microphone is located at the bottom of the handset (see "Controls and Functions" on page 8). Position yourself as near to the handset as possible and speak clearly.
- If the line is in use by another handset(s), Line In Use appears in the display of all registered handset's display, that are not in use.



- You can keep a call on hold 5 minutes. When 5 minutes has passed, the call is disconnected and the phone returns to standby mode.
- While a call is on hold, CIDCW can not be received.

## Placing a Call on Hold

- 1) During a call, press **hold/transfer/int'com** on the handset (or **hold** on the base).

```
Hold,to transfer
▶Handset      #2
Base
```



- 2) To talk to the caller, press **talk/flash** or **speaker** on a handset (or **Ⓜ** (speaker) on the base). The phone will return to the call.

```
SUN 12:00A
Handset #1
Line On Hold
```

## Redialing a Call


The last three phone numbers dialed can be quickly redialed.

### Redialing from Standby Mode

- 1) Press **redial/pause** in standby mode.
- 2) Press **redial/pause** again. Each press of **redial/pause** will display one of the last three number redialed.
- 3) Press **talk/flash** or **speaker**. The selected number is dialed.
- 4) To hang up, press **end**.

### Redialing from Talk Mode

- 1) Press **talk/flash** or **speaker**.
- 2) Press **redial/pause**. The last number dialed will be displayed and redialed. To hang up, press **end**.

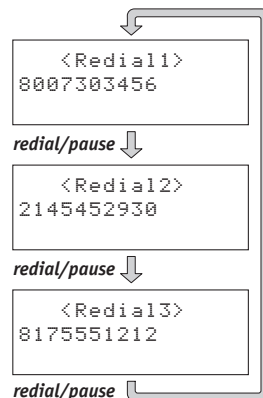

## Deleting a Redial Record

- 1) Press **redial/pause** in standby mode.
- 2) Press **redial/pause** repeatedly to display the number to be deleted.
- 3) Press **menu/del**.
- 3) Press **ring/vol/∧** or **ring/vol/∨** to choose Yes.
- 4) Press **select/☒**. The redialed number is deleted.

```
Delete Redial1?
▶ Yes
  No
```

## Storing a Redial Record

- 1) Press **redial/pause** in standby mode.
- 2) Press **redial/pause** repeatedly to display the number to be stored.
- 3) Press **select/☒**. Store/Edit Name appears.
- 4) To complete the setting, follow the steps 3-8 in "Storing Phone Numbers, Names, Distinctive Rings, and Speed Dial" on page 37-38.


## Redialing from the Base

- 1) Press **☎** (speaker) on the base.
- 2) Press **redial** on the base. The last number dialed from the base is redialed.

# Adjusting the Handset Ringer, Earpiece and Speaker Volume

### Handset ringer volume

Press the volume up key or volume down key (labeled as **∧/vol/∧** or **∨/vol/∨**) in standby mode to select one of three ringer volume (off, low, or high).



- If the number exceeds 32 digits, only the first 32 digits are retained in redial memory.
- If the redial memory is empty, you will hear a beep.

### Earpiece and speaker volume

Pressing the volume up key or volume down key (labeled as **⬆/vol/⬆** or **⬆/vol/⬇** key) during a call will change the earpiece volume of the handset. This setting will remain in effect after the telephone call has ended.



When you press volume up key (**ring/vol/⬆**) in the maximum volume level or volume down key (**ring/vol/⬇**) in the lowest volume level, an error tone sounds.

### Ringer Mute

You can temporarily mute the incoming ring. When the handset is off the cradle and the phone is ringing, press **end**. The incoming ring will return to the previous setting starting with the next incoming call.



- If you select Off, the ringer off LED on the base will be illuminate.
- **Standby Mode** - The handset is not in use and **talk/flash** has not been pressed.

## Adjusting the Base Ringer Volume and Speaker Volume

### Base ringer volume

In standby mode, press **ring/volume/⬆** or **ring/volume/⬇** on the base to select one of four base ringer volume settings (High, Medium, Low, and Off). Each time **ring/volume/⬆** or **ring/volume/⬇** is pressed, the volume setting is changed. You will hear the current ringer volume level. You have four ringer volume options. One allows you to turn the base ringer off. The other three are volume levels. You can also adjust the volume when the phone is ringing by pressing **ring/volume/⬆** or **ring/volume/⬇**.

### Speaker volume

When the base speaker is in use, press **ring/volume/⬆** or **ring/volume/⬇** on the base to adjust the volume. Press **ring/volume/⬆** for louder or **ring/volume/⬇** for softer. Press and hold **ring/volume/⬆** or **ring/volume/⬇** on the base to scroll quickly through the volume levels.



## Do Not Disturb (DND)

DND allows you to mute the ringer of the handset and the base at once. Additionally, if you have more than one handset, ringer for all handsets will be muted. To do this, in the standby mode, press and hold **do not disturb** on the base. You will hear a confirmation tone and the **DND** LED illuminates. To cancel, press **do not disturb** again. You can also mute the ringer tone while the phone is ringing by pressing **do not disturb** on the base.


## Mute Microphone

### With the handset


You can temporarily turn off the microphone so that the person you are talking with cannot hear you.

1) Press **menu/del** during talk mode (while phone is in use).

2) Press **ring/vol/∧** or **ring/vol/∨** to move the pointer to **Mute** and then **select/☒**.

**Mute On** and  appear in the display. To cancel muting, repeat above step again when **Mute** is set to on, **Mute Off** appears.

### With the base

While using the base speakerphone, press **mute/find handset** on the base to turn Off the microphone. Press **mute/find handset** again or press  (speaker) to cancel muting.




- The tone feature only applies when the dial mode is set to pulse.
- This special number can be stored in a memory location. This is referred to as Chain Dialing (see page 38).

## Tone Dialing Switch-over

Some telephone companies use equipment that requires pulse dialing (sometimes referred to as rotary dialing). If you need to enter tone dialing digits, you can switch-over to tone dialing during the call. This feature is useful when you need tone dialing to use automated systems, for example, entering your bank account number after you have called your bank.

Initially make your call with pulse dialing mode. Once your call connects, press **\*/tone/←** on the handset (or **\*/tone** on the base). Enter the desired number. These digits will be sent as tone dialing. Once the call ends, tone mode is canceled and pulse dialing mode resumes.




## Traveling Out-of-Range

During a call, as you begin to move your handset too far from your base unit, noise may increase. If you pass the range limits of the base unit, you will hear a beep and see **Out of Range** on the display, and then the handset returns to standby mode. You may return to the call if you move your handset within the range limits of the base and press **talk/flash** or **speaker** within 30 seconds.

## Clarity Booster

If you encounter interference while using your phone, you can manually improve the sound by setting the Clarity Booster to on. **This works only when the phone is in use.**



- 1) Press **menu/del** during talk time (while phone is in use).
- 2) Press **ring/vol/▲** or **ring/vol/▼** to move the pointer to Clarity Boost, and then **select/✉**.

Boost On and B appear in the display.

To turn Off the Clarity Booster, repeat above step again when the Clarity Booster is on, Boost Off appears.

## Privacy Mode


Privacy Mode allows you privacy, and guarantee of no interruption from the base and other registered handsets. **This works only when the phone is in use.**

- 1) Press **menu/del** during talk time (while phone is in use).
- 2) Press **ring/vol/▲** or **ring/vol/▼** to move the pointer to Privacy Mode, and then **select/✉**.

Privacy Mode On and  appear in the display.

To exit the Privacy Mode, repeat above step again when the Privacy Mode is on.

Privacy Mode Off appears.




## 3-Way Conferencing

The phone permits 3-way conversations between the handset, base, and an outside line.


### When speaking on the handset

- 1) Press **9** (speaker) on the base to initiate the 3-way conversation.
- 2) To hang up, press **#** (speaker) on the base.  
The handset will still be connected to the call.




### When speaking on the base

- 1) Press **talk/flash** or **speaker** on the handset to initiate the 3-way conversation.
- 2) To hang up, return the handset to the cradle, or press **end** key on the handset. The base will still be connected to the call.




## Find Handset

To locate the handset, press ***mute/find handset*** on the base when the base is in standby mode. All registered handsets beeps for 60 seconds, and **Paging** appears on the handset display. To cancel paging, press any key on the handset or ***mute/find handset*** on the base.



## Flash and Call Waiting

If you have Call Waiting service and a call waiting tone sounds while you are on a call, press ***talk/flash*** on the handset (or ***flash*** on the base) to accept the waiting call. There is a short pause, and then you will hear the new caller. To return to the original caller, press ***talk/flash*** on the handset (or ***flash*** on the base) again.



- If the battery pack is completely drained, the handset will not beep when paging.

- You must subscribe through your local telephone company to receive Call Waiting or Caller ID on Call Waiting service.





You must subscribe to voice mail service from your telephone company in order to use this feature. The voice mail service company will provide you with the access number.

## Using One Touch Voice Mail Access

If you subscribe to voice mail service, you can use your phone to access your voice mailbox. The new message LED flashes whenever you have messages waiting in your voice mailbox. Just program the handset with your access number, and you can get your messages at the touch of a button on the handset. (The voice mail service provider will supply you with the access number. This number may be simply a phone number. Refer to the provider's literature).

•To program or delete your Voice Mail Access Number, See page 21.

### Dialing your Voice Mail Service

Once you've programmed your personal access number, you can dial your mailbox with the touch of a button. When you have messages, simply pick up the handset and press **select**/. If you have not entered the access number or it has been deleted, when you press the **select**/, No Number Stored To store number press [MENU] appears and you will hear a beep. The phone returns to standby mode.

### Voice Mail Access

The new message LED on the handset is designed to work with your voice mail service provided by your local telephone company. The LED flashes when you have new incoming messages in the voice mail service. You may need to occasionally reset the indicators if they remain on after you've retrieved your messages. To reset the indicators, when the phone is in standby mode press and hold **find handset** on the base until the paging sound stops (about 5 seconds).

# Phonebook

The Phonebook allows you to dial a number using just a few key presses. Your phone stores names/numbers in the phonebook memory location, and you can search names in alphabetical order. You have a total of 100 locations that can be used for the phonebook (including the speed dials) and Caller ID messages.

## Storing Phone Numbers, Names, Distinctive Rings, and Speed Dial

- 1) When the phone is in standby mode, press **phonebook**.

The handset displays the following items:

(1st line) The number of the phonebook locations used

(2nd line) How to search (press the number keypad,

**ring/vol/△** or **ring/vol/▽**)

(3rd line) How to enter the storing operation (press the **select/☒** key)

```
Phonebook :100
Search [A-Z/↑/↓]
Store [SELECT]
```

- 2) Press **select/☒**, Store/Edit Name appears.
- 3) Enter the name (up to 16 characters) by using the number keypad (see the "Steps for Entering Names and Special Characters" on page 39).  
If a name is not required, go to step 4. <No Name> will be used as the name.
- 4) Press **select/☒** to store the name, Store/Edit No. appears.
- 5) Press the number keypad to enter the phone number (up to 20 digits), press **select/☒** to store the number.

```
Store/Edit Name
Movies
```

```
Store/Edit No.
8007303456■
```

### note

- Your phone has 100 memory locations for Caller ID messages or stored Phonebook numbers.
- Selecting a speed dial location where a number is already stored releases the old numbers speed dial setting. The new number will be stored in the speed dial location.
- When the memory is full, you will hear a beep, and Memory Full appears. You cannot store names and numbers.
- The pause key counts as one digit. Pressing **redial/pause** more than once increases the length of the pause between numbers. Each pause represents a 2 second delay.

- 6) Distinctive Ring appears. Press **ring/vol/Λ** or **ring/vol/∇** to move the pointer to one of the Distinctive Ring options, and then press **select/☒**.

```
Distinctive Ring
▶No Selectn
Flicker
```



If you choose not to store a "Distinctive Ring", simply select the "No Selectn" option.

- 7) Speed Dial appears. Press **ring/vol/Λ** or **ring/vol/∇** to move the pointer to select the Speed dial location (10 locations: SPD1-SPD0).

```
Speed Dial
▶No Selectn
SPD1:<Empty>
```



If you choose not to store the name/number as a Speed Dial, simply select the "No Selectn" option.

- 8) Press **select/☒**. You will hear a confirmation tone, and Done! appears in the display.

```
Movies
800-730-3456
♪Beethoven9/SPD1
```

## Chain Dialing

The memory locations in the handset are not limited to phone numbers. You can also store a group of numbers (up to 20 digits), that you need to enter once your call connects. This is referred to as Chain Dialing.

An example of this is a bank account number. Store the account or special number in one of the phonebook locations. (Refer to "Storing Phone Numbers, Names, Distinctive Rings and Speed Dial" on page 37). When you call your bank, and you are prompted to enter the account number, scroll through your phonebook locations until you find your account or special number, and then press **select/☒**.



# Steps for Entering Names and Special Characters

Refer to the letters on the number keys to select the desired characters. With each press of a number key (**0-9**), the displayed character appears in the following order:  
upper case letters first, lower case letters next and finally the number corresponding to the key.

	Number of times key is pressed								
keys	1	2	3	4	5	6	7	8	9
1	1								
2 abc	A	B	C	a	b	c	2		
3 def	D	E	F	d	e	f	3		
4 ghi	G	H	I	g	h	i	4		
5 jkl	J	K	L	j	k	l	5		
6 mno	M	N	O	m	n	o	6		
7 pqrs	P	Q	R	S	P	q	r	s	7
8 tuv	T	U	V	t	u	v	8		
9 wxyz	W	X	Y	Z	w	x	y	z	9
0 oper	&	(	)	<	>	/	(blank)	-	_
	.	,	:	?	!	@	'	"	*
	#	0							



If the next character uses the same number key, you must press **#/→** to move the cursor over. Otherwise the next time you press the number key, it changes the character that was previously set.

### If you make a mistake while entering a name

Use **\*/tone/←** or **#/→** to move the cursor to the incorrect character.

Press **menu/del** to erase the wrong character, and then enter the correct character.

To delete all characters, press and hold **menu/del**.

For example, to enter **Movies**:

- 1) When the phone is in standby mode, press **phonebook**.
- 2) Press **select/☒**, **Store/Edit Name** appears.
- 3) Press **6** once, and then press **#/→** to move the cursor to the right.
- 4) Press **6** six times.
- 5) Press **8** six times.
- 6) Press **4** six times.
- 7) Press **3** five times.
- 8) Press **7** eight times.
- 9) When finished, press **select/☒**.

To continue to store the telephone number, proceed to step 5 on page 37.

# Viewing the Phonebook

Your phone stores names/numbers in the phonebook memory locations, and you can search names in alphabetical order. You can view the phonebook even while the phone is in use.

- 1) Press **phonebook**.

If you recall the phonebook during a call,  
Store [SELECT] will not appear.

```
Phonebook :100
Search [A-Z/↑/↓]
Store [SELECT]
```

- 2) Press **ring/vol/Λ** or **ring/vol/∇**, or the number keypad to scroll through the phonebook locations. Phonebook locations appear in alphabetical order (from first to last when you press **ring/vol/∇**, from last to first when you **ring/vol/Λ**).

You can also use letters on the number keys to select the first letter of the desired name. Press a number key (**2-9** and **0**) once for the first letter, press twice for the second letter, and so on. The first location that begins with the letter you entered appears.

For example, to search for "Movies", press **6** once. Press **ring/vol/Λ** or **ring/vol/∇**, until the phonebook location is displayed.

- 3) To finish viewing numbers, press **end** (or **phonebook** during a call).



During a call, don't  
press **end** or the call  
will be disconnected.


# Making Calls Using the Phonebook

## From Standby Mode

- 1) When the phone is in standby mode, select the phonebook location to dial (see "Viewing the Phonebook" on page 41).
- 2) Press **talk/flash** or **speaker** to dial the displayed number.
- 3) To hang up press **end**.

Movies
800-730-3456
♪Beethoven9/SPD1

## From Talk Mode

- 1) Press **talk/flash** or **speaker**.
- 2) Select the phonebook location to dial (see "Viewing the Phonebook" on page 41).
- 3) Press **select**/. The number in the displayed phonebook location is dialed.
- 4) To hang up press **end**.

# Speed Dialing

If you store a phone number in a speed dial memory location (10 locations: SPD1 - SPD0), you can use the speed dialing feature. When the phone is in standby mode, press and hold a number key (**0-9**) associated with the speed dial until the phone number appears and then press **talk/flash** or **speaker**. The number stored in the speed dial (SPD1 - SPD0) is dialed.

# Editing or Erasing a Stored Name, Phone Number, Distinctive Ring, and Speed Dial

- 1) When the phone is in standby mode, press **phonebook**.
- 2) Press **ring/vol/∧** or **ring/vol/∨**, or the number keypad to view the phonebook locations (see "Viewing the Phonebook" on page 41).

```
Phonebook :100
Search [A-Z/↑/↓]
Store  [SELECT]
```

## a. Editing the Stored Data

- 1) When the phonebook location to be edited appears, press **select/☒**. Store/Edit Name appears.
- 2) Follow the steps 3 to 7 under "Storing Phone Numbers, Names, Distinctive Rings, and Speed Dial" on page 37-38 to complete the editing operation.
- 3) Press **select/☒**. You will hear a confirmation tone.

```
Store/Edit Name
Movies
```

## b. Deleting the Stored Data

- 1) When the phonebook location to be deleted appears, press **menu/del**. Delete Memory? appears.
- 2) Press **ring/vol/∧** or **ring/vol/∨** to move the pointer to Yes.
- 3) Press **select/☒**. You hear a confirmation tone. Deleted! appears in the display.

```
Delete Memory?
  Yes
▶ No
```



- The 10 memory locations in the base are independent from the handset.
- If you have not pressed any key for 30 seconds, the phone returns to standby mode.


## Memory Dialing (base only)

You can store 10 phone numbers in the base, and make calls with memory dialing from the base.

### Storing Phone Numbers

- 1) Press **memory** in standby mode.
- 2) Enter the number you wish to store. (The number cannot exceed 20 digits.)
- 3) Press **memory**. Enter the memory location number (**0-9**) on the keypad.

You will hear a confirmation tone.



### Making Calls with Memory Dialing

- 1) Press **speaker** (speaker icon) in standby mode.
- 2) Press **memory**. Enter the memory location number (**0-9**) to dial the number.

### Deleting the Stored Data

- 1) Press **memory** in standby mode.
  - 2) Press **memory** again.
  - 3) Enter the memory location number (**0-9**) you wish to delete.
- You will hear a confirmation tone.

# Caller ID and CIDCW (Caller ID on Call Waiting)

**You must subscribe to Caller ID services through your local telephone provider to use these features.**

When the telephone rings, the Caller ID feature allows you to view the caller's name, and phone number along with the date and time of call. With CIDCW (Caller ID on Call Waiting), you will hear a call waiting tone while you are on a call, and the Caller ID data is displayed. To accept the waiting call, press **talk/flash** (see page 35). Additionally, you can dial a number stored in the Caller ID list or save data to your Phonebook locations.

## Important:

Memory locations for Caller ID messages and Phonebook locations (including Speed Dials) are common, you can store up to 100 in total. A Caller ID message is not stored when you have stored 100 of the phonebook locations. The earliest Caller ID message is overwritten when you have stored 100 of the phonebook locations and Caller ID messages in total.

The date and time received	10/12 11:20AM
Caller's name	Jane Smith
Caller's phone number	214-555-1234

- 1) When the Caller ID message is received, the display shows the caller's phone number along with the date and time. The incoming call information is stored in the Caller ID record. If the Caller ID service includes the caller's name, the name will appear in the display (up to 15 characters).

You may receive any one of the following messages:

When invalid data is received	Incomplete Data
When a private name is received	Private Name
When a private number is received	Private Number
When an unknown name is received	Unknown Name
When an unknown number is received	Unknown Number

note

- If you answer a call before the Caller ID message is received (for example, before the second ring), the Caller ID message will not appear.
- When the call is received via a telephone company that does not offer Caller ID service, the caller's phone number and name does not appear. (This includes some international calls.)
- When the call is via a private branch exchange (PBX), the caller's phone number and name may not appear.



- The number of calls from the same Caller ID appears next to the received time. Once you view the new message, the number will be cleared and disappear.

- During a call, don't press **end** or the call will be disconnected.

- 2) When you pick up the phone, the display changes to **Talk**. (AutoTalk feature is set to on).



Data errors appear as "■".

## Viewing the Caller ID List

The Caller ID list stores information for incoming calls - even unanswered calls. You can store 100 of the Caller ID messages and Phonebook locations (including Speed Dials) in total. You can view the Caller ID list during a call or when the phone is in standby mode.

- 1) Press **call id**.

The summary screen appears. The screen shows the number of new messages and total messages.

- 2) To view the Caller ID messages in historical order (from new to old or from old to new), repeatedly press **ring/vol/√** to scroll through the messages from the latest to the earliest, or **ring/vol/∧** to scroll back through the messages.

To view the Caller ID messages with alphabetical search, press the number key pad (**2-9** and **0**) with the letter associated with the first letter of the desired message.



Once you view the Caller ID list with alphabetical search, you cannot switch back to historical order (from new to old or from old to new) unless you exit and re-enter the operation.

- 3) To finish the viewing operation, press **end** (or **call/id** during a call).



# Deleting a Caller ID Message

## Deleting Information from the Caller ID List

- 1) When the phone is in standby mode, view the Caller ID information to be deleted (see "Viewing the Caller ID List" on page 46).
- 2) Press **menu/del**. Delete Caller ID appears.
- 3) Press **ring/vol/∧** or **ring/vol/∨** to choose Yes.
- 4) Press **select/☒**. You will hear a confirmation tone.

```
Delete Caller ID
▶ Yes
  No
```

## Deleting all Caller ID names/numbers

- 1) When the phone is in standby mode, press **call id**.

```
Caller ID
New   : 5
Total: 25
```

- 2) Press **menu/del**. Delete All? appears.

```
Delete All?
  Yes
▶ No
```

- 3) Press **ring/vol/∧** or **ring/vol/∨** to choose Yes.

- 4) Press **select/☒**. You will hear a confirmation tone.

note

- Once the Caller ID data has been deleted, the information cannot be retrieved.

- **Standby Mode** - The handset is not in use and **talk/flash** has not been pressed.

- **Talk Mode** - The handset is not in the cradle and **talk/flash** or **speaker** has been pressed enabling a dial tone. Talk appears on the display.



- You cannot make a call from the Caller ID list if your phone is connected to a private branch exchange (PBX).
- When a long distance call has been set, 1 appears in the display.
- If a call comes in via a telephone system that does not offer Caller ID service, no information is stored.
- If the Caller ID message was received as a private/unknown number, or the message does not have the number, you cannot store the message in the Phonebook. If it was received as private/unknown name, the message will be stored as <No Name>.
- Even if the 100 memory locations are full, the message will be stored in the Phonebook. However, the message will be erased from the Caller ID list.

## Using the Caller ID Message List

### Calling a party from the Caller ID list

#### From Standby mode

- 1) When the phone is in standby mode, view the Caller ID message (see "Viewing the Caller ID List" on page 46).
- 2) Press **talk/flash** or **speaker**. The displayed phone number dials automatically.

10/12 11:20AM  
Jane Smith  
214-555-1234

#### From Talk mode

- 1) Press **talk/flash** or **speaker**.
- 2) View the Caller ID message you want to dial (see "Viewing the Caller ID List" on page 46).
- 3) Press **select**/. The displayed phone number will be dialed.

### Long Distance calls and Area Code Setting/Cancellation

While the present Caller ID information is displayed, pressing **\*/tone/←** will place or remove the prefix "1" in the display to set the call for a long distance call, or pressing **#/→** will set or cancel an area code (see page 24).

### Storing Caller ID messages in the Phonebook

Messages shown in the Caller ID list can be stored in the phonebook. The phone number and name of the party on the Caller ID list can be stored in memory.

- 1) When the phone is in standby mode, view the Caller ID message to be stored. Then press **select**/. **Store/Edit Name** appears.
- 2) To complete the setting, follow the steps 3-8 in "Storing Phone Numbers, Names, Distinctive Rings, and Speed dial" on page 37-38.

# Call Waiting Deluxe Features

Your phone gives you new options for call waiting. At the touch of a button, you can place the caller on hold, send them to your voice mail service, or conference them into your current call. You may be required to subscribe to Call Waiting and Call Waiting Deluxe to use these features. Not all features are available in all areas. Check with your local telephone company for details.

- 1) When you receive a Call Waiting call, press **menu/del** for a list of options.
- 2) Press **ring/vol/∧** or **ring/vol/∨** to select CW Deluxe and then press **select/☒**.
- 3) Press **ring/vol/∧** or **ring/vol/∨** or the number keypad (1-7) to select an option.

For example:

press **ring/vol/∨** 4 times

press **ring/vol/∨** 2 times

1▶Ask to Hold	3 Forward Call	5 Conference
2 Tell Busy	4 Answer/Drop 1	6 Drop First
3 Forward Call	5▶Conference	7▶Drop Last

- 3) Press **select/☒**. A confirmation screen will appear, and returns back to the call.

Your phone is pre-programmed with seven call waiting options. You may select to ask the calling party to hold, send them a busy message, forward them to your voice mail, or answer and drop the first caller. You may also select to conference them into the current call or, at any time, choose to drop the first or drop the last caller. Check with your local telephone company for a full list of options.



- To activate features, select **CW On/CWDX On** in the CIDCW option. See page 24.
- You can also answer a waiting call immediately by pressing **talk/flash**, the first caller will be placed on hold. To return to the original caller, press **talk/flash** again.
- If you don't press a key within 30 seconds while in the operation, the phone goes back to the original call.



- To use the DCX640, register it to the original base.
- Save this manual for detailed operation.
- All of the handsets ring when a call is received.

## Expanding Your Phone

### 4 Multi-Handset Expandability

Your phone supports up to 4 handsets (including any handsets supplied with your phone). You can now place a fully-featured cordless handset anywhere AC power is available to connect the handset charger.

Up to 2 handsets can be used for an outside and/or intercom call.

Effective combinations, for example:

- 4-way conferencing (the base, 2 handsets, and one outside line), while on an intercom call using the other 2 handsets.



#### IMPORTANT:


- If you purchase a DCX640 extra handset, please register the handset to the original/main base before use. The DCX640 will not operate until it is registered.
- If you change a Global setting in one handset, you change that particular setting for all registered handsets. All other settings (not included under Global Setup), must be set separately through each handset.

## Connecting the Charger

- Charge the handset battery pack for at least 15-20 hours before using your new cordless telephone for the first time.

1) Connect the AC adapter to the **DC IN 9V** jack and to a standard 120V AC wall outlet.

2) Set the charger on a desk or tabletop, and place the handset in the charger with the keypad facing forward. (See "B. Install the rechargeable battery pack into the handset" on page 12).

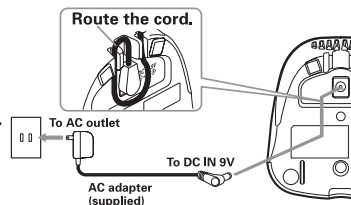


# Register the Handset to the Base

If you purchase an extra handset, you need to register the handset to the base before use. Only one handset can be registered at a time.

The handset ID for the supplied handset(s) was assigned at the factory. Factory-registered handsets have Handset #1 or #2 in the display (#2 for models that have two handsets in packaging). When you register additional handset to the base, the handset ID will be assigned.

- 1) Before registering the extra handset, the battery pack must be charged for 15-20 hours.
- 2) Place the extra handset in the main base unit to begin registration.
- 3) While the handset is registering, Handset Registering will appear in the LCD. When Registration Complete is displayed, the handset has been registered to the base. If Registration Failed appears, please try these steps again.

Place handset  
on main base  
to register

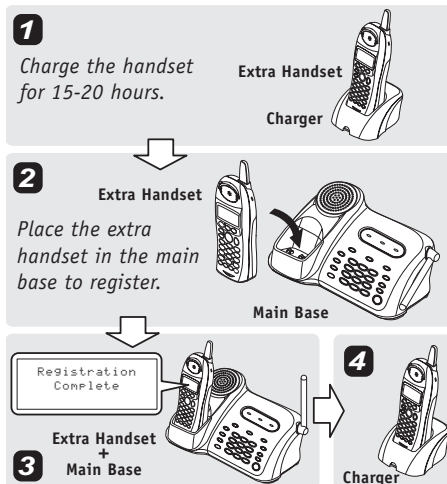

note

- An extra handset can be registered when the main base is in standby mode.
- Standby Mode** - The handset is not in use and **talk/flash** has not been pressed.




Two handsets can be in Direct Link mode while other handsets are in use.

## Using the DirectLink Mode

To use this feature, you must enter the two handsets into the DirectLink mode first.

**To enter the DirectLink mode, see page 20.**



### DirectLink Call

- 1) When the phone is in the DirectLink standby mode, press ***talk/flash*** (example of DirectLink from handset #1).
- 2) Select the handset to which you wish to DirectLink with by pressing the number keys (***1-4***). Your handset will then page the other handset.
- 3) On the receiving handset, press ***talk/flash***, or if Any Key Answer is on, press any number key, ***\*/tone/←***, or ***#/→***.
- 4) When you finish your conversation, press ***end*** on either handset. Return the handset to the cradle, or press ***menu/del***, and then ***select/☒*** to return to normal standby mode (canceling DirectLink mode).

```
SUN 12:00A  █  
Handset #1  
DirectLink Mode
```

```
To DirectLink  █  
a handset  
press [1-4]
```

```
DirectLink  █  
← Handset #1
```

## 4-Way Conferencing

Fourth person, at either the handset or the base, may be added to the conference call. For example, to add a fourth party to an ongoing conference call at the base or another handset, press **talk/flash** on the fourth party's handset (or **Ⓜ** (speaker) on the base). To remove either caller from your conversation, press **end** on the party's handset (or **Ⓜ** (speaker) on the base). The other parties will still be connected to the call.



## Intercom/Call Transfer Feature

Intercom and Call Transfer features are available for your phone.

### Intercom

#### From handset to handset or to the base

- 1) Press **hold/transfer/int'com** in standby mode.
- 2) Select the base or the handset you want to talk with from the selection list within 30 seconds. To select the handset (or the base), press **ring/vol/△** or **ring/vol/▽**, and then press **select/☒**. If you select All, all handsets and the base will be paged. An intercom tone sounds.
- 3) On the receiving handset (or the base), to answer the call, press **talk/flash** or **hold/transfer/int'com** (or **intercom** or **Ⓜ** (speaker) on the base). Or press any number key, **\*/tone/←**, or **#/→** (when Any Key Answer is on), or pick up the handset from the cradle (when AutoTalk is on).
- 4) To hang up the intercom call, press **end** on either handset (or **intercom** on the base).

```
To intercom
▶ Handset      #2
  Base
```

- If the party is busy or out of range, the handset returns to standby mode.
- If any of the following occurs while selecting the other handset (or the base), the operation will be canceled.
  - Press **talk/flash** or **speaker**.
  - Receive an outside/intercom call or page.
- When the party does not answer within one minute, the operation is canceled.
- **Standby Mode** - The handset is not in use and **talk/flash** has not been pressed.



For model number verification, contact Uniden Customer Service or visit our website [www.uniden.com](http://www.uniden.com)

## From the base to a handset

- 1) Press **intercom** on the base in standby mode.
- 2) Select the handset you want to talk with by pressing the number key (**1-4**).  
To page all the handsets press **\*/tone**.
- 3) Follow the steps 3-4 under "From handset to handset or to the base."

## Call Transfer Feature

### From handset to handset or to the base

- 1) During a call, press **hold/transfer/int'com** on the handset.
- 2) Select a handset or the base to transfer the call within 10 seconds. (Refer to step 2 in the intercom section on page 53).  
The call will automatically be placed on hold, and an intercom tone sounds.  
To cancel the transfer, press **talk/flash** or **speaker** on the initiating handset.
- 3) On the receiving handset, press **talk/flash** or **hold/transfer/int'com** (or **⏏** (speaker) or **intercom** on the base) to answer the page. Or press any number key, **\*/tone/←**, or **#/→** (when Any Key Answer is on), or pick up the handset from the cradle (when Auto Talk is on).
- 4) To speak to the caller, press **talk/flash** (or **⏏** (speaker) on the base) on the receiving handset.

Hold, to transfer	
▶ Handset	#2
Base	



### From the base to a handset

- 1) During a call, press **intercom** on the base. The call will automatically be placed on hold.
- 2) Select the handset you want to talk with by pressing the number key (**1-4**). To page all the handsets press **\*/tone**. An intercom tone sounds. To cancel the transfer, press **intercom** or **Ⓜ** (speaker) on the base.
- 3) On the receiving handset, press **talk/flash** or **hold/transfer/int'com** to answer the page. Or press any number key, **\*/tone/←**, or **#/→** (when Any Key Answer is On), or pick up the handset from the cradle (when AutoTalk is On). The intercom mode is activated, but the caller is still on hold.
- 4) To speak to the caller, press **talk/flash** or **speaker** on the receiving handset.

## Replacing the Base

If the base unit is replaced with a different base from this same series of cordless models, you must clear handset (s) and base identification numbers. To do this, select "System Reset" from handsets display menu option list (see page 26 for guidance).

## Changing the Digital Security Code

The digital security code is an identification code used to connect the handset and the base unit. Normally, setting the code is not necessary. In the rare situation that you suspect another cordless telephone is using the same security code, you can change the code.

To change the digital security code:

**1. Perform the "System Reset" menu options ("De-register the Handset" and "Replacing the Base Setting") for all the handsets you have (see page 26).**

**2. To register all the handsets do the following steps:**

1) Place a handset, one at a time in the base.

2) Registration starts automatically.

While registering Handset Registering appears in the display.

3) When the registration is complete, Registration Complete appears in the display.

4) Repeat steps 1 - 3 for another handsets.

If the registration fails, Registration Failed appears in the display. Try the steps above again.

## Installing the Beltclip

### To attach the beltclip


Insert the beltclip into the holes on each side of the handset.  
Press down until it clicks.

### To remove the beltclip

Pull either side of the beltclip to release the tabs from the holes.

## Headset Installation

Your phone may be used with an optional headset, the Uniden HS 910 or HS 915. To use the optional headset, insert the headset plug into the headset jack, and your phone is ready for hands-free conversations. Headsets may be purchased by calling, the Uniden Parts Department at 1-800-554-3988 or by visiting [www.uniden.com](http://www.uniden.com)

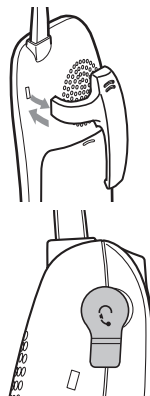

# Note on Power Sources

## Battery replacement and handling

When the operating time becomes short, even after a battery is recharged, please replace the battery. With normal usage, your battery should last about one year. Please contact your place of purchase or the Uniden Parts Department for a replacement battery.

## Warning

To avoid the risk of personal injury or property damage from fire or electrical shock, only use the Uniden battery model and Uniden adapter model specifically designated for this product.

## Power Failure

During the period that the power is off, you will not be able to make or receive calls with the telephone.

### Caution

- Use only the specified Uniden battery pack (BT-446).
- Do not remove the batteries from the handset to charge them.
- Never throw the battery into a fire, disassemble them, or heat them.
- Do not remove or damage the battery casing.

# Maintenance

To maintain a good charge, it is important to clean the charging contacts on both the handset and the base unit once a month. Using water only, dampen a cloth to clean the charging contacts. Then make sure to go back over the charging contacts with a dry cloth.

### Caution

Do not use paint thinner, benzene, alcohol, or other chemical products. Doing so may discolor the surface of the telephone and damage the finish.

## General Information

The phone complies with FCC Parts 15 and 68. Operating temperature: 0 °C to +50 °C (+32 °F to +122 °F)

### AC Adapter Information

AC Adapter part number:	AD-830 for the base	AD-310 for the charger (DCT6465-2 only)
Input Voltage:	120 AC 60Hz	120V AC 60Hz
Output Voltage:	9V DC 400mA	9V DC 210mA

### Battery Information

Battery part number:	BT-446
Capacity:	800mAh, 3.6V



- To avoid damage to the phone use only Uniden AD-830 and BT-446 with your phone.
- If the handset is left off of the base, the actual Talk mode duration will be reduced respective to the amount of time the handset is off the base.

Recharge your phone on a regular basis by returning the handset to the base after each phone call. When the operating time becomes short, even after the battery is recharged, please replace the battery. With normal usage, the battery should last about one year.

A replacement Uniden adapter or battery may be purchased by contacting the Uniden Parts Department (800) 554-3988. Hours are from 8:00 a.m. to 5:00 p.m. Central Time, Monday through Friday, or [www.uniden.com](http://www.uniden.com).

Specifications, features, and availability of optional accessories are all subject to change without prior notice.

# Troubleshooting

If your phone is not performing to your expectations, please try these simple steps first.

Symptom	Suggestion
The <b>charge</b> LED won't illuminate when the handset is placed in the cradle.	<ul style="list-style-type: none"> <li>• Make sure the AC adapter is plugged into the base or the charger (for DCT6465-2 only) and wall outlet.</li> <li>• Make sure the handset is properly seated in the cradle.</li> <li>• Make sure the charging contacts on the handset and the base or the charger (for DCT646-2 only) are clean.</li> </ul>
The audio sounds weak.	<ul style="list-style-type: none"> <li>• Move the handset and/or base to a different location away from and/or scratchy metal objects or appliances and try again.</li> <li>• Make sure that you are not too far from the base.</li> </ul>
Can't make or receive calls.	<ul style="list-style-type: none"> <li>• Check both ends of the base telephone line cord.</li> <li>• Make sure the AC adapter is plugged into the base and wall outlet.</li> <li>• Disconnect the AC adapter for a few minutes, and then reconnect it.</li> <li>• Remove the base ID (see "Replacing the Base Setting" on page 26) and register the handset (see "Register the Handset to the Base" on page 51).</li> <li>• Make sure that you are not too far from the base.</li> <li>• If an outside call is already established, you can not be able to make another outside call.</li> </ul>
The handset doesn't ring or receive a page.	<ul style="list-style-type: none"> <li>• Charge the batteries in the handset for 15-20 hours by placing the handset on the base or charging cradle.</li> <li>• The handset may be too far away from the base unit.</li> <li>• Place the base unit away from appliances or metal objects.</li> <li>• Remove the base ID (see "Replacing the Base Setting" on page 26) and register the handset (see "Register the Handset to the Base" on page 51).</li> </ul>
Unavailable appears in the display.	<ul style="list-style-type: none"> <li>• Make sure that another handset(s) or the base is not in use, and try the phone again.</li> <li>• Make sure that you are not too far from the base.</li> </ul>

Symptom	Suggestion
Severe noise interference.	<ul style="list-style-type: none"> <li>• Keep the handset away from microwave ovens, computers, remote control toys, wireless microphones, alarm systems, intercoms, room monitors, fluorescent lights, and electrical appliances.</li> <li>• Move to another location or turn off the source of interference.</li> </ul>
The Caller ID does not display.	<ul style="list-style-type: none"> <li>• The handset was picked up before the second ring.</li> <li>• The call was placed through a switchboard.</li> <li>• Call your local telephone company to verify your Caller ID service is current.</li> </ul>
Voice Message Indication does not work.	<ul style="list-style-type: none"> <li>• Contact your local telephone company to make sure that your telephone receives FSK or SDT message signaling.</li> </ul>
You cannot register the handset at the base.	<ul style="list-style-type: none"> <li>• Charge the battery pack for 15-20 hours.</li> <li>• Remove the base ID (see "Replacing the Base Setting" on page 26) and register the handset (see "Register the Handset to the Base" on page 51).</li> </ul>
The handset doesn't communicate with the other handsets.	<ul style="list-style-type: none"> <li>• Remove the base ID (see "Replacing the Base Setting" on page 26) and register the handset (see "Register the Handset to the Base" on page 51).</li> <li>• Make sure that you have registered all handsets.</li> </ul>
An extra handset can't join the conversation.	<ul style="list-style-type: none"> <li>• Make sure there are not 2 handsets already using the 3-way conference feature.</li> </ul>
You cannot make an intercom call with another handset.	<ul style="list-style-type: none"> <li>• Make sure that the receiving handset is not in use.</li> </ul>
If you still have a problem.	<ul style="list-style-type: none"> <li>• Call our customer hotline at 1-800-297-1023.</li> </ul>

# Liquid Damage

Moisture and liquid can damage your cordless phone. In case of accidental submersion, please read the following steps.

Case	Action
If the handset or base is exposed to moisture or liquid, but only affects the exterior plastic housing.	Wipe off the liquid, and use as normal.
If moisture or liquid has entered the plastic-housing (i.e. liquid can be heard in the phone or liquid has entered the handset battery compartment or vent openings on the base).	<p><b>Handset:</b></p> <ol style="list-style-type: none"> <li>1) Remove the battery cover and leave it off for ventilation.</li> <li>2) Remove the battery pack by disconnecting.</li> <li>3) Leave the battery cover off and the battery pack disconnected for at least 3 days.</li> <li>4) Once the handset is completely dry, reconnect the battery pack and the battery cover.</li> <li>5) Recharge the handset's battery pack for 20 hours before using again.</li> </ol> <p><b>Base:</b></p> <ol style="list-style-type: none"> <li>1) Disconnect the AC adapter from the base unit, cutting off electrical power.</li> <li>2) Disconnect the telephone cord from the base unit.</li> <li>3) Let dry for at least 3 days.</li> </ol> <p><b>IMPORTANT:</b> You must <b>unplug the telephone line while recharging the battery pack</b> to avoid charge interruption.</p> <p><b>CAUTION:</b> DO NOT use a microwave oven to speed up the drying process. This will cause permanent damage to the handset, base and the microwave oven.</p> <p>After following these steps, if your cordless telephone does not work, please send to:</p> <p style="text-align: center;">Uniden America Corporation Parts and Service Division 4700 Amon Carter Blvd. Ft. Worth TX 76155 1-800-554-3988. Monday through Friday 8 a.m. to 5 p.m. CST</p>

## Precautions!

Before you read anything else, please observe the following:

### Warning!

Uniden America Corporation DOES NOT represent this unit to be waterproof. To reduce the risk of fire, electrical shock, or damage to the unit, DO NOT expose this unit to rain or moisture.

### Rechargeable Nickel-Metal-Hydrate Battery Warning

- This equipment contains a rechargeable Nickel-Metal-Hydrate battery.
- Nickel is a chemical known to state of California to cause cancer.
- The rechargeable Nickel-Metal-Hydrate battery contained in this equipment may explode if disposed of in a fire.
- Do not short-circuit the battery.
- Do not charge the rechargeable Nickel-Metal-Hydrate battery used in this equipment in any charger other than the one designed to charge this battery as specified in the owner's manual. Using another charger may damage the battery or cause the battery to explode.

### Rechargeable Nickel-Metal-Hydrate Batteries Must Be Recycled or Disposed of Properly



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

Uniden works to reduce lead content in our PVC coated cords in our products and accessories.

### Warning!

The cords on this product and/or accessories contain lead, a chemical known to the State of California to cause birth defects or other reproductive harm. **Wash hands after handling.**

## Important Safety Instructions

When using your telephone equipment, these basic safety precautions should always be followed to reduce the risk of fire, electrical shock, and injury to persons:

1. Read and understand all instructions.
2. Follow all warnings and instructions marked on the product.
3. Unplug this product from the wall outlet before cleaning. Use a dry cloth for cleaning without liquid or aerosol cleaners.
4. Do not use this product near water; for example, near a bathtub, wash bowl, kitchen sink or laundry tub, in a wet basement, or near a swimming pool.
5. Do not place this product on an unstable cart, stand, or table. The telephone may fall, causing serious damage to the unit.
6. Slots and openings in the cabinet and the back or bottom are provided for ventilation. To protect the product from overheating, these openings must not be blocked or covered. This product should never be placed near or over a radiator or heat register. This product should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply to your home, consult your dealer or local power company.
8. Do not allow anything to rest on the power cord. Do not locate this product where the cord will be damaged by persons walking on it.
9. Do not overload wall outlets and extension cords, as this can result in the risk of fire or electric shock.
10. Never push objects of any kind into this product through cabinet slots, as they may touch dangerous voltage points or short out parts that could result in a risk of fire or electric shock. Never spill liquid of any kind on the product.
11. To reduce the risk of electric shock, do not disassemble this product. Take it to qualified service personnel when service or repair work is required. Opening or removing covers may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock when the appliance is subsequently used.
12. Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:
  - A. When the power supply cord is damaged or frayed.
  - B. If liquid has been spilled into the product.
  - C. If the product has been exposed to rain or water.
  - D. If the product does not operate normally when following the operating instructions. (Adjust only those controls that are covered by the operating instructions. Improper adjustment of other controls may result in damage and will often require extensive repair work by a qualified technician.)
  - E. If the product has been dropped or the cabinet has been damaged.
  - F. If the product exhibits a distinct change in performance.
13. Do not use the telephone to report a gas leak in the vicinity of the leak.

## Additional Battery Safety Precautions

**Caution!** To reduce the risk of fire or injury to persons by the battery, read and follow these instructions:

1. Use only the Uniden battery pack specified in the owner's manual.
2. Do not dispose of the battery pack in a fire. The cell may explode. Check the Nickel Metal Hydride battery disposal package insert for disposal instructions.
3. Do not open or mutilate the battery pack. Released electrolyte is corrosive and may cause damage to the eyes or skin. It may be toxic if swallowed.
4. Exercise care in handling the battery in order not to short the battery with conducting materials such as rings, bracelets, and keys. The battery or conductor may overheat and cause burns.
5. Charge the battery pack provided with or identified for use with this product only in accordance with the instructions and limitations specified in the owners manual provided for this product.
6. Observe proper polarity orientation between the battery pack and battery charger.

### SAVE THESE INSTRUCTIONS!

## Important Electrical Considerations

Unplug all electrical appliances when you know an electrical storm is approaching. Lightning can pass through your household wiring and damage any device connected to it. This phone is no exception.

## The FCC Wants You To Know

Changes or modifications to this product not expressly approved by Uniden, or operation of this product in any way other than as detailed by the owner's manual, could void your authority to operate this product. Your telephone complies with Part 68 of FCC Rules. You must, upon request, provide the FCC registration number and the REN to your telephone company. Both numbers are on the base unit.

**Note:** You must not connect your phone to:

- coin-operated systems
- most electronic key telephone systems

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Privacy of communications, may not be ensured when using this phone.

## Range

Your new phone is designed to achieve the maximum possible range by transmitting and receiving according to the highest specifications set forth by the FCC. We have rated this phone to operate at a maximum distance with the qualification that the range depends upon the environment in which the telephone is used. Many factors limit range, and it would be impossible to include all the variables in our rating. The Maximum Range rating of this phone is meant to be used as a means of comparison against other range claims.



## Telephone Line Problems

The FCC has granted the telephone company the right to disconnect service in the event that your phone causes problems on the telephone line. Also, the telephone company may make changes in facilities and services which may affect the operation of your unit. However, your telephone company must give adequate notice in writing prior to such actions to allow you time for making necessary arrangements to continue uninterrupted service. If you are having trouble with your telephone service, you must first disconnect your phone to determine if it is the cause of your problem. If you determine that it is the cause, you must leave it disconnected until the trouble has been corrected.

## Radio Interference

Radio interference may occasionally cause buzzing and humming in your cordless handset, or clicking noises in the base. This interference is caused by external sources such as TV, refrigerator, vacuum cleaner, fluorescent lighting, or electrical storm. Your unit is NOT DEFECTIVE. If these noises continue and are too distracting, please check around your home to see what appliances may be causing the problem. In addition, we recommend that the base not be plugged into a circuit that also powers a major appliance because of the potential for interference. Be certain that the antenna on the unit is fully extended when needed. In the unlikely event that you consistently hear other voices or distracting transmissions on your phone, you may be receiving radio signals from another cordless telephone or other source of interference. If you cannot eliminate this type of interference, you need to change to a different channel. Finally, it should be noted that some cordless telephones operate at frequencies that may cause interference to nearby TVs and VCRs. To minimize or prevent such interference, the base of the cordless telephone should not be placed near or on top of a TV or VCR. If interference is experienced, moving the cordless telephone farther away from the TV or VCR will often reduce or eliminate the interference.

## More than One Cordless Telephone

If you want to use more than one cordless telephone in your home, they must operate on different channels. Press the channel key to select a channel that provides the clearest communication.

## Cordless Telephone Privacy

Cordless telephones are radio devices. Communications between the handset and base of your cordless telephone are accomplished by means of radio waves which are broadcast over the open airways. Because of the inherent physical properties of radio waves, your communications can be received by radio receiving devices other than your own cordless telephone unit. Consequently, any communications using your cordless telephone may not be private.

## Installation Considerations

### Selecting a Location

Before choosing a location for your new phone, there are some important guidelines you should consider:

- The location should be close to both a phone jack and continuous power outlet. (A continuous power outlet is an AC outlet which does not have a switch to interrupt its power.)
- Keep the base and handset away from sources of electrical noise such as motors or fluorescent lighting.
- Be sure there is sufficient space to fully extend the base antenna.
- The base can be placed on a desk or tabletop or mounted on a standard telephone wall plate.
- You should charge your new phone for 15-20 hours before completing the installation or using the handset.

### Telephone Line Outlets

There are two types of phone outlets:

#### Modular Jack

Most phone equipment available now uses modular jacks. Phone cords are fitted with a molded plastic connector which plugs into this type of jack. If you do not have modular phone jacks, contact your local telephone company for information about their installation.

#### Hardwired Jack

Some equipment is wired directly to a phone jack, and these types of installations require a modular jack converter. This type of installation is not difficult; however, you should contact your Uniden telephone dealer or a telephone supply store for advice about the proper adapter or converter for your particular situation.

### Connecting the Telephone Cords

Consider these safety guidelines before connecting the telephone cords: Caution!

- *Never install telephone wiring during a lightning storm.*
- *Never touch uninsulated telephone wires or terminals unless the telephone line has been disconnected.*
- *Use caution when installing or modifying telephone lines.*

### Applying Power to the Base

This phone requires an AC outlet, without a switch to interrupt power, and the included AC adapter. To relieve strain on the DC plug when the phone is placed on a desk or table, wrap the power cord around the strain relief notch on the bottom of the base.

*NOTE: Place the power cord so that it does not create a trip hazard, or where it could become chafed and create a fire or other electrical hazards.*

## One Year Limited Warranty

Important: Evidence of original purchase is required for warranty service. WARRANTY: UNIDEN AMERICA CORPORATION ("Uniden") ELEMENTS OF WARRANTY: Uniden warrants, for one year, to the original retail owner, this Uniden Product to be free from defects in materials and craftsmanship with only the limitations or exclusions set out below.

WARRANTY DURATION: This warranty to the original user shall terminate and be of no further effect 12 months after the date of original retail sale. The warranty is invalid if the Product is (A) damaged or not maintained as reasonable or necessary, (B) modified, altered, or used as part of any conversion kits, subassemblies, or any configurations not sold by Uniden, (C) improperly installed, (D) serviced or repaired by someone other than an authorized Uniden service center for a defect or malfunction covered by this warranty, (E) used in any conjunction with equipment or parts or as part of any system not manufactured by Uniden, or (F) installed or programmed by anyone other than as detailed by the owner's manual for this product.

STATEMENT OF REMEDY: In the event that the product does not conform to this warranty at any time while this warranty is in effect, warrantor will either, at its option, repair or replace the defective unit and return it to you without charge for parts, service, or any other cost (except shipping and handling) incurred by warrantor or its representatives in connection with the performance of this warranty. Warrantor, at its option, may replace the unit with a new or refurbished unit. THE LIMITED WARRANTY SET FORTH ABOVE IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO THE PRODUCT AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES OF ANY NATURE WHATSOEVER, WHETHER EXPRESS, IMPLIED OR ARISING BY OPERATION OF LAW, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY DOES NOT COVER OR PROVIDE FOR THE REIMBURSEMENT OR PAYMENT OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow this exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you.

LEGAL REMEDIES: This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. This warranty is void outside the United States of America and Canada.

PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY: If, after following the instructions in the owner's manual you are certain that the Product is defective, pack the Product carefully (preferably in its original packaging). The Product should include all parts and accessories originally packaged with the Product. Include evidence of original purchase and a note describing the defect that has caused you to return it. The Product should be shipped freight prepaid, by traceable means, to warrantor at:

Uniden America Corporation  
Parts and Service Division  
4700 Amon Carter Blvd.  
Fort Worth, TX 76155

(800) 297-1023, 8 a.m. to 5 p.m. CST, Monday through Friday

# I.C. Notice

## TERMINAL EQUIPMENT

**NOTICE:** This equipment meets the applicable Industry Canada Terminal Equipment Technical Specifications. This is confirmed by the registration number. The abbreviation, IC, before the registration number signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment.

**NOTICE:** The Ringer Equivalence Number (REN) for this terminal equipment is marked on the equipment itself. The REN assigned to each terminal equipment provides an indication of the maximum number of terminals allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the Ringer Equivalence Numbers of all the devices does not exceed five.

## RADIO EQUIPMENT

The term "IC:" before the radio certification number only signifies that Industry Canada technical specifications were met.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. "Privacy of communications may not be ensured when using this telephone".

# Index

## 0 - 9

3-way conferencing . . . . .	33
20 ring options . . . . .	22

## A

Anykey answer . . . . .	23
Area code . . . . .	24
AutoTalk . . . . .	22

## B

Banner . . . . .	23
Battery	
Preparing and charging . . . . .	12
Replacement and handling . . . . .	57
Beltclip . . . . .	56

## C

Caller ID	
Caller ID service . . . . .	45
Calling . . . . .	48
Call Waiting . . . . .	35
Deleting . . . . .	47
Setting . . . . .	24
Storing . . . . .	48
Using . . . . .	48
Viewing . . . . .	46
Call transfer feature . . . . .	54
Chain dialing . . . . .	38
CIDCW . . . . .	45
CWDX . . . . .	49
Clarity Booster . . . . .	33
Clock . . . . .	24
Copy phonebook . . . . .	25

**www.uniden.com**

## D

Day & Time . . . . .	24
Deluxe Call Waiting features . . . . .	49
De-register the handset . . . . .	26
Dialing mode . . . . .	25
Digital security code . . . . .	56
Direct link . . . . .	20
Distinctive ringer . . . . .	22

## E, F, G, H

Earpiece volume . . . . .	30
Edit voice mail . . . . .	21
Expanding your phone . . . . .	50
General information . . . . .	58
Grobal setup . . . . .	24
Hands-free conversation . . . . .	27
Handset setup . . . . .	21
Headset installation . . . . .	56

## I, J, K, L

I.C. Notice . . . . .	64
Important safety instructions . . . . .	62
Intercom . . . . .	53
Key touch tone . . . . .	23
Language . . . . .	23

## M, N, O

Maintenance . . . . .	57
Making a call . . . . .	27
Mute . . . . .	31
New message LED . . . . .	36

## P, Q

Package contents . . . . .	1
Phonebook	
Editing . . . . .	43
Erasing . . . . .	43
Making calls . . . . .	42
Storing . . . . .	37
Viewing . . . . .	41
Precautions . . . . .	62
Privacy Mode . . . . .	33

## R

Receiving a call . . . . .	27
Redialing a call . . . . .	28
Register the handset . . . . .	51
Replacing Base . . . . .	55
Ringer volume . . . . .	30
Room Monitor . . . . .	21

## S

Setting up	
base unit . . . . .	14
extra handset . . . . .	50
handset . . . . .	12
Speed dialing . . . . .	42
System reset . . . . .	26

## T, U, V, W, X, Y, Z

Transferring a call . . . . .	53
Troubleshooting . . . . .	59
Voice Mail . . . . .	36
Voice Mail Tone . . . . .	26
Programming . . . . .	21
Warranty . . . . .	63

# Memory List

	Name	Phone No.
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		

	Name	Phone No.
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		

	Name	Phone No.
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		

# Memo

# Memo

**At Uniden, we'll take care of you!**

If you need any assistance with this product, please call our Customer Hotline at

**1-800-297-1023**

**PLEASE DO NOT RETURN THIS PRODUCT TO THE PLACE OF PURCHASE.**

Our Uniden representatives will be happy to help you with any matters regarding the operation of this unit, available accessories, or any other related matters.

Thank you for purchasing a Uniden product.

Hours: M-F 8:00 AM to 5:00 PM CST.

**[www.uniden.com](http://www.uniden.com)**



For information on the accessibility features of this product, please call  
**1-800-874-9314 (V/TTY)**

**Uniden®**

May be covered under one or more of the following U.S. patents:

4,523,058	4,595,795	4,797,916	5,381,460	5,426,690	5,434,905
5,491,745	5,493,605	5,533,010	5,574,727	5,581,598	5,650,790
5,660,269	5,661,780	5,663,981	5,671,248	5,696,471	5,717,312
5,732,355	5,754,407	5,758,289	5,768,345	5,787,356	5,794,152
5,801,466	5,825,161	5,864,619	5,893,034	5,912,968	5,915,227
5,929,598	5,930,720	5,960,358	5,987,330	6,044,281	6,070,082
6,125,277	6,253,088	6,314,278	6,418,209		

ADDITIONAL HANDSET & CHARGER

## EXPAND YOUR SYSTEM!

DCX 640 HANDSET & CHARGER

Easily expand your cordless phone system by adding the DCX 640 Handset and Charger.\*

The DCX 640 gives you the mobility you need to stay connected with friends and family. Place this handset and charger in any convenient location, no need for an extra phone jack!

Another innovation from Uniden, the company that brings you a world without wires.



\* Operates with  
Cordless Systems:  
DCT 600 and  
DCT 6000 Series.

# Uniden®

- Optional 2.4GHz Cordless Handset and Charging Cradle
- For use with Cordless Systems: DCT 6465, and DCT 6465-2.
- Digital Spread Spectrum
- Intercom or Call Transfer
- Caller ID/Call Waiting
- No Phone Jack Needed

**MAXIMUM EXPANDABILITY:**  
4 Handsets per system

©2004 Uniden America Corporation, Fort Worth, Texas. Contains additional foreign articles. Custom manufactured in China.

AVAILABLE AT PARTICIPATING RETAIL STORES

UPZZ01318BZ