


Agilent HSDL-9000

Miniature Surface-Mount

Ambient Light Photo Sensor

Data Sheet



Description

The HSDL-9000 is a low cost, digital-output ambient light photo sensor in miniature industry-standard PLCC lead-free surface-mount package. It incorporates a photodiode, which peaks in human luminosity curve at 550 nm. Hence, it provides an excellent responsivity that is close to the response of human eyes, as shown in Figure 2.

With the options of three digital levels and an analog Gain Control pin to fine tune the three threshold levels to achieve better sensitivity control, the HSDL-9000 is ideal for applications in which the measurement of ambient light is used to control display backlighting. Mobile appliances such as mobile phones and PDAs that draw heavy current from the display backlighting will benefit from incorporating the HSDL-9000 in their designs to reduce the power consumption significantly.

Features

- **Excellent responsivity which peaks in the human luminosity curve at 550 nm**
Close responsivity to the human eye
- **Miniature PLCC surface-mount package**
Height – 1.1 mm
Width – 4.0 mm
Depth – 3.2 mm
- **Ease of design with digital output**
Integrated photodiode and analog to digital output circuitry
- **Enable fine control of the backlight intensity with adjustable sensitivity control**
3 digital levels
An Analog Gain Control
- **Minimum power consumption**
30 μ A typical idle (standby) current
<10 nA typical shutdown current
- **Guaranteed temperature performance**
–40°C to 85°C
- **2.7 - V_{CC} - 3.6 V**
- **Lead-free package**
- **Low cost**

Applications

- **Detection of ambient light to control display backlighting**
Mobile devices – mobile phones, PDAs
Automotive – dashboard
Consumer appliances – audio sets
- **Daylight and artificial light exposed devices**



Ordering Information

| Part Number | Packaging Type | Package | Quantity |
|-------------|----------------|--|----------|
| HSDL-9000 | Tape and Reel | 6-lead PLCC with Top Transparent Epoxy Surface | 1500 |

Application Circuit For HSDL-9000 Ambient Light Photo Sensor

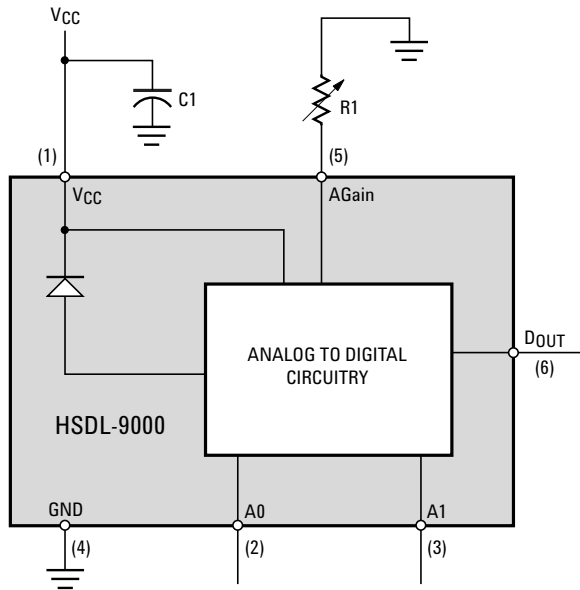


Figure 1. Functional block diagram of HSDL-9000.

I/O Pins Configuration Table

| Pin | Symbol | I/O | Description | Notes |
|-----|-----------------|-----|------------------------------|--|
| 1 | V _{CC} | I | Supply Voltage | Regulated, 2.7 to 3.6 Volt |
| 2 | A0 | I | Digital Gain Level Control_0 | This pin needs to be driven high or low and not left floating. |
| 3 | A1 | I | Digital Gain Level Control_1 | This pin needs to be driven high or low and not left floating. |
| 4 | GND | I | Ground | Connect to System Ground |
| 5 | AGain | I | Analog Gain Constant Control | If not used, leave this pin unconnected. |
| 6 | DOUT | O | Digital Output | Tri-State ^[1] |

Note:

1. The HSDL-9000 is in tri-state when it is in shut down mode.

I/O Truth Table^[2]

| Logic Level | | | |
|-------------|----|-------------|--|
| A1 | A0 | Description | Incidence Light Threshold (Lux) ^[3] |
| 0 | 0 | High Gain | 30 |
| 1 | 0 | Medium Gain | 81 |
| 0 | 1 | Low Gain | 164 |
| 1 | 1 | Shut down | — |

Notes:

2. AGain pin is left floating.
3. Measurements are carried out using incandescent light source.

Recommended Application Circuit Components

| Component | Recommended Value |
|-----------|---------------------------------|
| C1 | 1.0 μ F \pm 20%, Tantalum |

Recommended R1 Values^[4]

| R1 | Incidence Light Threshold (Lux) | | |
|---------------------------------|---------------------------------|-------------|----------|
| | High Gain | Medium Gain | Low Gain |
| 220 k Ω \pm 5%, 0.25 W | 23 | 50 | 81 |
| 430 k Ω \pm 5%, 0.25 W | 25 | 63 | 108 |
| 910 k Ω \pm 5%, 0.25 W | 28 | 71 | 133 |

Note:

4. Measurements are carried out using incandescent light source.

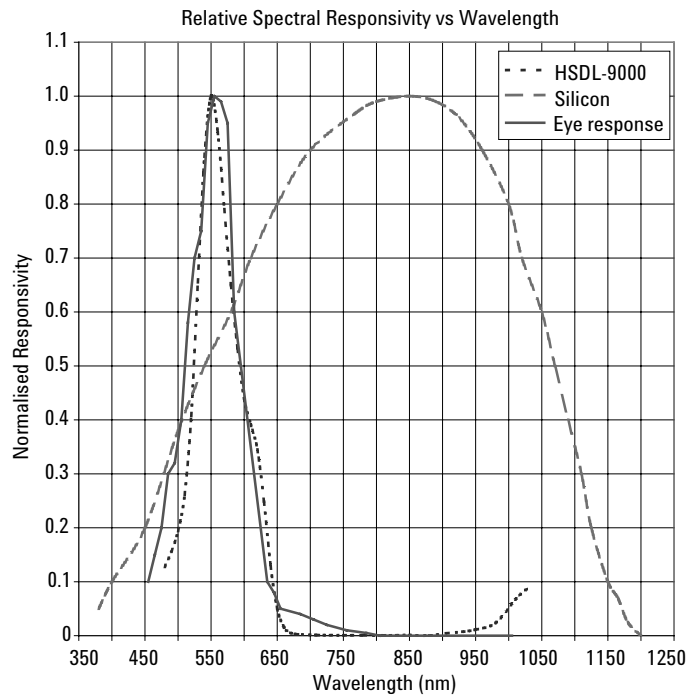


Figure 2. Relative spectral responsivity vs. wavelength.

Caution: The BiCMOS inherent to this design of this component increases the component's susceptibility to damage from Electrostatic Discharge (ESD). It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation, which may be induced by the ESD.

Absolute Maximum Ratings

For implementations where case to ambient thermal resistance is - 50°C/W

| Parameter | Symbol | Min. | Max. | Units | Conditions |
|-----------------------|-----------------|------|------|-------|------------|
| Storage Temperature | T _S | -40 | +85 | °C | |
| Operating Temperature | T _A | -40 | +85 | °C | |
| Supply Voltage | V _{CC} | 0 | 6 | V | |
| Output Voltage: RxD | V _O | -0.5 | 6 | V | |

Recommended Operating Conditions

| Parameter | Symbol | Min. | Max. | Units | Conditions |
|-----------------------|-----------------|-----------------|----------------------|-----------------|------------|
| Operating Temperature | T _A | -40 | +85 | °C | |
| Supply Voltage | V _{CC} | 2.7 | 3.6 | V | |
| Logic Input | Logic High | V _{IH} | V _{CC} -0.2 | V _{CC} | V |
| | Logic Low | V _{IL} | 0 | 0.2 | V |

Electrical & Optical Specifications

Specifications (Min. & Max. values) hold over the recommended operating conditions unless otherwise noted. Unspecified test conditions may be anywhere in their operating range.

All typical values (Typ.) are at 25°C with V_{CC} at 3.0 V unless otherwise noted.

| Parameter | Symbol | Min. | Typ. | Max. | Units | Conditions |
|-----------------------------|----------------------|-----------------|----------------------|-----------------|-------|---------------------------|
| Peak Sensitivity Wavelength | λ _p | | 550 | | nm | |
| Viewing Angle | | | 120 | | ° | |
| Logic Input | Logic High | V _{IH} | V _{CC} -0.2 | V _{CC} | V | |
| | Logic Low | V _{IL} | 0 | 0.2 | V | |
| Output Voltage | Logic High | V _{OH} | V _{CC} -0.2 | V _{CC} | V | I _{OH} = -200 μA |
| | Logic Low | V _{OL} | 0 | 0.2 | V | I _{OL} = 200 μA |
| Supply Current | I _{CC} | | 33 | 100 | μA | |
| Shutdown Current | I _{CC} (SD) | | 10 | 100 | nA | |

HSDL-9000 Package Outline

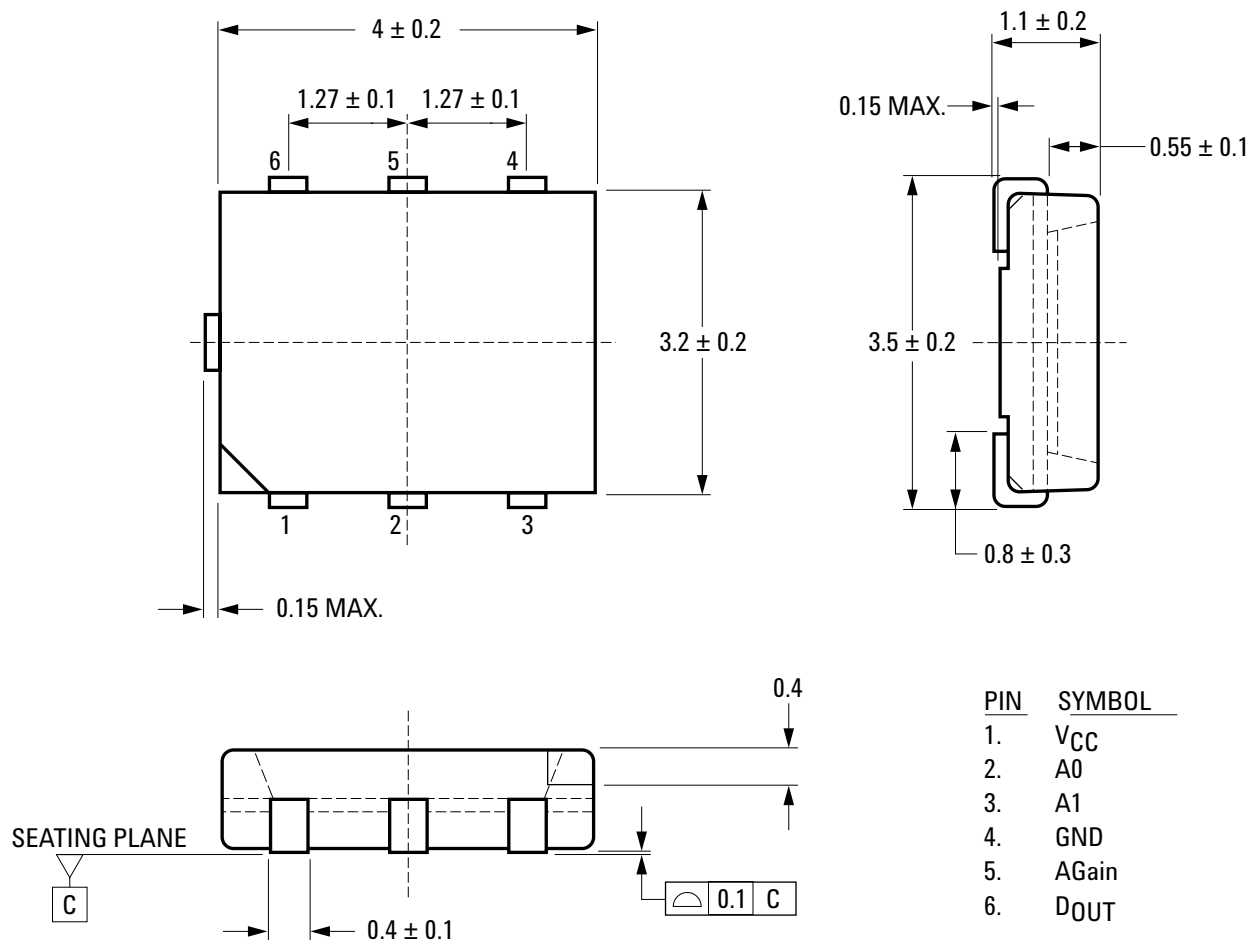


Figure 3. Package outline dimensions.

Tape and Reel Dimensions

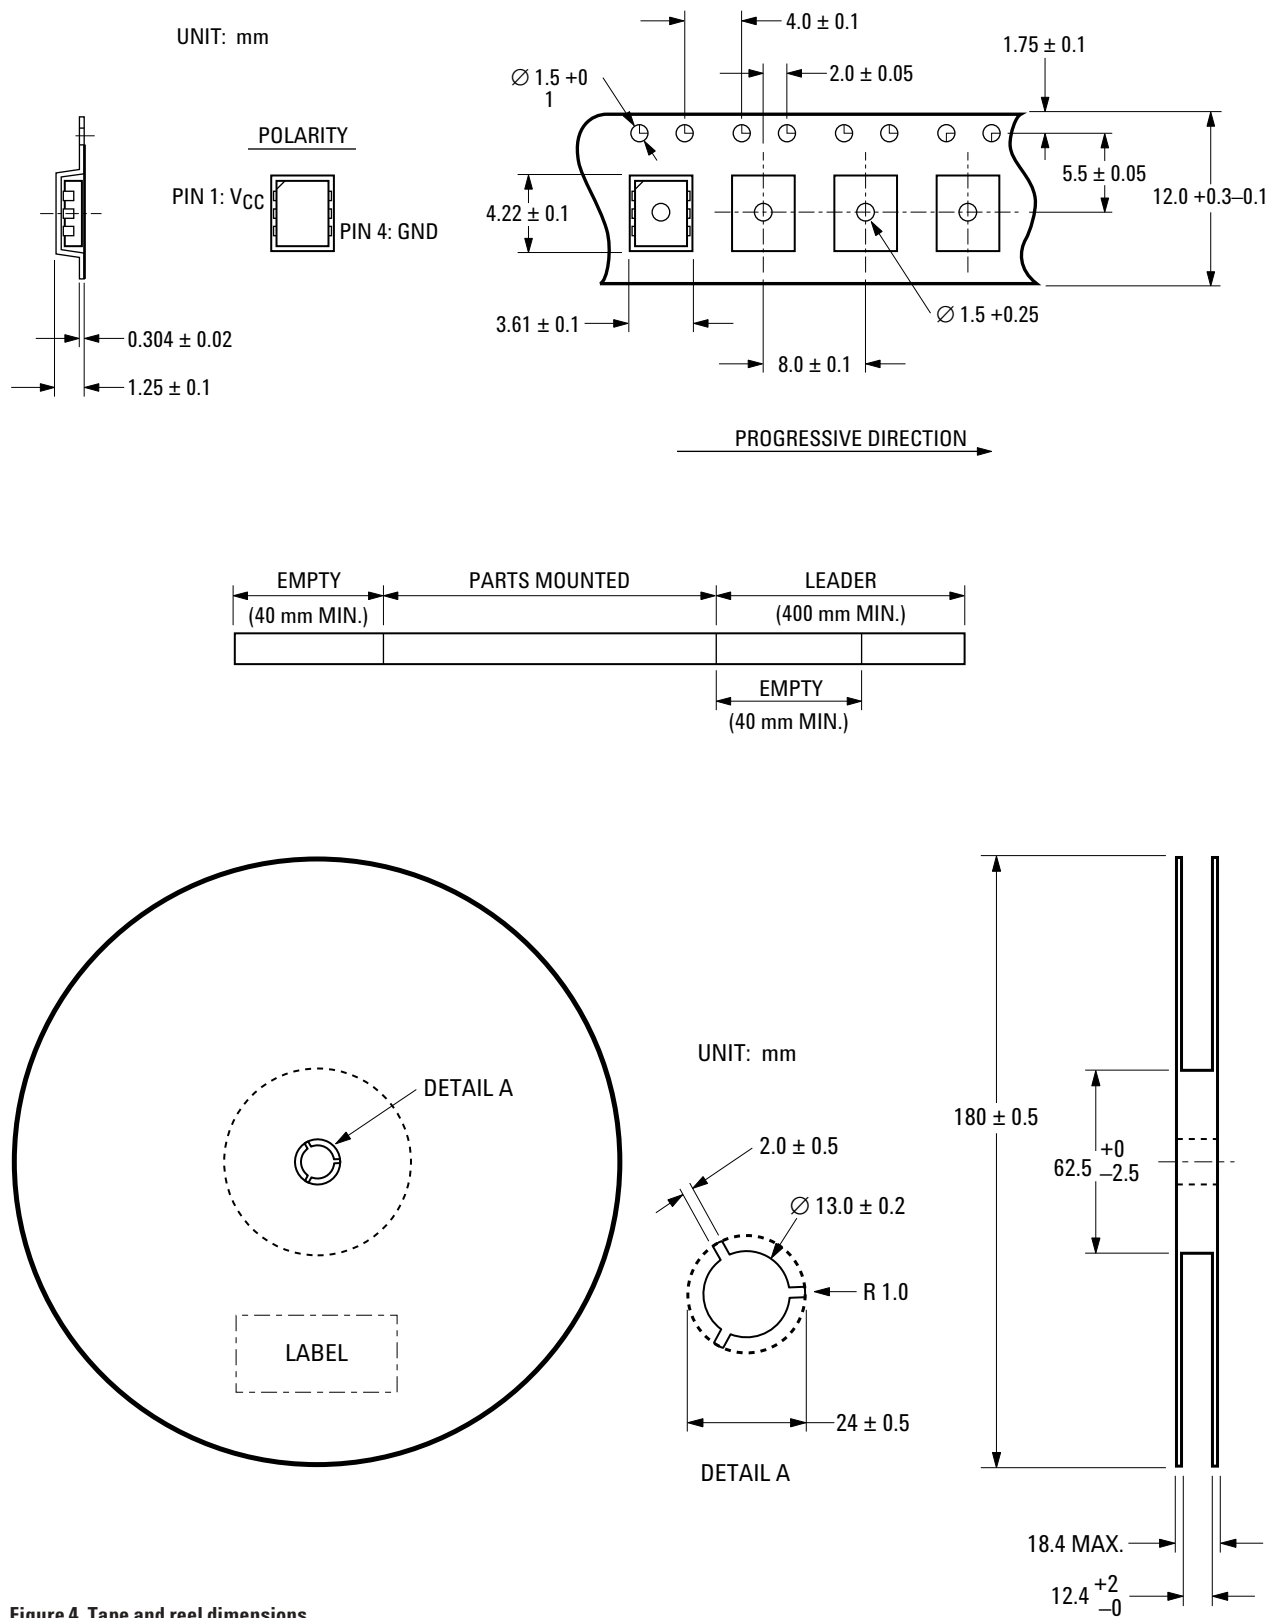


Figure 4. Tape and reel dimensions.

Moisture Proof Packaging

All HSDL-9000 options are shipped in moisture proof package. Once opened, moisture absorption begins.

This part is compliant to JEDEC Level 4.

Baking Conditions

If the parts are not stored in dry conditions, they must be baked before reflow to prevent damage to the parts.

| Package | Temp. | Time |
|----------|-------|----------|
| In reels | 60°C | 20 hours |
| In bulk | 125°C | 5 hours |

Baking should only be done once.

Recommended Storage Conditions

| | |
|---------------------|--------------|
| Storage Temperature | 10°C to 30°C |
| Relative Humidity | below 60% RH |

Time from Unsealing to Soldering

After removal from the bag, the parts should be soldered within three days if stored at the recommended storage conditions. If times longer than three days are needed, the parts must be stored in a drybox.

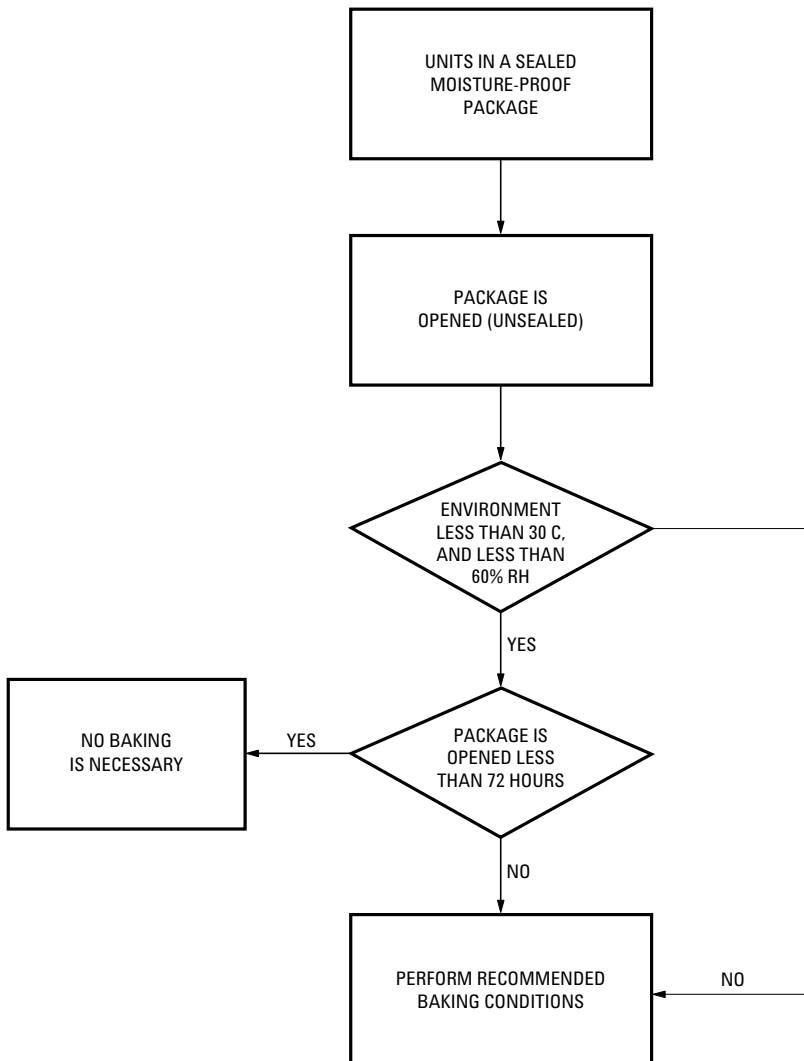


Figure 5. Baking conditions chart.

Reflow Profile

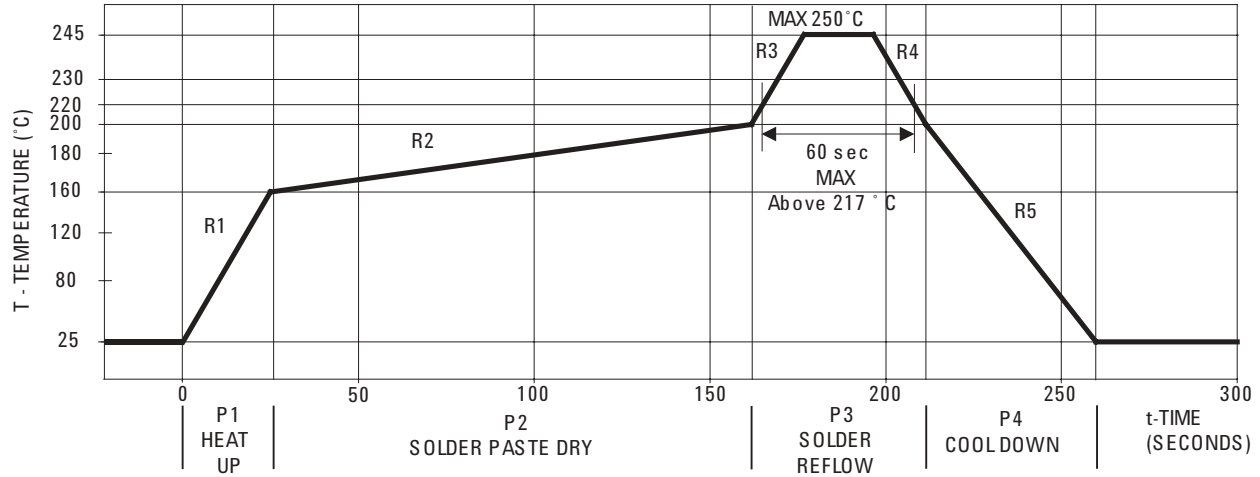


Figure 6. Reflow graph.

| Process | Symbol | ΔT | Maximum $\Delta T/\Delta \text{time}$ |
|------------------|--------|-----------------------------|---------------------------------------|
| Heat Up | P1, R1 | 25°C to 160°C | 4°C/s |
| Solder Paste Dry | P2, R2 | 160°C to 200°C | 0.5°C/s |
| Solder Reflow | P3, R3 | 200°C to 245°C (250°C max.) | 4°C/s |
| | P3, R4 | 245°C to 200°C | -6°C/s |
| Cool Down | P4, R5 | 200°C to 25°C | -6°C/s |

The reflow profile is a straight-line representation of a nominal temperature profile for a convective reflow solder process. The temperature profile is divided into four process zones, each with different $\Delta T/\Delta \text{time}$ temperature change rates. The $\Delta T/\Delta \text{time}$ rates detailed in the above table. The temperatures are measured at the component to printed circuit board connections.

In **process zone P1**, the PC board and I/O pins are heated to a temperature of 160°C to activate the flux in the solder paste. The temperature ramp up rate, R1, is limited to 4°C per second to allow for even heating of both the PC board and HSDL-9000 I/O pins.

Process zone P2 should be of sufficient time duration (60 to -120 seconds) to dry the solder paste. The temperature is raised to a level just below the liquidus point of the solder, usually 200°C (392°F).

Process zone P3 is the solder reflow zone. In zone P3, the temperature is quickly raised above the liquidus point of solder to 245°C (473°F) for optimum results. The dwell time above the liquidus point of solder should be between 20 and 60 seconds. It usually takes about 20 seconds to assure proper coalescence of the solder balls into liquid solder and the formation of good solder connections. Beyond a dwell time of 60 seconds, the intermetallic

growth within the solder connections becomes excessive, resulting in the formation of weak and unreliable connections. The temperature is then rapidly reduced to a point below the solidus temperature of the solder, usually 200°C (392°F), to allow the solder within the connections to freeze solid.

Process zone P4 is the cool down after solder freeze. The cool down rate, R5, from the liquidus point of the solder to 25°C (77°F) should not exceed -6°C per second maximum. This limitation is necessary to allow the PC board and transceiver's castellated I/O pins to change dimensions evenly, putting minimal stresses on the HSDL-9000.

Appendix A : SMT Assembly Application Note

1.0 Solder Pad, Mask and Metal Stencil Aperture

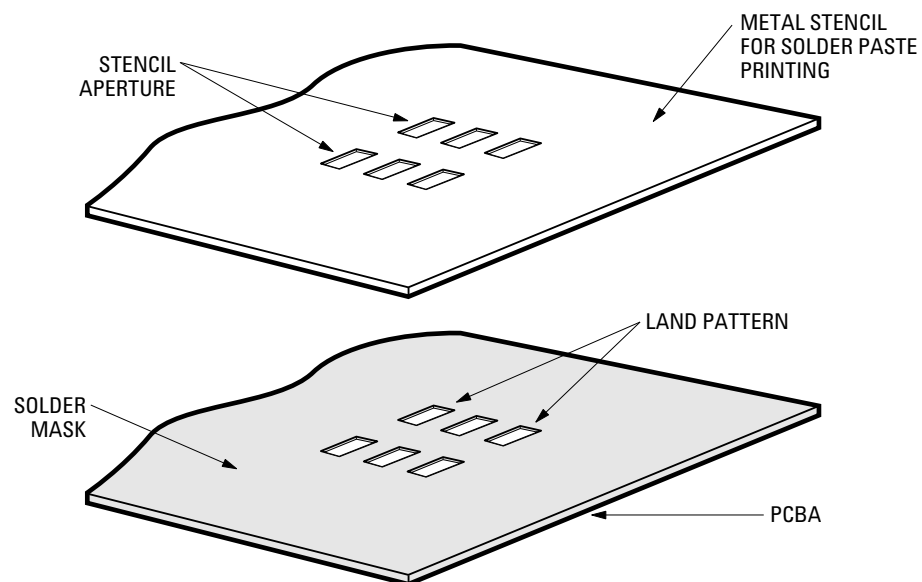


Figure 7. Stencil and PCBA.

1.1 Recommended Land Pattern

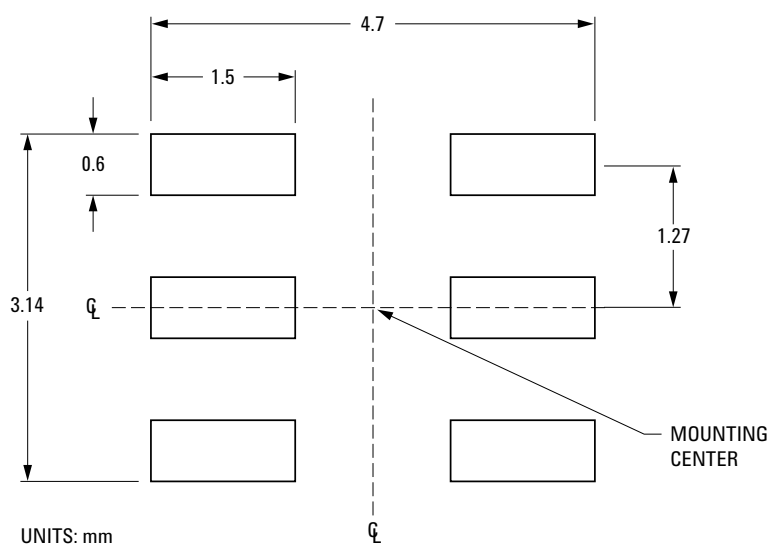


Figure 8. Stencil and PCBA.

1.2 Recommended Metal Solder Stencil Aperture

It is recommended that only a 0.152 mm (0.006 inches) thick stencil be used for solder paste printing. This is to ensure adequate printed solder paste volume and no shorting.

Aperture opening for shield pad is 1.5 mm x 0.6 mm as per land pattern.

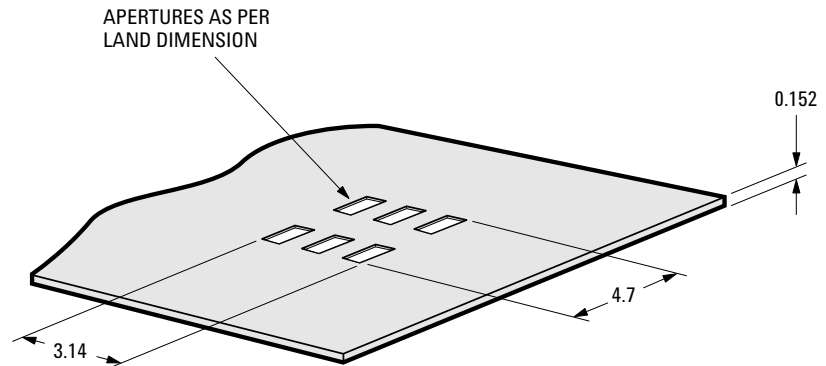


Figure 9. Solder stencil aperture.

1.3 Adjacent Land Keepout and Solder Mask Areas

Adjacent land keep-out is the **maximum space** occupied by the unit relative to the land pattern. There should be no other SMD components within this area.

The minimum solder resist strip width required to avoid solder bridging adjacent pads is **0.2 mm**.

Note: Wet/Liquid Photo-Imageable solder resist/mask is recommended.

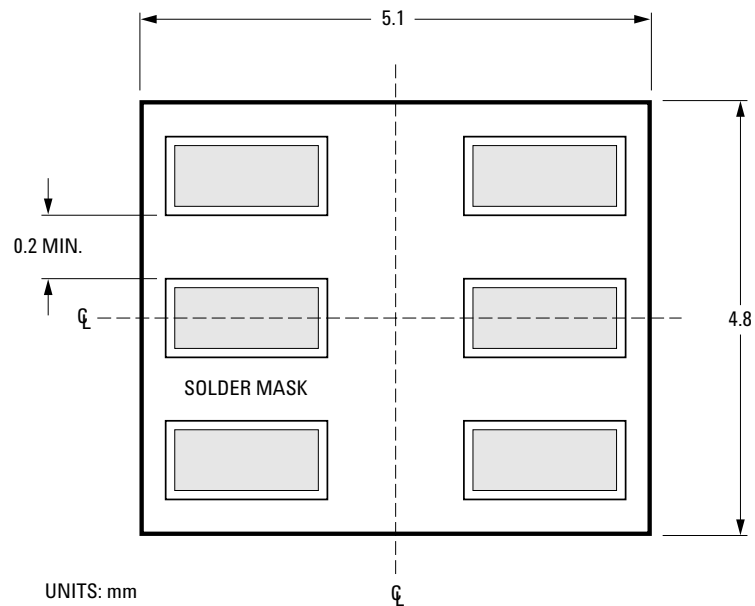


Figure 10. Adjacent land keepout and solder mask areas.


Appendix B: PCB Layout Suggestion

The following PCB layout shows a recommended layout that should result in good electrical and EMI performance. Things to note:


1. The ground plane should be continuous under the part, but should not extend under the shield trace.
2. The shield trace is a wide, low inductance trace back to the system ground.

3. C1 and C2 are optional V_{CC} filter capacitors. They may be left out if the V_{CC} is clean.

A reference layout of a 2-layer Agilent evaluation board for HSDL-9000 based on the guidelines stated above is shown below. For more details, please refer to Agilent Application Note 1114, *Infrared Transceiver PCB Board Layout for Noise Immunity*.

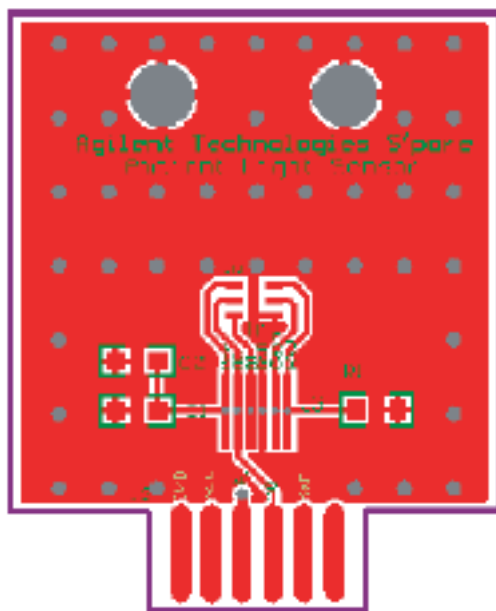

TopLayer

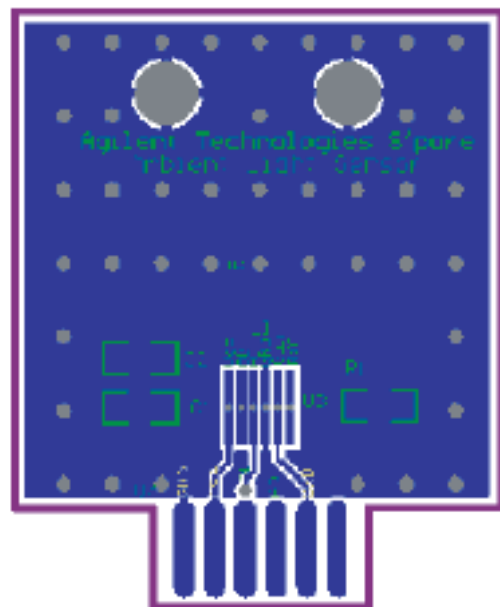

BottomLayer

Figure 11. PCB layout suggestions.

Appendix C: Optical Window Design for HSDL-9000

Optical Window Dimensions

To ensure that the performance of the HSDL-9000 will not be affected by improper window design, there are some constraints on the dimensions and design of the window. There is a constraint on the minimum size of the window, which is placed in front of the photodiode, so that it will not affect the angular response of the HSDL-9000. This minimum dimension that is recommended will ensure at least a $\pm 35^\circ$ light reception cone.

If a smaller window is required, a light pipe or light guide can be used. A light pipe or light guide is a cylindrical piece of transparent plastic which makes use of total internal reflection to focus the light.

The thickness of the window should be kept as minimum as possible because there is a loss of power in every optical window of about 8% due to reflection (4% on each side) and an additional loss of energy in the plastic material.

Figure 12 illustrates the two types of window that we have recommended which could either be a flat window or a flat window with light pipe.

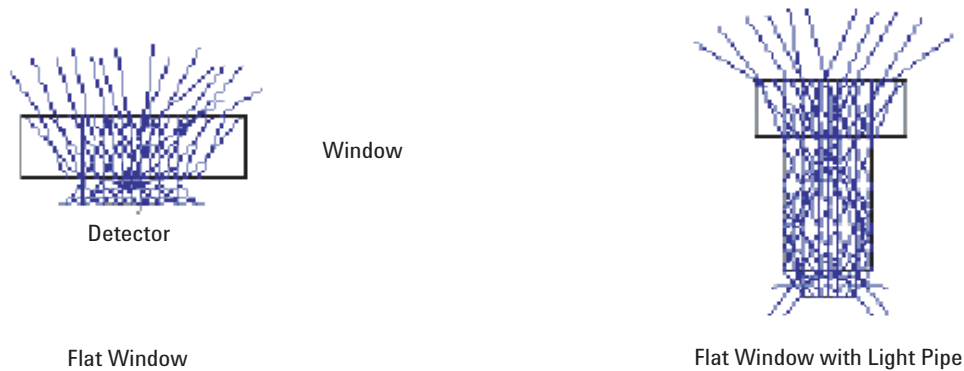


Figure 12. Recommended window design.

The table and figure below show the recommended dimensions of the window. These dimension values are based on a window thickness of 1.0 mm with a refractive index 1.585.

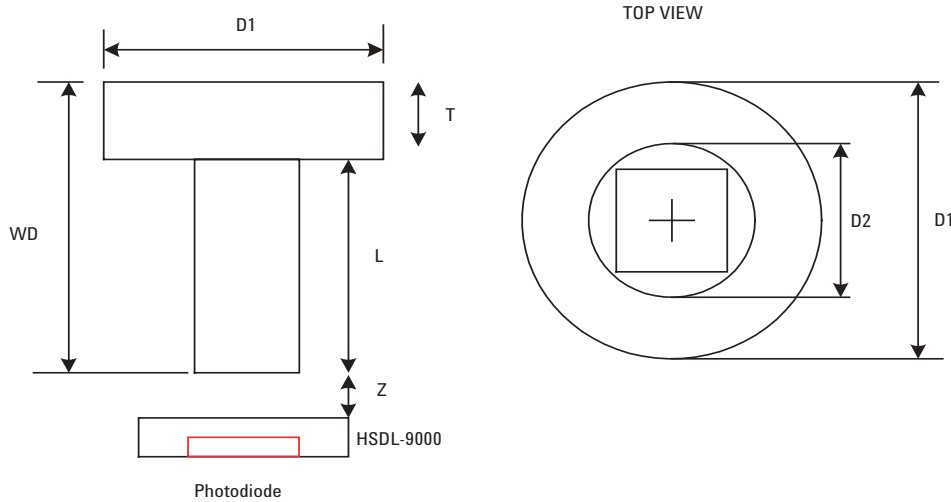


Figure 13. Recommended window dimensions.

WD: Working Distance between window front panel & HSDL-9000

D1: Window Diameter

T: Thickness

L: Length of Light Pipe

D2: Light Pipe Diameter

Z: Distance between window rear panel and HSDL-9000

Table 4. Recommended Dimension for Optical Window

| WD (T+L+Z) | Flat Window (L = 0.0) | | Flat Window with Light Pipe (D2 = 1.5; z = 0.5) | |
|---------------|--------------------------|------|--|-----|
| | Z | D1 | D1 | L |
| 1.5 | 0.5 | 2.25 | — | — |
| 2.0 | 1.0 | 3.25 | — | — |
| 2.5 | 1.5 | 4.25 | — | — |
| 3.0 | 5.00 | 5.00 | 2.5 | 1.5 |

All Dimensions are in mm.

The window should be placed directly on top of the photodiode to achieve better performance and if a flat window with a light pipe is used, dimension D2 should be

1.5 mm (same size as the PIN) to optimize the performance of HSDL-9000. Please refer to Figure 14 for the top view of the placement of the window.

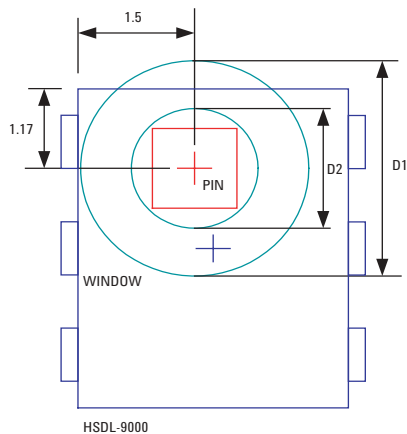


Figure 14. Placement of the window.

Optical Window Material

The material of the window is recommended to be polycarbonate. The surface finish of the plastic should be smooth, without any texture.

The recommended plastic material for use as a window is available from Bayer AG and Bayer Antwerp N. V. (Europe), Bayer Corp.(USA) and Bayer Polymers Co., Ltd. (Thailand).

Table 5. Recommended Plastic Material

| Material Number | Visible Light Transmission | Refractive Index |
|-----------------|----------------------------|------------------|
| Makrolon LQ2647 | 87% | 1.587 |
| Makrolon LQ3147 | 87% | 1.587 |
| Makrolon LQ3187 | 85% | 1.587 |

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or (408) 654-8675

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152 (Domestic/International), or 0120-61-1280 (Domestic Only)

Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2005 Agilent Technologies, Inc.

February 7, 2005

Obsoletes 5989-0023EN

5989-2300EN



Agilent Technologies