



**File Name:** Canon faxphone l80 manual.pdf

**Size:** 3775 KB

**Type:** PDF, ePub, eBook

**Category:** Book

**Uploaded:** 12 May 2019, 13:34 PM

**Rating:** 4.6/5 from 572 votes.

# Download Now!

Please check the box below to proceed.



I'm not a robot



reCAPTCHA  
Privacy - Terms

### Book Descriptions:

# Canon faxphone l80 manual



This page requires Javascript. Modify your browsers settings to allow Javascript to execute. See your browsers documentation for specific instructions. To install your download click on the name of the downloaded file. The driver may be included in your OS or you may not need a driver. Recommended Drivers

File Name	Date	File Size	Optional Drivers	File Name	Date	File Size	Recommended Software
File Name	Date	File Size	Optional Software	File Name	Date	File Size	Recommended Manuals
File Name	Date	File Size	Optional Manuals	File Name	Date	File Size	Warranty

replacement shall not extend the original warranty period of the Product. Note that a dated proof of purchase is required at the time of service. This requirement will be satisfied by providing a copy of your dated bill of sale or invoice. You must contact an ASF during such ASFs normal business hours to schedule the repair. If shipping is involved, it is your responsibility to properly package and send the Product at your cost to the ASF, together with your dated proof of purchase and a complete explanation of the problem. A Product covered by this limited warranty will be repaired and returned to you without charge by the ASF. Repairs not covered under this warranty will be charged to you at the then current service rates of the ASF.

**2 EXCHANGE SERVICE** A Canon Help Desk technician will attempt to diagnose the nature of the problem and, if possible, correct it over the telephone. If the problem cannot be corrected over the telephone, a Return Authorization Number RA will be issued to you. You will be asked for the Product serial number and other information pertaining to your defective Product and for a ship to location for the replacement Product street address only, no P.O. box. You must also provide your major credit card number.

<http://www.wtmaa.net/userfiles/download-porsche-manual.xml>

- **canon faxphone l80 manual, canon faxphone l80 manual pdf, canon faxphone l80 user guide, canon l80 fax machine manual, canon faxphone l80 setup instructions, 1.0.**



Your credit card will be charged in an amount up to the cost of a new Product a if your defective Product is not received by Canon USA within 10 business days after you receive the replacement Product, b if the defects in the defective Product are not covered by this limited warranty; or c if the warranty period on the Product has expired or has not been sufficiently established by you by supplying the appropriate documentation. The Canon Help Desk will ship out the replacement Product prepaid by Canon USA. After receipt of the replacement Product with instructions and a prepaid waybill, follow the instructions on how to ship the defective Product to Canon USA. You must return the defective Product in the shipping carton in which the replacement Product was packed, include the Return Authorization Number RA, a copy of your dated proof of purchase bill of sale, and a complete explanation of the problem. The Canon USA Help Desk must receive your request for this service by 3 p.m. ET, Monday through Friday, except holidays to ensure that the replacement Product expedites by the next business day two 2 business day EXCHANGE SERVICE for Alaska and Hawaii. Canon USA does not guarantee next business day service in the event of the occurrence of factors beyond Canon USAs reasonable control. The replacement Product you receive will be a refurbished or reconditioned unit and will be covered for the balance of the period remaining on your original limited warranty. Repairs of such Canon brand peripheral equipment shall be governed by the terms of the Separate Warranty. Nor does this warranty extend to any Product on which the original identification marks or serial numbers have been defaced, removed, or altered. The warranty in the preceding sentence applies to Toner and Drums A defective Toner or Drum returned to Canon U.S.A., Inc., Canon Canada, Inc. or an The warranty period for any Drum i.e. Canon USA, Inc., Canon Canada, Inc. or a Dealer. <http://www.willajarmar.pl/userfiles/download-prius-c-manual.xml>

# Canon

## FAXPHONE® L80

Laser Fax | Printer



### Desktop Laser Performance

- 33.6 Kbps Modem
- Quality Laser Output
- Print at 6 pages-per-minute
- Telephone handset included

### The Power to Fax and Print at Your Desk

For your small business or personal desktop, the FAXPHONE® L80 gives you the performance of a laser facsimile and a printer, with the added convenience of a telephone handset. With state-of-the-art fax capabilities and a six page-per-minute laser printer, this space saving business machine functions in the place of two devices. Now is the time to upgrade from a thermal or ink jet fax machine to the performance of quality laser output.

### High Productivity and Quality

With features such as a 30-sheet Automatic Document Feeder, Super G3 facsimile technology and large fax memory, the FAXPHONE L80 surpasses single function fax machines hands down. Its compact size and telephone handset make this the perfect machine to have on any desktop to save space and provide the productivity of a fax and a printer. Printed faxes and documents will both have the same result - quality laser output.


### Feature-Rich

Features such as delayed sending, polling and reception restriction allow users to manage their fax operations efficiently. Directory search allows you to look up and dial the correct number by easily viewing the stored phone numbers in the speed dials, coded dials or registered groups. For desktop laser facsimile performance - the FAXPHONE L80 is the smart choice.

To obtain the shipping address of Canon U.S.A, Inc. or Canon Canada, Inc., please call the Canon U.S.A., Inc. Help Desk at 18008284040 or Canon Canada Technical Support at 1800OKCANON. Shipping charges, if any, must be prepaid. If your Toner or Drum is covered by this Inc. or the Dealer from whom you purchased the Toner or Drum. Toner or Drum yield will vary depending on average density of originals copied and other Canon which damage the Toner or Drum or cause abnormally frequent service calls or service problems. Nor does Keep from contact with oxidizing materials. Refer to instructions for handling and storing. Further, Canon U.S.A. reserves the right to make changes in the specifications of the products described in this guide at any time without notice and without obligation to notify any person of such changes. A dedicated extension off a PBX machine without "Call Waiting" can be used with your FAXPHONE L80. Key telephone systems are not recommended because they send nonstandard signals to individual telephones for ringing and special codes, which may cause a fax error. Users should contact Canon Authorized Service Facilities for servicing of equipment. Information regarding Authorized Service Facility locations can be obtained by calling the Canon Customer Care Center. Preface Canon U.S.A. A dedicated extension off a PBX machine without "Camp On" signals is also permissible with your FAXPHONE L80. Key telephone systems are not recommended because they send nonstandard signals to individual telephones for ringing and special codes, which may cause a fax error. It also explains how to get the most out of the documentation provided, and gives important safety instructions. Welcome. 12 Main Features of the FAXPHONE. 13 Using Your Documentation. 14 How to Use This Guide. 14 Type Conventions Used in This Guide. 15 Customer Support. 16. Your machine is a complete multifunction system for your home or small office.

It combines the following essential office machines into a single, convenient desktop machine. If you still have questions on how to use your machine, please contact the Canon Customer Care Center. They will be happy to answer your questions. The warranty information describes Canon's limited warranty for this product. Be sure to read this warranty information. If you have a problem with the machine's operation, try to solve it by referring to the information in Chapter 13. For all service, contact the Canon Customer Care Center. Keep the area free so you can reach the outlet quickly. If you notice anything unusual smoke, strange odors, noises around the machine, unplug the machine immediately. Contact the Canon Customer Care Center. You will find instructions for unpacking,

assembling, and connecting your machine, and learn how to install the cartridge and load paper. Choosing a Location for the FAXPHONE.22 Dimensions.22 Unpacking the FAXPHONE.23 Do You Have Everything.23. When lifting the machine out of the box or when moving it, lift it from the recessed areas on the sides of the machine. Keep them in case you need to transport the machine in the future. Remove all shipping tapes from the machine. The actual shipping materials may differ in shape, quantity, and position from the ones shown above. Insert the ends of the document support into the slots on the machine. Setting Up Insert the tabs of one of the support trays into the corresponding slots above the face. Then connect the other end into a properly grounded 120 V AC threeprong outlet. The FX3 S Cartridge is a starter cartridge that comes with your machine, and yields approximately 1,500 pages of printouts. Lift the latch and open the front cover. Do not try to open the front cover without lifting the latch since this may damage your machine. Remove the FX3 S Cartridge from its protective bag.

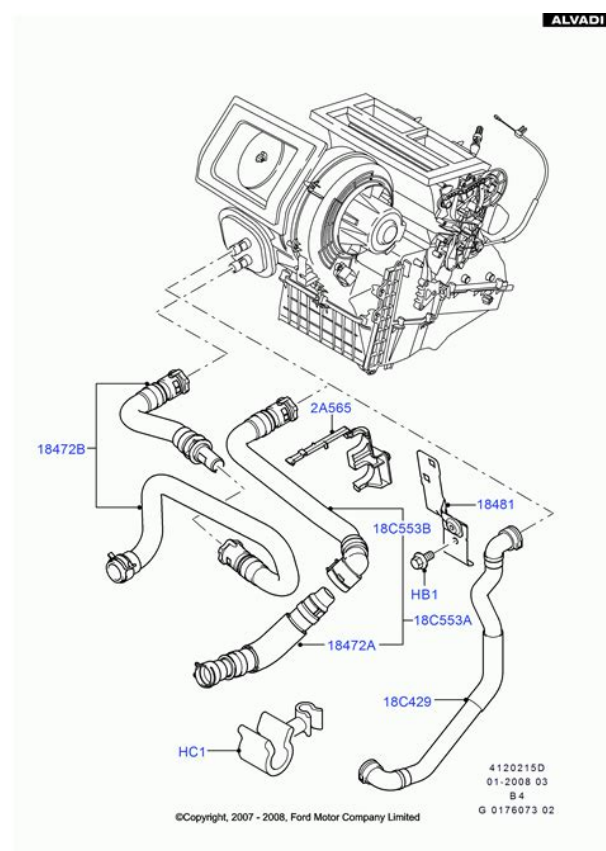

<https://www.interactivelearnings.com/forum/selenium-using-c/topic/14284/4-speed-transmission-manual>

Hold the cartridge by its handle and insert it into the machine as far as it will go, making sure that its tabs are aligned with the rails inside the machine. For complete details on paper and other print media for use with your machine, see Chapter 5. Before loading paper, be sure to read the following The laser printing process uses high temperatures to fuse toner to the paper. Prepare a stack of paper by tapping it on a flat surface to even its edges. Open the paper guides to the approximate width of the stack. Adjust the paper delivery selector if necessary 1 p. 57. For details on how to change the paper size setting, see p. 59. Testing the FAXPHONE Once you have assembled your machine, installed the cartridge, and loaded paper, you can make sure your machine is printing properly by making several copies of a. You will also find instructions for registering the sender information that you are required to enter. Guidelines for Entering Numbers, Letters, and Symbols.32 Correcting a Mistake.34 Registering Required Sender Information.35 What is Sender



Information.35 Registering Your Sender Information.36 Setting the Telephone Line Type.38. Registering Information CANEN CANON Chapter 3. Press Data Registration.If you are unsure of your telephone line type, check with your local telephone company. Your machine is factoryset to operate for tone dialing TOUCH TONE setting. If you need to change this setting for pulse dialing ROTARY PULSE setting, follow this procedure Press Function. You can select whether the time information in your machine changes to match the daylight saving time system and set the day and time when the daylight saving time starts and ends. Document Requirements.42 Scanned Area of a Document.42 Loading Documents.43 Adding Pages to the Document in the ADF.44 Chapter 4 Chapter 4 Document Handling Document Handling. The last and first page should overlap by about one inch 2.5 cm. Print Media Requirements.52 Printable Areas.

<http://araone.com/images/browning-double-auto-manual.pdf>



53 Selecting and Loading Print Media.54 Paper.54 Envelopes.54 Transparencies.56 Selecting FaceUp or FaceDown Delivery.57 Changing the Paper Size Setting.59 Adjusting the Toner Saver Setting.511 Chapter 5. However, Canon cannot guarantee consistent performance on these. When printing on envelopes, be sure to use faceup delivery 1 p. 57. Arrange the stack of envelopes on a firm, clean surface, and press down firmly on the edges to make the folds crisp. Adjust the paper delivery selector to faceup delivery. First, the paper travels to the cartridge where a laser beam “draws” the print image on the drum, which in turn applies toner to the paper. If you want to load a different paper size 1 p. 52, follow this procedure to change the paper size setting Press Function. Press Data Registration. Press Set. This will extend the cartridge life. By enabling this setting, print quality will be reduced. For highest print quality, disable this setting. What is Speed Dialing.62 Speed Dialing Methods.62 Registering OneTouch Speed Dialing.63 Registering Coded Speed Dialing.68 Registering Group Dialing.613 Using Speed Dialing.616 Sending a Document With Speed Dialing.616 Making a Telephone Call With Speed Dialing.617 Dialing with the Directory.618 Printing Speed Dialing Lists.619. OPTIONAL SETTING Speed Dialing. To check your entries, you can print a list of all the numbers and names registered for coded speed dialing to it when dialing. You can then send to all the fax numbers in the group in one quick and simple operation. Sending a Document With Speed Dialing Follow this procedure to send a document using onetouch speed dialing, coded speed dialing, or group dialing. You may want to keep these lists near your machine to refer to them

when dialing. Follow this procedure to print speed dialing lists Press Function. Canon GROUP 1  
Canon TOKYO Canon U.S.A. Canon UK IF YOU PRESS THE DESTINATIONS ARE LISTED IN  
ALPHABETICAL ORDER SORTED. Preparing to Send a Fax.72 Documents You Can Fax.

<http://gfenergies.com/images/browning-citori-parts-manual.pdf>



72 Setting the Scanning Resolution.72 Setting the Scanning Contrast.73 Dialing Methods.74  
Sending Methods.75 Memory Sending.75 Manual Sending Via the Handset.76 Canceling  
Sending.78. The higher the resolution the higher the output quality at the other end, but the slower  
the transmission speed. Adjust according to how light or how dark your document is. Follow this  
procedure to set the scanning contrast for sending and copying Press Function. Memory Sending  
Memory sending is a quick and easy way to send a document. As the machine scans the first page of  
a multipage document into its memory, it begins calling the other party and transmitting the  
information even as the remaining pages are being scanned. This section explains these two  
methods.If you selected OFF in step 8 Press Set.If this happens, remove the remainder of the  
document from the ADF you may need to open the operation panel to do so, then divide the  
document into several sections and send each section separately. This is called Delayed sending or  
Timer sending. By using this feature, you can take advantage of lower long distance rates at night,  
for example. Press Delayed Transmission.Press Delayed Transmission.You can activate reception  
directly from your machine, or if your telephone is located away from your machine, you can dial the  
remote receiving ID on the telephone to activate reception this is called Remote reception. If the  
caller wants to send a fax after talking to you, ask them to press the start button on their fax  
machine.Your machine will answer all calls as fax calls. Setting FAX ONLY MODE Follow this  
procedure to set the receive mode to FAX ONLY MODE Press Function. If your machine cannot print  
a received fax because it is performing another task that prevents it from doing so, it will receive the  
fax in memory.

If your machine is connected through a PBX or other telephone switching system, you will need to  
dial the outside line access number first, and then the number of the party you are calling.If your

machine is set for pulse dialing 1 p. 38, follow this procedure to set your machine temporarily for tone dialing Press Hook. Special Features DOC.Press Memory Reference.This feature is useful to prevent reception of unsolicited faxes e.g. junk mail. Follow this procedure to enable or disable receiving restriction Press Function. Documents You Can Copy.102 Making Copies.102 101 Chapter 10 Copying. The machine copies at 400 dpi for single copies, and at 200 300 dpi for multiple copies. For best quality output, make one copy at a time. You will find samples of some of these reports and instructions for printing.Refer to the pages indicated for more details.You will also find instructions for replacing the cartridge. Periodic Cleaning.122 Cleaning the Machine's Exterior.122 Cleaning the Machine's Interior.122 Cleaning the Scanner Components.125 Replacing the FX3 Cartridge.127 Chapter 12 Chapter 12 Maintenance. Since documents in memory are erased when the power is disconnected, print or send any documents stored in memory before disconnecting the power cord 1 p. Use a clean, soft, dry, lintfree cloth to remove any toner or paper debris from the machine's interior shaded area in the illustration. Reconnect the power cord. 124 Maintenance Chapter 12. While holding the operation panel open, clean these components Separation guide and separation roller. The replacement FX3 cartridge yields approximately 2,700 pages based on 5% coverage of an A4 size page.To recycle your used cartridge, simply follow the instructions included with your new FX3 cartridge. Use both hands to close the front cover. Chapter 12 129 Maintenance. Clearing Jams.132 Jams in the ADF.132 Paper Jams.133 Jams in the Paper Delivery Slots.133 Jams Inside the Machine.133 LCD Messages.138 Paper Feeding Problems.

<http://ophtalmic-overnight.fr/wp-content/plugins/formcraft/file-upload/server/content/files/16271053a22932---bowflex-xtreme-exercises-manual.pdf>

1313 Printing Problems.1314. Contact the Canon Customer Care Center. When you are finished, close the operation panel by pressing it down from the center. Try clearing the jam by following the procedure in Jams in the Paper Delivery Slots below. If this does not clear the jam, follow the procedure in Jams Inside the Machine. Jams in the Paper Delivery Slots Follow this procedure to clear a paper jam in the paper delivery slots You do not need to unplug your machine when clearing paper jams. Be very careful not to touch it so as to avoid injury. Move the paper release lever forward. Wait five seconds, then plug it back in. If the message remains in the LCD, contact the Canon Customer Care Center. Troubleshooting 139. Then plug it back in and try sending again. If you still cannot send, contact the Canon Customer Care Center. Receiving Problems Cannot receive a fax automatically. If you have set ANS.MACHINE MODE, confirm that an answering machine is connected to the machine and that it is turned on with an outgoing message properly recorded 1 p. The other party's fax machine may not be functioning properly. If the LCD remains blank, unplug the machine and wait five seconds, then plug it back in. If the LCD still remains blank, contact the Canon Customer Care Center. Chapter 13 1319. Do not attempt to disassemble or repair the machine yourself.Understanding the Menu System.142 Printing a List to Check the Current Settings.142 Accessing the Menus.143 USER SETTINGS Menu.144 REPORT SETTINGS Menu.145 TX Transmission SETTINGS Menu.146 RX Reception SETTINGS Menu.147 PRINTER SETTINGS Menu.148 POLLING BOX Menu.149. RX MODE Selects the receive mode 1 Chapter 8.If you select ON, you can select the direction of the reduction. Setting Description SETUP FILE Sets up the polling box to hold a document to be polled 1 p. 912. FILE NAME Enters the name for the polling box.

[5percent-design-action.com/upload/users/files/canon-500if-manual.pdf](http://5percent-design-action.com/upload/users/files/canon-500if-manual.pdf)

Setting Description RX RESTRICTION Restricts reception of faxes to the numbers registered for speed dialing on your machine 1 p. 917. If you select ON, you can select additional subsettings. General Specifications.A2 Printer.A2 Facsimile.A2 Copier.A3 Telephone.A3 Appendix Specifications. See also individual component names connecting 28 to 210 dimensions 22 features 13 name, registering 36, 37 number, registering 36 testing 218 unpacking 23 to 25 Maintenance, safety



instructions 17 to 19. See Delayed sending TIME OUT setting 146 Timer sending. See Delayed sending Tone dialing setting for 38 switching temporarily to 93 Toner saver setting 511 TONER SUPPLY LOW setting 148 TOUCH TONE setting 38, 144 Transfer charging roller 211. To get your machine ready for use, please follow the instructions in this document before referring to any other documentation. Unpack the machine and its components. Check that you have the following. Assemble the machine. Paper width guide Attach the handset cradle to the machine. Telephone line cord Connect the supplied cord to the jack. Then connect the other end to the telephone line jack on your wall. External device optional Connect the cord of an extension telephone, answering machine or data modem to the jack. The replacement cartridge is the FX3 Cartridge separately available from Canon. All other products and brand names are registered trademarks or trademarks of their respective owners. Specifications subject to change without notice.

Removing Shipping Materials Assembling the FAXPHONE Attaching the Handset to Your Machine Making Connections Connecting the Telephone Line Cord and External Devices Connecting the Power Cord Connecting the FAXPHONE to Your PC Main Components of the FAXPHONE Operation Panel Special Function Buttons LCD Standby Mode Installing the Cartridge Loading Paper Testing the FAXPHONE Chapter 3 Registering Information Guidelines for Entering Numbers, Letters, and Symbols Correcting a Mistake Registering Required Sender Information What is Sender Information. Registering Your Sender Information Setting the Telephone Line Type Setting the Daylight Saving Time Chapter 4 Document Handling Document Requirements Scanned Area of a Document Loading Documents Adding Pages to the Document in the ADF Chapter 5 Print Media Handling Print Media Requirements Printable Areas Selecting and Loading Print Media Paper Paper Envelopes Transparencies Selecting FaceUp or FaceDown Delivery Changing the Paper Size Setting Adjusting the Toner Saver Setting Chapter 6 Speed Dialing What is Speed Dialing. Speed Dialing Methods Registering OneTouch Speed Dialing Registering Coded Speed Dialing Registering Group Dialing Using Speed Dialing Sending a Document With Speed Dialing Making a Telephone Call With Speed Dialing Dialing with the Directory Printing Speed Dialing Lists Chapter 7 Sending Faxes Preparing to Send a Fax Documents You Can Fax Setting the Scanning Resolution Setting the Scanning Contrast Dialing Methods Sending Methods Memory Sending Manual Sending Via the Handset Canceling Sending Redialing When the Line is Busy Manual Redialing Canceling Manual Redialing Automatic Redialing What is Automatic Redialing.

All statements, technical information, and recommendations in this guide and in any guides or related documents are believed reliable, but the accuracy and completeness thereof are not guaranteed or warranted, and they are not intended to be, nor should they be understood to be, representations or warranties concerning the products described. Your FAXPHONE L80 has been sold to you subject to the limited warranties set forth in the warranty cards. Further, Canon U.S.A. reserves the right to make changes in the specifications of the products described in this guide at any time without notice and without obligation to notify any person of such changes. Trademarks Canon and FAXPHONE are registered trademarks, and UHQ is a trademark of Canon Inc. All other product and brand names are registered trademarks, trademarks or service marks of their respective owners. See page 22 for the machine's dimensions, and page A2 for the machine's weight.

B. Order Information 1. Only a single line, touchtone or rotary telephone set is to be used. 2. Order an RJ11C modular jack USOC code, which should be installed by the telephone company. If the RJ11C jack is not present, installation cannot occur. 3. Order a normal business line from your telephone company's business representative. The line should be a regular voice grade line or the equivalent. Use one line per machine. A dedicated extension off a PBX machine without "Call Waiting" can be used with your FAXPHONE L80. Key telephone systems are not recommended because they send nonstandard signals to individual telephones for ringing and special codes, which may cause a fax error. C. Power Requirements This equipment should be connected to a standard 120volt AC, threewire grounded outlet only. Do not connect this machine to an outlet or power line

shared with other appliances that cause "electrical noise.

" Air conditioners, electric typewriters, copiers, and machines of this sort generate electrical noise which often interferes with communications equipment and the sending and receiving of documents. If requested, this number must be provided to the telephone company. An FCC compliant telephone cord and modular jack are provided with this equipment. This equipment is designed to be connected to the telephone network or premises wiring using a compatible modular jack which is Part 68 compliant. See Installation instructions for details. Excessive RENs on a telephone line may result in the devices not ringing in response to an incoming call. In most but not all areas, the sum of RENs should not exceed five 5.0. To be certain of the number of devices that may be connected to a line, as determined by the total RENs, contact the local telephone company. Connection to party lines is subjected to state tariffs. In Case of Equipment Malfunction Should any malfunction occur which cannot be corrected by the procedures described in this guide, disconnect the equipment from the telephone line and unplug the power cord. The telephone line should not be reconnected or the power cord plugged in until the problem is completely resolved. Users should contact Canon Authorized Service Facilities for servicing of equipment. Information regarding Authorized Service Facility locations can be obtained by calling the Canon Customer Care Center. 18008284040 Rights of the Telephone Company Should the equipment cause harm to the telephone network, the telephone company may temporarily disconnect service. The telephone company also retains the right to make changes in facilities and services which may affect the operation of this equipment. When such changes are necessary, the telephone company is required to give adequate prior notice to the user. FCC Notice This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions 1 This device may not cause harmful interference, and 2 this device must accept an interference received, including interference that may cause undesired operation. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or Do not make any changes or modifications to the equipment unless otherwise specified in the User's Guide. If such changes or modifications should be made, you could be required to stop operation of the equipment. Canon U.S.A. Inc. One Canon Plaza, Lake Success, NY 11042, U.S.A. TEL No. 15163285000 The Telephone Consumer Protection Act of 1991 makes it unlawful for any person to use a computer or other electronic device to send any message via a telephone fax machine unless such message clearly contains in a margin at the top or bottom of each transmitted page or on the first page of the transmission, the date and time it is sent and an identification of the business or other entity, or other individual sending the message and the telephone number of the sending machine or such business, other entity, or individual. In order to program this information into your FAXPHONE L80, follow the instructions in Chapter 3 of this User's Guide. See page 22 for the machine's dimensions, and page A2 for the machine's weight. B. Order Information 1. Provide only a single line to touchtone or rotary telephone set terminated with a standard 4pin modular phone plug. Touchtone is recommended if available in your area. 2.

Order an CA1 1A modular jack USOC code, which should be installed by the telephone company. If the CA1 1A jack is not present, installation cannot occur. 3. Order a normal business line from your telephone company's business representative. The line should be a regular voice grade line or equivalent. A dedicated extension off a PBX machine without "Camp On" signals is also permissible with your FAXPHONE L80. Key telephone systems are not recommended because they send nonstandard signals to individual telephones for ringing and special codes, which may cause a fax error. C. Power Requirements The power outlet should be a threeprong grounded receptacle Single

or Duplex. It should be independent from copiers, heaters, air conditioners or any electric equipment that is thermostatically controlled. The rated value is 120 volts and 15 amperes. The CA1 1A modular jack should be relatively close to the power outlet to facilitate installation. Notice This equipment meets the applicable Industry Canada Terminal Equipment Technical Specifications. This is confirmed by the registration number. The abbreviation, IC, before the registration number signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment. Cet appareil est conforme aux Specifications techniques des équipements terminaux de l'Industrie du Canada. Ceci est confirmé par le numéro d'enregistrement. L'abréviation IC précédant le numéro d'enregistrement signifie que l'enregistrement a été effectué sur la base de la Déclaration de conformité indiquant que le produit est conforme aux spécifications techniques du Canada. Ceci n'implique pas que le produit ait été approuvé par l'industrie du Canada. The equipment must also be installed using an acceptable method of connection.

<https://ayurvedia.ch/4-speed-transmission-manual>