


D-Link
DPH-70s Modem Phone (SIP)
Quick Setup guide

Updated on 7 July 2005

DPH-70s Modem Phone

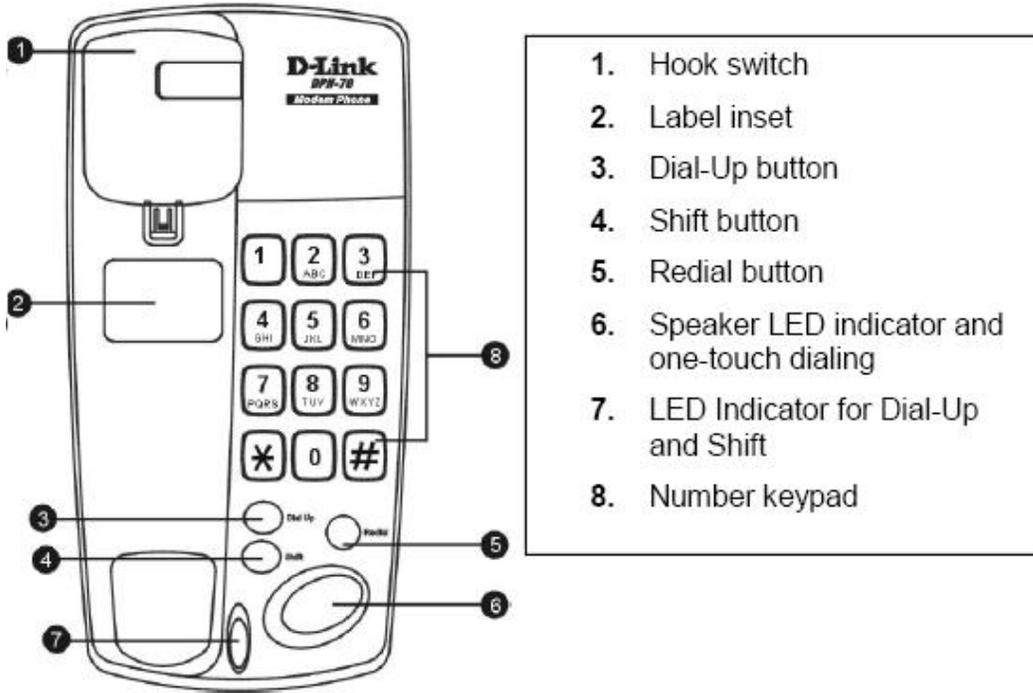

1) Connecting the Devices

Using telephone cable (RJ-11), connect the LINE port of the DPH-70 to the telephone wall jack. Plug the AC power adapter, lift the handset and listen for dial tone this indicates that the DPH-70 has been installed properly.

2) Configuring the DPH-70s phone using phone keypad

The DPH-70 voice menu helps you through the configuration process.

Step 1: Pick up **handset** or press **speaker** button

Step 2: Press ***123*** and followed by **#**

Step 3: Enter the password (Default password is '12345') and followed by **#**

2.1 ISP Parameters or ISP Dial up Account

Step 1: Enter **"1"** to edit the ISP Parameters

Step 2: At ISP Phone Number, press **"1"**, enter the **ISP Phone Number** and followed by **#** button. During entry, the phone will echo the character pressed

Step 3: Press **"1"** to accept

Step 4: At ISP User Name, press **"1"**, enter the **ISP User Name** and followed by **#** button. During entry, the phone will echo the character pressed

Step 5: Press **"1"** to accept

Step 6: At ISP Password, press **"1"**, enter the **ISP Password** and followed by **#** button

Step 7: Press **"1"** to accept

Step 8: Follow the voice menu, enter **"5"** to save the ISP information

Note: Please refer to the Keypad Legend for more details

2.2 Calling Card Parameters

Step 1: Enter **"2"** to edit the Calling Card Parameters

Step 2: At Calling Card User ID, press **"1"**, enter **12-digit MediaRing account number**, and followed by **#** button. During entry, the phone will echo the character pressed

Step 3: Press **"1"** to exit

Step 4: At Calling Card Password, press **"1"**, enter **6-digit PIN** and followed by **#** button. During entry, the phone will echo the character pressed

Step 5: Press **"1"** to accept

Step 6: At VoIP Server Address, enter the **SIP Proxy**, **"mrsip001.mediaring.com"**, including dots

Step 7: Press **"1"** to accept

Step 8: Follow the voice menu, enter **"5"** to save the ISP information

Note: Please refer to the Keypad Legend for more details

3) How to make on-net call in RECEIVE state

Step 1: Pick up the handset

Step 2: Press the **DIAL UP** button

Step 3: Dial the **"country code" + area code (if any) + destination Number**. Phone will play the progress tone and blink the DIAL UP LED. It will stays connected to the Internet for 15 minutes

Note: Please refer to the Keypad Legend for more details

4) **How to make on-net call in special dialing**

Step 1: Pick up the handset

Step 2: Dial the “**country code**” + “**area code (if any)**” + **destination Number** and followed by “**#**” button

Note: Please refer to the Keypad Legend for more details

5) **How to make off-net call**

Step 1: Press **speaker** button

Step 2: Press the **DIAL UP** button

Step 2: Dial the “**country code**” + “**area code (if any)**” + **destination number** and followed by “**#**” button

Note: Please refer to the Keypad Legend for more details

6) **How to make PSTN call**

Step 1: Pick up the **handset**

Step 2: Dial the destination number and followed by “**#**” button

7) **Resetting to factory default**

Step 1: Pick up the **handset**

Step 2: To reset DPH-70, press “***789***” and followed by “**#**” button while phone is idle

Step 3: Press “**1**”, enter the default password, ‘**12345**’ and followed by “**#**”

Note: Please refer to the Keypad Legend for more details

Keypad Legend

I Entering (Lower-case) Small Letters

- Press twice to enter the first character of the key
- Press thrice to enter the second character of the key
- Press four times to enter the third character of the key
- Press five times to enter the fourth character of the key

If the key is pressed, more than above-mentioned, it accepts the last letter of the key.

II Entering (Upper-case) Capital Letters

Press a SHIFT button followed by the digit key.

- Twice to enter the first capital letter of the key
- Thrice to enter the second capital letter of the key
- Four times to enter the third capital letter of the key
- Five times to enter the fourth capital letter of the key

If the key is pressed more than above-mentioned after the SHIFT button is pressed, it accepts. The last capital letter of the key

III Entering Special Characters

| Special Character | Description | DIAL UP followed by: |
|-------------------|--------------|----------------------|
| | "Backspace" | 0 |
| @ | "At" | 1 |
| . | "Dot" | 2 |
| - | "Hyphen" | 3 |
| _ | "Underscore" | 4 |
| \$ | "Dollar" | 5 |
| & | "Ampersand" | 6 |
| / | "Slash" | 7 |
| : | "Colon" | 8 |

IV Configuration Menu

