



## STGIPS14K60


SLLIMM™ (small low-loss intelligent molded module)  
IPM, 3-phase inverter - 14 A, 600 V short-circuit rugged IGBT

### Features

- IPM 14 A, 600 V 3-phase IGBT inverter bridge including control ICs for gate driving and free-wheeling diodes
- Short-circuit rugged IGBTs
- $V_{CE(sat)}$  negative temperature coefficient
- 3.3 V, 5 V, 15 V CMOS/TTL inputs comparators with hysteresis and pull down / pull up resistors
- Undervoltage lockout
- Internal bootstrap diode
- Interlocking function
- Shutdown function
- Comparator for fault protection against overtemperature and overcurrent
- DBC substrate leading to low thermal resistance
- Isolation rating of 2500 Vrms/min

### Applications

- 3-phase inverters for motor drives
- Home appliances, such as washing machines, refrigerators, air conditioners and sewing machines

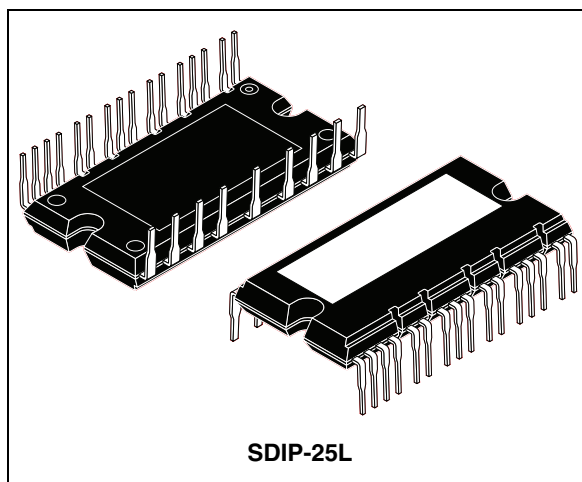

### Description

This intelligent power module provides a compact, high performance AC motor drive in a simple, rugged design. Combining ST proprietary control ICs with the most advanced short-circuit-rugged IGBT system technology, this device is ideal for 3-phase inverters in applications such as home appliances and air conditioners. SLLIMM™ is a trademark of STMicroelectronics.

Table 1. Device summary


| Order code  | Marking   | Package  | Packaging |
|-------------|-----------|----------|-----------|
| STGIPS14K60 | GIPS14K60 | SDIP-25L | Tube      |

# Contents

|          |                                                     |           |
|----------|-----------------------------------------------------|-----------|
| <b>1</b> | <b>Internal block diagram and pin configuration</b> | <b>3</b>  |
| <b>2</b> | <b>Electrical ratings</b>                           | <b>5</b>  |
| 2.1      | Absolute maximum ratings                            | 5         |
| 2.2      | Thermal data                                        | 6         |
| <b>3</b> | <b>Electrical characteristics</b>                   | <b>7</b>  |
| 3.1      | Control part                                        | 9         |
| 3.2      | Waveforms definitions                               | 12        |
| <b>4</b> | <b>Smart shutdown function</b>                      | <b>13</b> |
| <b>5</b> | <b>Applications information</b>                     | <b>14</b> |
| 5.1      | Recommendations                                     | 15        |
| <b>6</b> | <b>Package mechanical data</b>                      | <b>16</b> |
| <b>7</b> | <b>Revision history</b>                             | <b>19</b> |


# 1 Internal block diagram and pin configuration

Figure 1. Internal block diagram

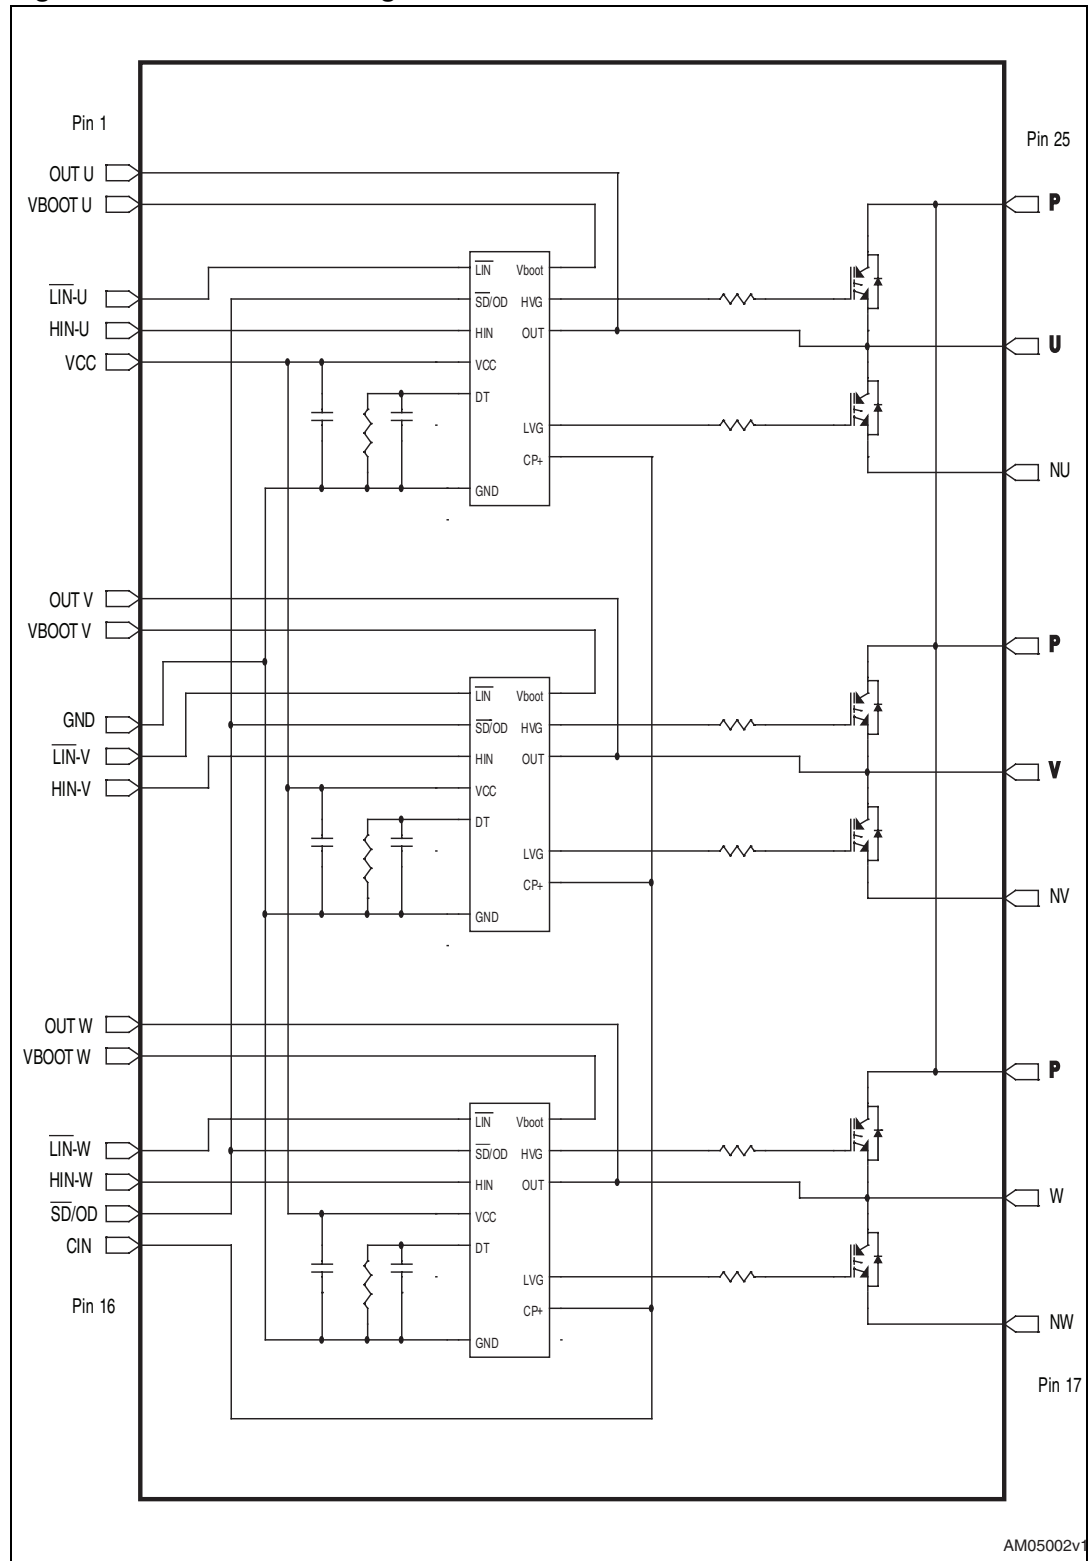

**Table 2. Pin description**

| Pin n° | Symbol                             | Description                                                         |
|--------|------------------------------------|---------------------------------------------------------------------|
| 1      | OUT <sub>U</sub>                   | High side reference output for U phase                              |
| 2      | V <sub>boot U</sub>                | Bootstrap voltage for U phase                                       |
| 3      | $\overline{\text{LIN}}_{\text{U}}$ | Low side logic input for U phase                                    |
| 4      | HIN <sub>U</sub>                   | High side logic input for U phase                                   |
| 5      | V <sub>CC</sub>                    | Low voltage power supply                                            |
| 6      | OUT <sub>V</sub>                   | High side reference output for V phase                              |
| 7      | V <sub>boot V</sub>                | Bootstrap voltage for V phase                                       |
| 8      | GND                                | Ground                                                              |
| 9      | $\overline{\text{LIN}}_{\text{V}}$ | Low side logic input for V phase                                    |
| 10     | HIN <sub>V</sub>                   | High side logic input for V phase                                   |
| 11     | OUT <sub>W</sub>                   | High side reference output for W phase                              |
| 12     | V <sub>boot W</sub>                | Bootstrap voltage for W phase                                       |
| 13     | $\overline{\text{LIN}}_{\text{W}}$ | Low side logic input for W phase                                    |
| 14     | HIN <sub>W</sub>                   | High side logic input for W phase                                   |
| 15     | $\overline{\text{SD}}$ / OD        | Shut down logic input (active low) / open drain (comparator output) |
| 16     | CIN                                | Comparator input                                                    |
| 17     | N <sub>W</sub>                     | Negative DC input for W phase                                       |
| 18     | W                                  | W phase output                                                      |
| 19     | P                                  | Positive DC input                                                   |
| 20     | N <sub>V</sub>                     | Negative DC input for V phase                                       |
| 21     | V                                  | V phase output                                                      |
| 22     | P                                  | Positive DC input                                                   |
| 23     | N <sub>U</sub>                     | Negative DC input for U phase                                       |
| 24     | U                                  | U phase output                                                      |
| 25     | P                                  | Positive DC input                                                   |

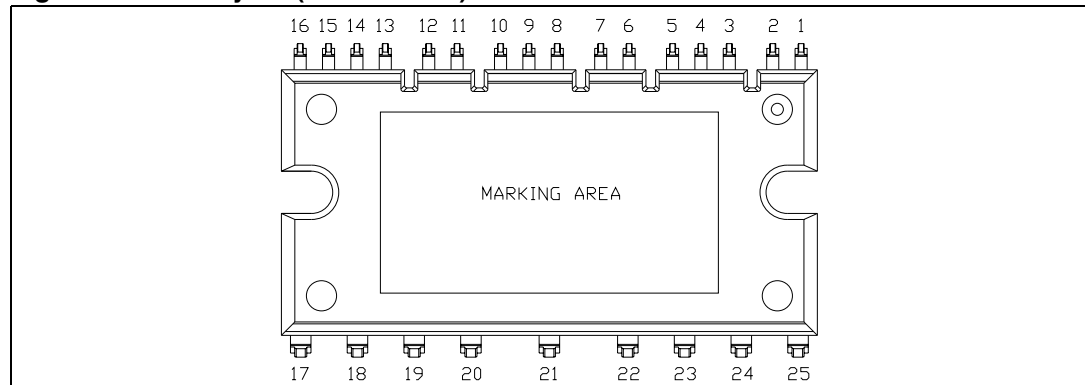**Figure 2. Pin layout (bottom view)**

## 2 Electrical ratings

### 2.1 Absolute maximum ratings

**Table 3. Inverter part**

| Symbol             | Parameter                                                                                                                                                      | Value | Unit          |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------|
| $V_{PN}$           | Supply voltage applied between P - $N_U$ , $N_V$ , $N_W$                                                                                                       | 450   | V             |
| $V_{PN(surge)}$    | Supply voltage (surge) applied between P - $N_U$ , $N_V$ , $N_W$                                                                                               | 500   | V             |
| $V_{CES}$          | Each IGBT collector emitter voltage ( $V_{IN}^{(1)} = 0$ )                                                                                                     | 600   | V             |
| $\pm I_C^{(2)}$    | Each IGBT continuous collector current at $T_C = 25^\circ\text{C}$                                                                                             | 14    | A             |
| $\pm I_{CP}^{(3)}$ | Each IGBT pulsed collector current                                                                                                                             | 30    | A             |
| $P_{TOT}$          | Each IGBT total dissipation at $T_C = 25^\circ\text{C}$                                                                                                        | 42    | W             |
| $t_{scw}$          | Short circuit withstand time, $V_{CE} = 0.5 V_{(BR)CES}$<br>$T_J = 125^\circ\text{C}$ , $V_{CC} = V_{boot} = 15\text{ V}$ , $V_{IN}^{(1)} = 0 \div 5\text{ V}$ | 5     | $\mu\text{s}$ |

1. Applied between  $HIN_i$ ,  $\overline{LIN_i}$  and GND for  $i = U, V, W$

2. Calculated according to the iterative formula:

$$I_C(T_C) = \frac{T_{j(max)} - T_C}{R_{thj-c} \times V_{CE(sat)(max)}(T_{j(max)}, I_C(T_C))}$$

3. Pulse width limited by max junction temperature

**Table 4. Control part**

| Symbol        | Parameter                                                                 | Value                               | Unit |
|---------------|---------------------------------------------------------------------------|-------------------------------------|------|
| $V_{OUT}$     | Output voltage applied between $OUT_U$ , $OUT_V$ , $OUT_W$ - GND          | $V_{boot} - 21$ to $V_{boot} + 0.3$ | V    |
| $V_{CC}$      | Low voltage power supply                                                  | -0.3 to +21                         | V    |
| $V_{CIN}$     | Comparator input voltage                                                  | -0.3 to $V_{CC} + 0.3$              | V    |
| $V_{boot}$    | Bootstrap voltage applied between $V_{boot\ i} - OUT_i$ for $i = U, V, W$ | -0.3 to 620                         | V    |
| $V_{IN}$      | Logic input voltage applied between $HIN$ , $\overline{LIN}$ and GND      | -0.3 to 15                          | V    |
| $V_{SD/OD}$   | Open drain voltage                                                        | -0.3 to 15                          | V    |
| $dV_{OUT}/dt$ | Allowed output slew rate                                                  | 50                                  | V/ns |

**Table 5. Total system**

| Symbol      | Parameter                                                                                           | Value      | Unit |
|-------------|-----------------------------------------------------------------------------------------------------|------------|------|
| $V_{ISO}$   | Isolation withstand voltage applied between each pin and heatsink plate (AC voltage, $t = 60$ sec.) | 2500       | V    |
| $T_j^{(1)}$ | Operating junction temperature                                                                      | -40 to 150 | °C   |
| $T_C$       | Module case operation temperature                                                                   | -40 to 125 | °C   |

1. The maximum junction temperature rating of the power chips integrated within the SDIP module is 150°C (@ $T_C \leq 100^\circ\text{C}$ ). To ensure safe operation of the SDIP module, the average junction temperature should be limited to  $T_{j(\text{avg})} \leq 125^\circ\text{C}$  (@ $T_C \leq 100^\circ\text{C}$ ).

## 2.2 Thermal data

**Table 6. Thermal data**

| Symbol     | Parameter                                     | Value | Unit |
|------------|-----------------------------------------------|-------|------|
| $R_{thJC}$ | Thermal resistance junction-case single IGBT  | 3     | °C/W |
|            | Thermal resistance junction-case single diode | 5.5   | °C/W |

### 3 Electrical characteristics

$T_J = 25\text{ }^{\circ}\text{C}$  unless otherwise specified.

**Table 7. Inverter part**

| Symbol                                          | Parameter                                                        | Test conditions                                                                                                                                                   | Value |      |      | Unit          |
|-------------------------------------------------|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|------|---------------|
|                                                 |                                                                  |                                                                                                                                                                   | Min.  | Typ. | Max. |               |
| $V_{CE(sat)}$                                   | Collector-emitter saturation voltage                             | $V_{CC} = V_{boot} = 15\text{ V}$ , $V_{IN}^{(1)} = 0 \div 5\text{ V}$ ,<br>$I_C = 7\text{ A}$                                                                    | -     | 2.1  | 2.5  | V             |
|                                                 |                                                                  | $V_{CC} = V_{boot} = 15\text{ V}$ , $V_{IN}^{(1)} = 0 \div 5\text{ V}$ ,<br>$I_C = 7\text{ A}$ , $T_J = 125\text{ }^{\circ}\text{C}$                              | -     | 1.8  |      |               |
| $I_{CES}$                                       | Collector-cut off current<br>( $V_{IN}^{(1)} = 0$ "logic state") | $V_{CE} = 600\text{ V}$ , $V_{CC} = V_{Boot} = 15\text{ V}$                                                                                                       | -     |      | 150  | $\mu\text{A}$ |
| $V_F$                                           | Diode forward voltage                                            | $V_{IN}^{(1)} = 0$ "logic state", $I_C = 7\text{ A}$                                                                                                              | -     |      | 2.1  | V             |
| <b>Inductive load switching time and energy</b> |                                                                  |                                                                                                                                                                   |       |      |      |               |
| $t_{on}$                                        | Turn-on time                                                     | $V_{DD} = 300\text{ V}$ ,<br>$V_{CC} = V_{boot} = 15\text{ V}$ ,<br>$V_{IN}^{(1)} = 0 \div 5\text{ V}$ ,<br>$I_C = 7\text{ A}$<br>(see <a href="#">Figure 5</a> ) | -     | 270  |      | ns            |
| $t_{c(on)}$                                     | Crossover time (on)                                              |                                                                                                                                                                   | -     | 130  |      |               |
| $t_{off}$                                       | Turn-off time                                                    |                                                                                                                                                                   | -     | 320  |      |               |
| $t_{c(off)}$                                    | Crossover time (off)                                             |                                                                                                                                                                   | -     | 110  |      |               |
| $t_{rr}$                                        | Reverse recovery time                                            |                                                                                                                                                                   | -     | 130  |      |               |
| $E_{on}$                                        | Turn-on switching losses                                         |                                                                                                                                                                   | -     | 150  |      | $\mu\text{J}$ |
| $E_{off}$                                       | Turn-off switching losses                                        |                                                                                                                                                                   | -     | 90   |      |               |

1. Applied between  $HIN_i$ ,  $\overline{LIN_i}$  and GND for  $i = U, V, W$  ( $\overline{LIN}$  inputs are active-low).

**Note:**  $t_{ON}$  and  $t_{OFF}$  include the propagation delay time of the internal drive.  $t_{C(ON)}$  and  $t_{C(OFF)}$  are the switching time of IGBT itself under the internally given gate driving condition.

Figure 3. Switching time test circuit


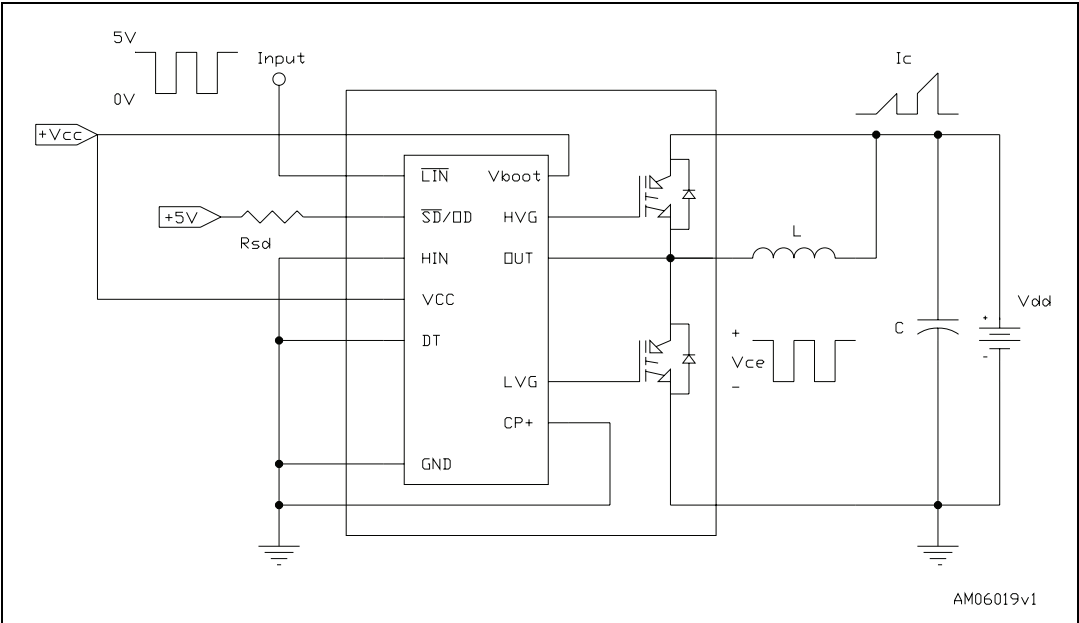


Figure 4. Switching time definition

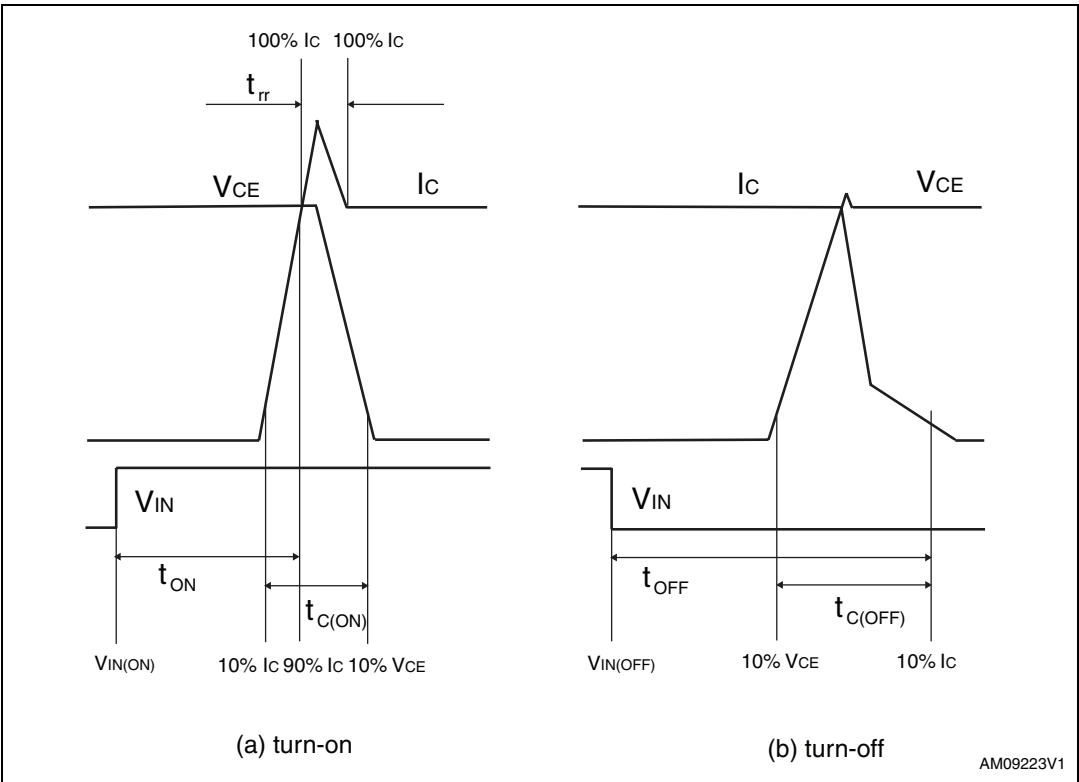

Note: Figure 4 "Switching time definition" refers to  $\text{HIN}$  inputs (active high). For  $\overline{\text{LIN}}$  inputs (active low),  $V_{IN}$  polarity must be inverted for turn-on and turn-off.

### 3.1 Control part

**Table 8. Low voltage power supply ( $V_{CC} = 15\text{ V}$ )**

| Symbol          | Parameter                                   | Test conditions                                                                                                      | Min. | Typ. | Max. | Unit          |
|-----------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_{CC\_hys}$   | $V_{CC}$ UV hysteresis                      |                                                                                                                      | 1.2  | 1.5  | 1.8  | V             |
| $V_{CC\_thON}$  | $V_{CC}$ UV turn ON threshold               |                                                                                                                      | 11.5 | 12   | 12.5 | V             |
| $V_{CC\_thOFF}$ | $V_{CC}$ UV turn OFF threshold              |                                                                                                                      | 10   | 10.5 | 11   | V             |
| $I_{qccu}$      | Undervoltage quiescent supply current       | $V_{CC} = 10\text{ V}$<br>$\overline{SD}/OD = 5\text{ V}$ ; $\overline{LIN} = 5\text{ V}$ ;<br>$HIN = 0$ , $CIN = 0$ |      |      | 450  | $\mu\text{A}$ |
| $I_{qcc}$       | Quiescent current                           | $V_{CC} = 15\text{ V}$<br>$\overline{SD}/OD = 5\text{ V}$ ; $\overline{LIN} = 5\text{ V}$<br>$HIN = 0$ , $CIN = 0$   |      |      | 3.5  | mA            |
| $V_{ref}$       | Internal comparator (CIN) reference voltage |                                                                                                                      | 0.5  | 0.54 | 0.58 | V             |

**Table 9. Bootstrapped voltage ( $V_{CC} = 15\text{ V}$ )**

| Symbol          | Parameter                               | Test conditions                                                                                                    | Min. | Typ. | Max. | Unit          |
|-----------------|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_{BS\_hys}$   | $V_{BS}$ UV hysteresis                  |                                                                                                                    | 1.2  | 1.5  | 1.8  | V             |
| $V_{BS\_thON}$  | $V_{BS}$ UV turn ON threshold           |                                                                                                                    | 10.6 | 11.5 | 12.4 | V             |
| $V_{BS\_thOFF}$ | $V_{BS}$ UV turn OFF threshold          |                                                                                                                    | 9.1  | 10   | 10.9 | V             |
| $I_{QBSU}$      | Undervoltage $V_{BS}$ quiescent current | $V_{BS} = 10\text{ V}$<br>$\overline{SD}/OD = 5\text{ V}$ ; $\overline{LIN}$ and<br>$HIN = 5\text{ V}$ ; $CIN = 0$ |      | 70   | 110  | $\mu\text{A}$ |
| $I_{QBS}$       | $V_{BS}$ quiescent current              | $V_{BS} = 15\text{ V}$<br>$\overline{SD}/OD = 5\text{ V}$ ; $\overline{LIN}$ and<br>$HIN = 5\text{ V}$ ; $CIN = 0$ |      | 150  | 210  | $\mu\text{A}$ |
| $R_{DS(on)}$    | Bootstrap driver on resistance          | LVG ON                                                                                                             |      | 120  |      | $\Omega$      |

**Table 10. Logic inputs ( $V_{CC} = 15\text{ V}$ )**

| Symbol     | Parameter                                     | Test conditions                | Min. | Typ. | Max. | Unit          |
|------------|-----------------------------------------------|--------------------------------|------|------|------|---------------|
| $V_{il}$   | Low logic level voltage                       |                                |      |      | 0.8  | V             |
| $V_{ih}$   | High logic level voltage                      |                                | 2.25 |      |      | V             |
| $I_{HINh}$ | HIN logic "1" input bias current              | $HIN = 15\text{ V}$            | 110  | 175  | 260  | $\mu\text{A}$ |
| $I_{HINl}$ | HIN logic "0" input bias current              | $HIN = 0\text{ V}$             |      |      | 1    | $\mu\text{A}$ |
| $I_{LINl}$ | $\overline{LIN}$ logic "1" input bias current | $\overline{LIN} = 0\text{ V}$  | 3    | 6    | 20   | $\mu\text{A}$ |
| $I_{LINh}$ | $\overline{LIN}$ logic "0" input bias current | $\overline{LIN} = 15\text{ V}$ |      |      | 1    | $\mu\text{A}$ |
| $I_{SDh}$  | $\overline{SD}$ logic "0" input bias current  | $\overline{SD} = 15\text{ V}$  | 30   | 120  | 300  | $\mu\text{A}$ |
| $I_{SDl}$  | $\overline{SD}$ logic "1" input bias current  | $\overline{SD} = 0\text{ V}$   |      |      | 3    | $\mu\text{A}$ |
| Dt         | Dead time                                     | see <a href="#">Figure 7</a>   |      | 600  |      | ns            |

**Table 11. Sense comparator characteristics ( $V_{CC} = 15\text{ V}$ )**


| Symbol        | Parameter                                                                  | Test conditions                                                   | Min. | Typ. | Max. | Unit               |
|---------------|----------------------------------------------------------------------------|-------------------------------------------------------------------|------|------|------|--------------------|
| $I_{ib}$      | Input bias current                                                         | $V_{CP+} = 1\text{ V}$                                            | -    |      | 3    | $\mu\text{A}$      |
| $V_{ol}$      | Open drain low level output voltage                                        | $I_{od} = -3\text{ mA}$                                           | -    |      | 0.5  | V                  |
| $t_{d\_comp}$ | Comparator delay                                                           | $\overline{SD}/OD$ pulled to 5 V through 100 k $\Omega$ resistor  | -    | 90   | 130  | ns                 |
| SR            | Slew rate                                                                  | $C_L = 180\text{ pF}$ ; $R_{pu} = 5\text{ k}\Omega$               | -    | 60   |      | V/ $\mu\text{sec}$ |
| $t_{sd}$      | Shut down to high / low side driver propagation delay                      | $V_{OUT} = 0$ , $V_{boot} = V_{CC}$ ,<br>$V_{IN} = 0$ to 3.3 V    | 50   | 125  | 200  | ns                 |
| $t_{isd}$     | Comparator triggering to high / low side driver turn-off propagation delay | Measured applying a voltage step from 0 V to 3.3 V to pin $CIN_i$ | 50   | 200  | 250  |                    |

**Table 12. Truth table**


| Condition                                | Logic input ( $V_I$ ) |                  |     | Output |     |
|------------------------------------------|-----------------------|------------------|-----|--------|-----|
|                                          | $\overline{SD}/OD$    | $\overline{LIN}$ | HIN | LVG    | HVG |
| Shutdown enable half-bridge tri-state    | L                     | X                | X   | L      | L   |
| Interlocking half-bridge tri-state       | H                     | L                | H   | L      | L   |
| 0 "logic state" half-bridge tri-state    | H                     | H                | L   | L      | L   |
| 1 "logic state" low side direct driving  | H                     | L                | L   | H      | L   |
| 1 "logic state" high side direct driving | H                     | H                | H   | L      | H   |

Note: X: don't care

**Figure 5. Maximum  $I_{C(RMS)}$  current vs. switching frequency <sup>(1)</sup>**

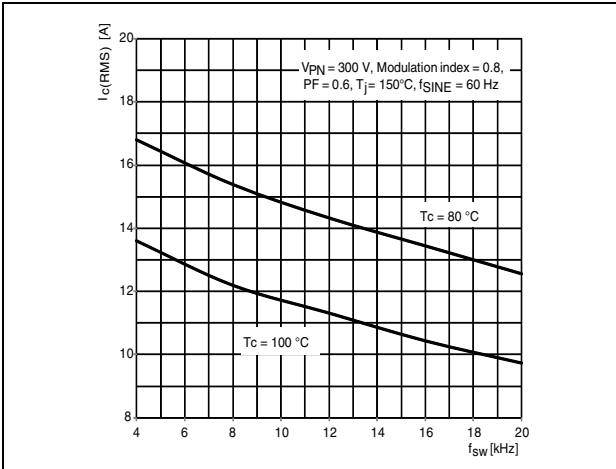


**Figure 6. Maximum  $I_{C(RMS)}$  current vs.  $f_{SINE}$  <sup>(1)</sup>**

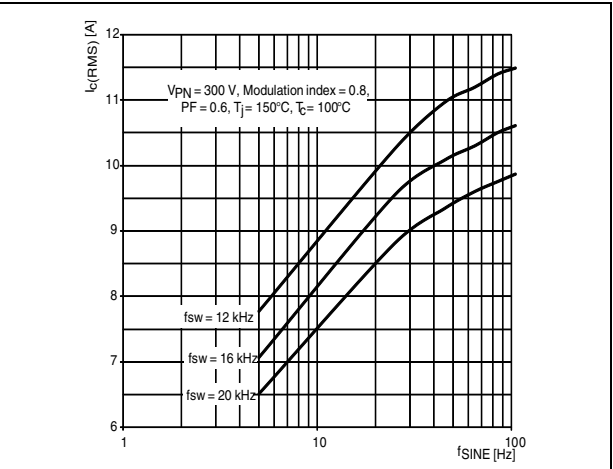

1. Simulated curves refer to typical IGBT parameters and maximum  $R_{thj-c}$ .

## 3.2 Waveforms definitions


Figure 7. Dead time and interlocking waveforms definitions

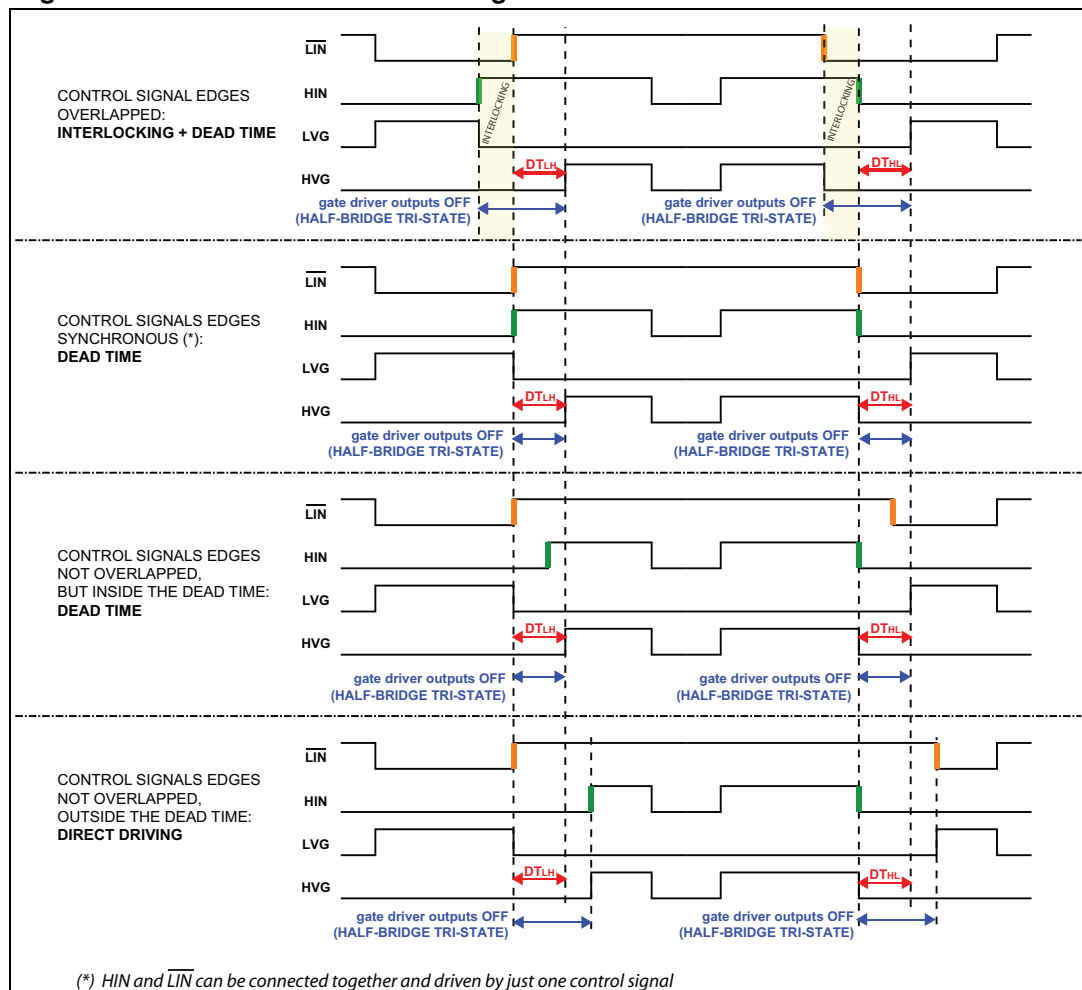

## 4 Smart shutdown function

The STGIPS14K60 integrates a comparator for fault sensing purposes. The comparator non-inverting input (CIN) can be connected to an external shunt resistor in order to implement a simple over-current protection function. When the comparator triggers, the device is set in shutdown state and both its outputs are set to low level leading the half-bridge in tri-state. In the common overcurrent protection architectures the comparator output is usually connected to the shutdown input through a RC network, in order to provide a mono-stable circuit, which implements a protection time that follows the fault condition. Our smart shutdown architecture allows to immediately turn-off the output gate driver in case of overcurrent, the fault signal has a preferential path which directly switches off the outputs. The time delay between the fault and the outputs turn-off is no more dependent on the RC values of the external network connected to the shutdown pin. At the same time the internal logic turns on the open drain output and holds it on until the shutdown voltage goes below the logic input lower threshold. Finally the smart shutdown function provides the possibility to increase the real disable time without increasing the constant time of the external RC network.

**Figure 8. Smart shutdown timing waveforms**

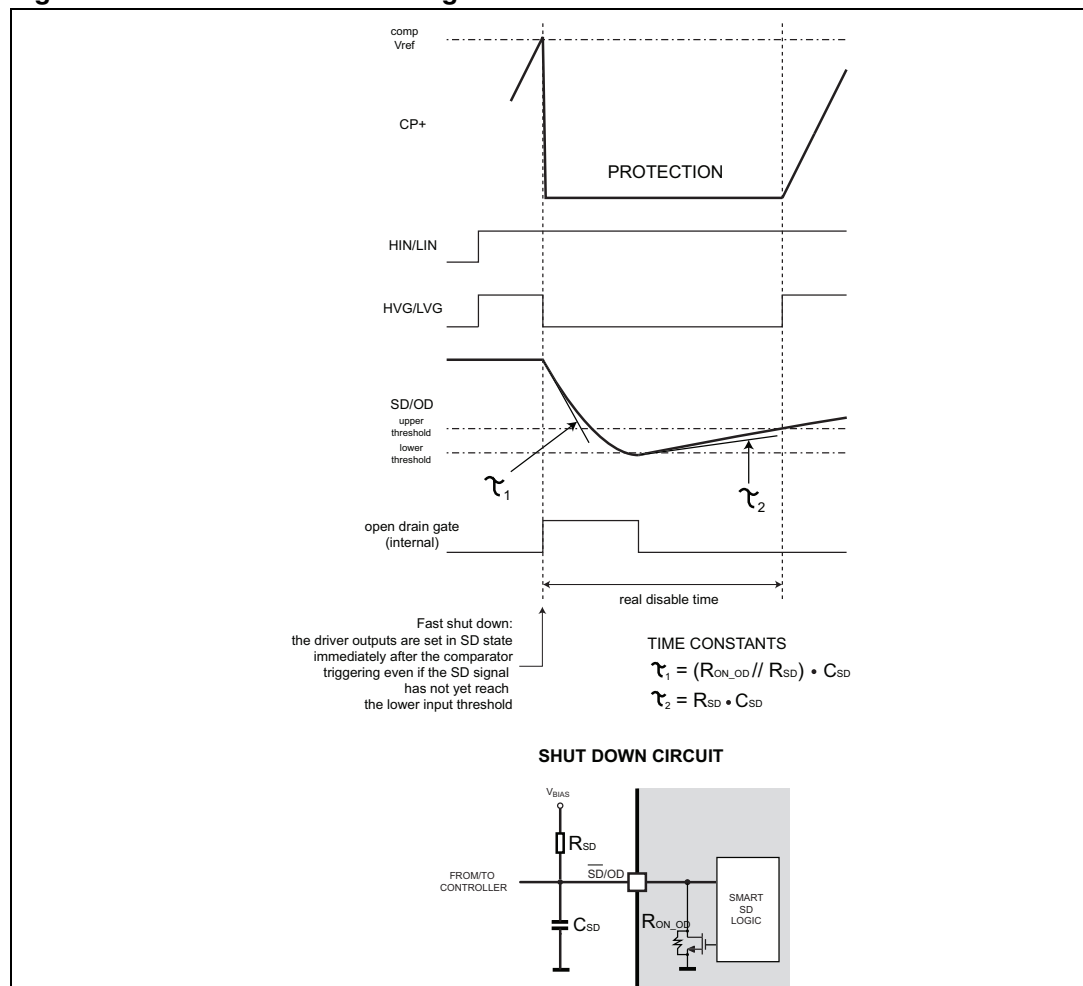


Note:

Pls refer to [Table 11: Sense comparator characteristics \(VCC = 15 V\)](#) for internal propagation delay time details.

## 5 Applications information

### Figure 9. Typical application circuit



## 5.1 Recommendations

- Input signal HIN is active high logic. A 85 k $\Omega$  (typ.) pull down resistor is built-in for each high side input. If an external RC filter is used, for noise immunity, pay attention to the variation of the input signal level.
- Input signal /LIN is active low logic. A 720 k $\Omega$  (typ.) pull-up resistor, connected to an internal 5V regulator through a diode, is built-in for each low side input.
- To prevent the input signals oscillation, the wiring of each input should be as short as possible.
- By integrating an application specific type HVIC inside the module, direct coupling to MCU terminals without any opto-coupler is possible.
- Each capacitor should be located as nearby the pins of IPM as possible.
- Low inductance shunt resistors should be used for phase leg current sensing.
- Electrolytic bus capacitors should be mounted as close to the module bus terminals as possible. Additional high frequency ceramic capacitor mounted close to the module pins will further improve performance.
- The  $\overline{\text{SD}}$ /OD signal should be pulled up to 5 V / 3.3 V with an external resistor (see [Section 4: Smart shutdown function](#) for detailed info).

**Table 13. Recommended operating conditions**

| Symbol            | Parameter                          | Conditions                                                           | Value |      |      | Unit          |
|-------------------|------------------------------------|----------------------------------------------------------------------|-------|------|------|---------------|
|                   |                                    |                                                                      | Min.  | Typ. | Max. |               |
| V <sub>PN</sub>   | Supply Voltage                     | Applied between P-Nu, Nv, Nw                                         |       | 300  | 400  | V             |
| V <sub>CC</sub>   | Control supply voltage             | Applied between V <sub>CC</sub> -GND                                 | 13.5  | 15   | 18   | V             |
| V <sub>BS</sub>   | High side bias voltage             | Applied between V <sub>BOOTi</sub> -OUT <sub>i</sub> for i = U, V, W | 13    |      | 18   | V             |
| t <sub>dead</sub> | Blanking time to prevent Arm-short | For each input signal                                                | 1     |      |      | $\mu\text{s}$ |
| f <sub>PWM</sub>  | PWM input signal                   | -40°C < T <sub>c</sub> < 100°C<br>-40°C < T <sub>j</sub> < 125°C     |       |      | 20   | kHz           |

## 6 Package mechanical data


In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

Please refer to dedicated technical note TN0107 for mounting instructions.

**Table 14. SDIP-25L mechanical data**


| Dim. | (mm.) |       |       |
|------|-------|-------|-------|
|      | Min.  | Typ.  | Max.  |
| A    | 43.90 | 44.40 | 44.90 |
| A1   | 1.15  | 1.35  | 1.55  |
| A2   | 1.40  | 1.60  | 1.80  |
| A3   | 38.90 | 39.40 | 39.90 |
| B    | 21.50 | 22.00 | 22.50 |
| B1   | 11.25 | 11.85 | 12.45 |
| B2   | 24.70 | 25.20 | 25.70 |
| C    | 5.00  | 5.40  | 6.00  |
| C1   | 6.50  | 7.00  | 7.50  |
| C2   | 11.20 | 11.70 | 12.20 |
| e    | 2.15  | 2.35  | 2.55  |
| e1   | 3.40  | 3.60  | 3.80  |
| e2   | 4.50  | 4.70  | 4.90  |
| e3   | 6.30  | 6.50  | 6.70  |
| D    |       | 33.30 |       |
| D1   |       | 5.55  |       |
| E    |       | 11.20 |       |
| E1   |       | 1.40  |       |
| F    | 0.85  | 1.00  | 1.15  |
| F1   | 0.35  | 0.50  | 0.65  |
| R    | 1.55  | 1.75  | 1.95  |
| T    | 0.45  | 0.55  | 0.65  |
| V    | 0°    |       | 6°    |

Figure 10. SDIP-25L drawing dimensions data

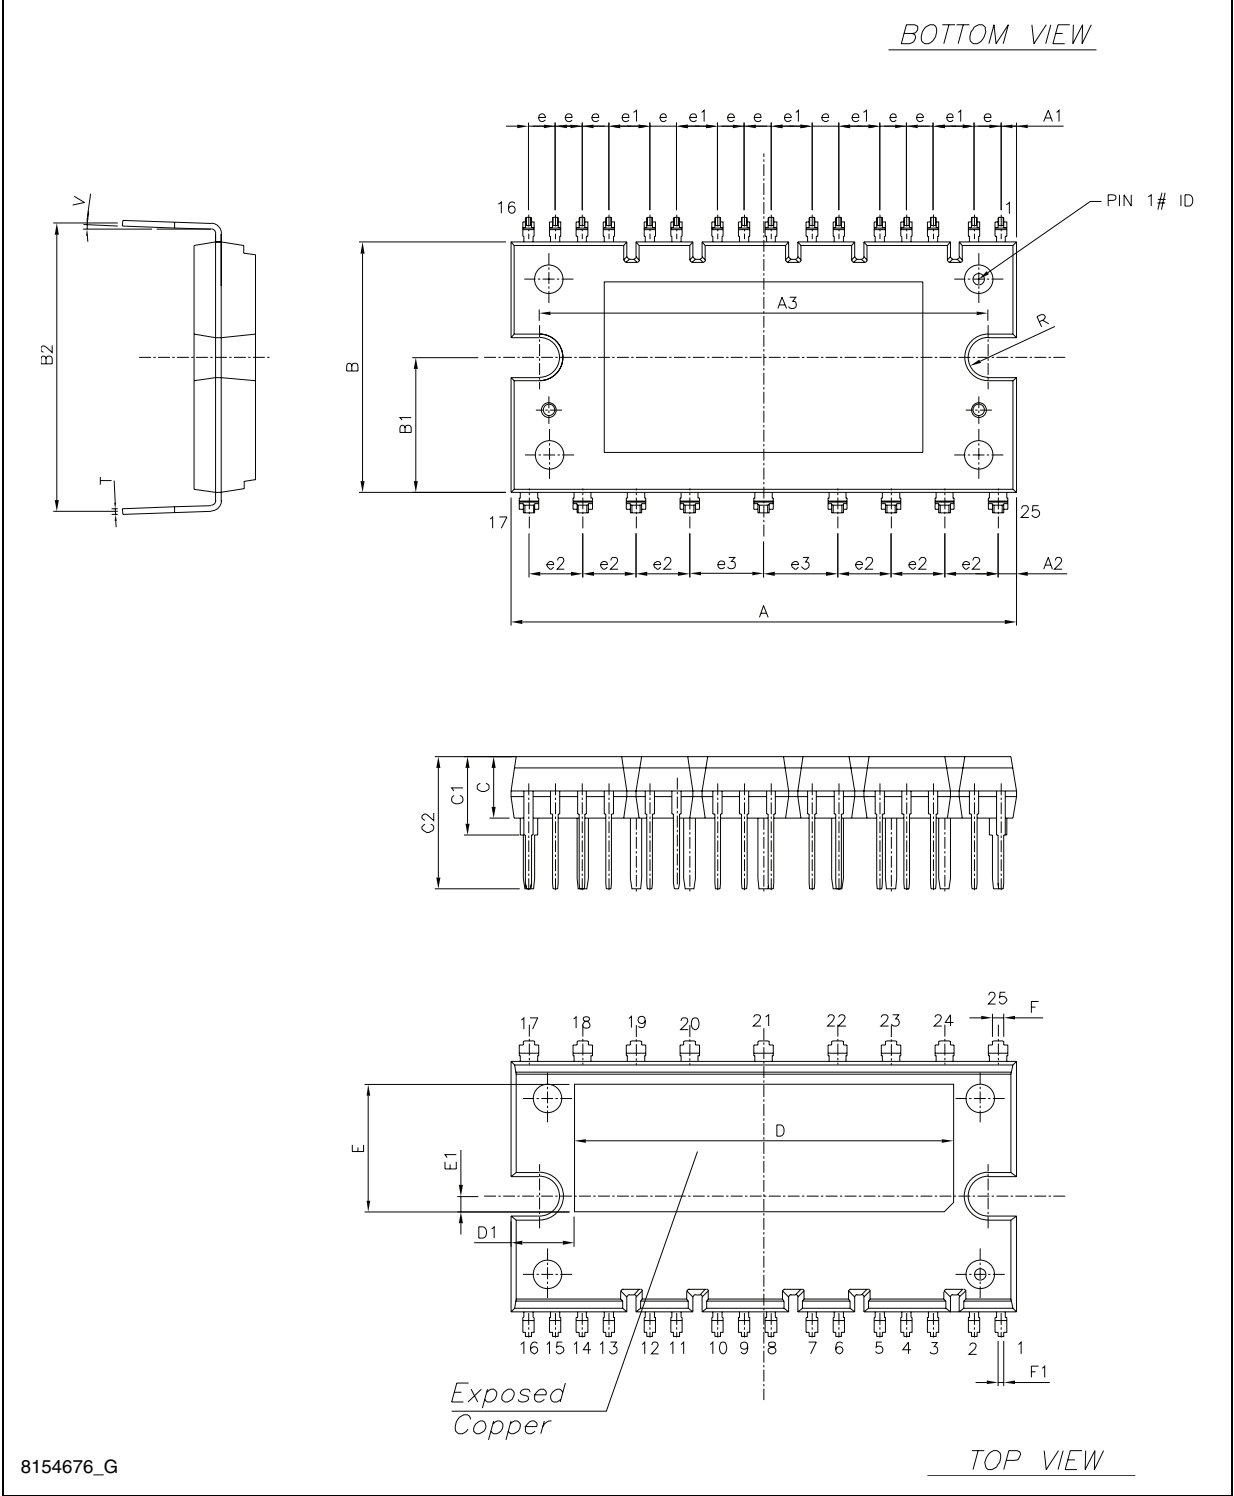

8154676\_G

Figure 11. SDIP-25L tube dimensions

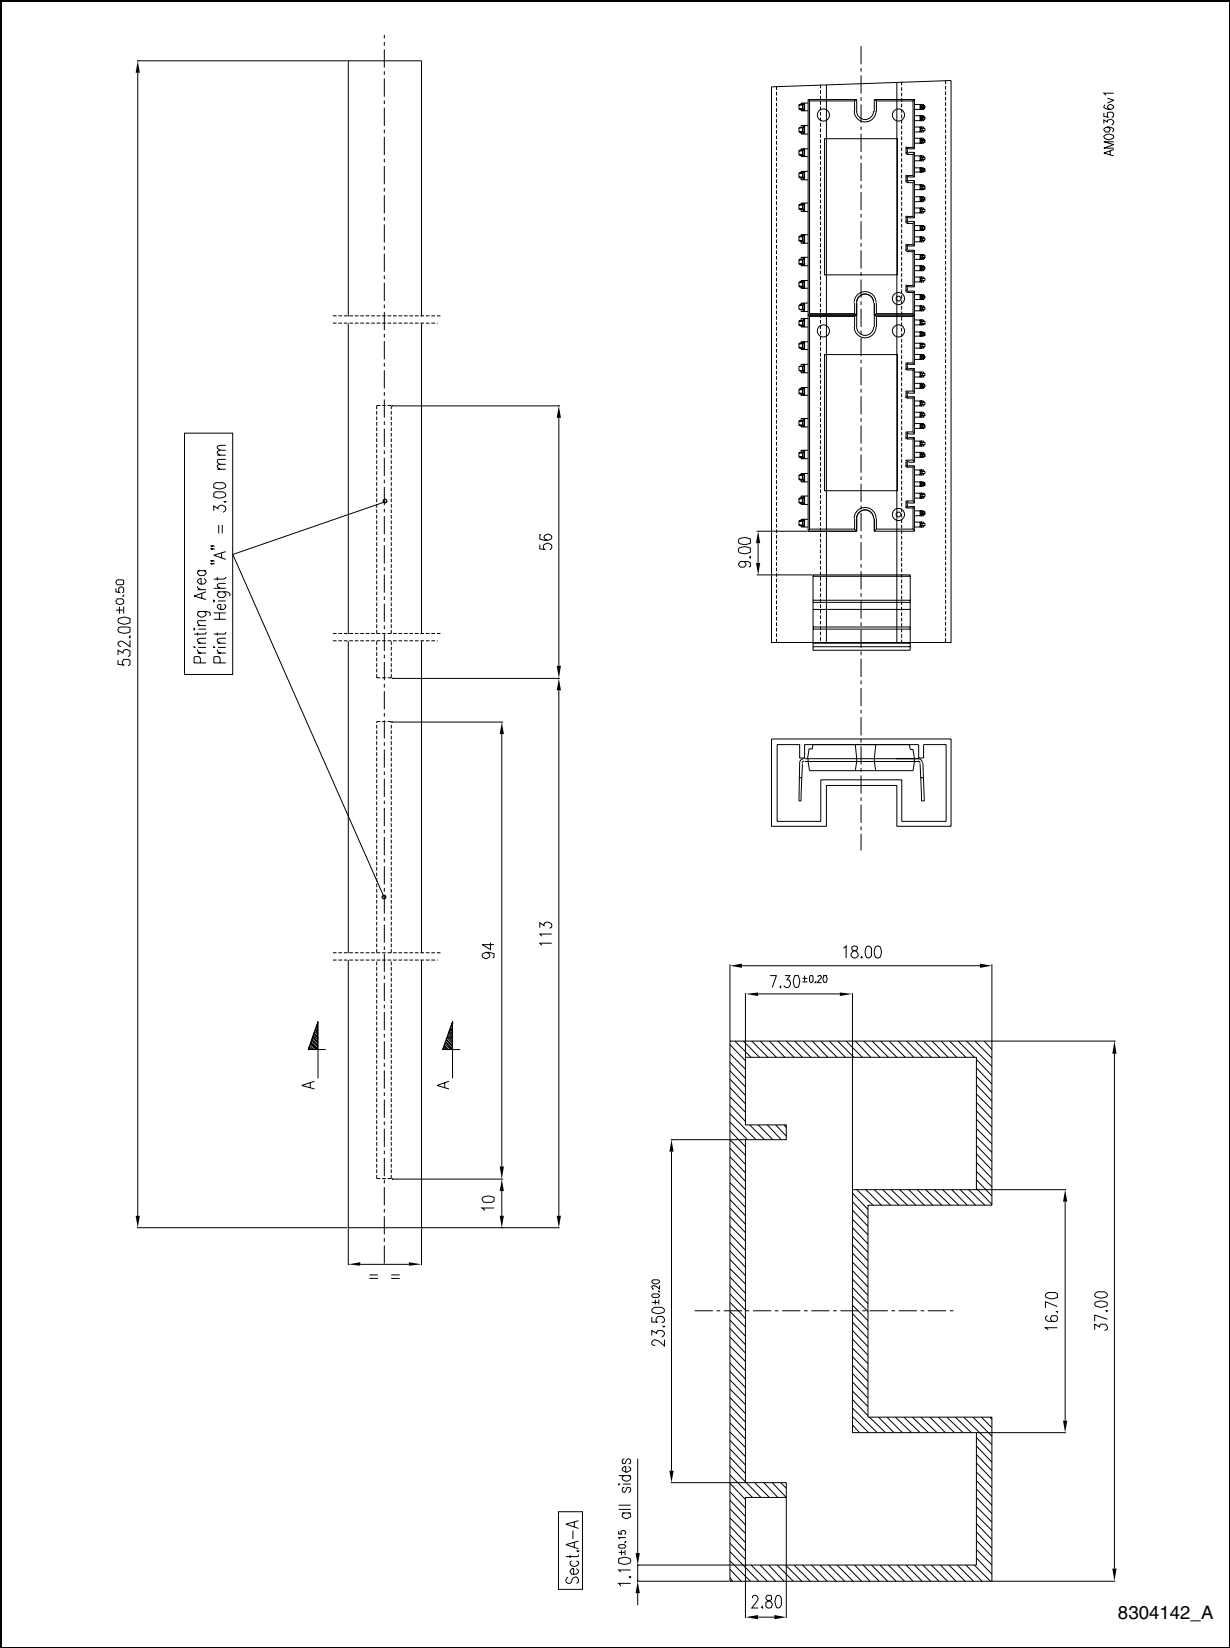

## 7 Revision history

**Table 15. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 25-Jun-2009 | 1        | Initial release.                                                                                                                                                                                                                                                                                                                                                                          |
| 05-Aug-2009 | 2        | Reduced $V_{CE(sat)}$ value on <a href="#">Table 7</a> .                                                                                                                                                                                                                                                                                                                                  |
| 15-Jun-2010 | 3        | Document status promoted from preliminary data to datasheet.<br>Updated package mechanical data, <a href="#">Table 7: Inverter part</a> ,<br><a href="#">Figure 5: Maximum <math>I_C(RMS)</math> current vs. switching frequency</a><br>and <a href="#">Figure 6: Maximum <math>I_C(RMS)</math> current vs. <math>f_{SINE}</math> (1)</a> .<br>Minor text changes to improve readability. |
| 08-Nov-2010 | 4        | Updated <a href="#">Table 3</a> , <a href="#">5</a> , <a href="#">8</a> , <a href="#">9</a> , <a href="#">10</a> and <a href="#">Table 11</a> .<br>Modified: <a href="#">Figure 5</a> and <a href="#">Figure 6</a> .                                                                                                                                                                      |
| 09-Mar-2011 | 5        | Updated title with SLLIMM™ in cover page, added SDIP-25L<br>tube dimensions <a href="#">Figure 11 on page 18</a> .                                                                                                                                                                                                                                                                        |
| 04-Nov-2011 | 6        | Updated title with SLLIMM™ (small low-loss intelligent molded<br>module) IPM, 3-phase inverter - 14 A, 600 V short-circuit<br>rugged IGBT in cover page and SDIP-25L mechanical data<br><a href="#">Table 14 on page 16</a> , <a href="#">Figure 10 on page 17</a> .                                                                                                                      |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)