

Resonator

Piezoelectric Resonator (4 to 16 MHz)

FAR Family (C4 series P/Q type) For Motor Application

■ DESCRIPTION


Fujitsu resonators C4 series (P/Q type) feature single crystals with a high electro-mechanical coefficient (LiNbO_3 : lithium niobate), the result is very compact packaging.

C4 series (P/Q type) with built-in capacitors for exclusive use in microcomputer clocks, and this series is chip type device for surface-mount and suitable for motor application due to its high reliability package.

■ FEATURES



- Wide frequency range in 4 to 16 MHz
- Suitable for microcomputer clock
- PCT (121 °C, 2 atms, 96 hours) is guaranteed for Motor application.
- Emboss-typed pack for automatic mounting
- Superior shock and vibration resistance, preventing damage during automatic mounting

■ PACKAGE

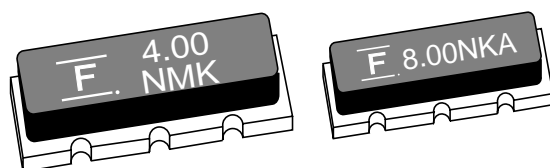

FAR Family (C4 series P/Q type)

■ STANDARD CHARACTERISTICS
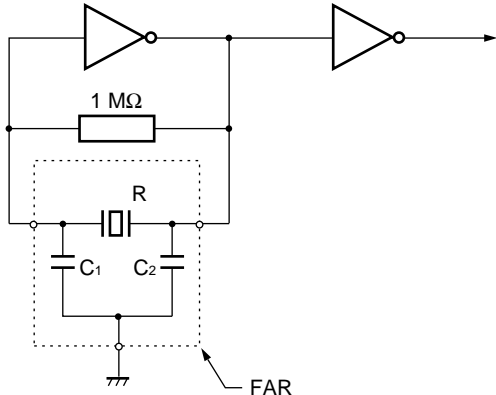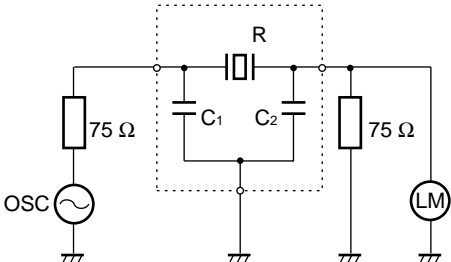
| Parameter | Series | C4 series (P/Q type) | Remarks |
|---|--------|--|--|
| Material | | Lithium Niobate (LiNbO ₃) | |
| Frequency | | 4 to 16 MHz | |
| Standard frequency | | See "■ Standard Frequency." | |
| Initial frequency deviation | | ±0.5% (M) | The ±0.3% (K) version can also be produced. |
| Temperature characteristic (-40°C to +105°C) | | ± ^{0.9} / _{1.0} % (M) | Reference temperature: +25°C |
| Capacity of built-in capacitor | | 20±8 pF (standard) | 10±4 pF, 30±8 pF are also available. Capacity is specified by Fujitsu, considering matching data with applied IC (mainly microcomputer). |
| Aging stability | | Within ±0.1% | For ten years at room temperature |
| PCT | | 96 hours guaranteed | Unstaturated PCT: 121°C 2 atmospheric pressures |
| Operating temperature | | -40°C to +105°C | |
| Storage temperature | | -55°C to +105°C | |
| Standard measuring circuit | | <p>• Resonant frequency</p>  <p>4 MHz to 10 MHz IC: MB84069B×2 10 MHz to 16.0 MHz IC: MC74HC04×2</p> <ul style="list-style-type: none"> • V_{CC}: 5 V DC • R: Resonator • C₁, C₂: Loading capacitors (built-in) <p>• Serial resonant resistance</p>  <p>R: Resonator Measuring instrument: Network analyzer</p> | |

FAR Family (C4 series P/Q type)

■ STANDARD FREQUENCY

| Standard frequency (kHz) | Package size | Resonant resistance |
|-------------------------------------|--------------|-----------------------------------|
| 4,000 | P | 150 Ω max. (Symbol: 01) |
| 8,000 10,000 12,000 16,000 | Q | 75 Ω max. (Symbol: 02) |

- Notes:**
- Fujitsu can also develop applicable device in addition to standard devices if it's oscillation frequency is from 4 to 16 MHz.
 - Resonant resistance of the part other than standard, Fujitsu should specify its resonant resistance according to applied frequency. (See "• Frequency and standard resonant resistance.")
 - Frequency and standard resonant resistance


| Frequency | Standard resonant resistance |
|-------------------|-------------------------------|
| 4.00 to 5.99 MHz | 150 Ω max. (Symbol: 1) |
| 6.00 to 16.00 MHz | 75 Ω max. (Symbol: 2) |

■ NOTES ON USE

- Handle carefully
- Solder under the following conditions.
5 seconds max. at 230°C (PCB)
Recommended preheating is 150°C for one minute in order not to apply extreme heat to the resonator.
- Avoid extreme fluctuations in temperature.
- There is no specific direction in resonator mounting.
- Oscillation data should be examined when used in oscillation circuit with microcomputer or other ICs.
- This is for reflow solder, not for flow solder.

FAR Family (C4 series P/Q type)

■ PART NUMBERING SYSTEM

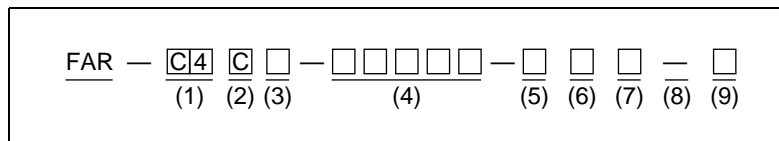

(1) Series

| Series | Single crystal | Capacitor |
|--------|--------------------|-------------------------|
| C4 | LiNbO ₃ | With built-in capacitor |

(2) Package Type

| Specification | Type |
|---------------|------|
| C | CHIP |

(3) Package Size

| Specification | Size |
|---------------|-------------------------|
| P | Large (4.0 to 5.9 MHz) |
| Q | Small (6.0 to 16.0 MHz) |

(4) Frequency

(Example) Unit: kHz (Specify in five digits.)

| Frequency | Specification |
|-----------|---------------|
| 8.000 MHz | 08000 |

See “■ Standard Frequency”.

(5) Initial Frequency Deviation

| Specification | Deviation |
|---------------|-----------|
| K | ±0.3% |
| M | ±0.5% |

(6) Built-in Capacitor

| Specification | Capacitance |
|---------------|-------------|
| 0 | 20±8 pF |
| 1 | 10±4 pF |
| 2 | 30±8 pF |

FAR Family (C4 series P/Q type)

(7) Resonant Resistance

| Specification | Resonant resistance |
|---------------|---------------------|
| 1 | 150 Ω |
| 2 | 75 Ω |

(8) User-specific Special Symbols


| Specification | Description |
|---------------|--|
| Name | No specifications, no taping specification |
| — | No specifications, with taping specification |
| A to Z | Serial number for custom design |

(9) Taping Specification

| Specification | Description |
|---------------|------------------------------------|
| R | 16 mm wide emboss tape (3,000 pcs) |

FAR Family (C4 series P/Q type)

■ MARKING

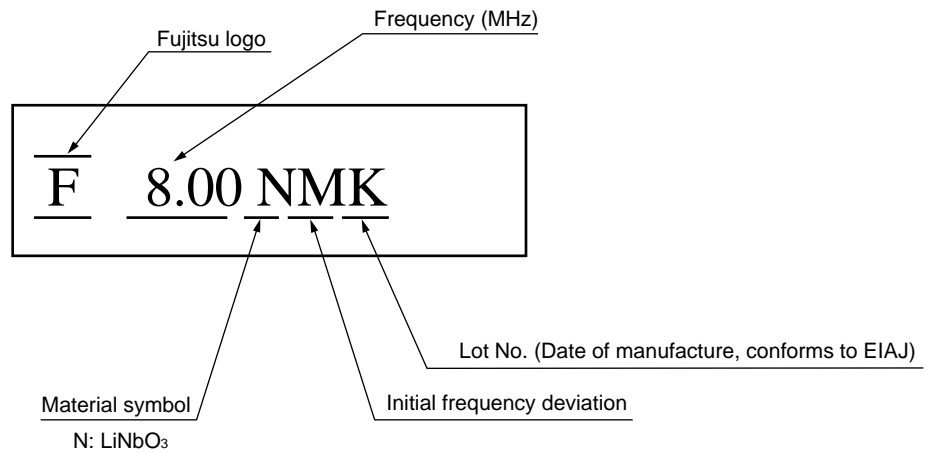

Note: The marking color varies with the capacitance of the built-in capacitor.


| Capacitance | Marking color |
|-------------|---------------|
| 10 pF | Yellow |
| 20 pF | White |
| 30 pF | Gray |

Data code (EIAJ standard) is specified as follows in four-year cycle.


| Year | Month | Symbol | Year | Month | Symbol | Year | Month | Symbol | Year | Month | Symbol |
|--------------|-------|--------|--------------|-------|--------|--------------|-------|----------|--------------|-------|----------|
| 1997 2001 | 1 | A | 1998 2002 | 1 | N | 1999 2003 | 1 | a | 2000 2004 | 1 | n |
| | 2 | B | | 2 | P | | 2 | b | | 2 | <i>p</i> |
| | 3 | C | | 3 | Q | | 3 | <i>c</i> | | 3 | <i>q</i> |
| | 4 | D | | 4 | R | | 4 | d | | 4 | r |
| | 5 | F | | 5 | S | | 5 | e | | 5 | <i>s</i> |
| | 6 | G | | 6 | T | | 6 | f | | 6 | t |
| | 7 | H | | 7 | U | | 7 | <i>g</i> | | 7 | u |
| | 8 | I | | 8 | V | | 8 | <i>h</i> | | 8 | <i>v</i> |
| | 9 | J | | 9 | W | | 9 | j | | 9 | <i>w</i> |
| | 10 | K | | 10 | X | | 10 | <i>k</i> | | 10 | <i>x</i> |
| | 11 | L | | 11 | Y | | 11 | <i>l</i> | | 11 | <i>y</i> |
| | 12 | M | | 12 | Z | | 12 | <i>m</i> | | 12 | <i>z</i> |

FAR Family (C4 series P/Q type)

PIN ASSIGNMENT

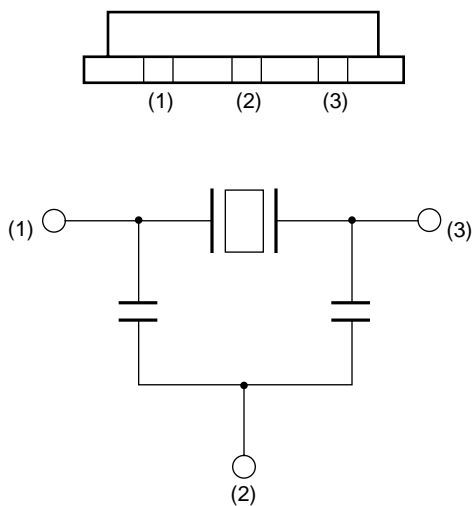


DIMENSIONS

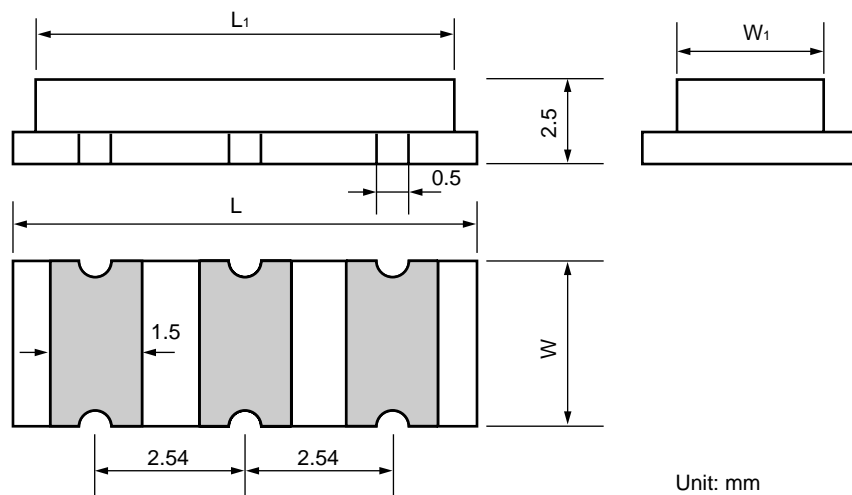

| Size | L | L ₁ | W | W ₁ |
|------|------|----------------|-----|----------------|
| P | 10.0 | 9.4 | 4.5 | 3.3 |
| Q | 8.0 | 7.4 | 3.2 | 2.6 |


FAR Family (C4 series P/Q type)

■ TAPING FORM AND DIMENSIONS

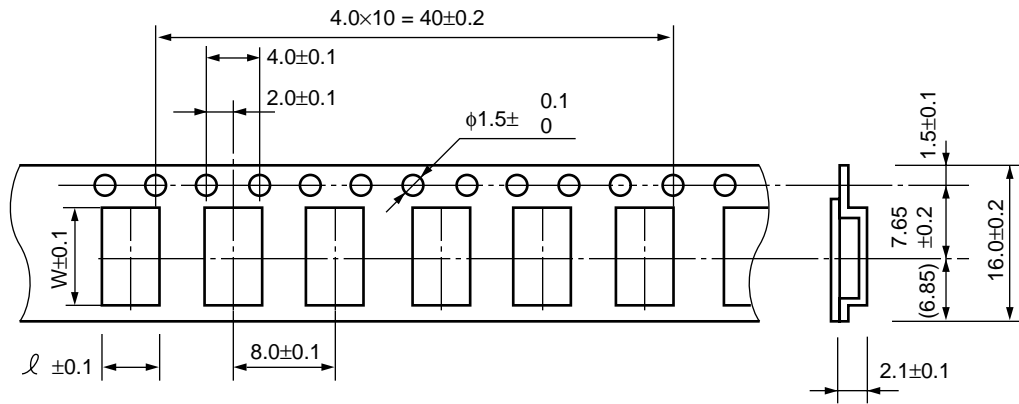

| Package size | ℓ | W | t |
|--------------|--------|------|-----|
| P | 5.0 | 10.5 | 3.0 |
| Q | 3.7 | 8.5 | 2.8 |

Reel form

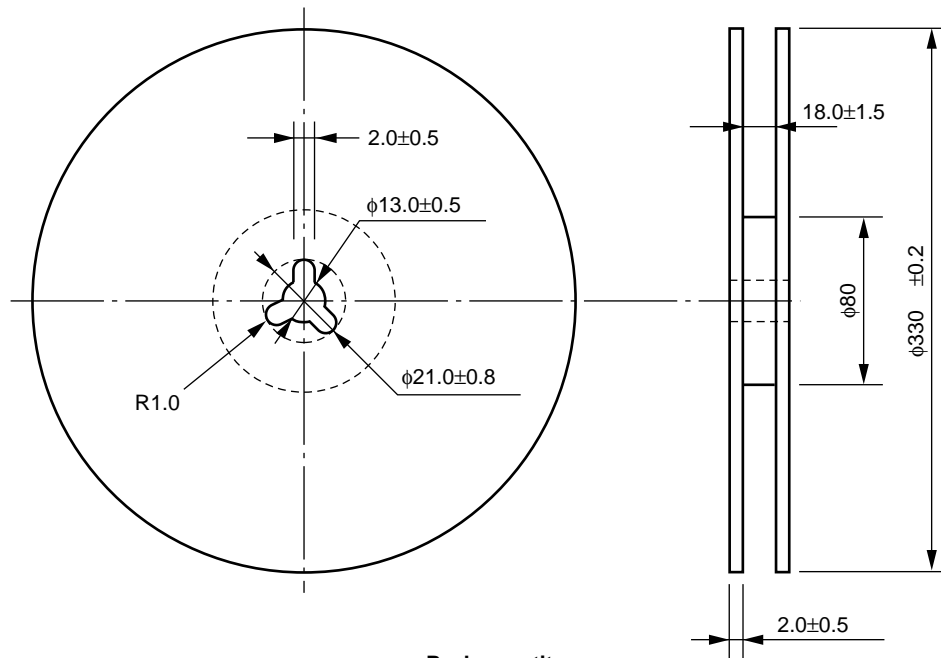

• Pack quantity

| Package size | Quantity |
|--------------|----------|
| P, Q | 3,000 |

Unit: mm

FAR Family (C4 series P/Q type)

FUJITSU LIMITED

For further information please contact:

Japan

FUJITSU LIMITED
Corporate Global Business Support Division
Electronic Devices
KAWASAKI PLANT, 4-1-1, Kamikodanaka
Nakahara-ku, Kawasaki-shi
Kanagawa 211-88, Japan
Tel: (044) 754-3763
Fax: (044) 754-3329

North and South America

FUJITSU MICROELECTRONICS, INC.
Semiconductor Division
3545 North First Street
San Jose, CA 95134-1804, U.S.A.
Tel: (408) 922-9000
Fax: (408) 432-9044/9045

Europe

FUJITSU MIKROELEKTRONIK GmbH
Am Siebenstein 6-10
63303 Dreieich-Buchschlag
Germany
Tel: (06103) 690-0
Fax: (06103) 690-122

Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE. LIMITED
#05-08, 151 Lorong Chuan
New Tech Park
Singapore 556741
Tel: (65) 281-0770
Fax: (65) 281-0220

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).

CAUTION:

Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.