

SHOP MANUAL

MASSEY-FERGUSON

MODELS 1010 AND 1020

The tractor serial number is located on a plate on the steering column below the dash (1—Fig. 1). The tractor model is located on plate at (2). The engine serial number is located on the right side of engine block (3—Fig. 2) and the chassis serial number is stamped into the rear axle center housing (4—Fig. 3).

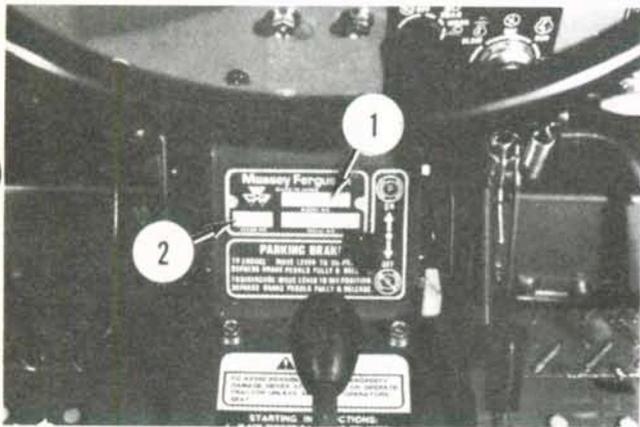


Fig. 1—The tractor serial number plate is located on the steering column below dash.

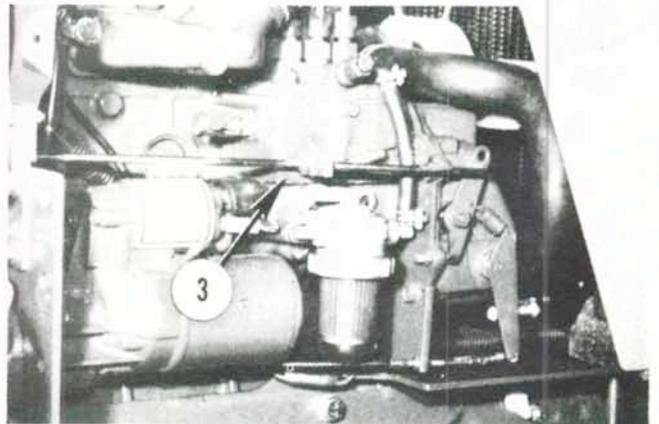


Fig. 2—Engine serial number is stamped on right side of engine.

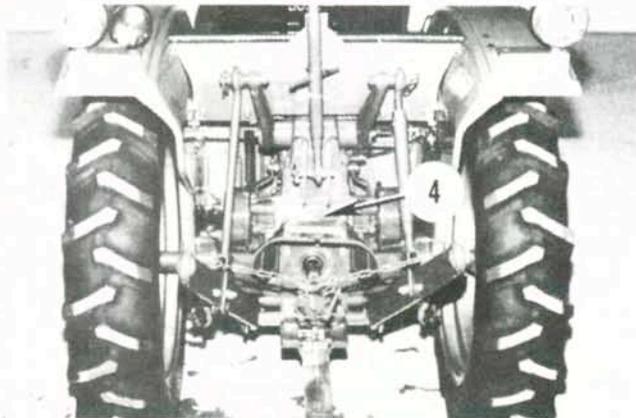


Fig. 3—The chassis serial number is stamped on rear axle center housing.

INDEX (By Starting Paragraph)

Models
1010 and 1020

Models
1010 and 1020

BRAKES

Adjust	144
R & R and Overhaul	145

CLUTCH

Adjustment	55
Clutch Shaft and Release Bearing	58
R & R and Overhaul	56

COOLING SYSTEM

Radiator	48
Thermostat	49
Water Pump	50

DIESEL FUEL SYSTEM

Fuel Filters and Lines	37
Glow Plugs	47
Governor and Injection Pump Camshaft	41
Injector Nozzles	43
Injection Pump	39

ELECTRICAL SYSTEM

Alternator and Regulator	51
Circuit Description	54
Safety Switches	53
Starter	52

ENGINE AND COMPONENTS

Cam Followers	23
Camshaft	27
Connecting Rod and Bearings	31
Crankshaft and Main Bearings	32
Crankshaft Rear Oil Seal	33
Cylinder Head	18
Flywheel	34
Front End/Engine Split	16
Oil Pan	35
Oil Pump	36
Piston Pin	30
Piston, Rings and Cylinder	29
R & R Engine	17
Rocker Arms	22
Rod and Piston Units	28
Timing Gear Housing	25
Timing Gears	26
Valve Clearance	19
Valve Springs	21
Valve Timing	24
Valves, Guides and Seats	20

FINAL DRIVE AND AXLES	142
---------------------------------	-----

FRONT AXLE SYSTEM (FOUR-WHEEL DRIVE)

Axle Housing, King Pin, Axle Shafts and Universal Joints	13
Differential	15
Front Axle Assembly	11
Front Axle Assembly and Steering Linkage	10
Front Final Drive	12

FRONT AXLE SYSTEM (TWO-WHEEL DRIVE)

	1
--	---

HYDRAULIC LIFT SYSTEM

Control Valve	170
Fluid and Filters	163
Hydraulic Pump	164
Lift Cover	168
Relief Valve	
1010 Hydro and All 1020 Models	167
1010 Standard Models	166

POWER TAKE-OFF

Front Pto	161
Mid Pto	158
Rear Pto	
1010 Hydro Models	147
1010 Standard Models	146
1020 Hydro Models	153
1020 Standard Models	152

REAR AXLE CENTER HOUSING AND DIFFERENTIAL

Axle Center Housing	
1010 Hydro Models	122
1010 Standard Models	120
1020 Hydro Models	126
1020 Standard Models	124
Differential and Bevel Gears	
1010 Hydro Models	132
1010 Standard Models	128
1020 Hydro Models	139
1020 Standard Models	136

STEERING SYSTEM

Power Assist	8
Steering Gear	6

TRANSMISSION

1010 HYDRO	
Front-Wheel-Drive Idler	84
Hydrostatic Unit	76

	Models 1010 and 1020
TRANSMISSION 1010 HYDRO (Cont.)	
Lubrication	69
Overhaul	78
Range Transmission	80
Spacer Housing Assembly	79
Tests and Adjustments	71
Troubleshooting	70

TRANSMISSION 1010 STANDARD	
Inspection	59
Lubrication	60
Overhaul	62
Remove and Reinstall	61

TRANSMISSION 1020 HYDRO	
Front-Drive Output Shaft	118

	Models 1010 and 1020
TRANSMISSION 1020 HYDRO (Cont.)	
Hydrostatic Unit	109
Lubrication	102
Overhaul	111
Range Transmission	113
Spacer	112
Tests and Adjustments	104
Troubleshooting	103

TRANSMISSION 1020 STANDARD	
Creeper (Mode) Transmission	97
Front-Wheel Drive	100
Inspection	86
Lubrication	87
Main and Range Transmission	89
Shifter Cover	88

DUAL DIMENSIONS

This service manual provides specifications in both U.S. Customary and Metric (SI) systems of measurement. The first specification is given in the measuring system perceived by us to be the preferred system when servicing a particular component, while the second specification (given in parenthesis) is the converted measurement. For instance, a specification of 0.011 inch (0.28 mm) would indicate that we feel the preferred measurement in this instance is the U.S. Customary system of measurement and the Metric equivalent of 0.011 inch is 0.28 mm.

CONDENSED SERVICE DATA

	Models			
	1010 Standard	1010 Hydro	1020 Standard	1020 Hydro
GENERAL				
Engine Make	Hinomoto			
Model	CS86		CS112	
Number of Cylinders	3			
Bore	70 mm (2.756 in.)		75 mm (2.953 in.)	
Stroke	75 mm (2.953 in.)		85 mm (3.347 in.)	
Displacement	865 cc (52.8 cu. in.)		1126 cc (68.7 cu. in.)	

**Thank you very much
for your reading.**

**Please click here and go
back to the website.**

**Then, you can
download the complete
manual instantly.**

No waiting.