

UNIVERSAL BEVEL PROTRACTOR

OPERATION AND CARE MANUAL

To take full advantage of Universal bevel protractor, read this manual thoroughly before using it. After reading, retain this manual for future reference. Specifications of Universal bevel protractor and the information in this manual are subject to change without notice.

Product Features

- Made of stainless steel throughout
- Measuring Range: 360° , Accuracy: $5'$
- With acute angle attachment
- With fine-adjustment
- All measuring faces is finished





Important

- Any excessive shock should avoided.
- Do not disassemble or modify the instrument.
- Before using this instrument for the first time, wipe the rust preventive oil from the instrument with a soft cloth.
- Please take rust preventive oil, if do not use for a long time.




Caution
















- Do not subject the protractor to blows or knobs.



Nomenclature

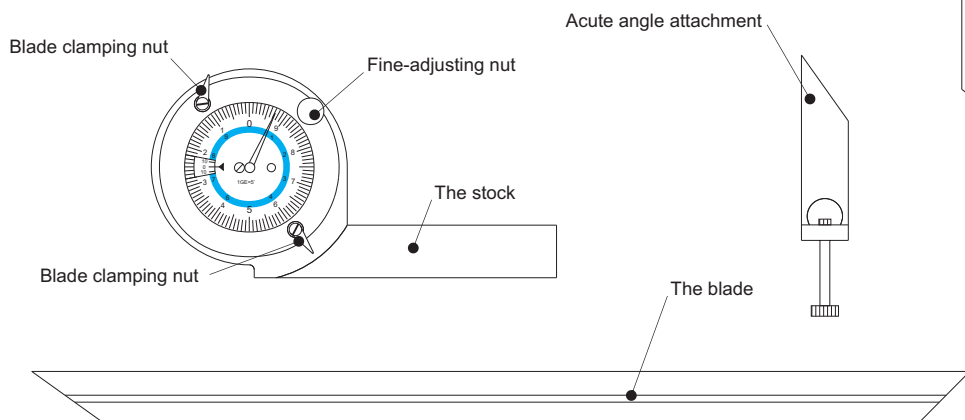

How to using



Specification

Measuring range	0-360°
Resolution	5'
Accuracy	±5'
Material	Stainless steel throughout
The blade	150mm, 200mm, 300mm

* Each protractor is attached the three blades, you can chose the different blade of specification as you need, and also can get three the blades together.