

Seamless Low Supply Current 150mA LDO REGULATOR

NO.EA-133-111027

OUTLINE

The R1182x Series are CMOS-based positive voltage regulator ICs with high output voltage accuracy and low supply current. Each of these ICs consists of a voltage reference unit, an error amplifier, resistor-net for voltage setting, a current limit circuit which prevents the destruction by excess current, and so on.

The output voltage of these ICs is fixed with high accuracy.

The R1182x Series has low dropout voltage caused by built in low on resistance transistor. Further, the consumption current of IC itself is Typ. 3.0 μ A at no load, at the same time, compared with the conventional low supply current regulator, transient response is improved in all the load range by our original seamless technology.

Since the packages for these ICs are SOT-23-5 and ultra small DFN(PLP)1616-6, high density mounting of the ICs on boards is possible.



FEATURES

- Supply Current Typ. 3 μ A
(Except the current through CE pull-down circuit)
- Standby Current Typ. 0.1 μ A
- Input Voltage Range 1.5V to 6.0V
- Output Voltage Range 1.2V to 4.0V (0.1V steps)
(For other voltages, please refer to MARK INFORMATIONS.)
- Dropout Voltage Typ. 0.23V ($I_{OUT}=150mA$, 3.0V Output type)
- Output Voltage Accuracy $\pm 1.0\%$ ($V_{OUT}>1.5V$)
 $\pm 15mV$ ($V_{OUT} \leq 1.5V$)
- Temperature-Drift Coefficient of Output Voltage Typ. $\pm 100ppm/^{\circ}C$
- Line Regulation Typ. 0.1%/V
- Packages DFN(PLP)1616-6, SOT-23-5
- Built-in Fold Back Protection Circuit Typ. 50mA (Current at short mode)
- Ceramic capacitors are recommended to be used with this IC (0.1 μ F or more)

APPLICATIONS

- Stable voltage reference.
- Power source for electrical appliances such as cameras, camcorders, mobile communication equipment.
- Power source for battery-powered equipment.

BLOCK DIAGRAMS

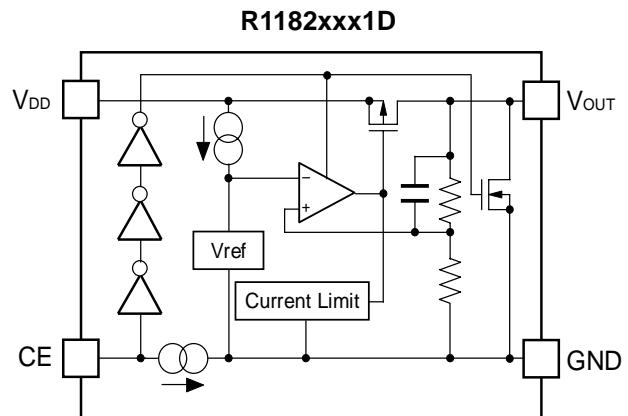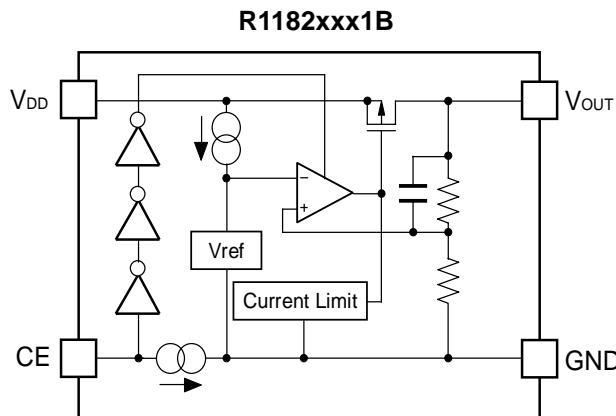

SELECTION GUIDE

The output voltage, auto discharge function, package, etc. for the ICs can be selected at the user's request.


Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
R1182Kxx1*-TR	DFN(PLP)1616-6	5,000 pcs	Yes	Yes
R1182Nxx1*-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes

xx: The output voltage can be designated in the range from 1.2V(12) to 4.0V(40) in 0.1V steps.
(For other voltages, please refer to MARK INFORMATIONS.)


* : The auto discharge function at off state are options as follows.
(B) without auto discharge function at off state
(D) with auto discharge function at off state

PIN CONFIGURATIONS

• DFN(PLP)1616-6

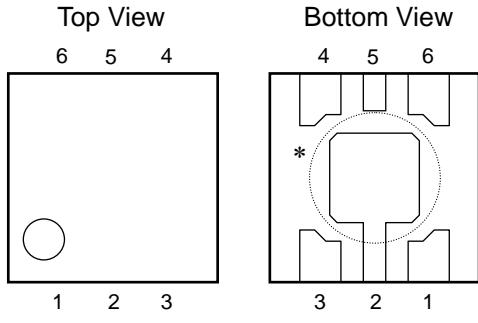

• SOT-23-5



PIN DESCRIPTIONS

• DFN(PLP)1616-6

Pin No	Symbol	Pin Description
1	V _{DD}	Input Pin
2	GND	Ground Pin
3	CE	Chip Enable Pin ("H" Active)
4	NC	No Connection
5	NC	No Connection
6	V _{OUT}	Output pin

*) Tab is GND level. (They are connected to the reverse side of this IC.)

The tab is better to be connected to the GND, but leaving it open is also acceptable.

• SOT-23-5

Pin No	Symbol	Pin Description
1	GND	Ground Pin
2	V _{DD}	Input Pin
3	V _{OUT}	Output pin
4	NC	No Connection
5	CE	Chip Enable Pin ("H" Active)

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	6.5	V
V_{CE}	Input Voltage (CE Pin)	–0.3 to 6.5	V
V_{OUT}	Output Voltage	–0.3 to $V_{IN}+0.3$	V
I_{OUT}	Output Current	200	mA
P_D	Power Dissipation (DFN(PLP)1616-6) *	640	mW
	Power Dissipation (SOT-23-5) *	420	
T_{opt}	Operating Temperature Range	–40 to 85	°C
T_{stg}	Storage Temperature Range	–55 to 125	°C

*) For Power Dissipation, please refer to PACKAGE INFORMATION.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

ELECTRICAL CHARACTERISTICS

- R1182xxx1B/D


Topt=25°C

Symbol	Item	Conditions		Min.	Typ.	Max.	Unit
V _{OUT}	Output Voltage	V _{IN} =Set V _{OUT} +1V I _{OUT} =1mA	V _{OUT} >1.5V	x0.99		x1.01	V
			V _{OUT} ≤1.5V	-15		+15	mV
I _{OUT}	Output Current	V _{IN} -V _{OUT} =1.0V		150			mA
ΔV _{OUT} / ΔI _{OUT}	Load Regulation	V _{IN} =Set V _{OUT} +1V 1mA ≤ I _{OUT} ≤ 150mA			30	80	mV
V _{DIF}	Dropout Voltage	I _{OUT} =150mA	1.2 ≤ V _{OUT} < 1.3		0.60	0.82	V
			1.3 ≤ V _{OUT} < 1.4		0.53	0.75	
			1.4 ≤ V _{OUT} < 1.5		0.46	0.67	
			1.5 ≤ V _{OUT} < 2.0		0.43	0.60	
			2.0 ≤ V _{OUT} < 2.8		0.31	0.40	
			2.8 ≤ V _{OUT} < 4.0		0.23	0.29	
			V _{OUT} =4.0		0.19	0.23	
I _{SS}	Supply Current	V _{IN} =Set V _{OUT} +1V, I _{OUT} =0mA			3.0	7.0	μA
I _{Standby}	Standby Current	V _{IN} =Set V _{OUT} +1V, V _{CE} =GND			0.1	1.0	μA
ΔV _{OUT} / ΔV _{IN}	Line Regulation	Set V _{OUT} +0.5V ≤ V _{IN} ≤ 6.0V I _{OUT} =30mA			0.1	0.3	%/V
V _{IN}	Input Voltage			1.5		6.0	V
ΔV _{OUT} / ΔT _{Opt}	Output Voltage Temperature Coefficient	I _{OUT} =30mA -40°C ≤ T _{Opt} ≤ 85°C			±100		ppm/°C
I _{SC}	Short Current Limit	V _{OUT} =0V			50		mA
I _{PD}	CE Pull-down Current			0.05	0.30	0.55	μA
V _{CEH}	CE Input Voltage "H"			1.0		6.0	V
V _{CEL}	CE Input Voltage "L"			0		0.4	V
en	Output Noise	BW=10Hz to 100kHz			30		μVrms
R _{LOW}	Nch Tr. On resistance for auto discharge function (Only applied to D Version)	V _{CE} =0V			50		Ω

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

TYPICAL APPLICATIONS

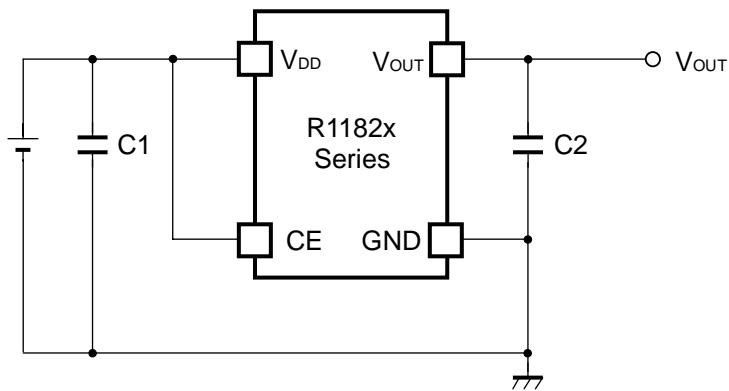

(External components)

Output capacitor : Ceramic type

Input capacitor : Ceramic type

Output Capacitor:	0.1 μ F	Kyocera CM05B104K06AB
		Murata GRM155B31C104KA87B
1.0 μ F	Kyocera CM05X5R105K06AB	
	TDK C1005JB0J105K	
	Murata GRM155B30J105KE18B	

TECHNICAL NOTES

When using these ICs, consider the following points:

Phase Compensation

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, be sure to use a 0.1 μ F or more capacitor C2 (Ceramic type).

If a tantalum capacitor is used, and its ESR (Equivalent Series Resistance) of C2 is large, the loop oscillation may result. Because of this, select C2 carefully considering its frequency characteristics.

Mounting on Board

Make VDD and GND lines sufficient. If their impedance is high, pick-up the noise or unstable operation may result.

Connect the capacitor C1 with a 0.1 μ F or more between VDD and GND as close as possible.

Set external components, especially the output capacitor C2, as close as possible to the ICs and make wiring as short as possible. (Refer to the typical application)

TEST CIRCUITS

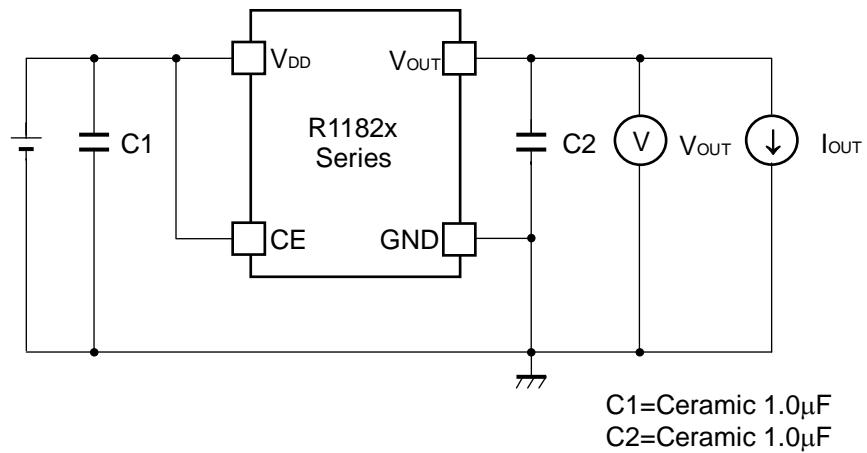


Fig.1 Standard test Circuit

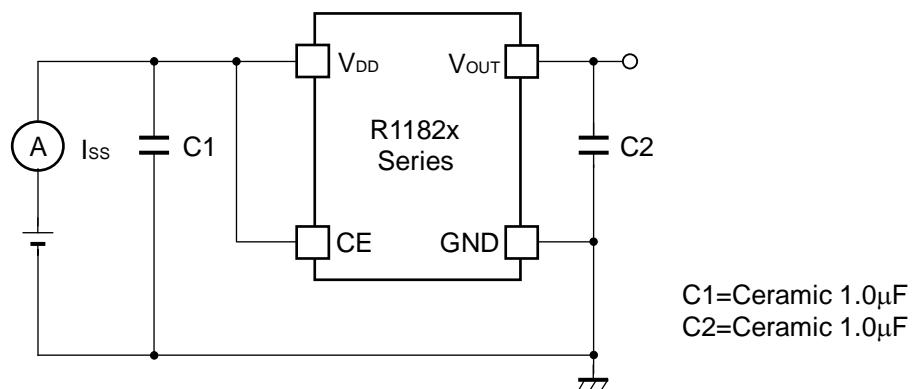


Fig.2 Supply Current Test Circuit


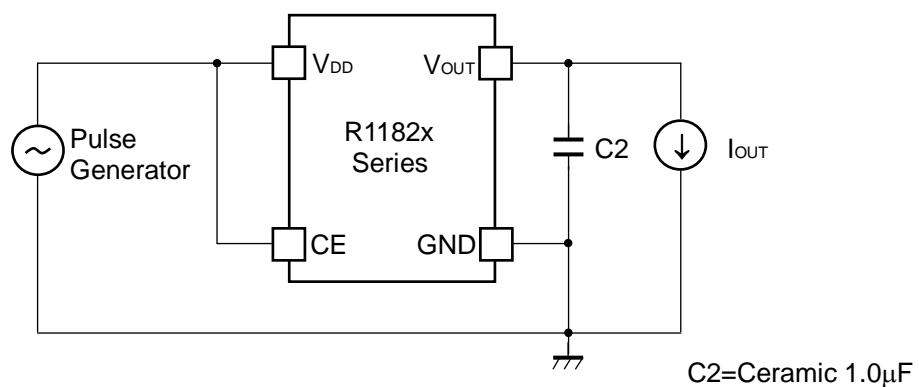


Fig.3 Ripple Rejection, Line Transient Response Test Circuit


TYPICAL CHARACTERISTICS

1) Output Voltage vs. Output Current ($T_{opt}=25^{\circ}\text{C}$)


R1182x121x

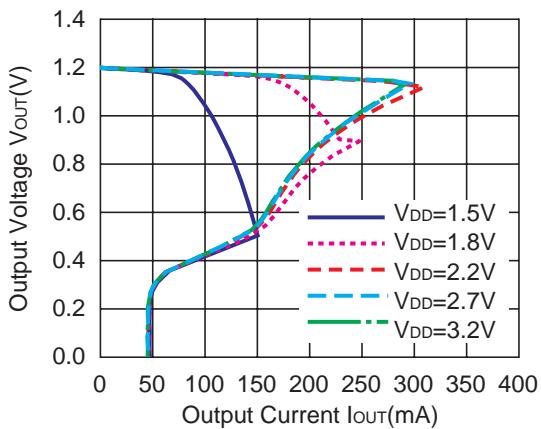

R1182x281x

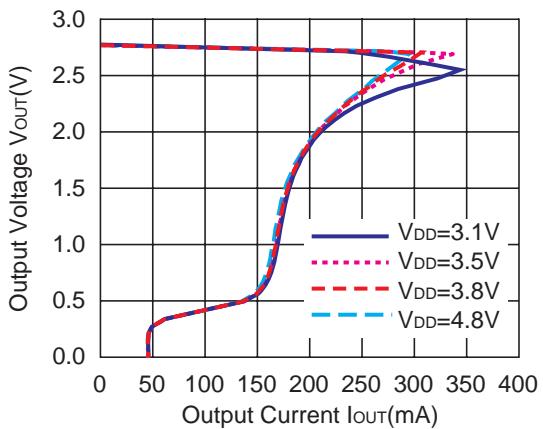


R1182x401x

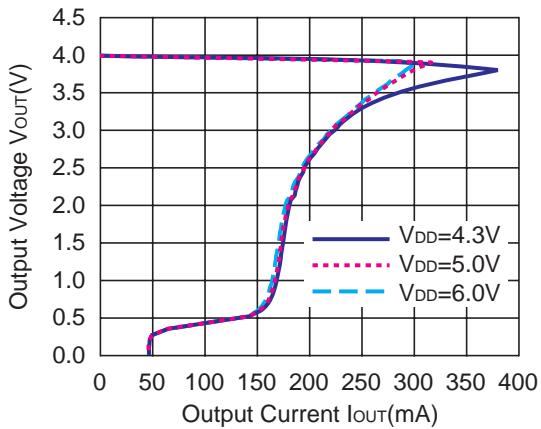


2) Output Voltage vs. Input Voltage ($T_{opt}=25^{\circ}\text{C}$)


R1182x121x

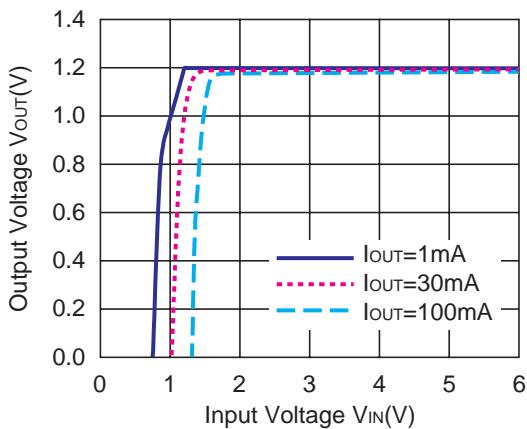

R1182x281x

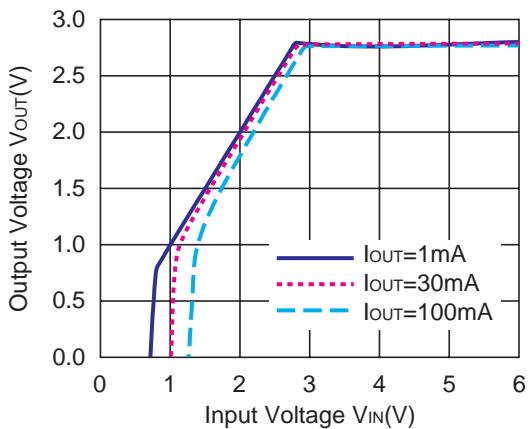


R1182x401x

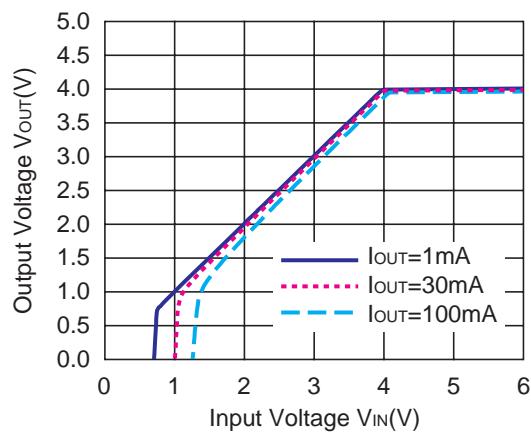


3) Supply Current vs. Input Voltage


R1182x121x

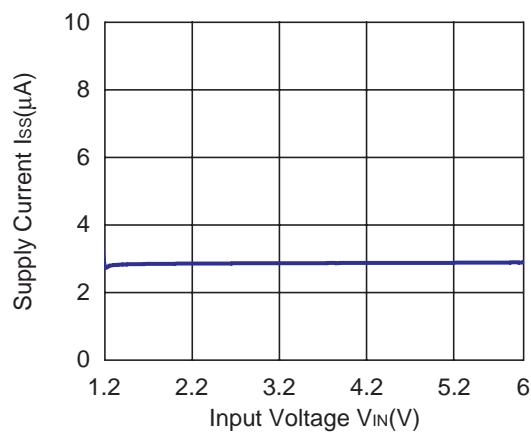

R1182x281x

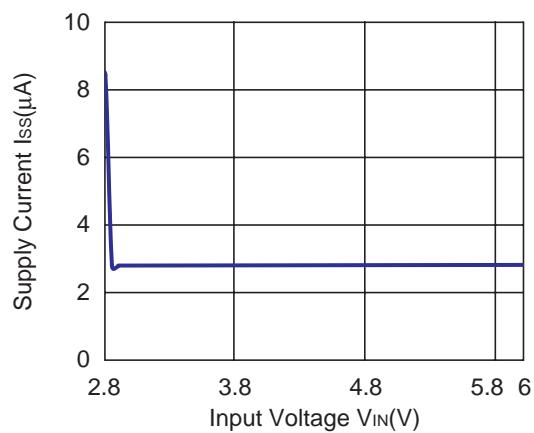


R1182x401x

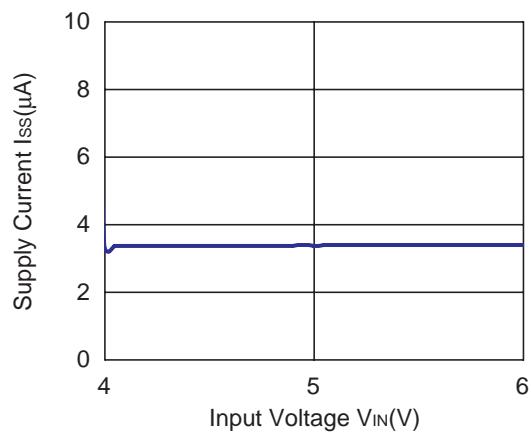


R1182x

4) Output Voltage vs. Temperature ($I_{out}=30mA$)


R1182x121x

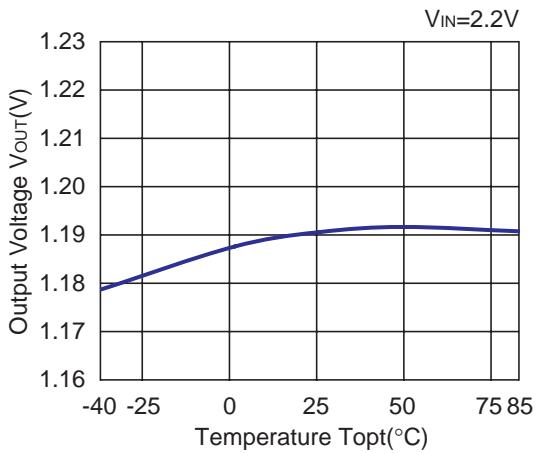

R1182x281x

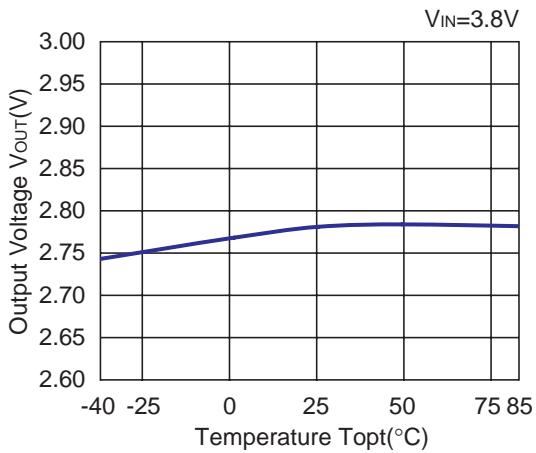


R1182x401x

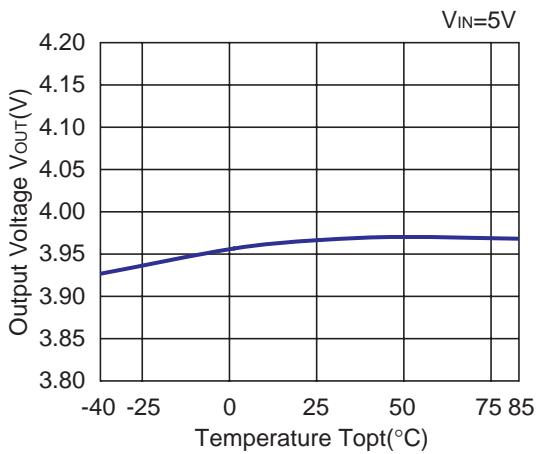






5) Supply Current vs. Temperature (Topt=25°C)

R1182x121x

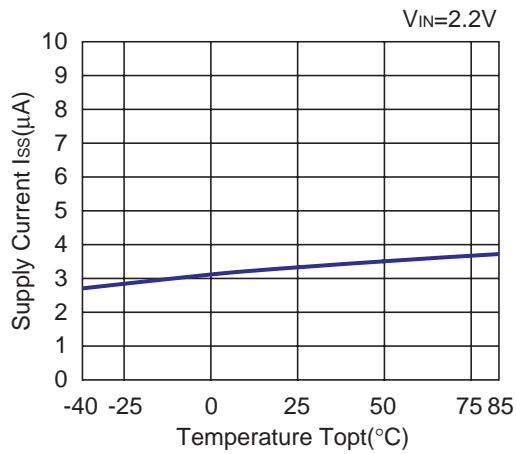


R1182x281x

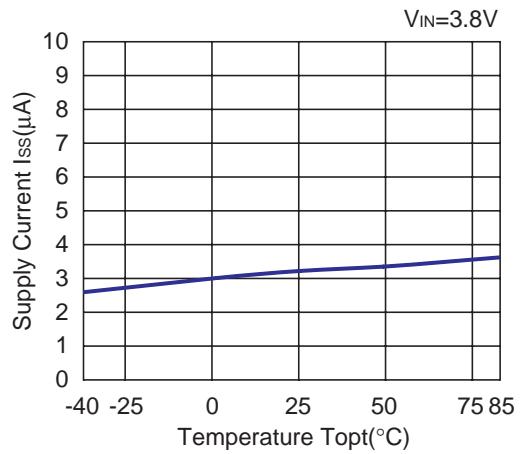

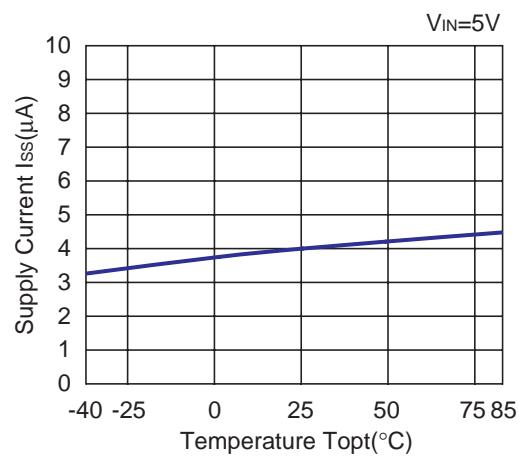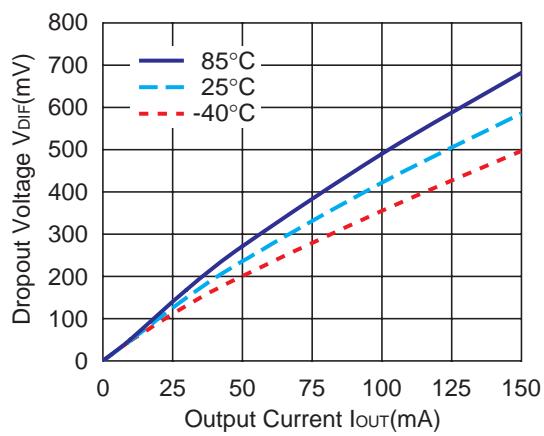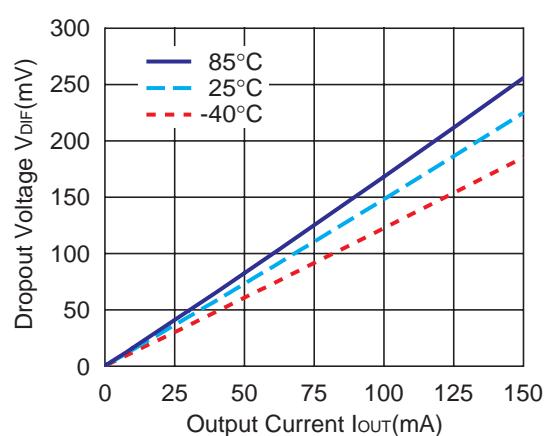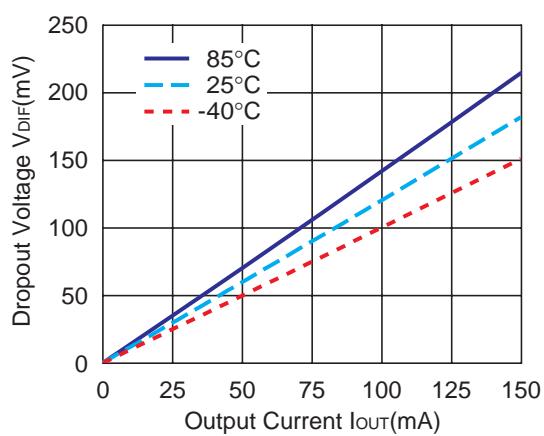
R1182x401x**6) Dropout Voltage vs. Output Current****R1182x121x****R1182x281x****R1182x401x**

7) Dropout Voltage vs. Set Output Voltage ($T_{opt}=25^{\circ}\text{C}$)

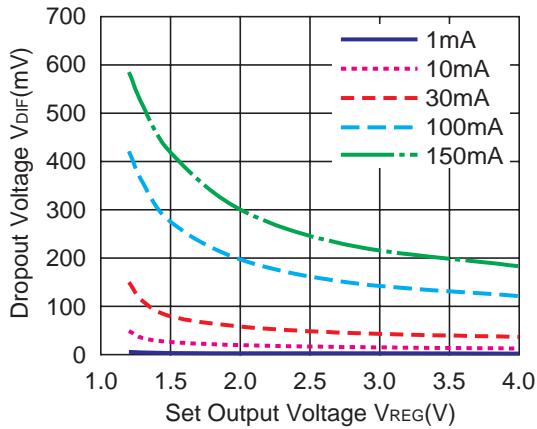


8) Ripple Rejection vs. Input Bias Voltage (Ripple=0.2V_{p-p})


R1182x281x

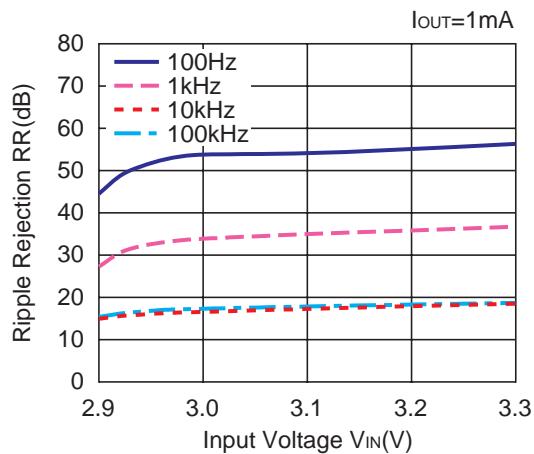

R1182x281x

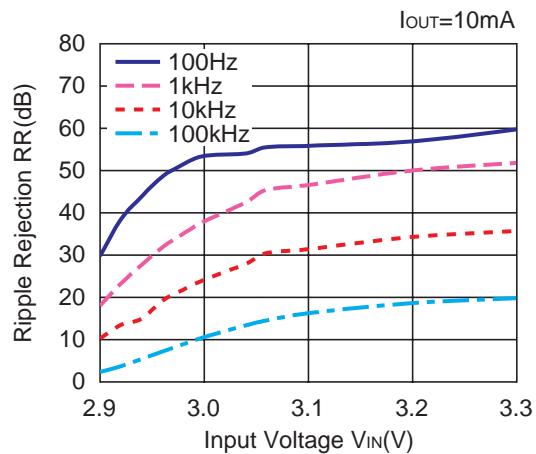


R1182x281x

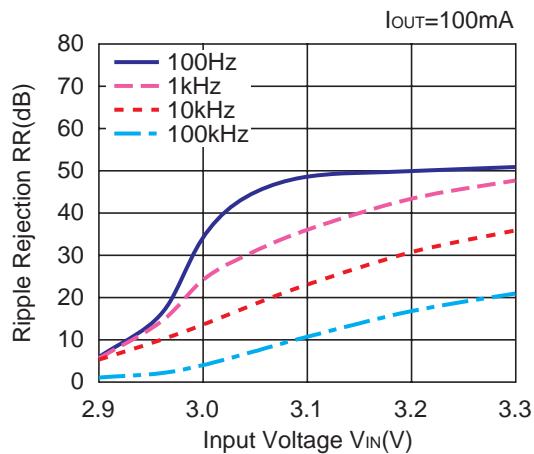


9) Ripple Rejection vs. Frequency ($C_{out}=\text{ceramic } 0.1\mu\text{F}$)


R1182x121x

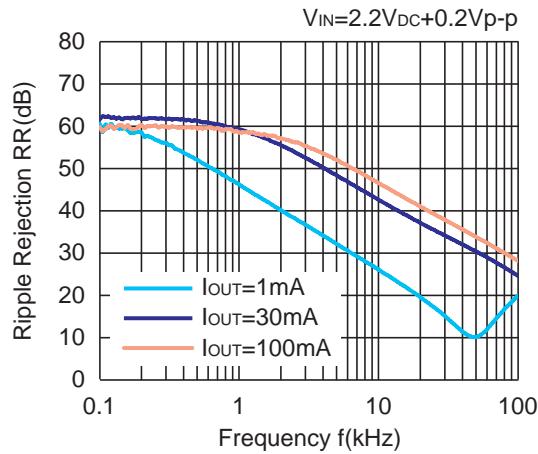

R1182x281x

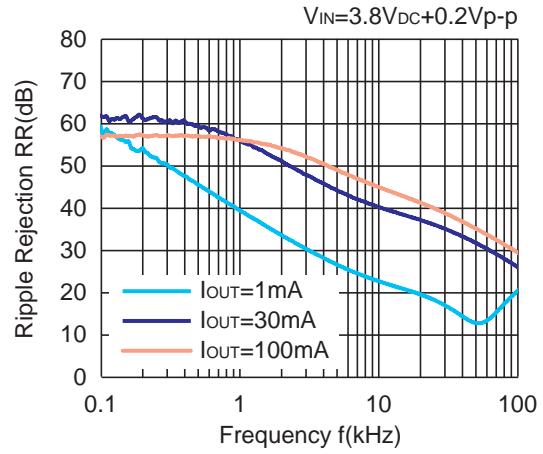


R1182x401x

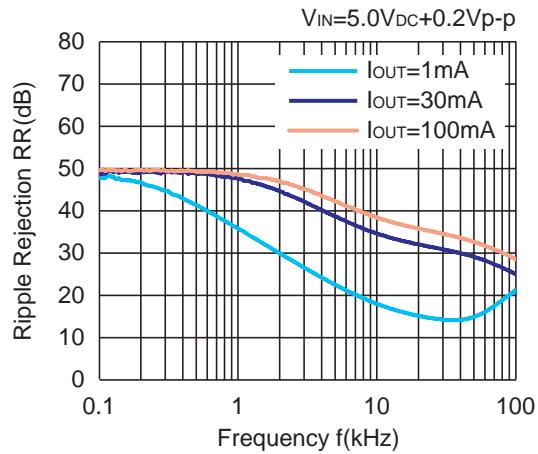


10) Input Transient Response ($tr=tf=5\mu\text{s}$, $I_{OUT}=30\text{mA}$)

R1182x121x

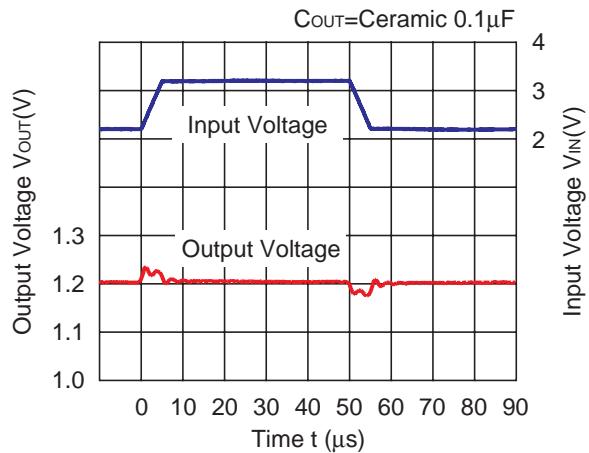


R1182x121x

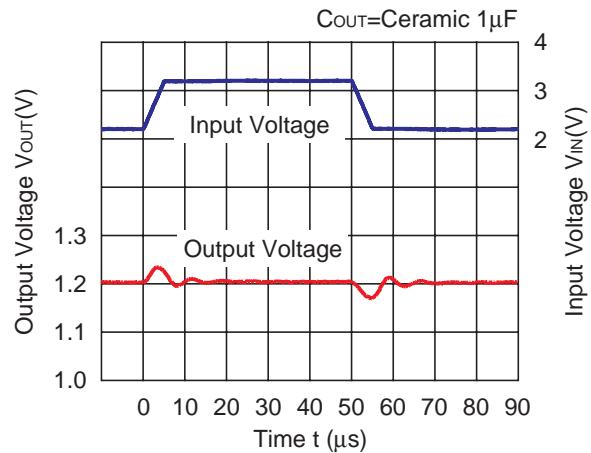


R1182x


R1182x281x

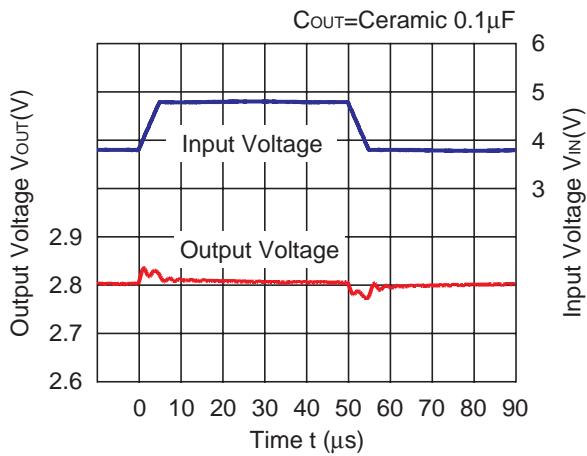


R1182x281x

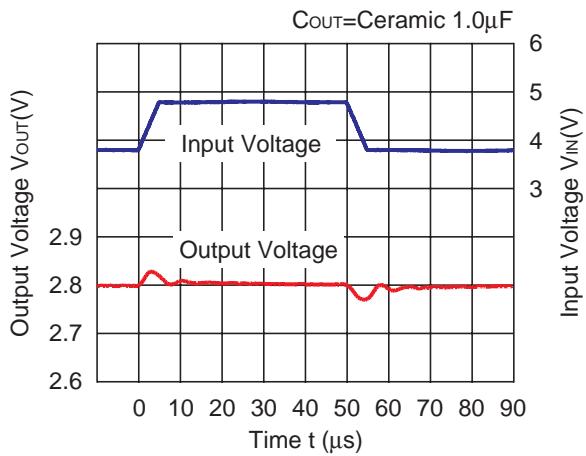

R1182x401x

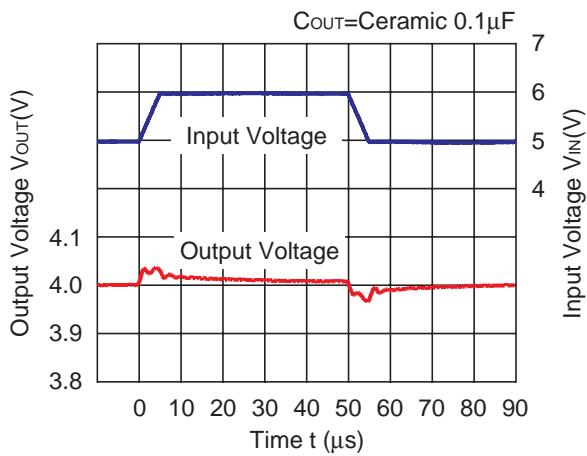


R1182x401x

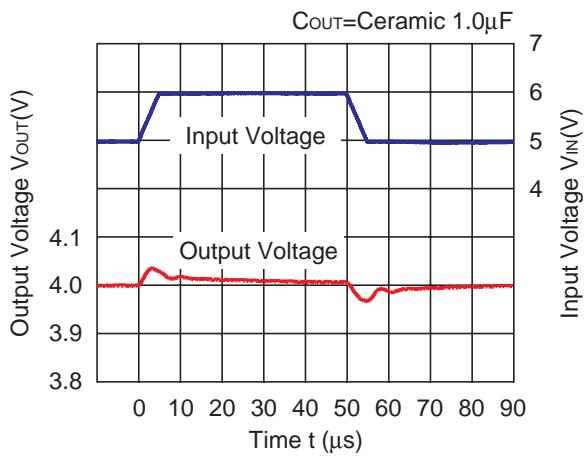


11) Load Transient Response ($tr=tf=0.5\mu\text{s}$, $C_{IN}=\text{Ceramic } 0.1\mu\text{F}$)


R1182x281x

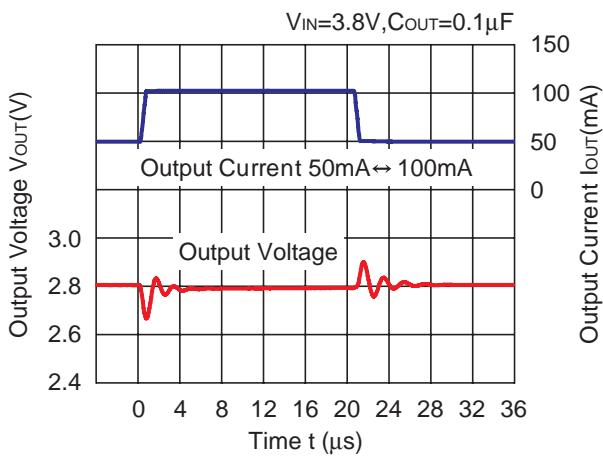


R1182x281x

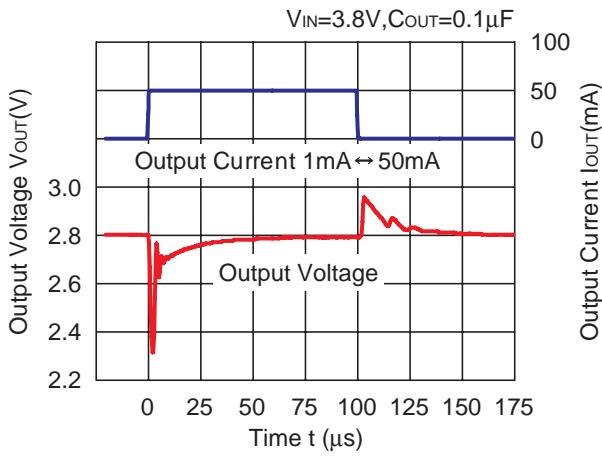


R1182x281x

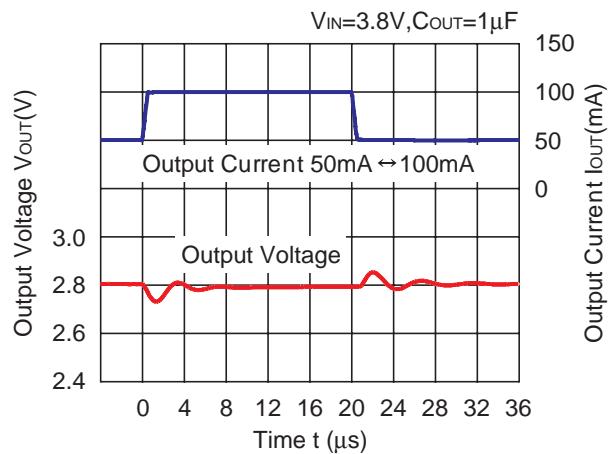


R1182x281x

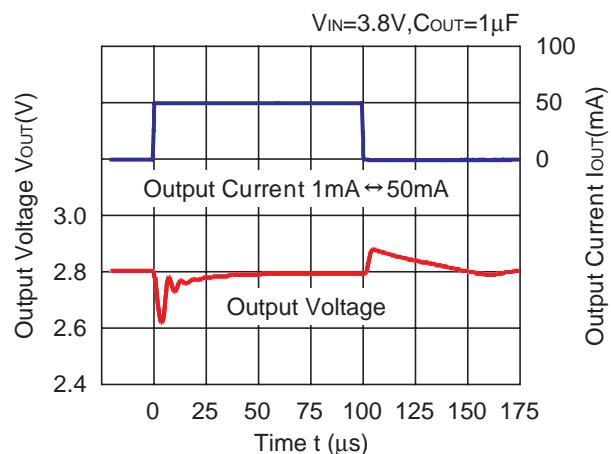


R1182x281x

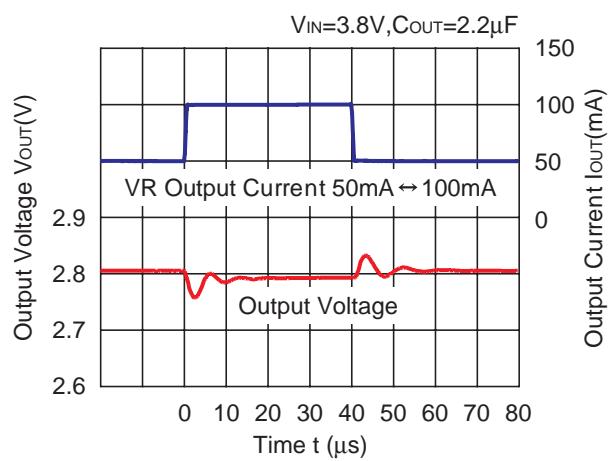


R1182x121x

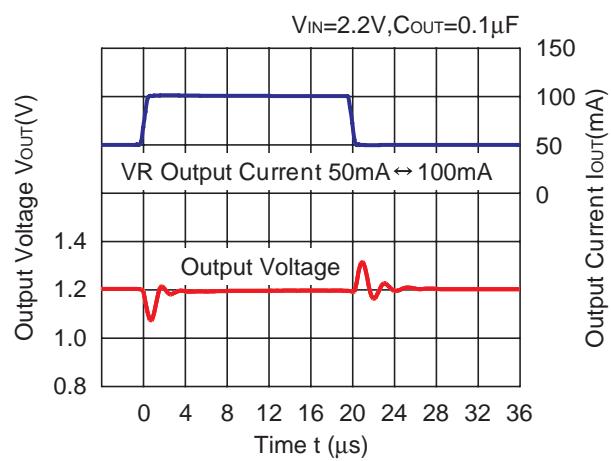

R1182x121x

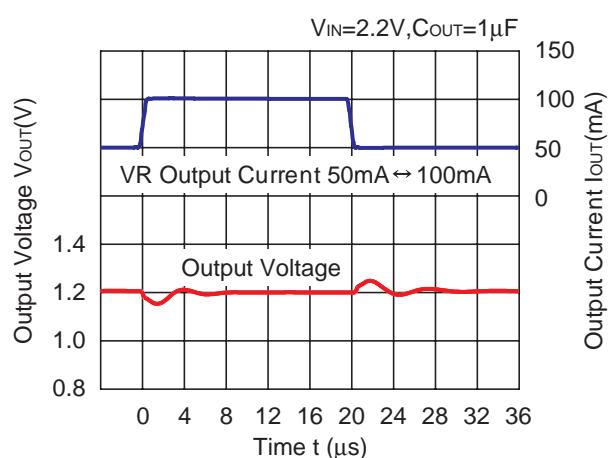


R1182x401x

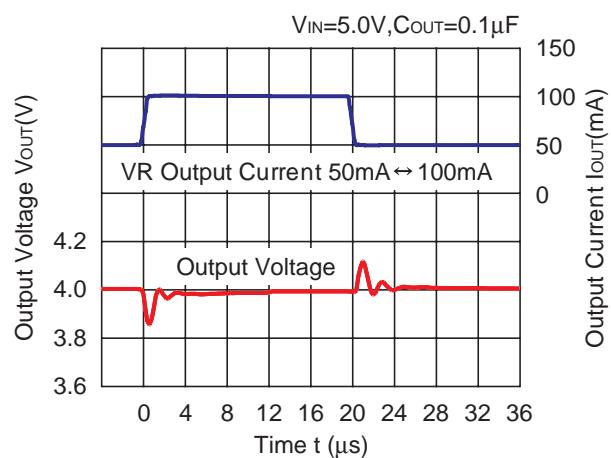


R1182x

R1182x401x

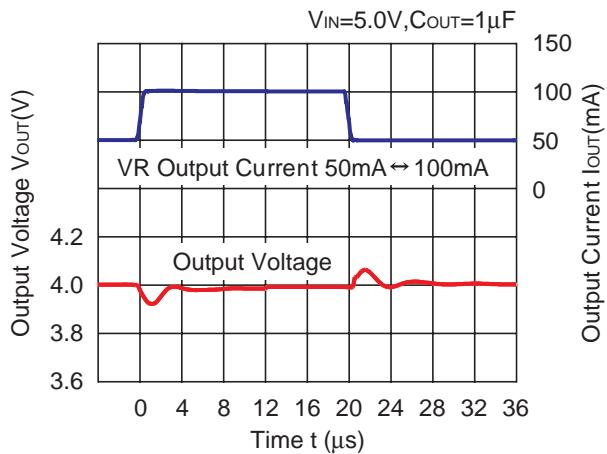


12) Turn on speed by CE pin (C_{in} =Ceramic 0.1 μF)


R1182x121x

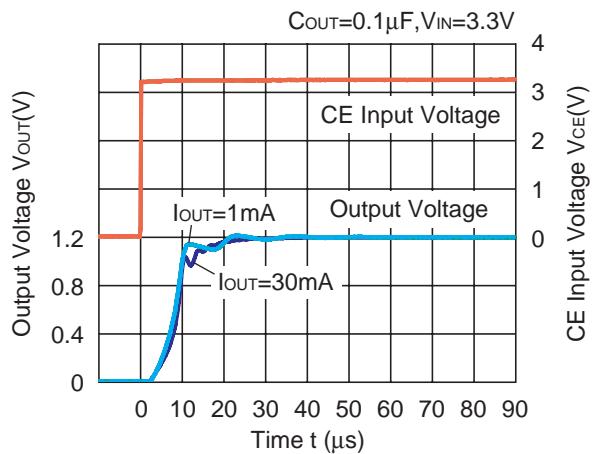


R1182x121x


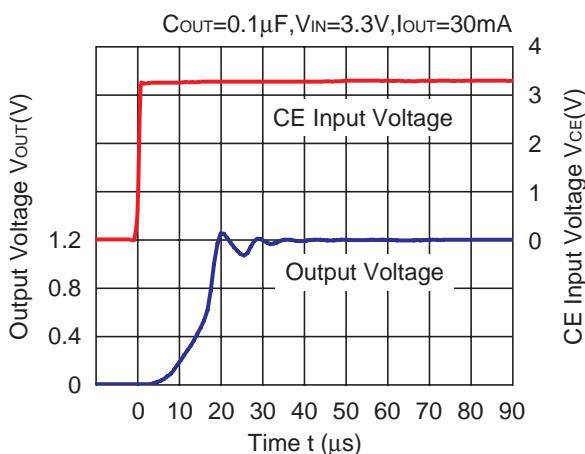


R1182x281x




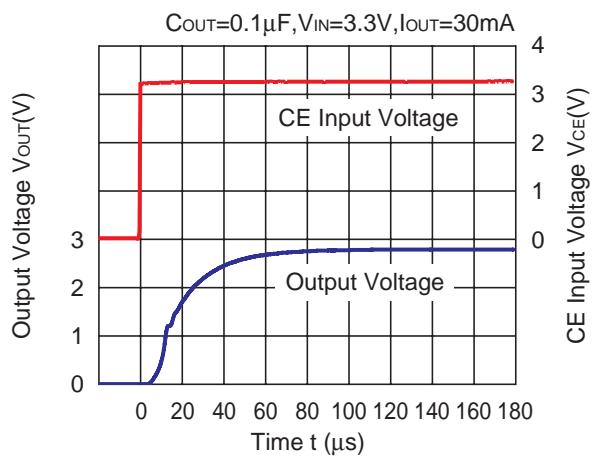


R1182x281x

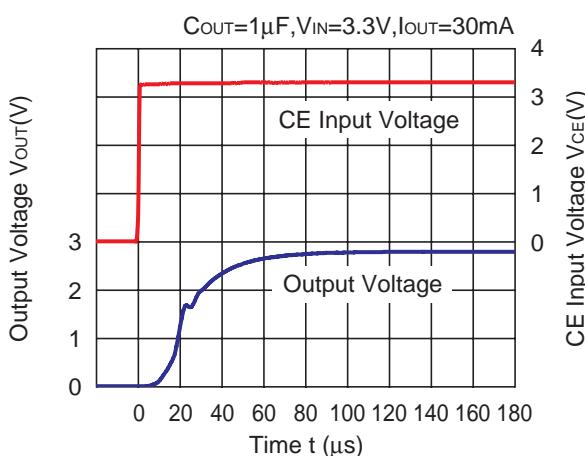

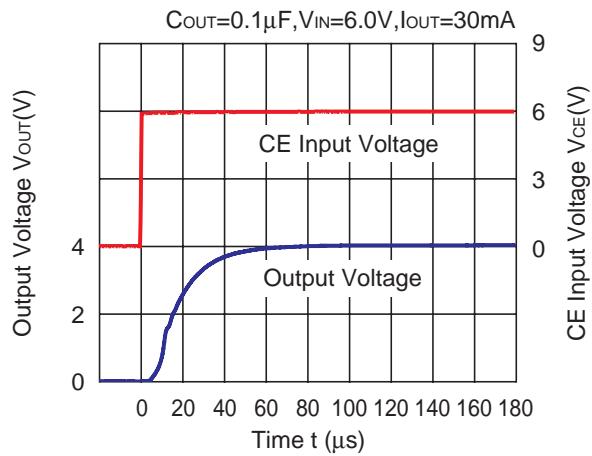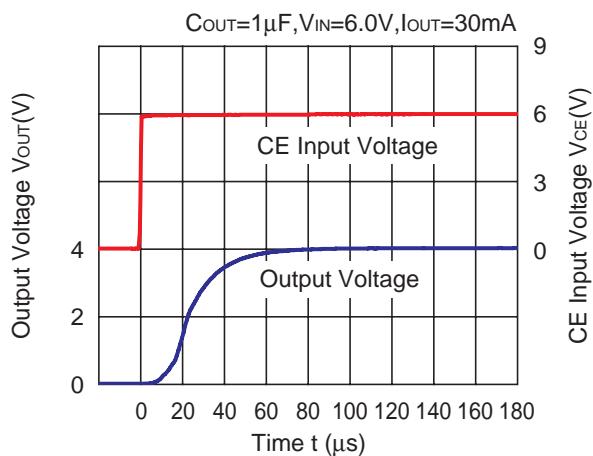R1182x401x**R1182x401x**


13) Turn-off Speed by CE pin (C_{IN} =Ceramic $0.1\mu F$) (D version)

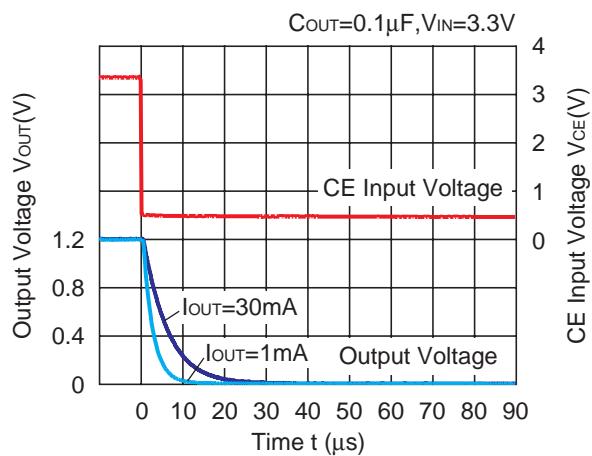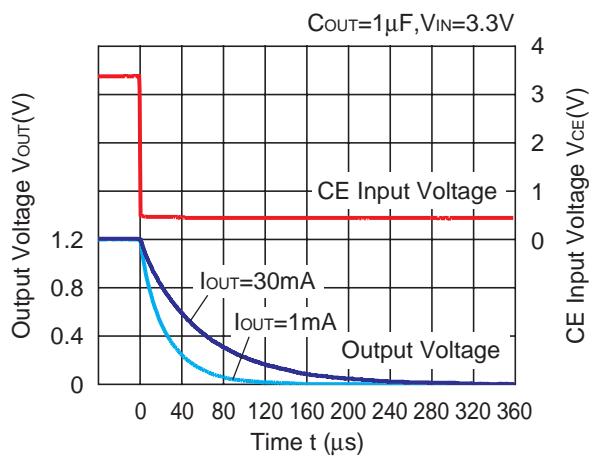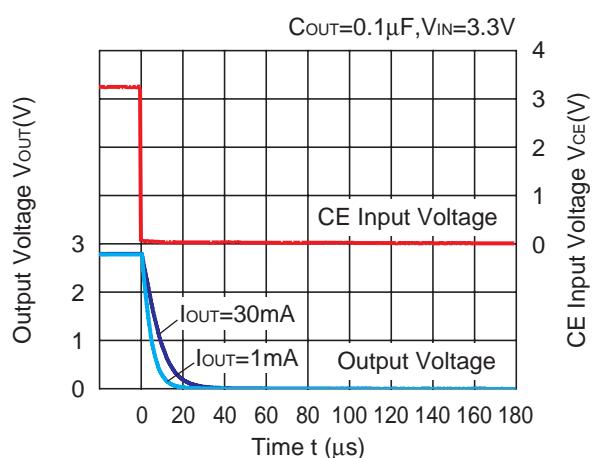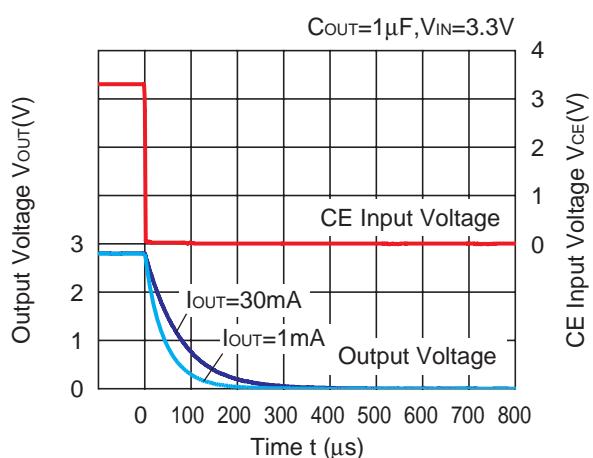R1182x121D**R1182x121D****R1182x281D****R1182x281D**

R1182x


R1182x401D

$C_{OUT}=0.1\mu F, V_{IN}=6.0V$

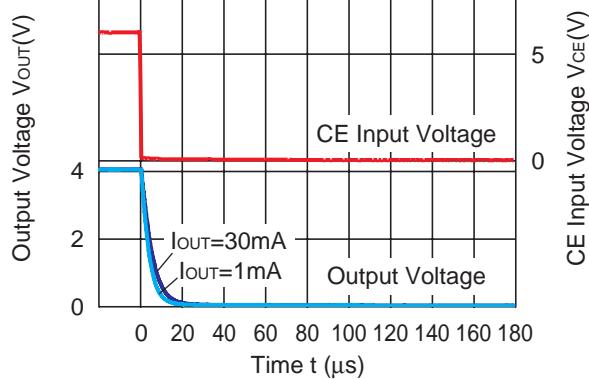

R1182x401D

$C_{OUT}=1\mu F, V_{IN}=6.0V$

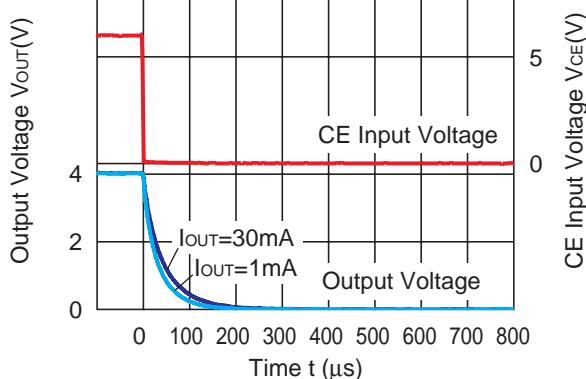



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, firecontainment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.

RICOH COMPANY., LTD. Electronic Devices Company



■Ricoh presented with the Japan Management Quality Award for 1999.
Ricoh continually strives to promote customer satisfaction, and shares the achievements of its management quality improvement program with people and society.



■Ricoh awarded ISO 14001 certification.
The Ricoh Group was awarded ISO 14001 certification, which is an international standard for environmental management systems, at both its domestic and overseas production facilities. Our current aim is to obtain ISO 14001 certification for all of our business offices.

<http://www.ricoh.com/LSI/>

RICOH COMPANY, LTD.
Electronic Devices Company

● Higashi-Shinagawa Office (International Sales)
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.
● Semiconductor Support Centre

Prof. W.H.Keesomlaan 1, 1183 DL Amstelveen, The Netherlands
P.O.Box 114, 1180 AC Amstelveen
Phone: +31-20-5474-309 Fax: +31-20-5474-791

RICOH ELECTRONIC DEVICES KOREA Co., Ltd.
11 floor, Haesung 1 building, 942, Daechidong, Gangnamgu, Seoul, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2135-5705

RICOH ELECTRONIC DEVICES SHANGHAI Co., Ltd.
Room403, No.2 Building, 690#B1 Bo Road, Pu Dong New district, Shanghai 201203,
People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH COMPANY, LTD.
Electronic Devices Company
● Taipei office
Room109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623



Ricoh completed the organization of the Lead-free production for all of our products. After Apr. 1, 2006, we will ship out the lead free products only. Thus, all products that will be shipped from now on comply with RoHS Directive.