

Secondary LDO Regulators

Dual Output

Secondary Fixed Output LDO Regulators


BA3258HFP, BA33D15HFP, BA33D18HFP

No.11026EBT01

●Description

The BA3258HFP, BA33D15HFP, BA33D18HFP are fixed 2-output low-saturation regulators with a voltage accuracy at both outputs of $\pm 2\%$. These series incorporate both overcurrent protection and thermal shutdown (TSD) circuits in order to prevent damage due to output short-circuiting and overloading, respectively.

●Features

- 1) Output voltage accuracy: $\pm 2\%$.
- 2) Output current capacity: 1A (BA3258HFP), 0.5A (BA33D□□ Series)
- 3) A ceramic capacitor can be used to prevent output oscillation (BA3258HFP).
- 4) High Ripple Rejection (BA33D□□ Series)
- 5) Built-in thermal shutdown circuit
- 6) Built-in overcurrent protection circuit

●Applications

FPDs, TVs, PCs, DSPs in DVDs and CDs

●Product Lineup

Part Number	Output voltage Vo1	Output voltage Vo2	Current capability Io1	Current capability Io2	Package
BA3258HFP	3.3 V	1.5 V	1 A	1 A	HRP5
BA33D15HFP	3.3 V	1.5 V	0.5 A	0.5 A	HRP5
BA33D18HFP	3.3 V	1.8 V	0.5 A	0.5 A	HRP5

●Absolute Maximum Ratings

BA3258HFP

Parameter	Symbol	Ratings	Unit
Applied voltage	V _{CC}	15 ^{*1}	V
Power dissipation	P _d	2300 ^{*2}	mW
Operating temperature range	T _{opr}	-30 to 85	°C
Ambient storage temperature	T _{stg}	-55 to 150	°C
Maximum junction temperature	T _{jmax}	150	°C

*1 Must not exceed Pd

*2. Derated at 18.4 mW/°C at Ta>25°C when mounted on a glass epoxy board (70 mm × 70 mm × 1.6 mm)

BA33D□□ Series

Parameter	Symbol	Ratings	Unit
Applied voltage	V _{CC}	18 ^{*1}	V
Power dissipation	P _d	2300 ^{*2}	mW
Operating temperature range	T _{opr}	-25 to 105	°C
Ambient storage temperature	T _{stg}	-55 to 150	°C
Maximum junction temperature	T _{jmax}	150	°C

●Recommended Operating Conditions

BA3258HFP

Parameter	Symbol	Ratings			Unit
		Min.	Typ.	Max.	
Input power supply voltage	V _{CC}	4.75	-	14.0	V
3.3 V output current	Io1	-	-	1	A
1.5 V output current	Io2	-	-	1	A

BA33D□□ Series

Parameter	Symbol	Ratings			Unit
		Min.	Typ.	Max.	
Input power supply voltage	V _{CC}	4.1	-	16.0	V
3.3 V output current	Io1	-	-	0.5	A
1.5V output current	Io2	-	-	0.5	A
1.8 V output current	Io2	-	-	0.5	A

●Electrical Characteristics

BA3258HFP (Unless otherwise specified, Ta = 25°C, Vcc = 5 V)

Parameter	Symbol	Limits			Unit	Conditions
		Min.	Typ.	Max.		
Bias current	IB	-	3	5	mA	Io1 = 0 mA, Io2 = 0 mA
[3.3 V Output Block]						
Output voltage 1	Vo1	3.234	3.300	3.366	V	Io1 = 50 mA
Minimum output voltage difference 1	ΔVd1	-	1.1	1.3	V	Io1 = 1 A, Vcc = 3.8 V
Output current capacity 1	Io1	1.0	-	-	A	
Ripple rejection 1	R.R.1	46	52	-	dB	f=120 Hz,ein=0.5Vp-p,Io1=5mA
Input stability 1	Reg.I1	-	5	15	mV	Vcc = 4.75→14 V, Io1 = 5 mA
Load stability 1	Reg.L1	-	5	20	mV	Io1 = 5 mA→1A
Temperature coefficient of output voltage 1 ^{*3}	Tcvo1	-	±0.01	-	%/°C	Io1 = 5 mA, Tj = 0°C to 85°C
[1.5 V Output Block]						
Output voltage 2	Vo2	1.470	1.500	1.530	V	Io2 = 50 mA
Output current capacity 2	Io2	1.0	-	-	A	
Ripple rejection 2	R.R.2	46	52	-	dB	f=120 Hz,ein=0.5Vp-p,Io2=5mA
Input stability 2	Reg.I2	-	5	15	mV	Vcc = 4.1→14 V, Io2 = 5 mA
Load stability 2	Reg.L2	-	5	20	mV	Io2 = 5 mA→1 A
Temperature coefficient of output voltage 2 ^{*3}	Tcvo2	-	±0.01	-	%/°C	Io2 = 5 mA, Tj = 0°C to 125°C

*3: Design is guaranteed within these parameters. (No total shipment inspection is made.)

BA33D□□ Series (Unless otherwise specified, Ta = 25°C, Vcc = 5 V)

Parameter	Symbol	Limits			Unit	Conditions
		Min.	Typ.	Max.		
Bias current	Ib	-	0.7	1.6	mA	Io1 = 0 mA, Io2 = 0 mA
[3.3V Output Block]						
Output voltage 1	Vo1	3.234	3.300	3.366	V	Io1 = 250 mA
Minimum output voltage difference 1	ΔVd1	—	0.25	0.50	V	Io1 = 250 mA, Vcc = 3.135 V
Output current capacity 1	Io1	0.5	-	-	A	
Ripple rejection 1	R.R.1	-	68	-	dB	f=120 Hz,ein=1Vp-p,Io1=100mA
Input stability 1	Reg.I1	-	5	30	mV	Vcc=4.1V→16V,Io1=250mA
Load stability 1	Reg.L1	-	30	75	mV	Io1= 0 mA→0.5 A
Temperature coefficient of output voltage 1 ^{*3}	Tcvo1	-	±0.01	-	%/°C	Io1 = 5 mA, Tj=0°C to 125°C

BA33D15HFP Vo2 output

[1.5V Output Block]						
Output voltage 2	Vo2	1.470	1.500	1.530	V	Io2 = 250 mA
Output current capacity 2	Io2	0.5	-	-	A	
Ripple rejection 2	R.R.2	-	74	-	dB	f=120 Hz,ein=1Vp-p,Io2=100mA
Input stability 2	Reg.I2	-	5	30	mV	Vcc =4.1V→16 V,Io2=250mA
Load stability 2	Reg.L2	-	30	75	mV	Io2 = 0 mA→0.5A
Temperature coefficient of output voltage 2 ^{*3}	Tcvo2	-	±0.01	-	%/°C	Io2 = 5 mA, Tj = 0°C to 125°C

BA33D18HFP Vo2 output

[1.8V Output Block]						
Output voltage 2	Vo2	1.764	1.800	1.836	V	Io2=250 mA
Output current capacity 2	Io2	0.5	-	-	A	
Ripple rejection 2	R.R.2	-	72	-	dB	f =120Hz,ein =1Vp-p,Io2=100mA
Input stability 2	Reg.I2	-	5	30	mV	Vcc = 4.1V→16V,Io2=250mA
Load stability 2	Reg.L2	-	30	75	mV	Io2 = 0 mA→0.5 A
Temperature coefficient of output voltage 2 ^{*3}	Tcvo2	-	±0.01	-	%/°C	Io2 = 5 mA, Tj = 0°C to 125°C

*3: Design is guaranteed within these parameters. (No total shipment inspection is made.)

●BA3258HFP Electrical Characteristics Curves (Unless otherwise specified, $T_a = 25^\circ\text{C}$, $V_{cc} = 5\text{V}$)

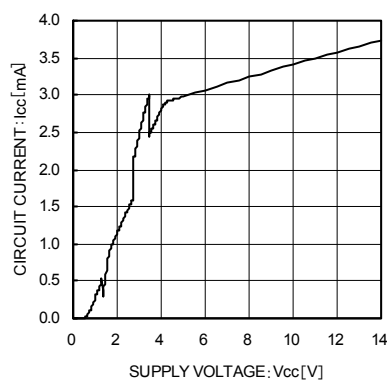


Fig. 1 Circuit Current
(with no load)

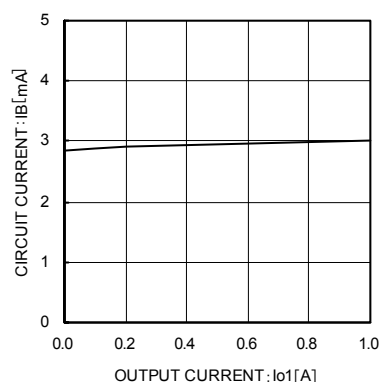


Fig. 2 Circuit Current vs Load Current I_{o2}
(I_{o1} = 0 → 1 A)

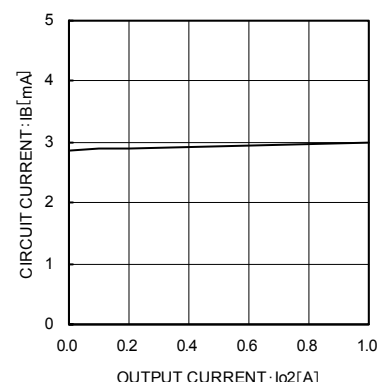


Fig. 3 Circuit Current vs Load Current I_{o2}
(I_{o2} = 0 → 1 A)

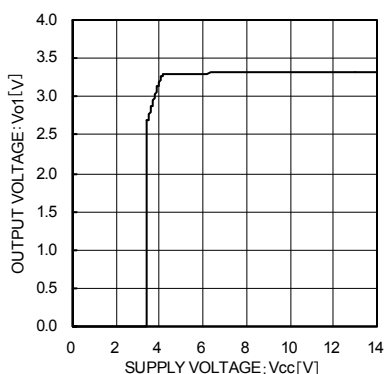


Fig. 4 Input Stability
(3.3 V output with no load)

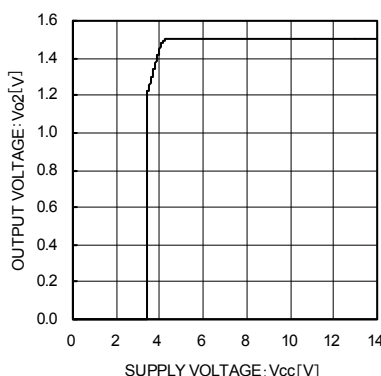


Fig. 5 Input Stability
(1.5 V output with no load)

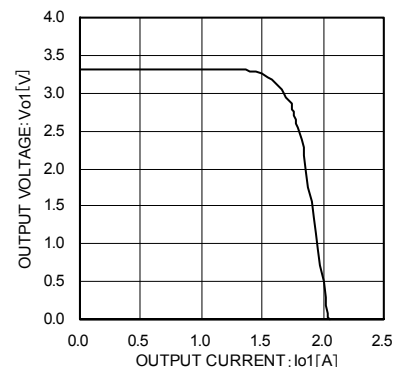


Fig. 6 Load Stability
(3.3 V output)

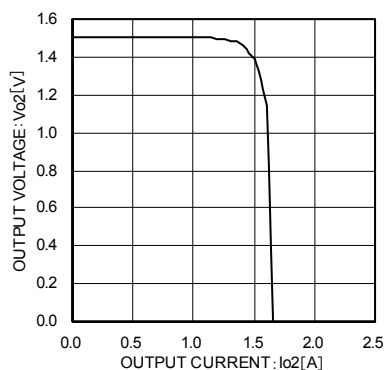


Fig. 7 Load Stability

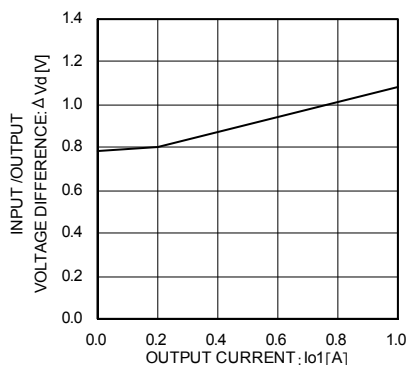


Fig. 8 I/O Voltage Difference (3.3 V output)
($V_{cc} = 3.8\text{V}$, I_{o1} = 0 → 1 A)

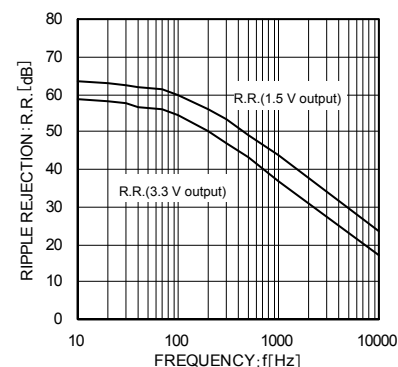


Fig. 9 R.R. Characteristics
($e_{in} = 0.5\text{Vp-p}$, I_o = 5 mA)

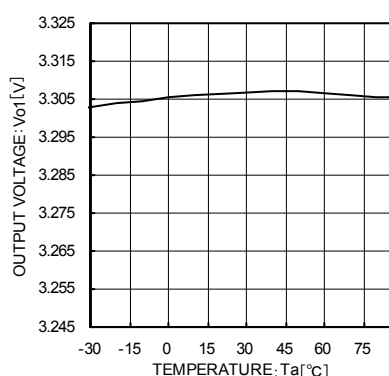


Fig. 10 Output Voltage vs Temperature
(3.3 V output)

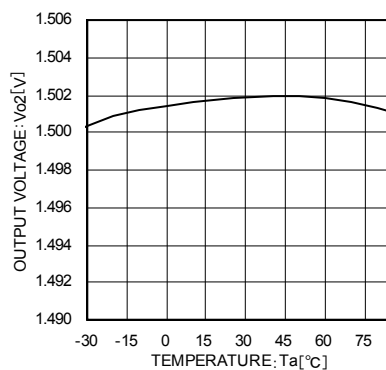


Fig. 11 Output Voltage vs Temperature
(1.5 V output)

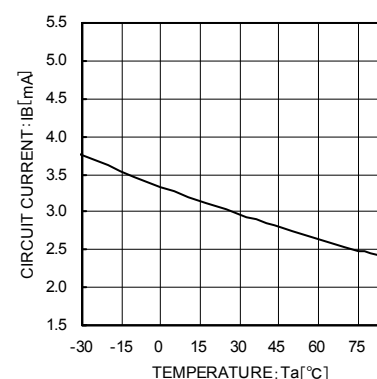


Fig. 12 Circuit Current vs Temperature
(I_o = 0 mA)

●BA33D15HFP Electrical Characteristics Curves (Unless otherwise specified, $T_a = 25^\circ\text{C}$, $V_{cc} = 5\text{V}$)

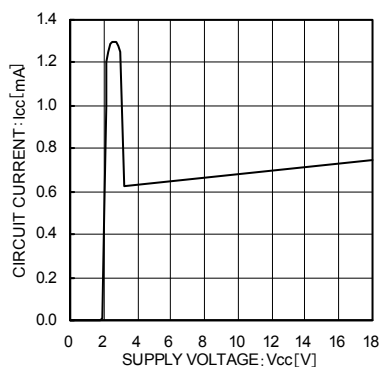


Fig. 13 Circuit Current (with no load)

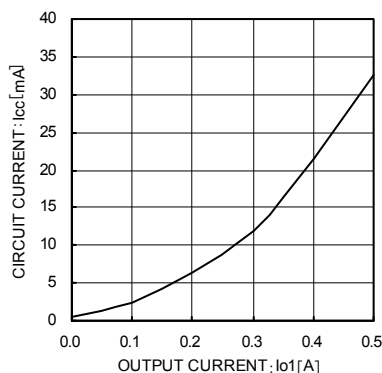


Fig. 14 Circuit Current vs Load Current I_{o1} (I_{o1} = 0 → 500 mA)

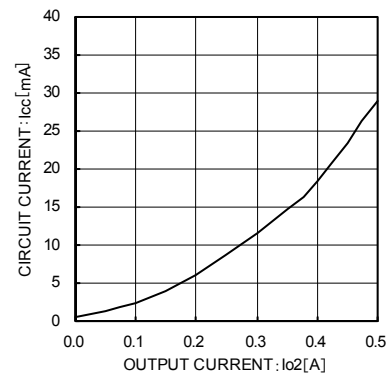


Fig. 15 Circuit Current vs Load Current I_{o2} (I_{o2} = 0 → 500 mA)

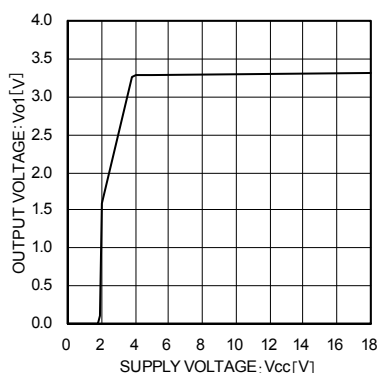


Fig. 16 Input Stability (3.3 V output, I_{o1} = 250 mA)

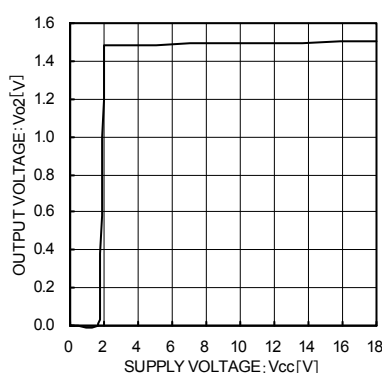


Fig. 17 Input Stability (1.5 V output, I_{o2} = 250 mA)

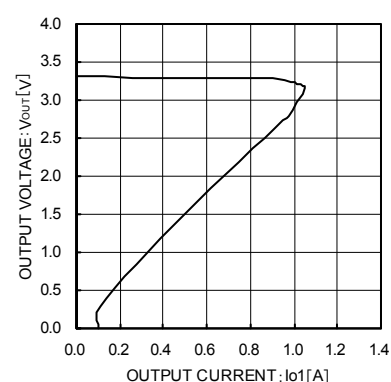


Fig. 18 Load Stability (3.3 V output)

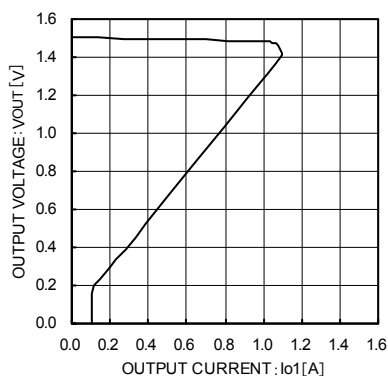


Fig. 19 Load Stability (1.5 V output)

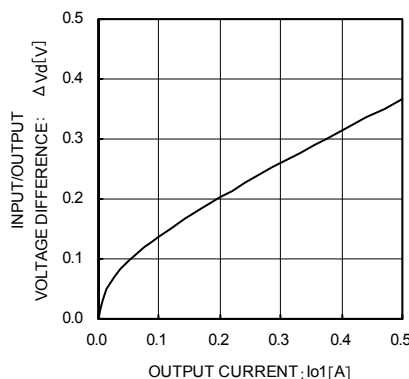


Fig. 20 I/O Voltage Difference (V_{cc} = 3.135 V, 3.3 V output)

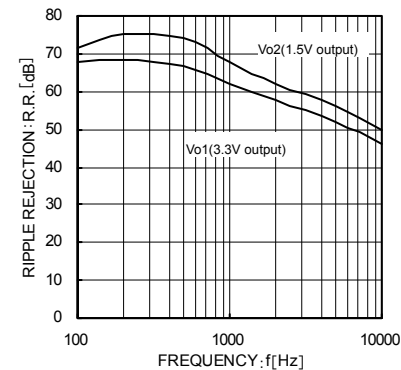


Fig. 21 R.R. Characteristics (e_{in} = 1 V_{p-p}, I_o = 100 mA)

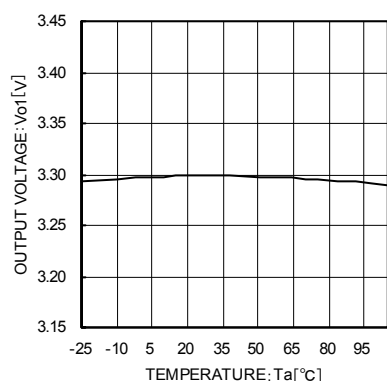


Fig. 22 Output Voltage vs Temperature (3.3 V output)

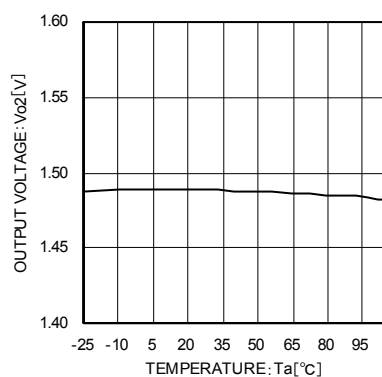


Fig. 23 Output Voltage vs Temperature (1.5 V output)

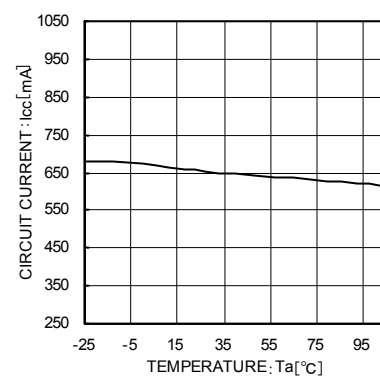


Fig. 24 Circuit Current vs Temperature (I_o = 0 mA)

●Block Diagrams / Standard Example Application Circuits

BA3258HFP


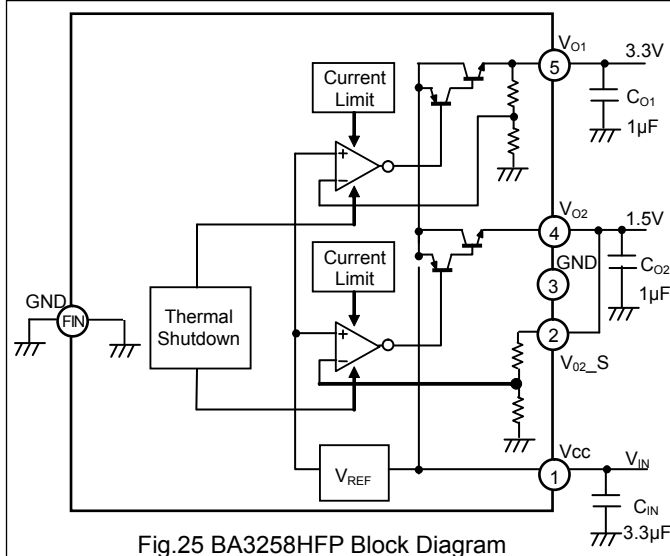


Fig.25 BA3258HFP Block Diagram

Pin No.	Pin name	Function
1	Vcc	Power supply pin
2	V _{O2_S}	Output voltage monitor pin
3	GND	GND pin
4	Vo2	1.5 V output pin
5	Vo1	3.3 V output pin
FIN	GND	GND pin

PIN	External capacitor setting range
Vcc (1 Pin)	Approximately 3.3μF
Vo1 (5 Pin)	1μF to 1000μF
Vo2 (4 Pin)	1μF to 1000μF

TOP VIEW



BA33D□□Series

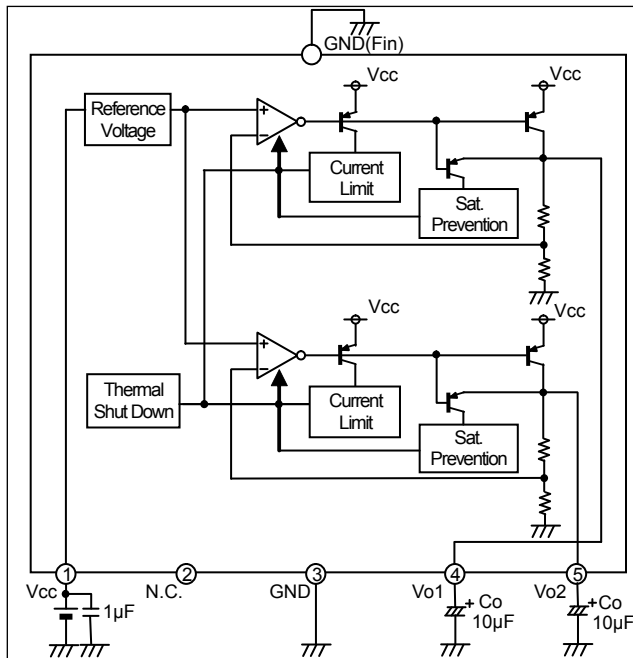



Fig.26 BA33D□□ Series Block Diagram

Pin No.	Pin name	Function
1	Vcc	Power supply pin
2	N.C.	N.C. pin
3	GND	GND pin
4	Vo1	3.3 V output pin
5	Vo2	1.5 V/1.8 V output pin
FIN	GND	GND pin

*The N.C. pin is not electrically connected internally

PIN	External capacitor setting range
Vcc (1 Pin)	Approximately 3.3μF
Vo1 (4 Pin)	10μF to 1000μF
Vo2 (5 Pin)	10μF to 1000μF

TOP VIEW



●Input / Output Equivalent Circuits

BA3258HFP

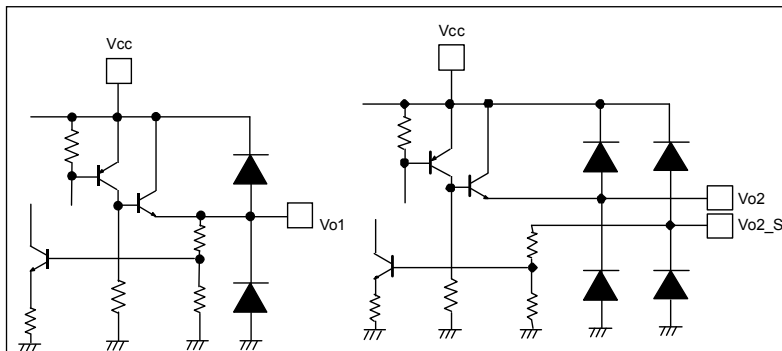


Fig. 27 BA3258HFP Input / Output Equivalent Circuit

BA33D□□Series

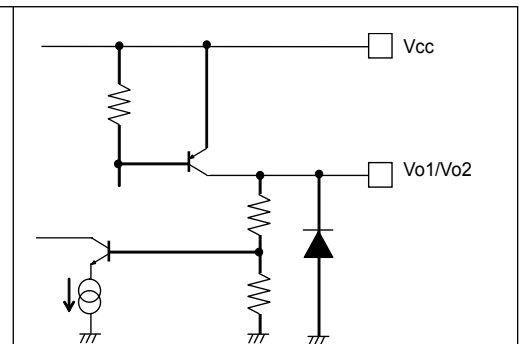


Fig. 28 BA33D□□Series Equivalent Circuit

● Thermal Design

If the IC is used under excessive power dissipation conditions, the chip temperature will rise, which will have an adverse effect on the electrical characteristics of the IC, such as a reduction in current capability. Furthermore, if the temperature exceeds T_{jmax} , element deterioration or damage may occur. Implement proper thermal designs to ensure that the power dissipation is within the permissible range in order to prevent instantaneous IC damage resulting from heat and maintain the reliability of the IC for long-term operation. Refer to the power derating characteristics curves in Fig. 29.

• Power Consumption (P_c) Calculation Method

• Power consumption of 3.3V power transistor:

$$P_{c1} = (V_{cc} - 3.3) \times I_{o1}$$


• Power consumption of Vo2 power transistor:

$$P_{c2} = (V_{cc} - V_{o2}) \times I_{o2}$$

• Power consumption due to circuit current:

$$P_{c3} = V_{cc} \times I_{cc}$$

$$\rightarrow P_c = P_{c1} + P_{c2} + P_{c3}$$

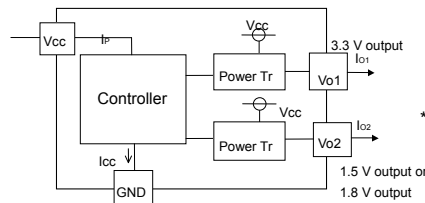

* V_{cc} : Applied voltage

I_{o1} : Load current on Vo1 side

I_{o2} : Load current on Vo2 side

I_{cc} : Circuit current

* The I_{cc} (circuit current) varies with the load.
(See reference data in Figs. 2, 3, 14, and 15.)

Refer to the above and implement proper thermal designs so that the IC will not be used under excessive power dissipation conditions under the entire operating temperature range.

• Calculation example (BA33D15HFP)

Example: $V_{cc} = 5V$, $I_{o1} = 200mA$, and $I_{o2} = 100mA$

• Power consumption of 3.3V power transistor:

$$P_{c1} = (V_{cc} - 3.3) \times I_{o1} = (5 - 3.3) \times 0.2 = 0.34W$$

• Power consumption of 1.5V power transistor:

$$P_{c2} = (V_{cc} - 1.5) \times I_{o2} = (5 - 1.5) \times 0.2 = 0.35W$$

• Power consumption due to circuit current: $P_{c3} = V_{cc} \times I_{cc} = 5 \times 0.0085 = 0.0425 (W)$ (See Figs. 14 and 15)

Implement proper thermal designs taking into consideration the dissipation at full power consumption
(i.e., $P_{c1} + P_{c2} + P_{c3} = 0.34 + 0.35 + 0.0425 = 0.7325W$).

● Explanation of External Components

OBA3258HFP

1) Pin 1 (V_{cc} pin)

Connecting a ceramic capacitor with a capacitance of approximately $3.3\mu F$ between V_{cc} and GND as close to the pins as possible is recommended.

2) Pins 4 and 5 (Vo pins)

Insert a capacitor between the Vo and GND pins in order to prevent output oscillation. The capacitor may oscillate if the capacitance changes as a result of temperature fluctuations. Therefore, it is recommended that a ceramic capacitor with a temperature coefficient of X5R or above and a maximum capacitance change (resulting from temperature fluctuations) of $\pm 10\%$ be used. The capacitance should be between $1\mu F$ and $1,000\mu F$. (Refer to Fig. 30)

OBA33D□□Series

1) Pin 1 (V_{cc} pin)

Insert a $1\mu F$ capacitor between V_{cc} and GND. The capacitance will vary depending on the application. Check the capacitance with the application set and implement designing with a sufficient margin.

2) Pins 4 and 5 (Vo pins)

Insert a capacitor between the Vo and GND pins in order to prevent oscillation. The capacitance may vary greatly with temperature changes, thus making it impossible to completely prevent oscillation. Therefore, use a tantalum aluminum electrolytic capacitor with a low ESR (Equivalent Serial Resistance). The output will oscillate if the ESR is too high or too low, so refer to the ESR characteristics in Fig. 31 and operate the IC within the stable operating region. If there is a sudden load change, use a capacitor with higher capacitance. A capacitance between $10\mu F$ and $1,000\mu F$ is recommended.

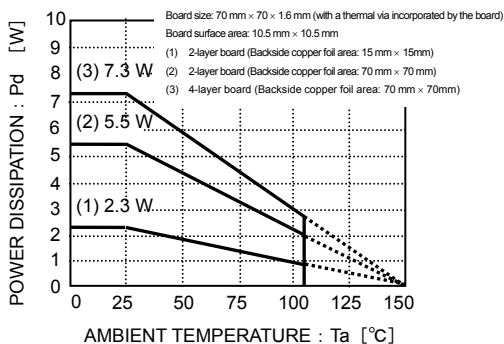


Fig. 29 Thermal Derating Curves

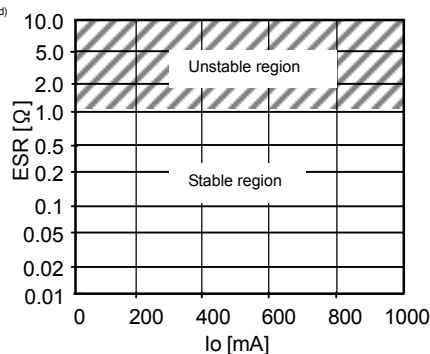


Fig. 30 BA3258HFP ESR characteristics

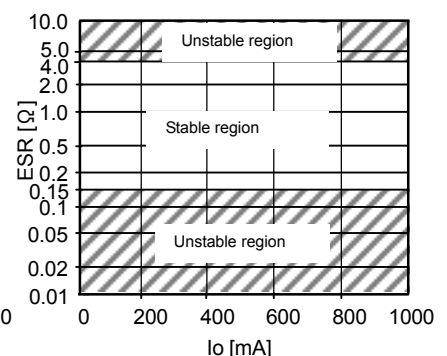


Fig. 31 BA33D□□ Series ESR

Notes for use

- 1) Absolute maximum ratings
An excess in the absolute maximum ratings, such as supply voltage, temperature range of operating conditions, etc., can break down the devices, thus making impossible to identify breaking mode, such as a short circuit or an open circuit. If any over rated values will expect to exceed the absolute maximum ratings, consider adding circuit protection devices, such as fuses.
- 2) GND voltage
The potential of GND pin must be minimum potential in all operating conditions.
- 3) Thermal Design
Use a thermal design that allows for a sufficient margin in light of the power dissipation (P_d) in actual operating conditions.
- 4) Inter-pin shorts and mounting errors
Use caution when positioning the IC for mounting on printed circuit boards. The IC may be damaged if there is any connection error or if pins are shorted together.
- 5) Actions in strong electromagnetic field
Use caution when using the IC in the presence of a strong electromagnetic field as doing so may cause the IC to malfunction.
- 6) Testing on application boards
When testing the IC on an application board, connecting a capacitor to a pin with low impedance subjects the IC to stress. Always discharge capacitors after each process or step. Always turn the IC's power supply off before connecting it to or removing it from a jig or fixture during the inspection process. Ground the IC during assembly steps as an antistatic measure. Use similar precaution when transporting or storing the IC.
- 7) Regarding input pin of the IC
This monolithic IC contains P+ isolation and P substrate layers between adjacent elements in order to keep them isolated. P-N junctions are formed at the intersection of these P layers with the N layers of other elements, creating a parasitic diode or transistor. For example, the relation between each potential is as follows:
When $GND > Pin A$ and $GND > Pin B$, the P-N junction operates as a parasitic diode.
When $GND > Pin B$, the P-N junction operates as a parasitic transistor.
Parasitic diodes can occur inevitable in the structure of the IC. The operation of parasitic diodes can result in mutual interference among circuits, operational faults, or physical damage. Accordingly, methods by which parasitic diodes operate, such as applying a voltage that is lower than the GND (P substrate) voltage to an input pin, should not be used.
- 8) Ground Wiring Pattern
When using both small signal and large current GND patterns, it is recommended to isolate the two ground patterns, placing a single ground point at the ground potential of application so that the pattern wiring resistance and voltage variations caused by large currents do not cause variations in the small signal ground voltage. Be careful not to change the GND wiring pattern of any external components, either.
- 9) Thermal Shutdown Circuit (TSD)
This IC incorporates a built-in thermal shutdown circuit for protection against thermal destruction. Should the junction temperature (T_j) reach the thermal shutdown ON temperature threshold, the TSD will be activated, turning off all output power elements. The circuit will automatically reset once the chip's temperature T_j drops below the threshold temperature. Operation of the thermal shutdown circuit presumes that the IC's absolute maximum ratings have been exceeded. Application designs should never make use of the thermal shutdown circuit.
- 10) Overcurrent protection circuit
An overcurrent protection circuit is incorporated in order to prevention destruction due to short-time overload currents. Continued use of the protection circuits should be avoided. Please note that the current increases negatively impact the temperature.
- 11) Damage to the internal circuit or element may occur when the polarity of the Vcc pin is opposite to that of the other pins in applications. (I.e. Vcc is shorted with the GND pin while an external capacitor is charged.) Use a maximum capacitance of 1000 mF for the output pins. Inserting a diode to prevent back-current flow in series with Vcc or bypass diodes between Vcc and each pin is recommended.

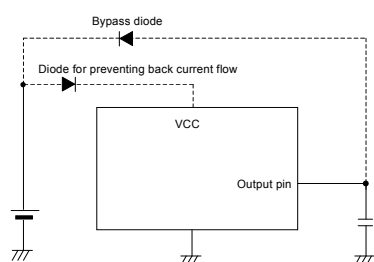


Fig32 Bypass diode

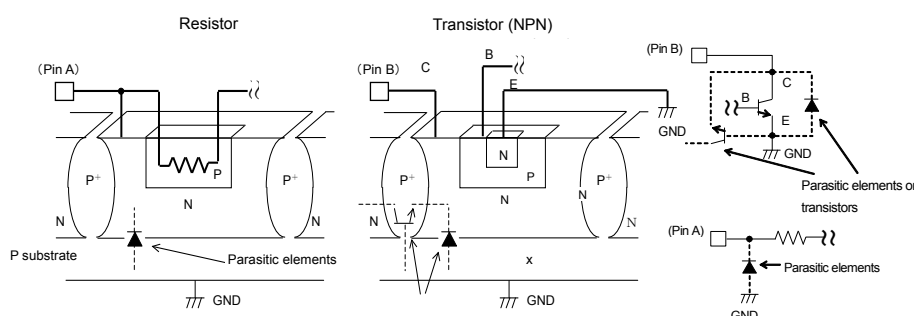


Fig. 33 Example of Simple Bipolar IC Architecture

●Ordering part number

B	A
---	---

Part No.

3	5	2	8
---	---	---	---

Part No.

3528
33D15
33D18



H	F	P
---	---	---

Package
HFP:HRP5

T	R
---	---

Packaging and forming specification
TR: Embossed tape and reel
(HRP5)

HRP5

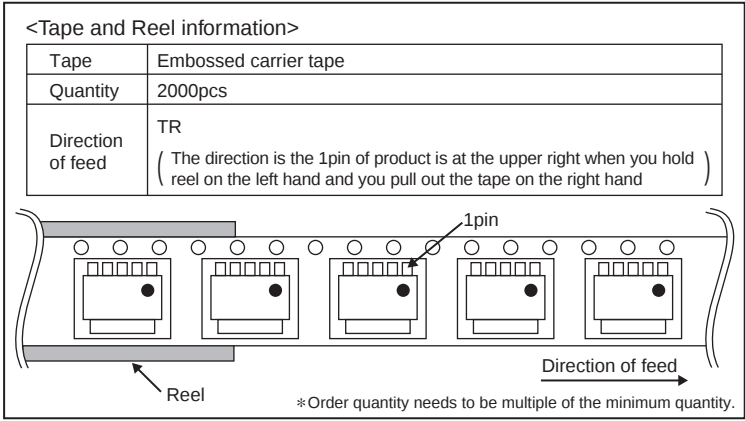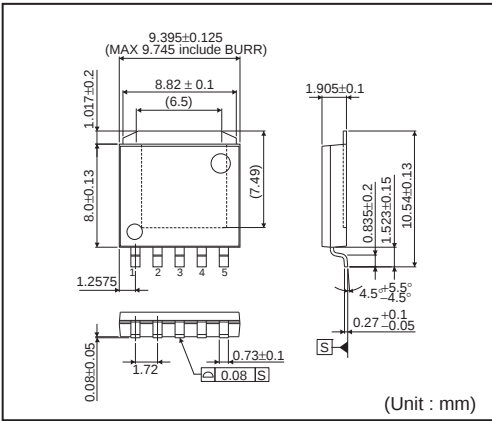

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>