



File Name: Casio cb-100 manual.pdf

Size: 1981 KB

Type: PDF, ePub, eBook

Category: Book

Uploaded: 11 May 2019, 12:49 PM

Rating: 4.6/5 from 659 votes.

Download Now!

Please check the box below to proceed.



I'm not a robot



reCAPTCHA
[Privacy](#) - [Terms](#)

Book Descriptions:

Casio cb-100 manual



After placing order well send You download instructions on Your email. See below for delivery information Well send You download instructions on Your email. What is PDF How to get Adobe Reader Thank you very much. You are doing an excellent job. Thanks again. The best party that I met. The excellent quality. I recommend to all. This is my first purchase in this company. For sure not the last. Cheers from Poland. If you have lost or thrown out the CD with the Casio manual and you need advice with settings, error messages or are just interested in the capabilities and different functions of your Casio, then you can download a user manual from the Casio website. If the manufacturer's website does not give instructions on where to download a Casio user manual, then you will find plenty of Casio fans in our database. Take a look at our discussion forum for your particular product, a more experienced Casio user will surely be able to help you with the settings. We're trying to help you find exactly what you're looking for to keep you coming back. These active shutter glasses, designed to be used with DLPLink compatible Casio 3D projectors, enable. Combined with Casios color thermal print system, you can produce unique, professionallooking. Play along to 10 song bank tunes and choose from 100 preset tones. There are 44 miniature size keys, 5 percussion pads. The stand provides a stable and secure platform for the piano, bringing it to adequate playing. The stand provides a stable and secure platform for the piano, bringing it to perfect playing height and making it feel more like a real. It has a locking height adjustment mechanism, while the doublex design provides excellent rigidity. Textured feet on the base preven. It has a height adjustment mechanism that adjusts to 6 different heights and adds additional stability. Textured feet on the base prevent s. Combined with Casios color thermal print system, you can produce unique, professionallooking. <http://www.termosystem.pl/userfiles/elastix-manual-free-download.xml>

- **casio ga 100cb manual, casio cb-100 manual, casio ca-100 manual, casio pb-100 manual.**

- Small metal objects including hairpins, sewing needles and coins.
 - Flammable objects.
- In the event a foreign object should happen to get inside the instrument, please take the following actions:
1. Turn power off.
 2. Unplug the AC adapter from the wall outlet.
 3. If there are any batteries loaded in the keyboard, remove them.
 4. Do not touch the batteries directly with your hands when removing them. They may be hot or battery fluid may be leaking from them.
 5. Consult with the dealer where you purchased the keyboard or with an authorized CASIO service provider.

Do not disassemble or modify the instrument.

- Never attempt to take apart or modify the instrument, its accessories, or separately sold options. Doing so may cause fire, electrical shock or malfunction. Consult your dealer concerning all inspection, adjustment or repair of internal components.

Do not use if there is an abnormality or malfunction.

- Do not use the instrument if there appear to be abnormalities such as the presence of smoke or abnormal odor. Also do not use the instrument if there appear to be malfunctions such as the power not coming on or sound not being produced. Use under such conditions may cause fire or electrical shock. In such cases, take the following actions immediately. Never attempt to repair the instrument yourself.

1. Turn power off.
2. Unplug the AC adapter from the wall outlet.
3. If there are any batteries loaded in the keyboard, remove them.
4. Do not touch the batteries directly with your hands when removing them. They may be hot or battery fluid may be leaking from them.
5. Consult with the dealer where you purchased the keyboard or with an authorized CASIO service provider.

When the instrument has been dropped:

- In the case the instrument has been dropped or damaged, take the following actions. Continued use may cause fire or electrical shock.

1. Turn power off.
2. Unplug the AC adapter from the wall outlet.
3. If there are any batteries loaded in the keyboard, remove them.
4. Do not touch the batteries directly with your hands when removing them. They may be hot or battery fluid may be leaking from them.
5. Consult with the dealer where you purchased the keyboard or with an authorized CASIO service provider.

Be careful of the bags around children.

- Never allow anyone to place the plastic bags of the instrument, its accessories, or separately sold options over their heads. Doing so may cause suffocation. Particular caution is required in homes with small children.

CAUTION

AC Adapter

- Do not locate the power cord in close proximity to heaters or other heating appliances. This may cause the cord to melt leading to possible fire or electrical shock.

- When unplugging the AC adapter from an electrical outlet, always make sure to pull on the adapter itself and not the cord. Pulling excessively on the cord may cause it to be damaged or break leading to possible fire or electrical shock.

- Do not touch the AC adapter with wet hands when it is plugged in. This may cause electrical shock.

- When not using the instrument for an extended period such as when traveling, always make sure to unplug the AC adapter from the electrical outlet for safety reasons.

- After use turn off the power switch of the instrument and unplug the AC adapter from the electrical outlet.

Batteries

- Improper battery use may cause batteries to rupture and leak. This may cause injury, malfunction of the instrument or discoloration of furniture and other articles that come into contact with battery fluid. Take care to observe the following.

- Install batteries so their polarity (+/-) matches that indicated on the instrument.

- For safety and to prevent possible leakage of battery fluid, always make sure to remove batteries from the instrument when you do not plan to use it for a long time.

- Always make sure that the batteries making up a set are all of the same type.

- Never combine new batteries with old ones.

- Never dispose of batteries by incinerating them. Never short or disassemble batteries, and do not expose them to excessive heat.

- Replace dead batteries as soon as possible.

- Never attempt to recharge batteries.

Transport

- When transporting the instrument, always make sure to unplug the AC adapter from the electrical outlet and confirm that all other external connections have been disconnected. Only then should the instrument be transported. If the above is not done, the cord may be damaged leading to possible fire or electrical shock.

Care

- Whenever caring, make sure to first unplug the AC adapter from the electrical outlet. Also remove the instrument's batteries if battery power is being used.

Location

- Never locate the instrument in areas subject to high humidity or heavy accumulation of dust. Doing so may cause fire or electrical shock.

- Never locate the instrument in areas subject to grease, solvents or steam, such as in a kitchen or near a hair-dryer. Doing so may cause fire or electrical shock.

Do not place keyboard on lacquered furniture.

- The instrument's silicone rubber feet may eventually scratch or scar lacquered surfaces. Use felt cloth pads to insulate the feet or preferably use a CASIO musical instrument stand designed for your keyboard.

Do not place heavy objects on the instrument.

- Do not place heavy objects on the instrument. This may cause the instrument to tip over or break resulting in injury.

Volume

- Very high volume levels can damage hearing. Avoid using the instrument at very high volume settings for long periods. Consult with a physician immediately if you experience impaired hearing or ringing in the ears.

Combined with Casios color thermal print system, you can produce unique, professionallooking. The seat cushion makes it very comfortable. The bench can support up to 250 pounds. Combined with Casios color thermal print system, you can produce unique, professionallooking. Try Google Search! MSR Dragonfly stove manual MSR DragonFly LiquidFuel Camp Stove 11774 Posted by Stephen Glasby 20200822 045607 Dear MSR staff. Could you email me a PDF manual for the Dragonfly stove pleaseBest, StephenKit RODLNKFM Rode RodeLink Wireless Filmmaker Kit RODLNKFM Posted by Rick 20200818 143821 Hello, could you please send me rodelink filmmaker manual in spanish. Thank you in advance. Super high amount of views. 1 sold, 0 available. More Super high amount of views. 1 sold, 0 available. You are the light of the world. All manuals on ManualsCat.com can be viewed completely free of charge. By using the Select a language button, you can choose the language of the manual you want to view. This manual describes basic setups and operation methods. For more detail, pleaseThank you very much for purchasing this CASIO electronic Cash Register. STARTUP is QUICK and EASY! Power Supply. Your Cash Register is designed to operate on standard household current 120 V, 220 V, 230 V, 240 V. Cleaning. Clean the Cash Register exterior with a soft cloth which has been moistened with a solution of a mildBe sure that the cloth is thoroughly wrung out to avoidNever use paint thinner, benzene, or other volatile solvents. The mains plug on this equipment must be used to disconnect mains power. Please ensure that thePreparations. Please follow the steps described below.To use the Cash Register safelyOverloading an electric outletLoose plugs create the danger ofDo not use the register if the plug is damaged. Never connect to a power outlet that isContact CASIO service representative whenever the power cord or plug requires repair orManufacturerCASIO COMPUTER CO., LTD.<http://www.lacavenormande.fr/userfiles/20200929222639.xml>



Casio CB-100



Responsible within the European Union CASIO EUROPE GmbH. CASIO Platz 1, 22848 Norderstedt, Germany. The main plug on this equipment must be used to disconnect mains power. Please ensure that the socket outlet is installed near the equipment and shall be easily accessible. WARNING This equipment has been tested and found to comply with the limits for a Class A digital device, These limits are designed to provide reasonable protection against This equipment generates, Operation of this equipment in a residential Please keep all information for future The declaration of conformity may be Printer cover. Drawer. Take up reel. Mode switch. Keyboard. Platen arm Please make sure that the battery compart Important This Cash Register is fitted with a thermal printer only 58 mm wide thermal paper rolls can be used. Note Never touch the printer's thermal head and the platen. Avoid the thermal paper from heat, Important Register in the Mode switch and turn it to OFF position. Important. Make sure that If you have made incorrect date and time setting, press y key. For As soon as you plug in the power cord, the printer prints instructions for selecting language coun For example, if you wish to select English, Enter the date in order of day, month, and year. For example, input 210115 for January 21, 2015. Af Enter the present hours and minutes in 24 hour system. For example, 1300 for 100 pm. Press Z p if you use the. Cash Register in UK other area than Ireland. To use the register in Ireland, press X p keys. Input tax rate 1 and press p. For example, If you wish to exit from the tax rates settings, press o key. Now, If you chose the language DANSK, NORSK, or SUOMI in Press Z p if you wish to use the rounding system. Press p The followings show the major functions of the keys. Also this key is used for Using this key with Also this key is used to Mode switch. Use this position for setups. Use this position for refunding. Use this position to turn the Cash Register off. Use this position for registrations.

In the CAL mode, the Cash Register functions as a calculator. Use this position to print the sales report. After the reporting, all the sales Use this position to print the sales report. After the reporting, all the sales Mode keys The program key marked "PGM" and The program key can set the Mode switch Entry 10 key system; Buffer memory 8 keys 2 key roll over. Main display 20 characters x 1 line Customer display Amount 8 digits zero suppression Paper feed Receipt or Journal. Chronological data. Operation temperature 0C to 40C. Humidity 10 to 90%. Dimensions 180 mm H 410 mm W 450 mm D with medium size drawer. Weight 7.3 kg with medium size drawer 3.3 kg with small size drawer. Specifications and design are subject to change without notice. You can download "Setting tool" from the following websites. Germany. France. Spain. EU English Those setups make you simple and quick registrations. To preset unit price to each department. By presetting unit prices to the departments, you can register an item just by pressing Step Operation Cash Register becomes a program mode. Mode switch to PGM. Zo Depts. 13 to 24 are assigned by using j key. Operate ja to j This example selects tax rate 2. The example on the Press o to complete the setting and

proceed to step 10 for disMode Switch. To preset discount rate. By presetting a discount rate to key, it makes discount sales quick and easy. Step OperationThe example on the right isPress o key to complete the setup. Proceed to step 11 to preset item names to departments.To preset item name to each department. You can choose item names from 200 item list and set it to a Dept. Step OperationThe example on the right is forPrinter then prints item list of the category.The Cash Register is set to program itemXoThe example on the right is for setting "JUICE"Press o key to complete the setup.Before opening your store. To prepare bills and coins for change. To prepare coins and bills for change, you can open the drawer by pressing. key.




<http://www.familyreunionapp.com/family/events/bose-installation-manual>

This operationWhile the store is open. Note Perform the following operations in "REG" position of the Mode switch. Basic registration. You can register items without using preset prices. The following example is for a customer pur. Department is a category of items. For example apples are Dept. 1, bananas are Dept. 2, and. Dept. 3 for canned fruits, etc. Step OperationDept. 1. CMBd. ZXBalf received amount is more than the subtotal amount, the amount ofZpMode Switch. To register Dept.'s preset unit price. If a unit price is preset to a Dept.The following example is for registering three pieces of Dept. 2 items and one piece of Dept. 16 item. Step OperationThree items of Dept. 2 with a preset priceYou can also register multiple items by using h key. In thisAn item of Dept. 16 with a preset price isDepts. 13 to 24 are assigned by ja to j.To register PLU items. By assigning a PLU number, preset price to the PLU is registered. The following example is for regisStep OperationPerform the same operation for the PLU No. 105. Cii. ZBiTo give a discount on an item. The Cash Register calculates discount on an item. Step OperationThe example on the right is forZaTo grant a discount on the whole transaction, use key after o key. Step OperationInput discount rate and press key. The example on the right is 10%. Manually input discount rate is effective in preference to preset rate.Paid out cash from the drawer is registered and subtracted from total cash amount inStep Operation. To register received money. Use this operation when you put money in the drawer without any sales transactions such case asStep OperationCorrections and refunds. If you pressed an incorrect key, follow these operations. Also you can refund for returned goods. To correct

erroneous item input before registration. When you made incorrect input before you register it in a Dept.Step Operation. Press y key and input correct price then press corresponding Dept.Continue the transaction.Za.

<http://kelleyharper.com/images/canadian-safety-manual-template.pdf>

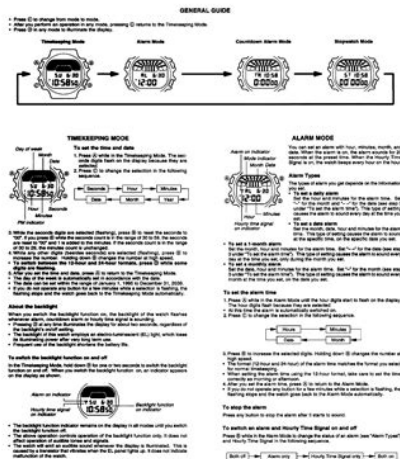

To correct erroneous item immediate after registration. If an item has been already registered in a Dept.Step OperationPress g key to cancel the previous registration the last d key. Continue the transaction. XBddTo refund for returned goods. In the refund mode, the Cash Register subtracts refunded amount from the totalizer. Step OperationMode switch to RFBdMode Switch After closing the store. At the end of the business day, you can print categorized and summarized resultsIt clears allStep OperationRead X or Reset Z report. Mode switch to X or ZPrintoutRFMODE TTL No 2. CALCULATOR No 3Mode Switch. PrintoutRFMODE TTL No 2. CALCULATOR No 3CHARGE No 3. CHECK No 1. CREDIT No 2. RA No 1Step OperationAfter you withdraw all the moneyMode switch to OFFError code Guidance on the display Cause Solution. E001 Wrong mode Mode switch position has beenReturn the Mode switch to itsE008 Please sign on Registration without entering aInput a clerk number. E010 Close the platen arm Platen arm is not closed. Close the platen arm firmly. E014 Paper end There is no paper. Insert paper. E029 In the tender operation Item registration is prohibited whileFinalize the transaction. E046 REG buffer full Register buffer is full. Finalize the transaction. E081 EJ Full Electronic journal memory is full. Print reset Z report of electronicE090 Totals remain in the memory Totals not cleared at the end ofPerform reset Z reporting. E139 Negative balance is notThe result of the transaction isRegister properly. When the cash drawer does not open! In case of power failure or the machine is in malfunction, theEven in these cases,Important. The drawer will not open, if it is locked with a drawer lockAbout drawer hook. Drawer hook prevents the Cash Register from falling causedInsert the drawer hook in the ditch of the drawer. Peel theAs it may cause a malfunction of the drawer, please do not putDrawer release leverPerhaps the users of ManualsCat.com can help you answer your question.

<http://www.dandbmachine.com/images/canadian-tire-mastercraft-snowblower-manuals.pdf>



By filling in the form below, your question will appear below the manual of the Casio SES100. Please make sure that you describe your difficulty with the Casio SES100 as precisely as you can. The more precise your question is, the higher the chances of quickly receiving an answer from another user. You will automatically be sent an email to inform you when someone has reacted to your question. Solo puede ser manipulado para el chequeo del circuito y cambio de piezas por personal del servicio de RKC. Thank you, for helping us keep this platform clean. The editors will have a look at it as soon as possible. Please check your inbox, and if you can't find it, check your spam folder to make sure it didn't end up there. Please also check your spam folder. Simple to use! Do not overload the outlet by plugging in too many appliances. After reading this guide, keep it close at hand for easy reference. The icons and definitions are given below. In this triangle the actual type of precautions to be taken electric shock, in this case is indicated. In this symbol the actual type of prohibited actions disassembly, in this case will be indicated. In this symbol the type of actual restriction removal of the power plug from an outlet, in this case is indicated. Continued use creates the danger of fire and electric shock. Should water or other foreign matter get into the register, immediately shut down the power and unplug the AC plug from the power outlet. Continued use creates the danger of short circuit, fire and electric shock. Continued use creates the danger of short circuit, fire and electric shock. Contact CASIO service representative. High voltage components inside the register create the danger of fire and electric shock. Use of an outlet with a different voltage from the rating creates the danger of malfunction, fire, and electric shock. Overloading an electric outlet creates the danger of overheating and fire.

Loose plugs create the danger of electric shock, overheating, and fire. Never connect to a power outlet that is loose. Humidity can cause poor insulation and create the danger of electric shock and fire if dust stays on the prongs. Continued use of a damaged power cord can cause deterioration of the insulation, exposure of internal wiring, and short circuit, which creates the danger of electric shock and fire. Doing so can cause the register — especially when the drawer is open — to fall, creating the danger of malfunction, fire, and electric shock. Doing so can cause short circuit or breaking of the power cord, creating the danger of fire and electric shock. Pulling on the cord can damage it, break the wiring, or cause short, creating the danger of fire and electric shock. Doing so creates the danger of electric shock. Pulling on the cord can damage it, break the wiring, or cause short, creating the danger of fire and electric shock. The PROGRAM key marked PGM that comes with the cash register can be used to select any mode switch setting, while the OPERATOR key marked OP can be used to select OFF, REG or CAL only. This setting clears the totals. These indicators are also used for department shift level. The capacity of the display is 8 digits. Refer to page 33. Example Change the language to Spanish. To print receipts, please refer to 173 on page 24

to switch the printer for receipt or journal. To get the most out of your purchase, be sure to read this manual carefully. All sample displays in this manual are shown using dark figures on a light background. Further details and technical information can be found in the "Reference" section. This is the setting mode. Remember that not all countries or even local areas use Daylight Saving Time. This is the setting mode. If you specify a distance value, the stopwatch also will calculate and display speeds. If it reaches the above limit, it will restart the time measurement from zero.

<https://www.sevgiliyevideo.net/wp-content/plugins/formcraft/file-upload/server/content/files/162740fa54d267---brompton-bike-owners-manual.pdf>

This is to let you know that a stopwatch operation is in progress. If you specify a distance value, the watch will calculate and indicate speed for certain stopwatch operations. Though the. Corporation in the United States and other countries. You are allowed to use this. Any other use is forbidden without the permission of CASIO. About this manual..5. Projector Overview. 6. Projector Features and Main Functions. 6. Remote Controller and Projector Keys. 8. Back Terminals. 9. Operation During Projection. 10. Selecting the Input Source. 10. To select a different input source. 10. Horizontal Flipping in the 3D Input Mode. 12. Image Operations During Projection. 13. Adjusting Image Brightness. 13. Selecting the Color Mode. 14. Zooming an Image. 14. Momentarily Cutting Off the Input Source Image. 15. Freezing an Image. 15. Displaying a Pointer in the Projected Image. 16. Changing the aspect ratio of the projected image. 17. Adjusting the Volume Level. 18. To adjust the volume level. 18. To mute the audio. 18. Eco Mode Power Saving, Low Noise. 19. To select the Eco Mode. 19. Basic Setup Menu Operations. 21. Displaying the Setup Menu. 21. Configuring Setup Menu Settings. 21. Basic Setup Menu Example. 22. Direct Power On. 23. Password Protecting the Projector. 24. Inputting a Password. 24. Using the Password Feature. 24. Entering the Password when Turning On the Projector. 26. Restoring Projector Settings to Their Initial Factory Defaults. 27. Setup Menu Contents. 29. Image Adjustment 1 Main Menu. 29. Image Adjustment 2 Main Menu. 31. Volume Adjustment Main Menu. 31. Screen Settings Main Menu. 32. Input Settings Main Menu. 34. Option Settings 1 Main Menu. 35. Option Settings 2 Main Menu. 36. Wired LAN Settings Main Menu USB Port Models Only. 38. USB Settings Main Menu USB Port Models Only. 38. Operational Info Main Menu. 39. Restore All Defaults Main Menu. 39. Cleaning the Projector. 40. Cleaning the Projector Exterior. 40. Cleaning the Lens. 40. Cleaning the Vents. 40.

5percent-design-action.com/upload/users/files/comtrend-5813-user-manual.pdf

Error Indicators and Warning Messages. 41. Connecting to a Video Device. 44. Connection to a composite video output or S-video output. 44. Connection to a component video output. 45. Connecting the HDMI Output of a Video Device or. Computer to the Projector. 46. Remote Controller Signal Range. 47. Hanging the Projector from a Ceiling. 48. Projection Distance and Screen Size. 49. Aspect Ratio Setting and Projection Image. 50. Supported Signals. 52. Using Wired LAN to Control the Projector. Controlling the Projector from a Computer. 55. Projector RS232C Control. 60. Connecting the Projector to a Computer. 60. Specifications. 63. About this manual. All of the operations in this manual are explained using the remote controller that comes with the. This section describes the features of the projector, and explains the functions of the projector and. Projector Features and Main Functions. A CASIO original laser and LED hybrid light source delivers high luminance from 2500 to 4000. The projector senses surrounding light levels and adjusts projection brightness automatically as. The remote controller can be used to select one of a variety of different pointers for use during. The projector can be configured to turn on automatically and start projecting as soon as it is. USB memory or a memory card using a commercially available USB card reader can be connected. The projector comes with special software for converting. PowerPoint presentation data to a format that can be stored to USB memory or a memory card and. Images and movies also can be projected directly from USB. You can use a separately available interactive pointer YAP10 to draw lines and figures directly on. You can also use the. A CASIO Multi Projection Camera can be

connected directly to the projector's USB port for fineDocument camera capabilities allowCertain CASIO graphic scientific calculator models can be connected directly to the projector's. USB port for projection of the calculator screen contents.

The projector comes with a wireless LAN adapter. After a wireless LAN connection is established, You can install AWIND's MobiShow client software for wireless connection to a projector on aRemote control of the projector is supported via a wired connection to the LAN port on the back orOperations in this manual are presented based on the remote controller that comes with the projector. Major operation keys are also provided on the projector unit, so the most of the same procedures canRemote Controller Keys. Remote control signal emitterYou need to load the two suppliedImportant! To avoid running down the batteries, store the remote control unit so its keys are not pressedProjector Keys and Indicators. TEMP indicator. LIGHT indicatorIt normally is not used. ForSelecting the Input Source. Turning on the projector initially causes the same input source that was selected the last time it wasTo select a different input sourceNote. The table below shows how the input source selection affects the projector's MONITOR OUT. When this input source isThe video input signal from thisMONITOR OUT terminal. The audio input signal from thisComputer 1VideoOutput is not guaranteed whenOUT terminal continues output the video input signal from COMPUTER IN 1.Your projector supports projection of 3D images. To project a 3D image, first enter the projector's 3DImportant!The input sources described below can be selected for projection in the 3D Input Mode. Input Source. Projection Conditions. Computer Analog RGBComposite Video, SvideoNote. See "3D Signals 3D Input Mode" page 54 for a list of 3D image signals supported by thisEntering the 3D Input ModeImportant!To use either ofHorizontal Flipping in the 3D Input Mode. In sidebyside 3D, a full frame consists of two halves on the left and right for each eye. In rare cases,If this happens, try usingTo swap the left and right imagesYou can perform the following operations while projecting an image.Adjusting Image Brightness.

NoteUse the setup menu page 21 to adjust image brightness when the input source is an externalTo adjust image brightnessYou can select from among various different color mode settings in accordance with image contentsImportant!See "3D Input Mode" page 11.Settings 2 J Interactive Pointer" setting. Though the color mode change operation may beTo change the color modeThe currently selected color mode is the oneMain Menu" on page 30.You can specify projection of a black screen or blue screen, or a logo. For details, see "Blank. Screen" under "Screen Settings Main Menu" on page 33. Freezing an Image. To freeze the projected imageThat image remains projected on the screen.You can select from among different pointer styles, including various arrow styles, for display in theNote. Depending on the pointer style you are using, the pointer may not display properly when you areTo display a pointer in the imageToggle between flashing and not flashing. To select the pointer typeAvailable settings are as shown below. For details about the meaning of each setting, see the "Aspect. Ratio" setting under "Screen Settings Main Menu" on page 32. Video, Svideo, Component, HDMI DTVSetting and Projection Image" page 50.For details, see "Aspect. Ratio" under "Screen Settings Main Menu" on page 32. Important!You can use the remote controller keys to adjust the volume level of the audio that is output from theTo adjust the volume levelYou also can use the setup menu to adjust the volume level. For details, see "Volume. Adjustment Main Menu" on page 31. To mute the audioThe following three Eco Mode settings are available to specify whether priority should be given toOn Auto A brightness sensor on the top of the projector senses surrounding light, andBrightness isOn Manual Enables manual adjustment to balance the needs of lowpower, quiet operation andOffImportant!To select the Eco ModeFewerA greater number gives highPointer" setting.

If the "Ceiling Mount" setting isIf the "Projection Mode" setting isNoteFor details, see "Eco Off Mode" under "Image Adjustment 1. Main Menu" page 30.Use the setup menu page 21 to select the Eco Mode when the input source is an externalYou can use this menu to perform the operations

described below. **Note** For details, see the “USB Function Guide” Your projector has a setup menu that you can use to configure advanced settings. **Basic Setup Menu Operations.** Displaying the Setup Menu. Main menu. The currently selected menu item is the one that is Submenu. The submenu shows each individual setting under each Guidance text. Guidance text provides a brief description of the main To exit the setup menu. **Configuring Setup Menu Settings** The procedure below shows how to configure the following three settings **Note** Perform the procedure For more detailed information, see “Setup Menu. Contents” on page 29. To configure the “Image Adjustment 1 J Contrast” setting You can configure the projector so it powers up automatically as soon as you plug it into a power **Important!** When you have Direct Power On enabled, do not leave the projector plugged into an electrical If you do, there is the chance that it and the light source unit might **Note** Projection Starts that the projector performs is the same, regardless of whether Direct Power. On is enabled or disabled. The only difference is what triggers the sequence plugging in or The password feature lets you keep unauthorized individuals from using the projector. You can specify Use the setup menu “Option Settings 1 J Power On Password” Inputting a Password. The password of your projector is not really a “word” made up of letters, but rather a sequence of The following is the 8key sequence that represents the initial factory Using the Password Feature. Note the following precautions whenever you use the password feature.

Note that it is not an Change the initial factory default password to a different one of Replace the remote control batteries as soon as possible after it starts to go low. If you forget your password. You will not be able to use the projector if you forget the password for some reason. If you forget the **Note** that your CASIO distributor will not be able to clear the password of your projector unless you Also, keep the projector’s warranty in a safe place. **Important!** Having your password cleared using the procedure described above will return all of the settings You will not be able to use the projector if you forget its password. We strongly suggest that you keep To change the password When you turn on the projector while password protection is turned on will cause a password input All projector operations will be accessible to you after Defaults. You can use the procedures in this section to restore all of the settings on a particular main menu or all To restore all settings on a particular main menu to their initial factory Settings, Input Settings, Option Settings 1, or Option Settings 2. Light Time, Unit Operating Time and password settings. This section contains tables that provide detailed explanations of all of the items included on the setup **Setting Name** This column shows the names of the settings as they appear on the submenu. **Input** This column shows the input source for which each setting is supported. Input source names are abbreviated as follows. R RGB input. C Component video input. V Video or Svideo input. H HDMI PC input. D HDMI DTV input. U USB input USB port models only. The letter N indicates that the setting can be configured while there is no input signal. **Setting Unit** The setting unit indicates how a setting is stored. **Description** This column provides details about the setting item and how to select it. The initial. Image Adjustment 1 Main Menu. Setting Name. Input. Setting Unit. Description. Brightness Specific.

Use this submenu to adjust the brightness of the projected image. A larger value produces a brighter image. Contrast Specific. Use this submenu to adjust the contrast of the projected image. A larger value produces a stronger contrast. Sharpness. Source. Specific. Use this submenu to adjust the sharpness of the outlines in the Saturation. Use this submenu to adjust the color saturation of the projected Tint. Use this submenu to adjust the tint of the projected image. A larger value makes the overall image more bluish, while a smaller This setting is Input. Color Mode Specific. You can select from among various different color mode settings in Standard. Use this setting when you want to highlight the colors of your Graphics. Use this setting when you want photographs and graphics to Theater.

<https://www.thebiketube.com/acros-bose-instruction-manual>