

EMN Series

Mini Mobile IP Dome Camera

User's Manual



Copyright © EverFocus Electronics Corp,
Release Date: March, 2013



Copyright © 2013 EverFocus Electronics Corp.

All rights reserved. No part of the contents of this manual may be reproduced or transmitted in any form or by any means without written permission of the EverFocus Electronics Corporation.

EverFocus

12F, No.79, Sec. 1, Shin-Tai Wu Road,

Hsi-Chih, Taipei, Taiwan

TEL: +886 2 2698 2334

FAX: +886 2 2698 2380

www.everfocus.com.tw

March, 2013

About this document

All the safety and operating instructions should be read and followed before the unit is operated. This manual should be retained for future reference. The information in this manual was current when published. The manufacturer reserves the right to revise and improve its products. All specifications are therefore subject to change without notice.

Regulatory Notices

FCC Notice "Declaration of Conformity Information"

This equipment has been tested and found to comply with the limits for a Class

A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications made to this equipment, not expressly approved by EverFocus or parties authorized by EverFocus could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

EverFocus Electronics Corp.

12F, No. 79, Sec. 1, Shin-Tai Wu Rd., Hsi-Chi,
Taipei Hsien, Taiwan, R.O.C.

EMN Series cameras comply with CE and FCC.

Precautions

1. Do not install the camera near electric or magnetic fields.

Install the camera away from TV/radio transmitters, magnets, electric motors, transformers and audio speakers since the electromagnetic fields generated from these devices may distort the video image or otherwise interfere with camera operation.

2. Never disassemble the camera beyond the recommendations in this manual nor introduce materials other than those recommended herein.

Improper disassembly or introduction of corrosive materials may result in equipment failure or other damage.

3. Try to avoid facing the camera toward the sun.

In some circumstances, direct sunlight may cause permanent damage to the sensor and/or internal circuits, as well as creating unbalanced illumination beyond the capability of the camera to compensate.

4. Keep the power cord away from water and other liquids and never touch the power cord with wet hands.

Touching a wet power cord with your hands or touching the power cord with wet hands may result in electric shock.

5. Never install the camera in areas exposed to oil, gas or solvents.

Oil, gas or solvents may result in equipment failure, electric shock or, in extreme cases, fire.

6. Cleaning

For cameras with interchangeable lenses, do not touch the surface of the sensor directly with the hands. Use lens tissue or a cotton tipped applicator and ethanol to clean the sensor and the camera lens. Use a damp soft cloth to remove any dirt from the camera body. Please do not use complex solvents, corrosive or abrasive agents for cleaning of any part of the camera.

7. Do not operate the camera beyond the specified temperature, humidity or power source ratings.

This camera is suitable for outdoor operation only. Use the camera at temperatures within $-40^{\circ}\text{C}\sim 55^{\circ}\text{C}/-40^{\circ}\text{F}\sim 131^{\circ}\text{F}$ (DC Power) or $-20^{\circ}\text{C}\sim 55^{\circ}\text{C}/-4^{\circ}\text{F}\sim 131^{\circ}\text{F}$ (PoE), and humidity between 20% and 85%; this device is not rated as submersible. The input power source is 10-36VDC/PoE. Be sure to connect the proper + / - polarity and voltage, as incorrect polarity or too high a voltage will likely cause the camera to fail, and such damage is not covered by the warranty. The use of properly fused or Class 2 power limited type supplies is highly recommended.

8. Mounting

Use care in selecting a solid mounting surface which will support the weight of the camera plus any wind, snow, ice or other loading, and securely attach the camera to the mounting surface using screws and anchors which will properly support the camera. If necessary (e.g. when mounting to drop ceilings) use a safety wire to provide additional support for the camera.

Contents

1.	Introduction.....	1
2.	Overview	2
3.	Features	3
4.	Installation.....	4
	4.1 Packing List.....	4
	4.2 Basic Installation	4
5.	Accessing the User Interface.....	8
	5.1 Checking the Dynamic IP Address.....	8
	5.2 Settings for Microsoft Internet Explorer	10
	5.3 Connecting the Camera to the Network.....	12
	5.4 Live View Window.....	14
6.	Playback	17
	6.1 Remote Playback Using Playback Page	17
	6.2 Setting Up the Playback Function	19
	6.2.1 Inserting / Removing the SD Card	19
	6.2.2 Testing the Playback Function	20
	6.3 Playing Back Using ARV Viewer.....	22
7.	Settings	23
	7.1 System Settings	24
	7.1.1 Network.....	24
	7.1.2 Date / Time	31
	7.1.3 Storage.....	32
	7.1.4 Display and Overlay	34
	7.1.5 System Maintenance	35
	7.1.6 System Information	38
	7.1.7 User	39
	7.1.8 Black/White List.....	41
	7.2 Camera Settings	42
	7.2.1 Streaming and Audio	42
	7.2.2 Camera.....	45
	7.2.3 Schedule	48
	7.2.4 Image.....	49

7.3	Event Settings.....	49
7.3.1	Event Wizard.....	50
7.3.2	Event.....	51
7.3.3	Notification.....	55
7.4	Link to Smart Phone App	58
8.	Upgrading Firmware Using IP Utility.....	59
9.	Specifications	61

1. Introduction

The small form-factor mobile dome, EMN series mini mobile IP dome, comes with three models, 1.3 MP, 2 MP and 3 MP, providing up to 15 fps at 2048 x 1536 viewing resolution. Video compression formats including H.264, MPEG4 and MJPEG are all supported. Equipped with a vandal-proof (IK10) and weather-proof (IP67) housing, the cameras meet a wide variety of needs for mobile (outdoor) surveillance.

The EMN series mini IP dome features the Wide Dynamic Range (WDR) function, which can provide clear images even under back light circumstances where intensity of illumination can vary excessively. The DNR (Digital Noise Reduction) function is designed for reducing the noises in the images, allowing the camera to better distinguish between real motion and image noise, and thus results in a possibility to store more video evidence on the connected storage devices.

A built-in micro SDHC card slot and Power over Ethernet (IEEE802.3af) features are also provided. You can power the camera over the network or by connecting the camera to a 10-36 VDC power supply. Since the EMN series mini IP dome conforms to ONVIF / PSIA for compatibility with other network video devices, it interoperates with a wide variety of hardware and software systems. You can also use EverFocus Mobile Applications to remotely view the live views of the cameras through your handheld devices; or use EverFocus CMS to remotely manage multiple IP devices connected on the network. The EMN series mini mobile IP dome is the ideal solution for your mobile (outdoor) surveillance needs.

The EMN Series Mini Mobile IP Dome Models

Model Name	Megapixel	Fixed Lens (Selectable)
EMN2120	1.3 MP	2.8mm, 3.6mm, 6mm, 8mm
EMN2220	2 MP	
EMN2320	3 MP	


System Requirement

Before installing, please check that your computer meets the following system requirements.

- Operating System: Microsoft Windows XP / Vista (32-bit) / 7 (32-bit); Apple iOS
- Microsoft Internet Explorer 7 or above

Note: For using the Internet Explorer, some settings are required. Please refer to *5.2 Settings for Microsoft Internet Explorer*.

2. Overview

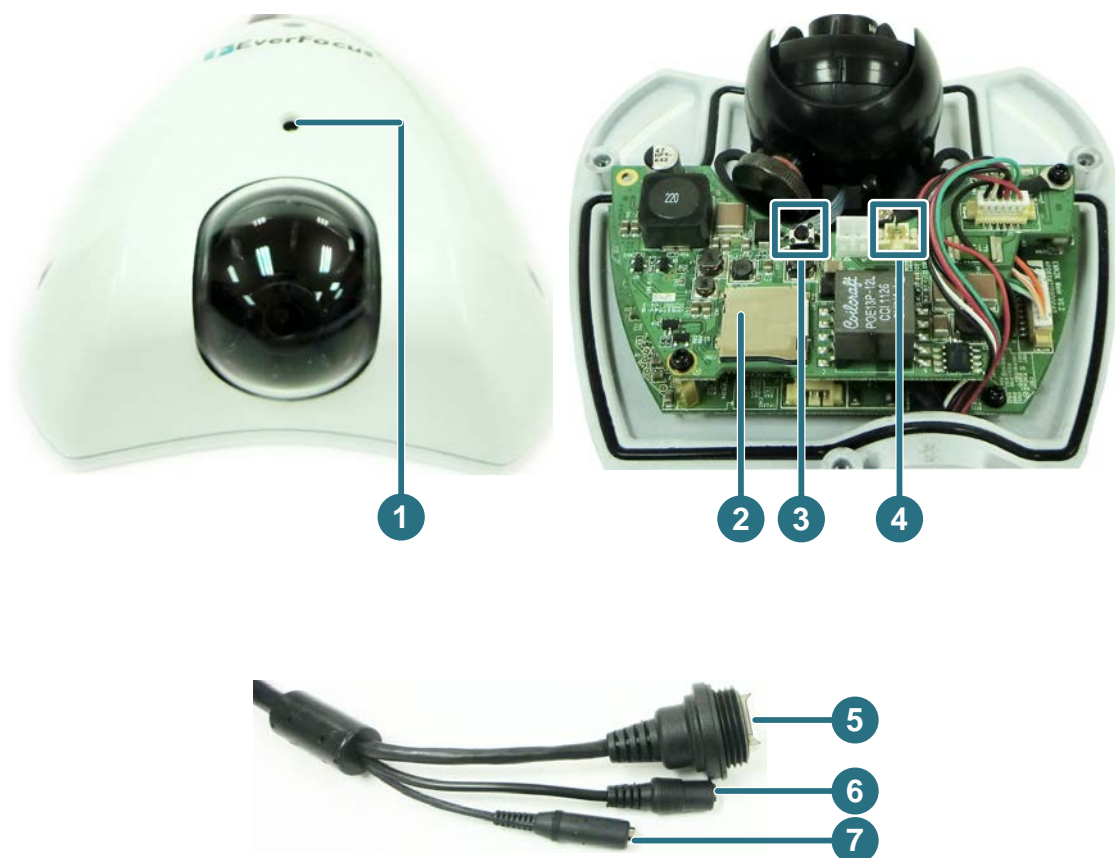

No.	Item Name	Descriptions
1	Microphone	One built-in microphone.
2	Micro SD / SDHC Slot	For inserting a micro SD / SDHC card.
3	Reset Button	Resets all configurations to the factory default settings.
4	Test-Out Connector	Connects to a handheld monitor for adjusting camera focus and zoom using the supplied Test-Out Cable.
5	LAN / PoE Cable	Connects to a 10/100 Ethernet or PoE.
6	Power Cable	Connects to a 10-36 VDC power.
7	Audio Cable	A Line-in cable for connecting to the audio input device.

3. Features

- 1/2.7" progressive scan CMOS (for EMN2120 / 2220)
1/3" progressive scan CMOS (for EMN2320)
- Triple streams from H.264, MPEG4 or MJPEG
- Up to 30 fps at 1920 × 1080
Supports 15 fps at 2048 x 1536 (only for EMN2320)
- Hallway Display (9:16)
- Vandal-proof (IK10)
- Weather-proof (IP67-rated)
- EN50155 compliance for rolling stock applications
- Built-in micro SD / SDHC card slot
- Electronic Day / Night
- 3-axis mechanism (pan / tilt / rotate)
- Built-in microphone
- TV-out
- Wide Dynamic Range (WDR)
- Digital Slow Shutter (DSS)
- 2D / 3D Dynamic Noise Reduction (DNR)
- Motion Detection
- 10x Digital Zoom
- Privacy Mask
- Endurable to low environment temperatures (-40°C ~ 55°C / -40°F ~ 131°F)
- 10-36 VDC / PoE
- Multi-languages on Web interface
- ONVIF / PSIA compliant
- Supports EverFocus CMS and Mobile Applications

4. Installation

4.1 Packing List

Please check that there is no missing item in the package before installing.

- Camera x 1
- Long Screw x 4 (with 4 Anchors)
- for thick surface installation
- Set Screw x 4 (with 4 Nuts)
- for thin surface installation
- Cable Gland x 1 (with one Waterproof Ring)
- Test-Out Cable (RCA) x 1
- Power Pigtail Cable x 1
- Torx Screwdriver x 1
- Mounting Template x 1
- Software CD x 1
- Quick Installation Guide x 1


Note:

1. Equipment configurations and supplied accessories vary by country. Please consult your local EverFocus office or agents for more information. Please also keep the shipping carton for possible future use.
2. Contact the shipper if any items appear to have been damaged in the shipping process.

4.2 Basic Installation

Please follow the steps below to mount the camera to the wall / ceiling.

1. Paste the supplied mounting template onto a desired location on the wall / ceiling. Drill the three cross marks and insert the supplied three Anchors into the holes. Note that the camera lens should point to the arrow direction.

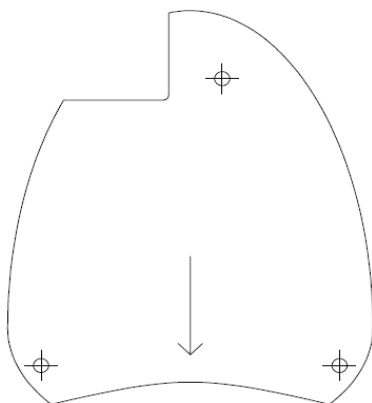


Note: Drill another hole on the upper-left corner of the template only if you want to run the cables through the wall / ceiling.

2. Unscrew the three screws to remove the cover.



3. Attach and then screw the camera to the wall / ceiling using the supplied three Long Screws.

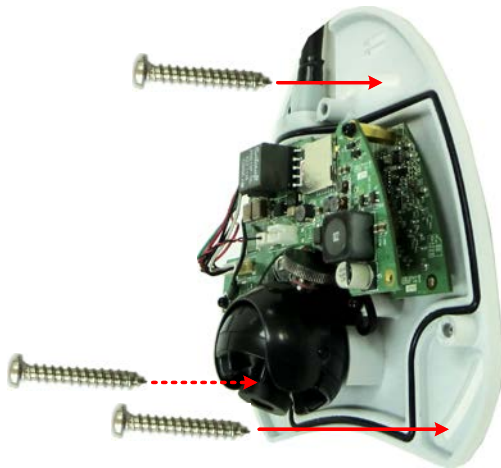

4. Thread the cables.
a. From the side cut of the camera case: remove the plug from the camera case first.



- b. Through the wall / ceiling: run the cables through the hole on the wall / ceiling.

5. Connect the network, power and audio cables to the camera.
You can optionally use the supplied Cable Gland to connect the camera to the network for water proofing:


- a. Remove the Screw Cap from the Cable Gland.




- b. Insert a RJ-45 network cable (without the RJ-45 connector on the one end) through the Cable Gland and Screw Cap. Note that the **diameter of the network cable should be ranging from 5mm to 5.7mm.**



- c. Place the Waterproof Ring into the LAN/PoE cable. Connect the RJ-45 network cable to the LAN/PoE cable.

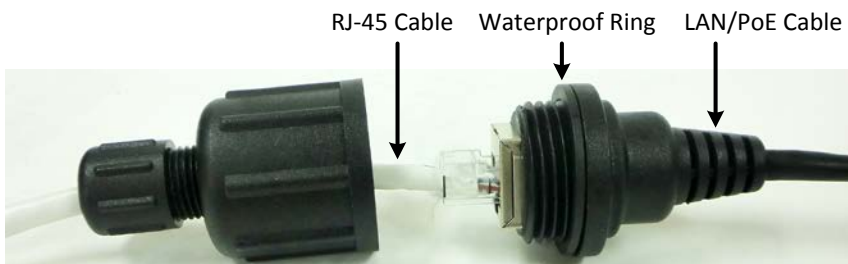

- d. Tightly screw the Cable Gland and Screw Cap to the LAN/PoE cable.

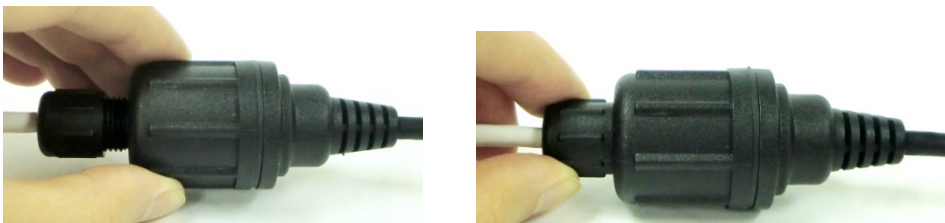

- e. Crimp the RJ-45 connector onto the network cable. Note that the wires should be placed into the RJ-45 connector based on the following order (from left to right).


Orange with white stripe
Orange
Green with white stripe
Blue
Blue with white stripe
Green
Brown with white stripe
Brown




6. Optionally insert a micro SD / SDHC card to the card slot. See **No.2** in 2. *Overview*.
7. Access the camera live view. See 5.1 *Assigning an IP Address*. Or using the supplied Test-Out cable to connect a monitor to the Test-Out connector (see **No.4** in 2. *Overview*) of the camera for adjusting camera angles.

Note: Do Not adjust camera focus yourself as it has already been adjusted (with the dome cover on) in the factory. It is normal to see the blurry image on the live view when the camera is connected to a monitor without the dome cover on. The live view image will be focused once the dome cover has been put back to the camera.


Pan Adjustment: Loosen the screw and pan the camera by $\pm 25^\circ$.

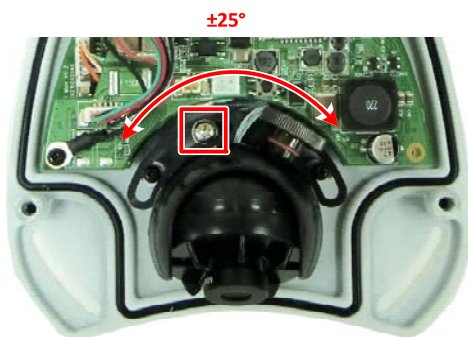

Tilt Adjustment: Loosen the screw and tilt the camera by 90° .

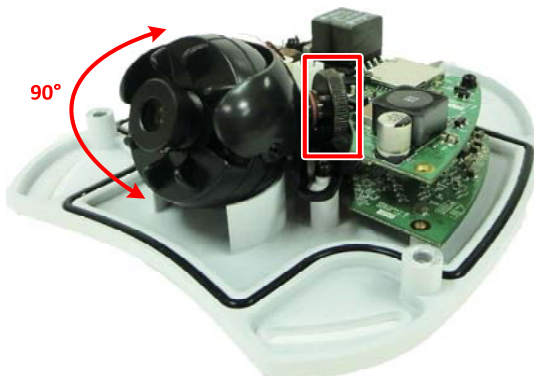

Rotational Adjustment: Loosen the screw and rotate the camera by $\pm 90^\circ$.

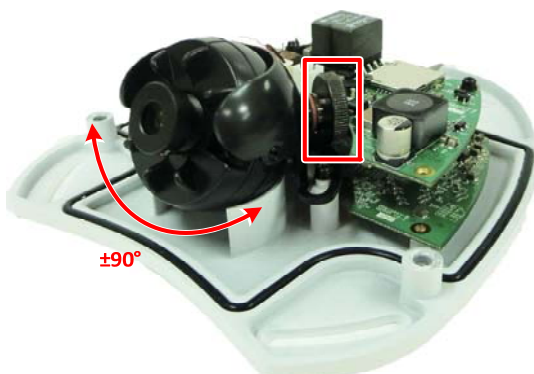

8. Secure the cover back to the camera.


5. Accessing the User Interface


This section explains how to access the Web interface of the camera for configuration.

5.1 Checking the Dynamic IP Address


You can look up the IP address and access the Web interface of the camera using the **IP Utility (IPU)** software included in the software CD. Please connect the IP camera in the same LAN of your computer.



1. Install and then start the IPU program . The following dialog box appears.

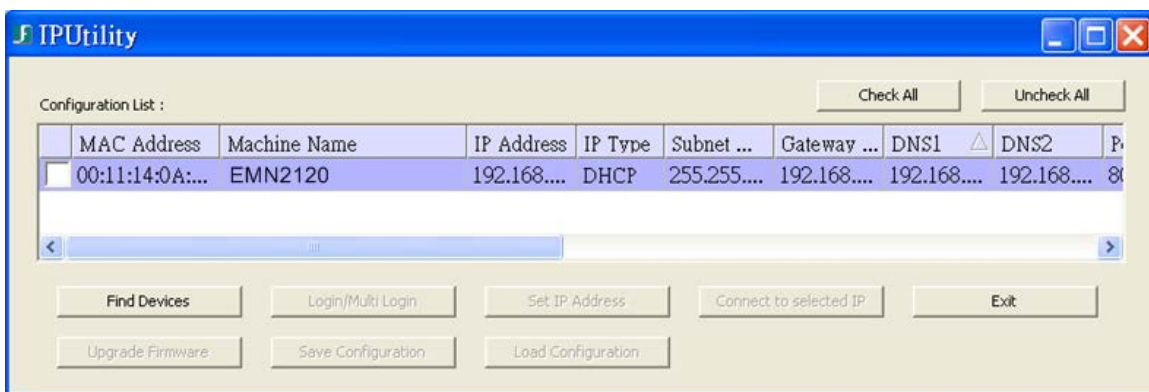

2. IPU will automatically search the cameras connected in the LAN. The default network values of the cameras will be displayed. By default, the network protocol of the camera is **DHCP**.
3. To configure the network settings, select a camera and then click **Login/Multi Login** to log in.

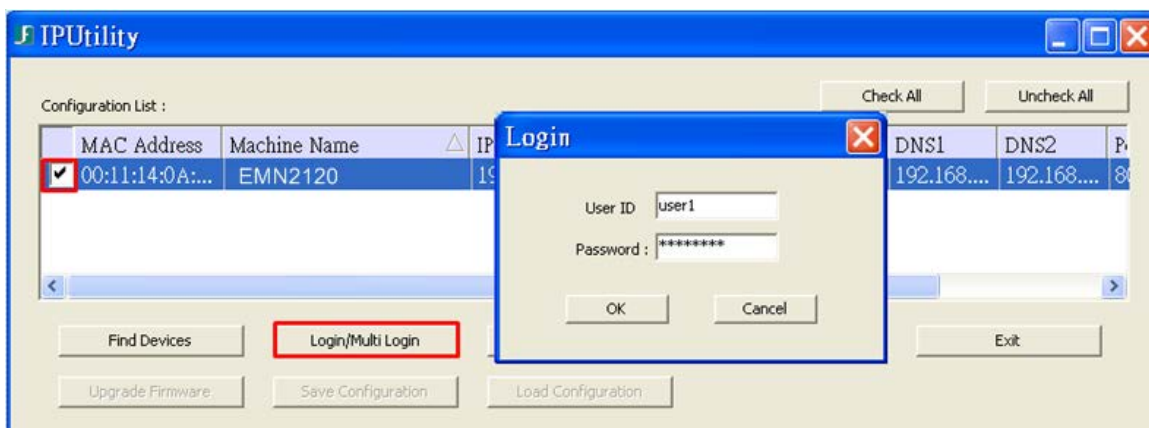


4. Type the user ID and password. Click **OK**.

Note:

1. The default user ID is **user1** and the default password is **11111111**.
2. If you select more than one camera that has the same user ID / password, you will be able to log in several cameras at once.

5. To change the IP settings, double-click the values in the column and type the numbers or select an option. Click **Set IP Address** to save the settings.

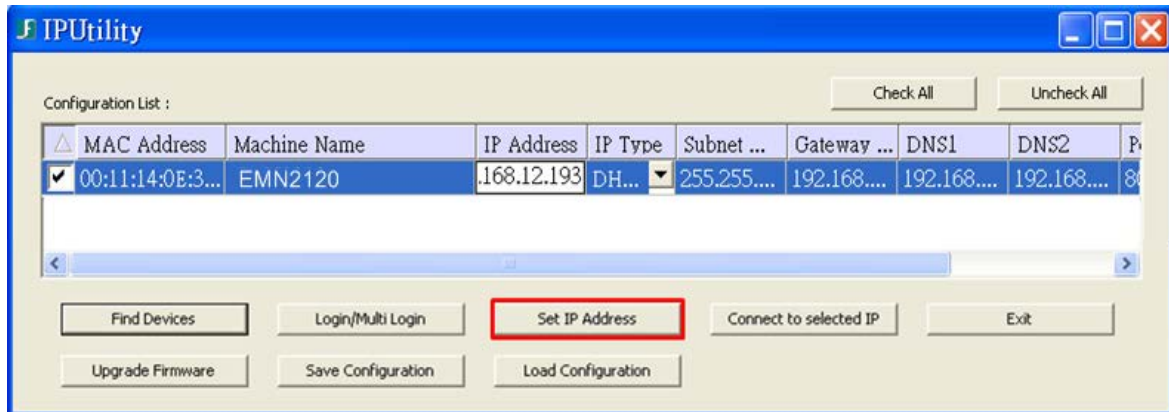

Note: Most networks support DHCP protocol, but if you are unsure of your network protocol, please consult your IP administrator for network configuration details.


6. To access the camera, highlight the camera and click **Connect to Selected IP**. The Internet Explorer window pops up.
7. Type the user ID and password to log in. The Live View window of the camera appears.

Note: You might be required to download **ActiveX**, which is required to view the camera feed. If asked, click "**Yes**". For more details on setting up the Microsoft Internet Explorer, please refer to *5.2 Settings for Microsoft Internet Explorer*.


5.2 Settings for Microsoft Internet Explorer

To enable Remove Live View, Firmware Upgrade and ActiveX Prompt on Internet Explorer, some settings have to be complete. Please follow the steps below:



1. On the computer, click Start > Control Panel > System and Security > Action Center (click Change User Account Control Settings), the **User Account Control Settings** window appears. Adjust the slide bar to **Never notify** and then click **OK**. Restart your computer if requested.

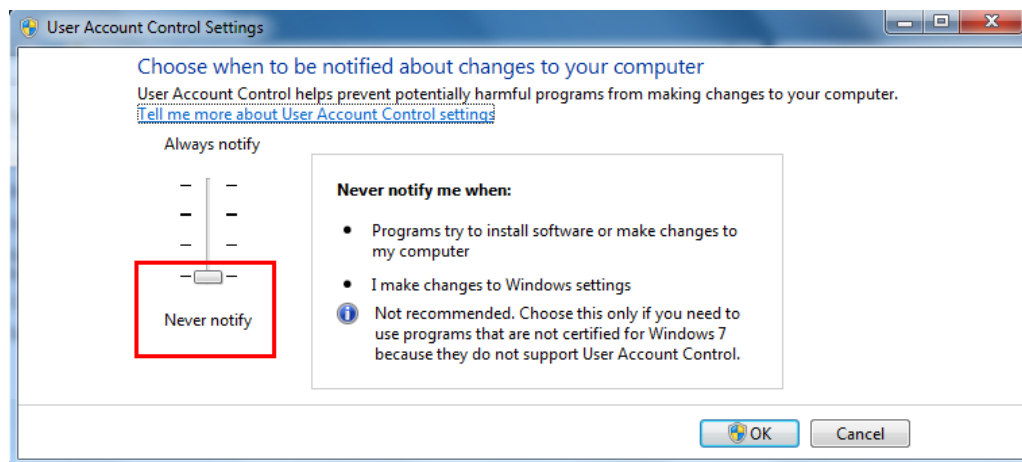


2. Open the Internet Explore, click Tools > Internet Options > Security Tab > Custom Level, the **Security Settings** windows appears.

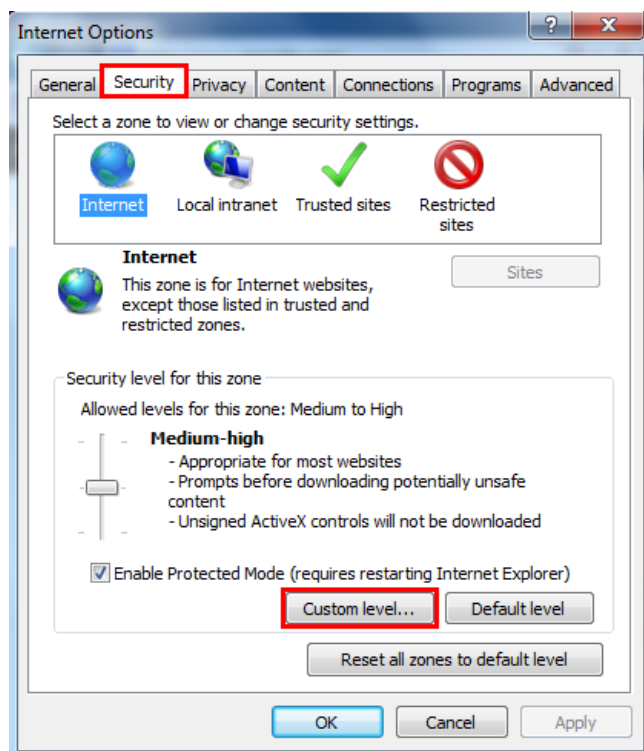

3. In the **Download unsigned ActiveX controls** field, select **Prompt**. In the **Include local directory path when uploading files to a server** field, select **Enable**. Click **OK**.

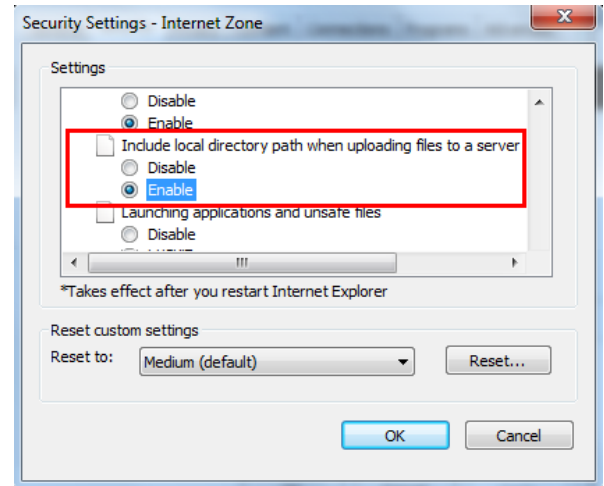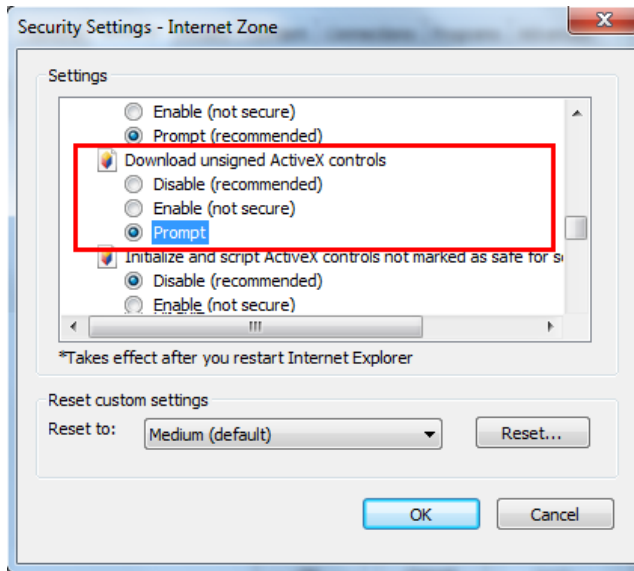

4. In the Internet Options window, click the **Advanced** tab and then disable **Enable memory protection to help mitigate online attacks**. Click **OK**.

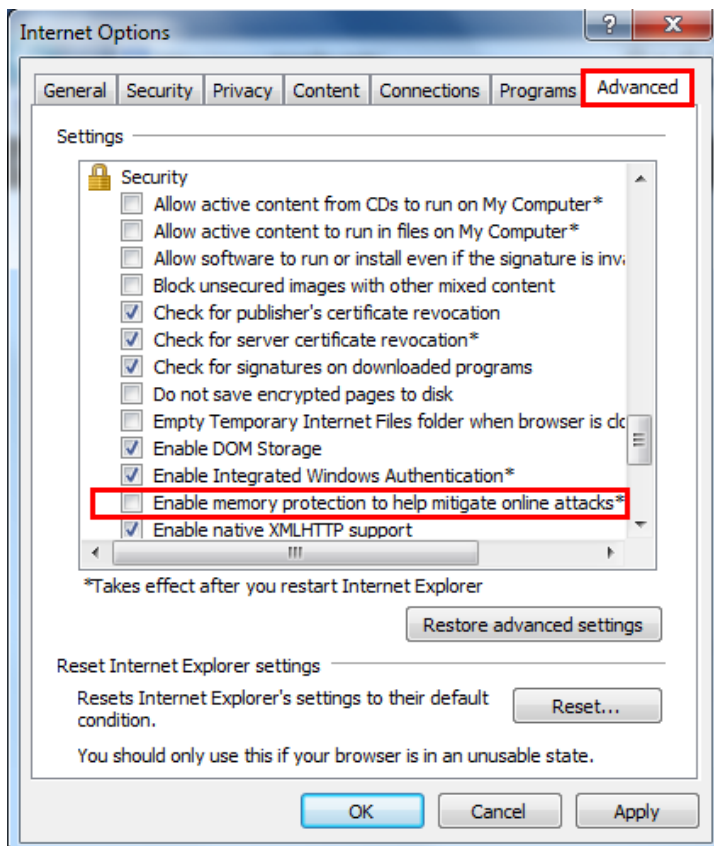


5.3 Connecting the Camera to the Network

There are three methods to connect the IP camera to the network: **Router or LAN Connection**, **Direct High-Speed Connection** and **One-to-One Connection**.


Router or LAN connection

This is the most common connection in which the IP camera is connected to a router and allows multiple users on and off site to see the IP camera on a LAN/WAN (Internet). The camera must be assigned an IP address that is compatible with its LAN. By setting up port forwarding on the router, you can remotely access the cameras from outside of the LAN via the Internet. To remotely access the Web interface of the IP camera, please refer to 7.3.2 DDNS. To set up port forwarding, please consult the manual of the router.

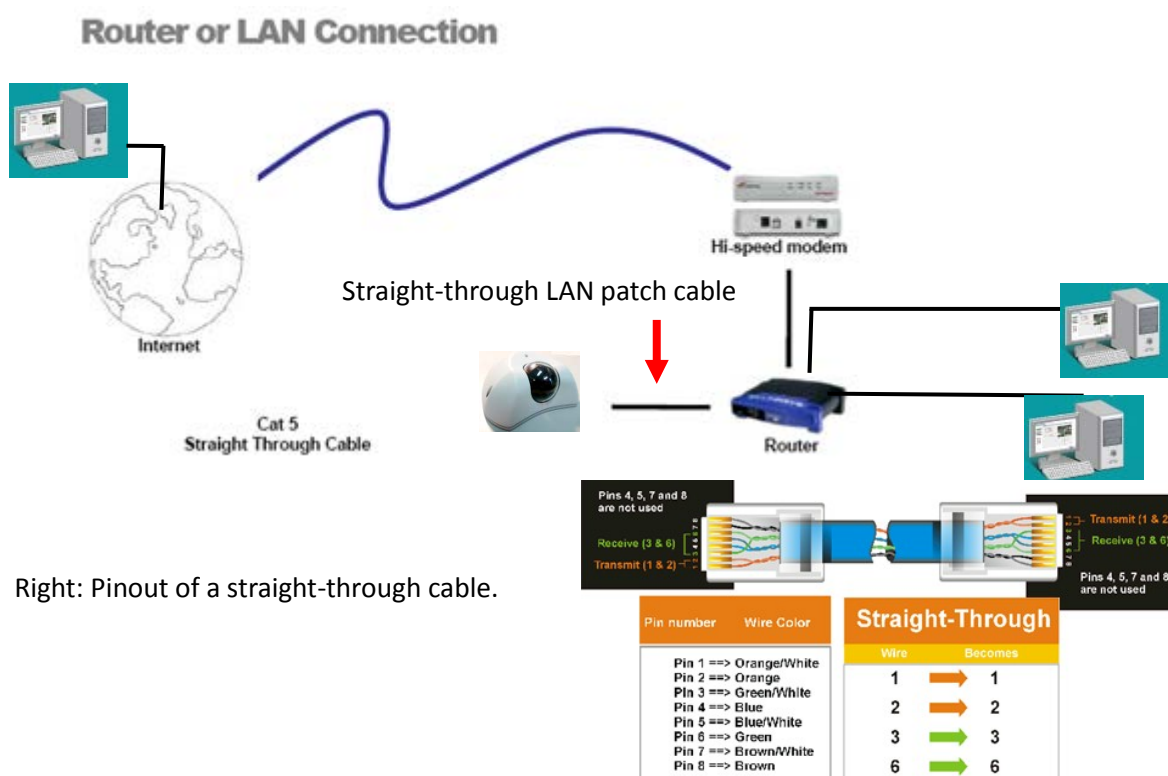

Direct High-Speed Connection


In a Direct High-Speed Connection, the camera connects directly to a modem without the need for a router. You need to set the static or dynamic WAN IP address assigned by your ISP (Internet Service Provider) in the camera's configuration web pages. To access the camera, just type "http://xxx", where xxx is the IP address given by your ISP. If you have a dynamic IP address, this connection may require that you use DDNS for a reliable connection. Please refer to 7.3.2 DDNS.

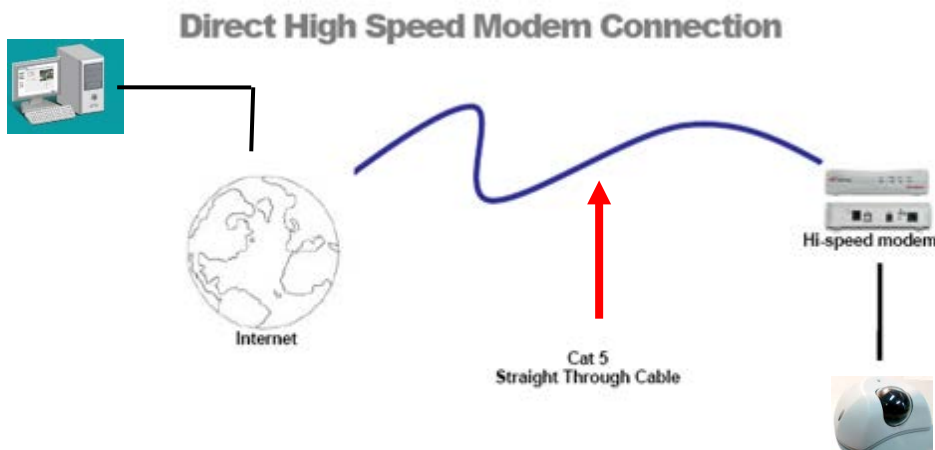


One-to-One Connection (Directly from PC to IP Camera)



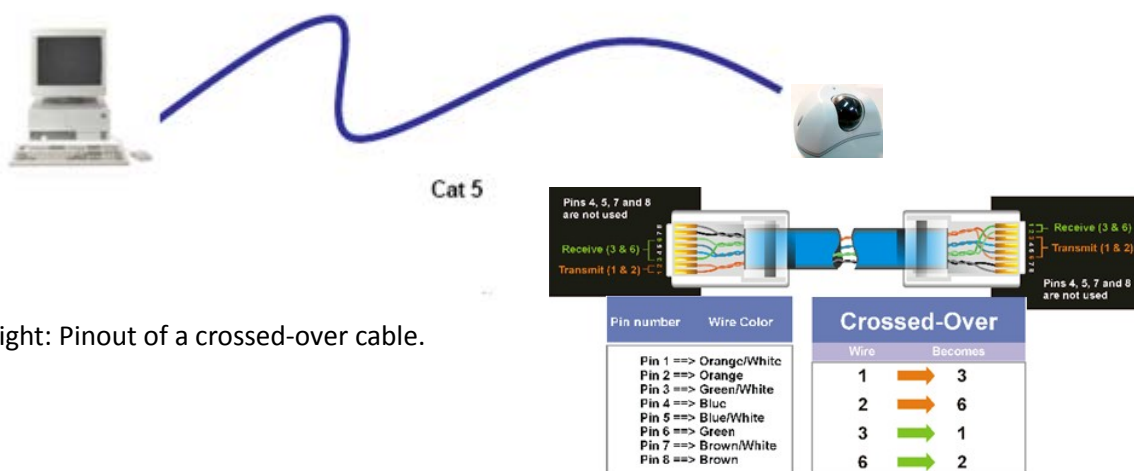

You can connect directly without using a switch, router or modem. However, only the PC connected to the camera will be able to view the IP camera. You will also have to manually assign a compatible IP address to both the computer and the IP camera. Unless the PC has another network connection, the IP camera will be the only network device visible to the PC. See the diagram below:

Simple One to One Connection

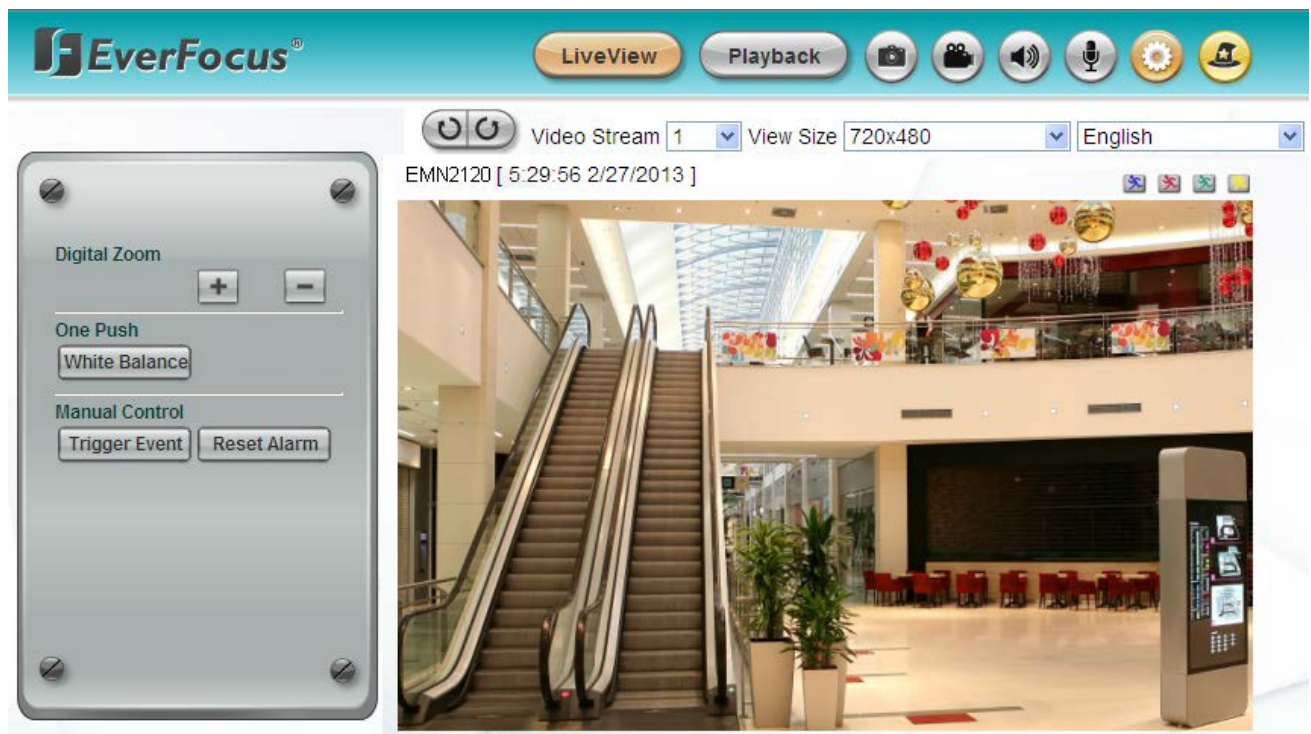

5.4 Live View Window



1. Click the  button to display the Live View window. If you experience video feed lag time (if connected via Internet), you can reduce the resolution or limit the number of streams. See 7.2.1 *Streaming and Audio*.
2. Click the  button to play back the recorded data directly from the on-camera Micro SD / SDHC card (for this function to become active, you have to insert a Micro SD / SDHC card in the Micro SD / SDHC card slot on the camera. See 6.2 *Setting up the Playback Function*).
3. **Snapshot** 
Click the **Snapshot** button to take a snapshot. By default, the snapshot will be saved at C:\EverFocus\. To change the location, see Record to Local in 7.1.3 *Storage*.
4. **Record** 
Click the **Record** button to start / stop recording. By default, the video recordings will be saved at C:\EverFocus\. To change the location, see Record to Local in 7.1.3 *Storage*. To change the source video stream and recording format, see Recording and Snapshot Settings in 7.1.3 *Storage*. To configure the Schedule Record setting, see Schedule Settings in 7.3.2 *Schedule Settings*.


5. Speaker / Microphone

Click the **Speaker** and **Microphone** buttons to switch the sound on/off for the speaker and microphone respectively (if such external devices have been connected to the camera directly or via the network). To activate the Audio function, the **Enable Audio** must be selected. See Audio Settings in 7.2.1 *Streaming and Audio*. Note that the Speaker function is not available for this camera.

6. Click the **Setting** button to enter the Settings page (see 7. *Settings*).

7. Click the **Wizard** button to enter the Setup Wizard.

8. **Hallway Display (9:16):** Click the **Rotate** button to rotate the live image. This function allows users to monitor vertically-oriented areas such as hallway, corridors and aisles. It's recommended to select a 16:9 View Size (e.g. 1920x1080 / 1024x768) to achieve the best display effect.

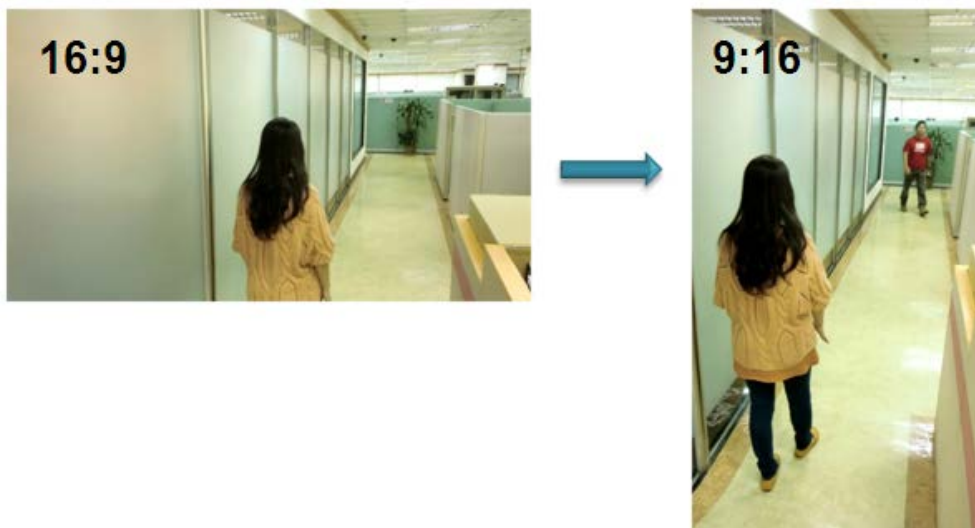

9. **Video Stream**

Select the Video Stream (Stream 1, Stream 2 or Stream 3) that will be displayed in the video box on the bottom. Stream 2 and Stream 3 are only selectable if you have enabled the stream. The default setting is Stream 1 only. See 7.2.1 *Streaming and Audio*.



10. **View Size**

Use this to select the appropriate view size and shape of the video box on the bottom. A smaller size might increase transmission speed and video quality.

11. **Language**

Click the Language drop-down list to select the desired language.

12. **Digital Zoom**

Click   to zoom in / out the camera view up to 10x. Clicking on a magnified image will re-center the image around that point.


13. One Push


The **One Push** button can be displayed on the live view window by enabling the **Show One Push Buttons** function in the Live View Layout Settings (see 7.1.4 *Display and Overlay*). For the



White Balance button to work, select **Indoor** from the White Balance Mode drop-down list. See Camera Settings > Image > White Balance Settings (7.2.4 *Image*). Once this is done, clicking the **White Balance** button on the Live View Window will instruct the camera to adjust the white balance settings, and these settings will be active until the button is pushed again. This is like a “semi-automatic” way to adjust white balance to suit the user, if the Auto or Manual mode does not give the result the user wants.

14. Manual Control

Click the  button to trigger an event directly from the Live View window. If you have configured an event (in the Event List) that will trigger a reaction (like a recording) when a *Manual Trigger* event occurs, clicking this button will trigger that reaction. You can select what that reaction will be. You can, for instance, set the camera to record the audio/video feed to the SD card on board the camera. You can then click on the **Playback** button to open the Playback page and search for and play all such recordings that had been stored on the card. Such event actions will be effective once they have been configured in the Event List (see 7.3.2 *Event*).

Click the  button to reset the alarm output remotely.


15. Status Display (info line that can be placed above video box or at bottom of page)

This shows the name of the camera that is currently active or being configured, current date/time and current frame rate. You can activate these info displays in the Overlay Text Settings (see 7.1.4 *Display and Overlay*).

16. Event signal icons (above video screen)

When an alarm or motion event is triggered, a signal icon will appear at the top right of the Live View window to alert the user.

Alarm event icon  : When an alarm is triggered, this icon appears.

Motion detection icons  : The colors of these motion event icons correspond to the colors of the motion trigger areas you have configured in the Motion Settings (see 7.3.2 *Event*).

Recording icon  : When the camera is recording to a PC-based folder, this icon appears.


6. Playback


You can remotely play back the recordings stored in the on-camera micro SD card on the Web interface, or play back the recordings stored in the computer using the **ARV Viewer** included in the software CD.

Playback is designed as a quick way to check recent recordings that were triggered by Events that were configured to “Record to SD Card” in the Event Management (see 7.3.2 *Event*).

Note: Note that the Playback page is only accessible once the on-camera SD card is inserted and active.

6.1 Remote Playback Using Playback Page

On the Live View Window, click the Playback button  to open the Playback page.

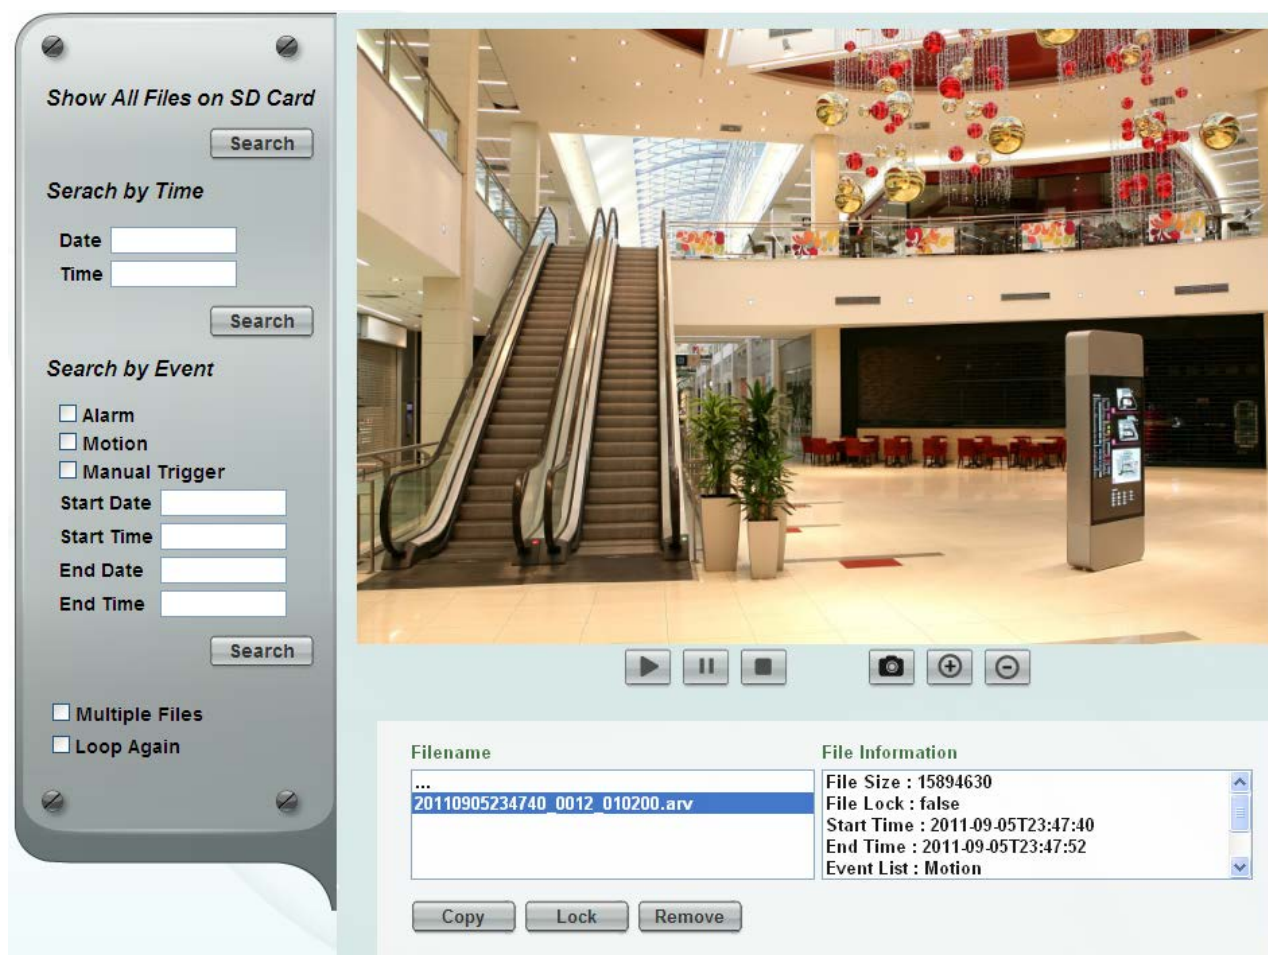


Search by File: Click the **Search** button to search for all recording files on the on-camera SD card. Search results will be displayed in the Filename area.


Search by Time: Click the **Date / Time** column and select the date and time from which you want to search until the present moment. Click **Search** to get your search results, which will be displayed in the Filename area.


Search by Event: Select the type of Event recordings you want to search for (Alarm, Motion, Manual Trigger) and then click the **Start Date / Time; End Date / Time** column to select the Start Time date/time and the End Time date/time of your search. Click **Search** to get your search results, which will be displayed in the Filename area.

Multiple Files: Check this box if you want the video player to play all the files in the selected folder. The files will be displayed in the Filename area.

Loop Again: Check this box if you want the video player to play the selected file over and over again.

Play: Once you have opened the file's folder and have clicked on the file to highlight it, its details will be displayed in the File Information area. You can now click **Play**  to play that specific file.

Pause: Click  to pause playing back.

Stop: Click  to stop playing back.

Snapshot: Click  to take a snapshot.

Zoom In: Click  to zoom in.

Zoom Out: Click  to zoom out.

Filename: This area will display a list of search results (recording files and folders). Folders (named with the recorded date) will be displayed first. Click on the folder and click on each subfolder until the recording files (.arv) in that folder is listed.

File Information: Click a file on the Filename list, the selected file information will be listed.


Copy: Click to copy the selected file to the computer-based folder of your choice. A browsing box will open so that you can search for the folder of your choice. You can use the ARV Viewer to play back the recordings recorded in your computer. For details on ARV Viewer, see *6.3 Playing Back Using ARV Viewer*.

Lock: Click to lock the selected file. This will protect that file from being overwritten during any overwrite procedure. The file will thus be saved on the micro SD card indefinitely. However, the file will still be deleted if the micro SD card is ever formatted.

Remove: Click to delete the selected file.

6.2 Setting Up the Playback Function

Note that the Playback function will not be activated until the user has inserted a micro SD card in the camera's micro SD card slot. The card may also have to be formatted in the Secure Digital Card field (see 7.1.3 Storage).

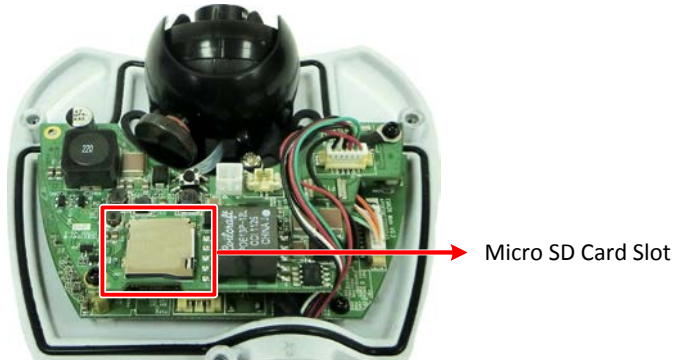

6.2.1 Inserting / Removing the SD Card

1. **To insert the SD card:** Remove the camera cover and insert the SD card into the SD card slot before powering on the camera.
2. **To remove the SD card:** Click the **Remove** button (System Settings > Storage > Secure Digital Card) when the camera is powered on, the SD card information "SD card is not mounted" will display and the Remove button will change to **Attach**, and then you may remove the SD card. If you want to insert the SD card again, insert the SD card and then click the **Attach** button.

After inserting the SD card into the SD card slot, the Playback button on the Live View page should be activated. If not, do the following:

1. Click the **Remove** button, pull the card out and re-insert it.
2. Click the **Format** button to format the card. NOTE: All data on the disk will be deleted if the Format button is clicked.

6.2.2 Testing the Playback Function

1. To test the Playback function (this is not required), set up a “Manual Trigger” Recording Event by clicking Event Settings > Event.

Event Management

Event List

Name	Type	Notification	Enable
Motion	VMD	SDNAsyslog	true
Tampering Detection	badvideo	SDNAsyslog	true
Test 1	manualTrigger	SD	true

Page 1 of 1
View 1 - 3 of 3

Event Name

Event Trigger Type

Manual Trigger

☒ Enable This event

☐ Enable Re-trigger miniman interval between triggers 1 second

☐ Enable Pre-trigger Buffer

☒ Enable Post-trigger Buffer

Notification Over

☐ Log
☐ Send Mail Notification
☐ Upload to FTP
☒ Record to SD Card
☐ Network Alarm

Create

Edit

Remove

Cancel

Trigger Options Settings

Pre-trigger Buffer 10 second
Post-trigger Buffer 10 second


Apply


Cancel

2. Give the event a name, like “Test 1”.
3. In the “Event Triggered Type” field, click on Manual Trigger.
4. Below this, check “Enable This Event”, “Enable Post-trigger Buffer”, and “Record to SD Card”.
5. To save your settings, click the **Create** button, and the Event will be listed in the Event List.
6. Look at the “Post-trigger Buffer” at the bottom to make sure the buffer time is set to 10 seconds. Click the **Apply** button.
7. Click the **LiveView** button to go back to the Live View page.

8. Get ready to click the **Trigger Event** button on the Live View page. Before you do, see if you can find something in the view screen that will give you a visual time marker. For instance, if you can get your hand in front of the camera's lens, get ready to count down on your fingers.
9. Click the **Trigger Event** button and slowly count down on your fingers in front of the lens (if you are able to do so – if not, try to find visual cues on the view screen that will help you to mark the moment you pushed the trigger). The recording period will be as long as the buffer time you selected – the default period is 10 seconds.
10. Click the **Playback** button to open the Playback page.
11. There are different ways to search for recording files on the camera's micro SD card (i.e. the Playback memory). For a recent recording like your test event, simply click the "Search" button under the "Show All Files on SD Card" header.
12. If the micro SD card is active and formatted correctly, the recording folder's name (the recording day's date) will appear in the Filename area. Click on this folder to open it. If there are sub-folders, click on the bottom one (the most recent would be at the bottom) until you can click on a file that cannot open to another sub-level and shows data in the File Information area to the right. This would be the file of the most recent recording event.
13. To play this file, click the **Play** button below the video box. The test footage you have recorded should start playing. Play time should be 10 seconds if you left the Post-trigger Buffer as 10 seconds.


6.3 Playing Back Using ARV Viewer


You can play back the recordings stored in the computer using the **ARV Viewer**  included in the software CD. To store the recordings in the computer, please refer to **Copy** in 6.1 Remote Playback using Playback Page.

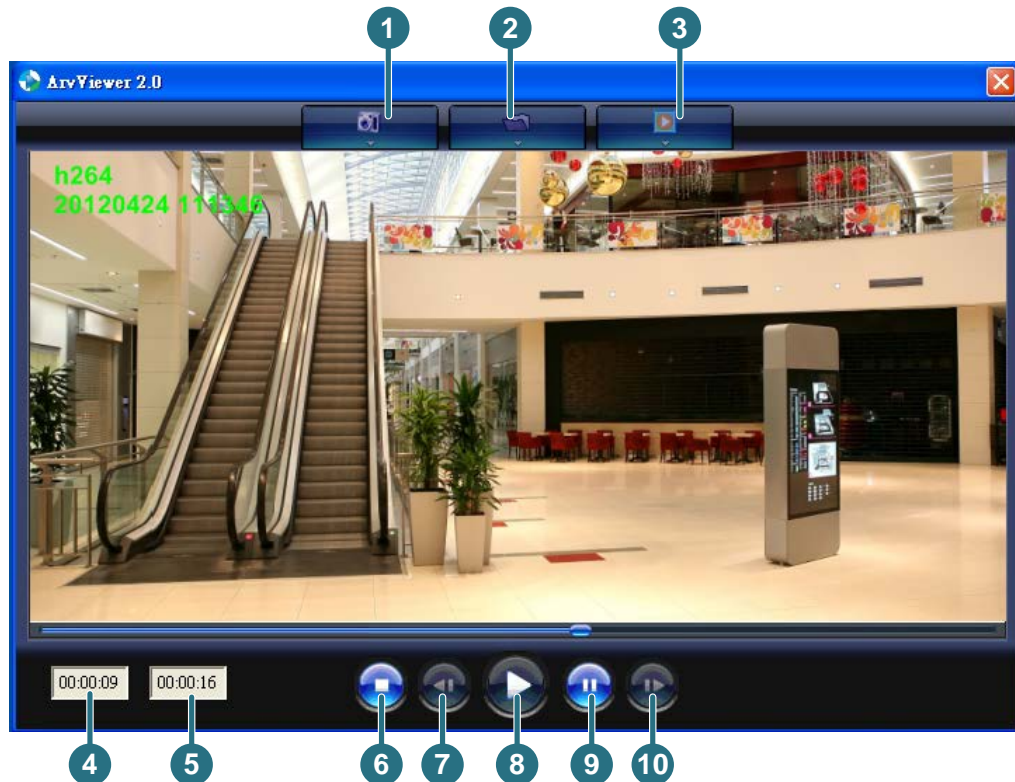

No.	Item Name	Descriptions
1	Snapshot	Click to take and save a snapshot.
2	Load File	Click to load the recordings for playing back.
3	Convert ARV to AVI	Convert the recording from ARV format to AVI format.
4	Playback Time	Display the playback time.
5	Total Time of Recording	Display the total time of the recording.
6	Stop	Click to stop playing the recording.
7	Step Reverse	Click to display the previous frame.
8	Play	Click to play back the recording.
9	Pause	Click to pause the recording.
10	Step Forward	Click to display the next frame.

7. Settings

Click the **Setting** button  on the Live View Window to enter the setting submenu. There are two tabs: Basic and Advanced on the left-side bar. You can set up the basic camera settings in the **Basic** tab. To further set up comprehensive camera settings, click the **Advanced** tab, which includes all the settings to be configured. The chapters below describe the detailed information of the Advanced tab.

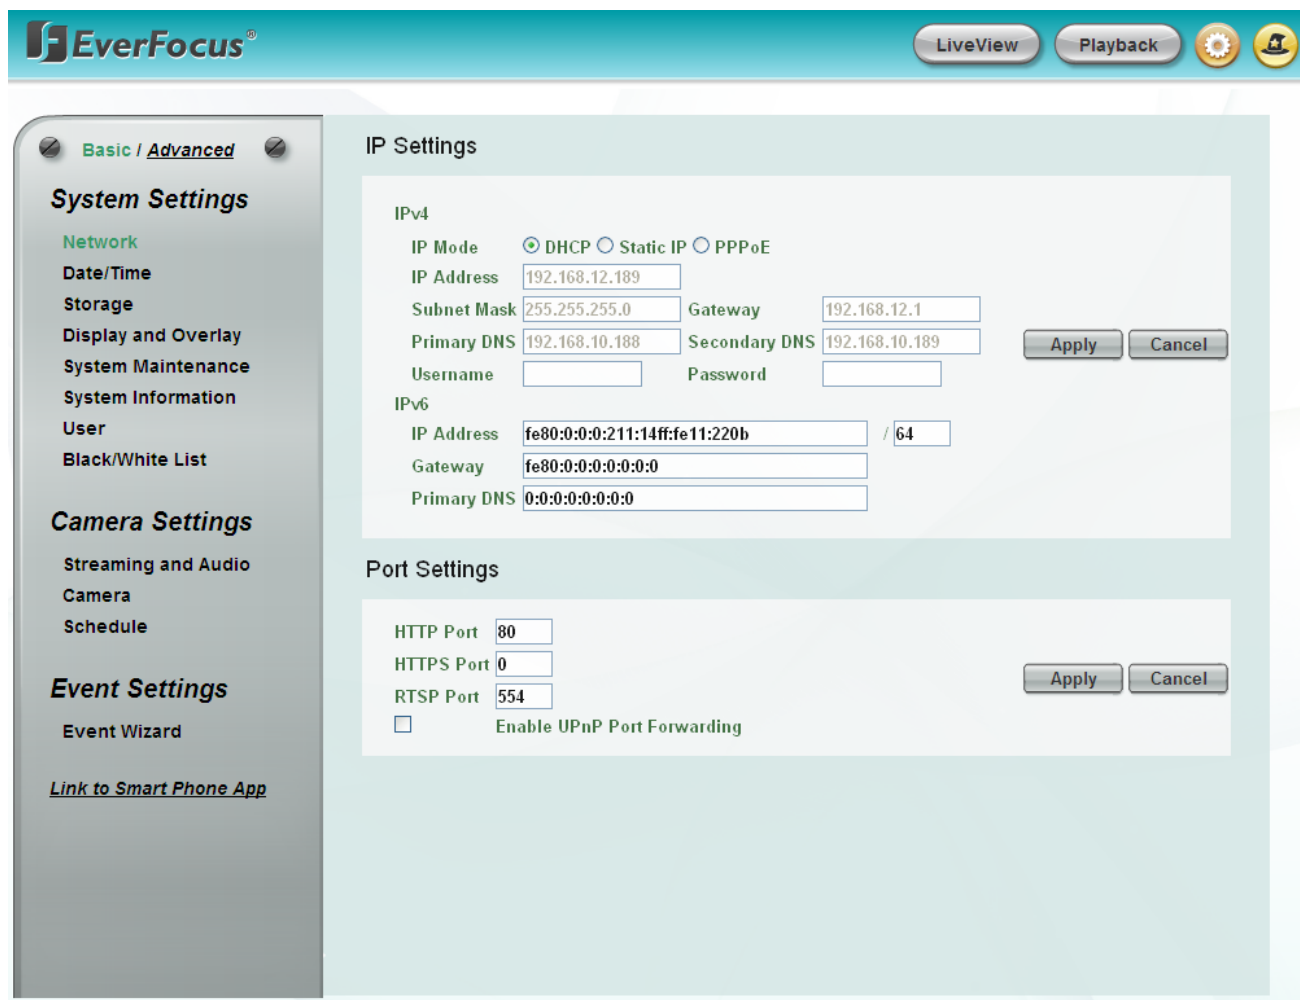

The screenshot displays the EverFocus web interface. At the top, there is a header bar with the EverFocus logo, a 'LiveView' button, a 'Playback' button, and two circular icons (a gear and a camera). On the left side, there is a sidebar menu with the following sections: 'System Settings' (containing Network, Date/Time, Storage, Display and Overlay, System Maintenance, System Information, User, and Black/White List), 'Camera Settings' (containing Streaming and Audio, Camera, and Schedule), and 'Event Settings' (containing Event Wizard). Below the sidebar, there is a link to 'Link to Smart Phone App'. The main content area is titled 'IP Settings' and contains two sub-sections: 'IPv4' and 'IPv6'. The 'IPv4' section has fields for IP Mode (DHCP selected), IP Address (192.168.12.189), Subnet Mask (255.255.255.0), Gateway (192.168.12.1), Primary DNS (192.168.10.188), Secondary DNS (192.168.10.189), Username, and Password. The 'IPv6' section has fields for IP Address (fe80:0:0:211:14ff:fe11:220b), Gateway (fe80:0:0:0:0:0:0:0), and Primary DNS (0:0:0:0:0:0:0:0). Below these, there is a 'Port Settings' section with fields for HTTP Port (80), HTTPS Port (0), and RTSP Port (554), along with a checkbox for 'Enable UPnP Port Forwarding'. 'Apply' and 'Cancel' buttons are present for both the IP and Port settings sections.

7.1 System Settings

7.1.1 Network



The screenshot displays the EverFocus web interface for network configuration. The top navigation bar includes the EverFocus logo, a 'LiveView' button, a 'Playback' button, and icons for settings and help. The left sidebar contains a menu with categories: System Settings (Basic/Advanced), Camera Settings, and Event Settings. The main content area is titled 'Network' and contains several sections:

- Protocol Settings:** Includes radio buttons for RTP over UDP, RTP over TCP, RTP over HTTP, and Nevio CGI (selected). Buttons for 'Apply' and 'Cancel' are present.
- IP Settings:**
 - IPv4:** Includes fields for IP Mode (DHCP selected, Static IP, PPPoE), IP Address (192.168.12.189), Subnet Mask (255.255.255.0), Gateway (192.168.12.1), Primary DNS (192.168.10.188), Secondary DNS (192.168.10.189), Username, and Password. Buttons for 'Apply' and 'Cancel' are present.
 - IPv6:** Includes fields for IP Address (fe80:0:0:211:14ff:fe11:220b), Gateway (fe80:0:0:0:0:0:0:0), and Primary DNS (0:0:0:0:0:0:0:0). A '/ 64' suffix is shown next to the IP address field.
- Port Settings:** Includes fields for HTTP Port (80), HTTPS Port (0), and RTSP Port (554). A checkbox for 'Enable UPnP Port Forwarding' is present. Buttons for 'Apply' and 'Cancel' are present.
- Multicast Settings:** Includes a checkbox for 'Enable Multicast', Multicast IP (239.238.144.152), Port (50000), and Time to Live (5). Buttons for 'Apply' and 'Cancel' are present.
- DDNS Settings:**
 - Includes a checkbox for 'Enable Service ISP' and a radio button for 'www.everfocusddns.com' (selected).
 - Fields for IP Camera Name, .everfocusddns.com, Record ID, FQDN, Username, and Password are present.
 - Buttons for 'Register', 'Apply', and 'Cancel' are present.
- HTTPS Settings:**
 - Includes radio buttons for 'Self-signed Certificated' and 'Certificate Request'.
 - Fields for Country Name, State or Province Name, Locality Name, Organization Name, Organization Unit Name, Common Name, Email, and Validity (Day) are present.
 - Buttons for 'Apply' and 'Cancel' are present.
 - Fields for Created Request, Install Signed Certificated, and Install Certificated Info are present.
 - Buttons for 'Property', 'Remove', 'Browse', and 'Upload' are present.
 - A 'Property Information' section is at the bottom.

【Protocol Settings】 This function can only be set up in the **Advanced** tab. You can transmit the data stream from the IP cameras using the RTSP (Real Time Streaming Protocol) on the network. The RTSP is a protocol that allows you to access video streams by using the compatible media players. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

- **RTP over UDP:** The RTSP protocol uses UDP for camera data stream transmission.
- **RTP over TCP:** The RTSP protocol uses TCP for camera data stream transmission.
- **RTP over HTTP:** The RTSP protocol uses HTTP for camera data stream transmission.
- **Nevio CGI:** This is EverFocus' protocol designed for EverFocus' IP devices. Select this protocol for camera data stream transmission.

【IP Settings】 Enter the IPv4 / IPv6 details in this area, which applies to your system. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

■ **IPv4:**

IP Mode: Refer to the network administrator for these settings of the server. **Default: DHCP.**

- **DHCP:** This setting lets the system use an automatically assigned (dynamic) IP address. This address can change under certain circumstances. For instance, when the camera's network switch/hub has to be rebooted. Do not assign to the DHCP server the same IP addresses used for the other network cameras and PCs with unique IP addresses.
- **Static IP:** The user can manually set the Static IP address. This type of address is stable and cannot change, but the user has to make sure there are no address conflicts with other network-connected devices.
- **PPPoE:** This is a DSL-connection application. The ISP will ask the user to input a username and password. Contact your ISP for these details.

Note: If PPPoE is selected as the IP type, the supplied IP Utility program will not be able to detect the device.

IP address: When DHCP is not used, the user needs to manually enter the IP address of the camera. Do not enter an IP address that is already used for your computer or other network cameras.

Subnet Mask: This field is used to set the subnet mask for your network, so that the IP camera will be recognized within the network. Example: 255.255.255.0. When DHCP is selected, the DHCP server will assign this value automatically.

Gateway: This field is used to set the gateway for your network so that the IP camera will be recognized within the network. When DHCP is selected, the DHCP server will assign this value automatically.

Primary DNS: Enter the IP address of the DNS server if this is provided by an ISP.

Secondary DNS: If your ISP provided you with a secondary DNS address, please enter it here.

Username: Enter the account's username (used only for PPPoE).

Password: Used only for PPPoE.

- **IPv6:** Enter the IPv6 details in this area, if this applies to your system.

【Port Settings】 Enter the HTTP, HTTPS and RTSP port numbers. Check the **Enable UPnP Port Forwarding** box to enable the UPnP function. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

Promoted by the UPnP Forum (Universal Plug and Play), the UPnP is a networking architecture providing compatibility among networked devices listed in the networked device table. Enable the UPnP function means you can directly connect the cameras listed in the networked device table by clicking on them.

Note:

1. For the UPnP function to work, an UPnP-enabled router is required.
2. The UPnP function may fail owing to the compatibility between the camera and the router.

【Multicast Settings】 This function can only be set up in the **Advanced** tab. Enable if required, fill in the setting options and click **Apply** to save.

【DDNS Settings】 This function can only be set up in the **Advanced** tab. DDNS (Dynamic Domain Name System) is a service used to map a domain name to the dynamic IP address of a network device. You can set up the DDNS service for remote access to the IP camera. DDNS assigns a domain name (URL) to the IP camera, so that the user does not need to go through the trouble of checking if the IP address assigned by DHCP Server has changed. Once the IP is changed, the IP camera will automatically update the information to the DDNS to ensure it is always available for remote access. Before enabling the following DDNS function, user should have applied for a host name from the DDS service provider's website. We support these four DDNS server providers: www.everfocusddns.com, www.sitelutions.com, www.dyndns.com, and www.no-ip.com

Note: We highly recommend that you use **xxxx.everfocusddns.com** for the simplicity of setting up your IP cameras.

- **Enable Service ISP:** Check this box to enable the DDNS function. You can either apply for a host name from **EverFocus** or **other DDNS server providers**.
 - **From EverFocus:** If you choose the EverFocus DDNS server, you can obtain a free host name from EverFocus. To obtain a free host name from EverFocus, type a desired host name in the textbox, click the **Register / Update** button, and then click the **Apply** button.
 - **From other DDNS server providers:** To obtain a domain name from one of the three DDNS server providers, you have to register your name with the provider first, and then select the provider and fill in the required information. Please refer to the specific DDNS company's website for further information.

Record ID: Type the record ID if provided by the DDNS server provider.

FQDN: Type the fully qualified domain name applied from the DDNS server provider. For example, xxxx.dyndns.com

Username / Password: Type the login account of your DDNS server provider.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

Note:

1. In order to support the full functionality of the camera, you must open the port numbers (80, 554, 443) on the router for remote access to the IP camera. This function is available on most routers in the market and is often known as “Port Forwarding”. To set up Port Forwarding, please consult the manual of the router.
2. In certain router models, it is possible that you will not be able to access the camera using DDNS while inside the router’s network. Please try using a PC located outside of your router’s network.

Default Ports on All EverFocus IP Cameras:

HTTP: 80

RTSP: 554

HTTPS: 443

【HTTPS Settings】 This function can only be set up in the **Advanced** tab. Hypertext Transfer Protocol Secure (HTTPS) is a combination of the Hypertext Transfer Protocol and the SSL/TLS protocol that provides encrypted communication and secure identification of a network web server. Before using the HTTPS function for communication with the IP camera, a Certificate must be created first. There are two ways to create and install a certificate: **Self-Signed Certificated** and **Certificate Request**.

Self-Signed Certificated

Please note that even though self-signed certificates are free and offer some protection, true security is only implemented after the installation of a signed certificate issued by a certificate authority.

1. Select **Self-Signed Certificated** and fill in the following information.

Create Certificated Mode	<input checked="" type="radio"/> Self-signed Certificated <input type="radio"/> Certificate Request
Country Name	TW
State or Province Name	TPE
Locality Name	TPE
Organization Name	EF
Organization Unit Name	PM
Common Name	1
Email	everfocus@everfocus.c
Validity	7 Day

2. Click the **Apply** button. The subject line will be displayed in the Install Certificated Info field.

Install Certificated Info	C=TW,ST=TPE,L=TPE,O=EF,OU=PM,CN=1	Property	Remove
---------------------------	-----------------------------------	----------	--------

3. Click the **Property** button, a pop-up window appears to display the details of the certificate.

Property Information Install Certificated Info Property Not Valid Before : Tue Sep 6 22:10:33 2011 Not Valid After : Tue Sep 13 22:10:33 2011 Subject : C=TW,ST=TPE,L=TPE,O=EF,OU=PM,CN=1 Certificated (PEM format) : -----BEGIN RSA PRIVATE KEY----- MIICXglBAAKBgQCyludiB5SKR0JaRUvxeZmZDorhDosOpDidwRYTo4Ylr5N/kAAI memxkCjQSiVh317WkMC2oOnS0P4gtNqvUDSz3iLTKSJUnjtoazZ8Yd57Q8b0SbZg HXSB66JuoiT+7oB6x040EI2Ue32Im20wAsXxVV0Coq4FkhiRs2LzTkuf8QIDAQAB AoGARK/Rclyj/sMFfB6m5Mr2Dm4PcBvd09XJiLMYwJjmFjUhl7C8vbmCri5Z5DKA SJJVEYU++X7OL6z98KpeaYsZmWdfAa1cz7j06phgzlrFeoq6qtgXTkWZ4V8lgx8P 0rg5nZ4HyCTk/BYa4kHBBGsNWccDa+99Z3Ze0tbep/Js0xkCQQDnH6M8bhNlcaWy lzbNK/PLxgXFmevUuR2t3Rs8NRh0I23VI4BWiVbVx6AbcoEqs8K6LywHzHFcJBBQ ZZt45qwPAKEAxc++t+1NSjW6Dgr2PnjT9sg8vL8NIZ0dqjDMEdVQM/NE+MZGUrMk PtZsz1Pk75M4QD9g9yCj1V8nnTC+/Yzz/wJBALveo7nDYFDdiGsbL5inWY0SciI Z2WK8+0YBcNzBWYAkW7nZLLzAHrVwfeNpCEp7eeZ4JiWPq8/QWOYtEAagVECQODA 7k5ltd2cc6pz590kMVULbWFP9keZIRRJ2i4vdo4zHSI4Qap1HqRLZXfa/0hblovK
--

4. To optionally create and install other certificates, remove the existing one by clicking the **Remove** button to erase the certificate.
5. On the Web page, change the address from "http://" to <https://> in the address bar and press Enter on the keyboard. Some Security Alert dialogs will pop up. Click **OK** or **Yes** to enable HTTPS.

Create Certificate Request

You can apply for an official certificate from an issuing Certificate Authority.

1. Select **Certificate Request** and fill in the following information.

Create Certificated Mode	<input type="radio"/> Self-signed Certificated <input checked="" type="radio"/> Certificate Request
Country Name	TW
State or Province Name	TPE
Locality Name	TPE
Organization Name	EF
Organization Unit Name	PM
Common Name	1
Email	everfocus@everfocus.c
Validity	7 Day

2. Type the required Certificate information and then click the **Apply** button. The subject line will be displayed in the Created Request field

Created Request	C=TW,ST=TPE,L=TPE,O=EF,OU=PM,CN=1	Property	Remove
-----------------	-----------------------------------	----------	--------

3. Click the **Property** button, a pop-up window appears to display the details of the certificate.

Property Information

Created Request Property

Subject : C=TW,ST=TPE,L=TPE,O=EF,OU=PM,CN=1

Certificated (PEM format) :

```

-----BEGIN CERTIFICATE-----
MIIDQzCCAqygAwIBAgIJA0wbJX1WmibSMA0GCSqGSIb3DQEBBQUAMHUxCzAJBgNV
BAYTAIRXMQwwCgYDVQQIEwNUUEUxDDAKBgNVBACjA1R0RTELMAkGA1UEChMCRUYx
CzAJBgNVBAsTAIBNMQowCAYDVQQDEwExMSQwIlgYJKoZIhvcNAQkBFhVldmVyZm9j
dXNAZXZlcmZvY3VzLmMwHhcNMTEwOTA2MjlyNTEwWWhcNMTEwOTEzMjlyNTEwWjB1
MQswCQYDVQQGEwJUVzEMMAoGA1UECBMDVFBFMQwwCgYDVQQHEwNUUEUxMzAJBgNV
BAoTAKVGMQswCQYDVQQLEwJQTTEKMAkGA1UEAxMBMTEkMCIGCSqGSIb3DQEJARYV
ZXZlcmZvY3VzQGV2ZXJmb2N1cy5jMIGfMA0GCSqGSIb3DQEBQUAA4GNADCBiQKB
gQDGEUBQQIPWgIEqDZmtOWb/2Q+yAgF8roJgoiEwURY5vPH72acjVsEo4/+XeNIT
yxR8r1UeUviAduMXpnwNe04VhTKceC5eWkPEgyEebQtZITdPw+3GZije00SK5Ztp
hnhA0MwLJCMSKVMRFTaU3H/UmJkJKI+F55z3q+EqC0mRNwIDAQABo4HaMIHXB0G
A1UdDgQWBBTh07oQ3ydr7X+fzBljxWAQ7ZTLBzCBpwYDVROjBIGfMIGcgBTh07oQ
3ydr7X+fzBljxWAQ7ZTLB6F5pHcWdTELMakGA1UEBhMCVFcxDDAKBgNVBAGTA1RQ
RTEMAoGA1UEBxMDVFBFMQswCQYDVQQKEwJFRjJELMAkGA1UECjMCUEUxMzAJBgNV


```

4. To optionally create and install other certificates or request, remove the existing one by clicking the **Remove** button to erase the certificate or request.

5. Copy the contents of the Certificate request (in PEM format) and paste it to the certificate request field on the Web page of the 3rd-party certification authority such as Symantec VeriSign. Wait for the certificate authority to issue an SSL/TLS certificate and then download the issued certificate on your computer.
6. In the Install Signed Certificated field, click the **Browse** button to search for the issued certificate, and then click the **Upload** button to import the certificate. Once the certificate has been uploaded, this field will show the subject line of the certificate.

7.1.2 Date / Time

You can set up the system's time on this page.

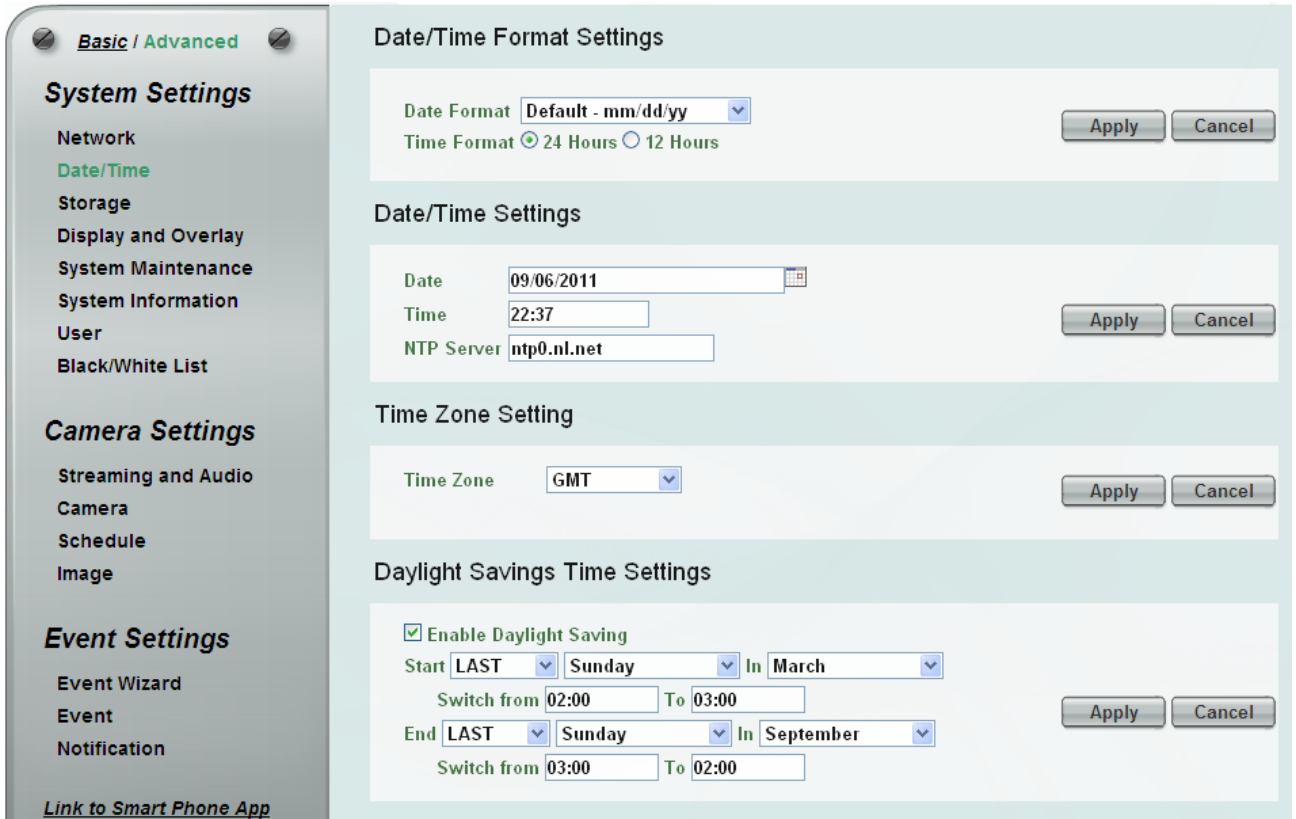

Basic / Advanced

System Settings

- Network
- Date/Time**
- Storage
- Display and Overlay
- System Maintenance
- System Information
- User
- Black/White List

Camera Settings

- Streaming and Audio
- Camera
- Schedule
- Image

Event Settings

- Event Wizard
- Event
- Notification

[Link to Smart Phone App](#)

Date/Time Format Settings

Date Format:

Time Format: ☒ 24 Hours ☐ 12 Hours

Date/Time Settings

Date:

Time:

NTP Server:

Time Zone Setting

Time Zone:

Daylight Savings Time Settings

☒ Enable Daylight Saving

Start: In

Switch from To

End: In

Switch from To

【Date/Time Format Settings】 Select the desired Date / Time format and then click the **Apply** button.

【Date/Time Settings】


- **Manual:** Set the date/time if you won't be using an NTP server to update the date/time. Click **Apply** to save the setting.
- **NTP:** Enter the Network Time Protocol server, if applicable. The camera's time will be automatically adjusted by synchronizing with the NTP server. Click **Apply** to save the setting.

【Time Zone Setting】 Set the time zone of the camera's location. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【Daylight Savings Time Settings】 Click **Enable Daylight Saving** to enable this schedule, and select the dates when the region's daylight saving period begins and ends. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

7.1.3 Storage

You can configure the recording path / format, source video stream and SD card settings on this page.

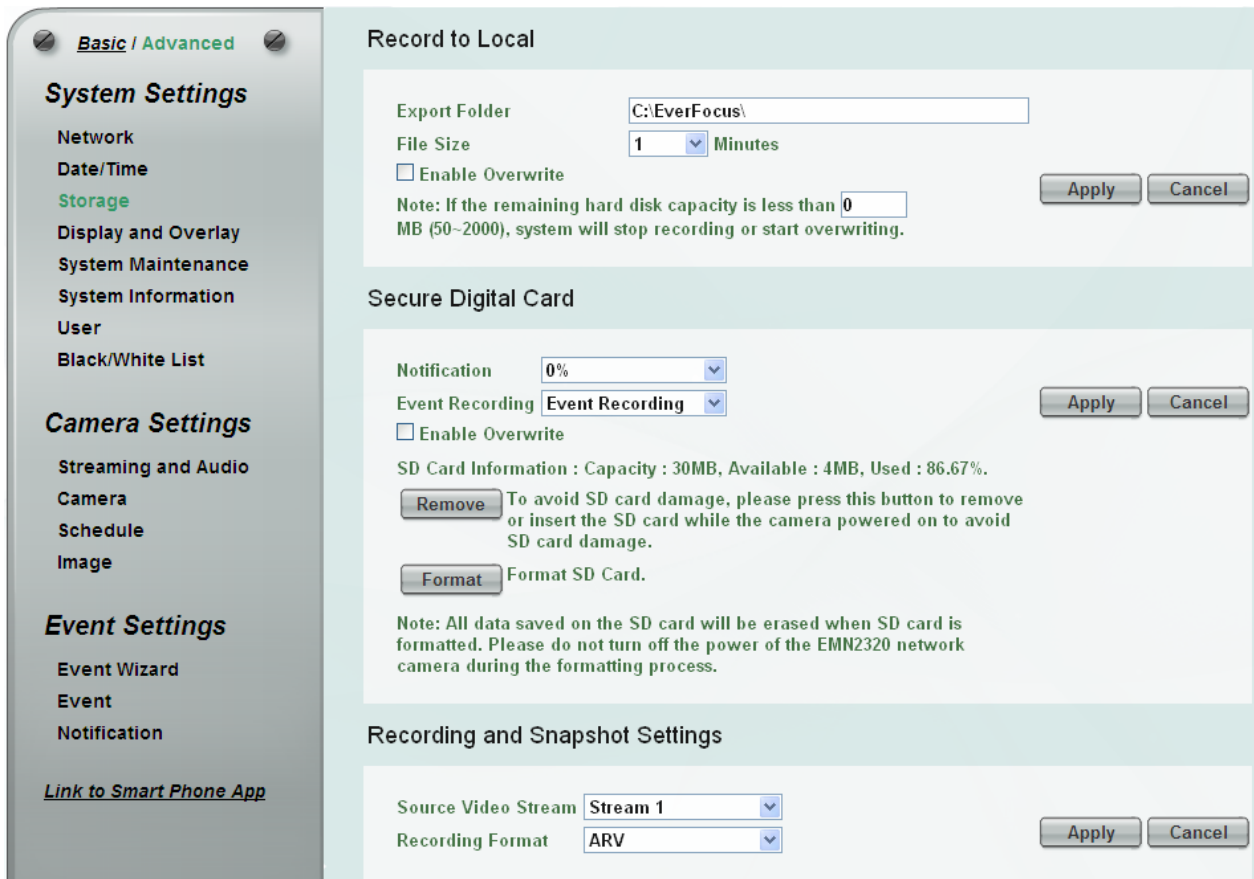

Basic / Advanced

System Settings

- Network
- Date/Time
- Storage**
- Display and Overlay
- System Maintenance
- System Information
- User
- Black/White List

Camera Settings

- Streaming and Audio
- Camera
- Schedule
- Image

Event Settings

- Event Wizard
- Event
- Notification

[Link to Smart Phone App](#)

Record to Local

Export Folder:

File Size: Minutes

☐ Enable Overwrite

Note: If the remaining hard disk capacity is less than MB (50~2000), system will stop recording or start overwriting.

Secure Digital Card

Notification:

Event Recording:

☐ Enable Overwrite

SD Card Information : Capacity : 30MB, Available : 4MB, Used : 86.67%.

To avoid SD card damage, please press this button to remove or insert the SD card while the camera powered on to avoid SD card damage.

Format SD Card.

Note: All data saved on the SD card will be erased when SD card is formatted. Please do not turn off the power of the EMN2320 network camera during the formatting process.

Recording and Snapshot Settings

Source Video Stream:

Recording Format:

【Record to Local】 This function can only be set up in the **Advanced** tab. You can configure the storage path for storing the recordings / snapshot on your PC.

- **Export Folder:** Type the storage path for storing the recordings / snapshot.
- **File size:** The user can limit the size of each recorded file here (in minutes). When a single recording file exceeds the time you set, the system will create a new file to save that data to.
- **Enable Overwrite:** Check the box for overwriting recording/snapshot file when the disk storage capacity is full. The user can set the storage capacity limitation in the in-sentence box below the Enable Overwrite setting: "If the remaining hard disk capacity is less than ____ MB (50~2000), ... "

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【Secure Digital Card】

- **Notification:** Select the percentage of storage space that should be left on the card before the camera notifies you of the impending storage shortage or overwrite. The notification will be sent out through the E-mail (*Event Settings > Notification > SMTP (Email) Settings*).
- **Event Recording:** Select if you want event recording, FTP back up or both.


- **Enable Overwrite:** Check the box if you want the card to start writing over recorded footage when its memory is full. Uncheck the box if you want the card to stop recording new footage when its memory is full.
- **SD Card Information:** If a SD card has been inserted to the card slot of the camera, the SD card information will be displayed in this field.
- **Remove:** Click before removing the card from the system (6.2.1 *Inserting / Removing the SD Card*).
- **Format:** Click to format the card. All data saved on the SD card will be removed if the card is formatted (6.2.1 *Inserting / Removing the SD Card*).

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【Recording and Snapshot Settings】 Select the desired video stream and recording format. The video stream can be configured in 7.2.1 *Streaming and Audio*. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

7.1.4 Display and Overlay

You can configure the recording path / format, source video stream and SD card settings on this page.

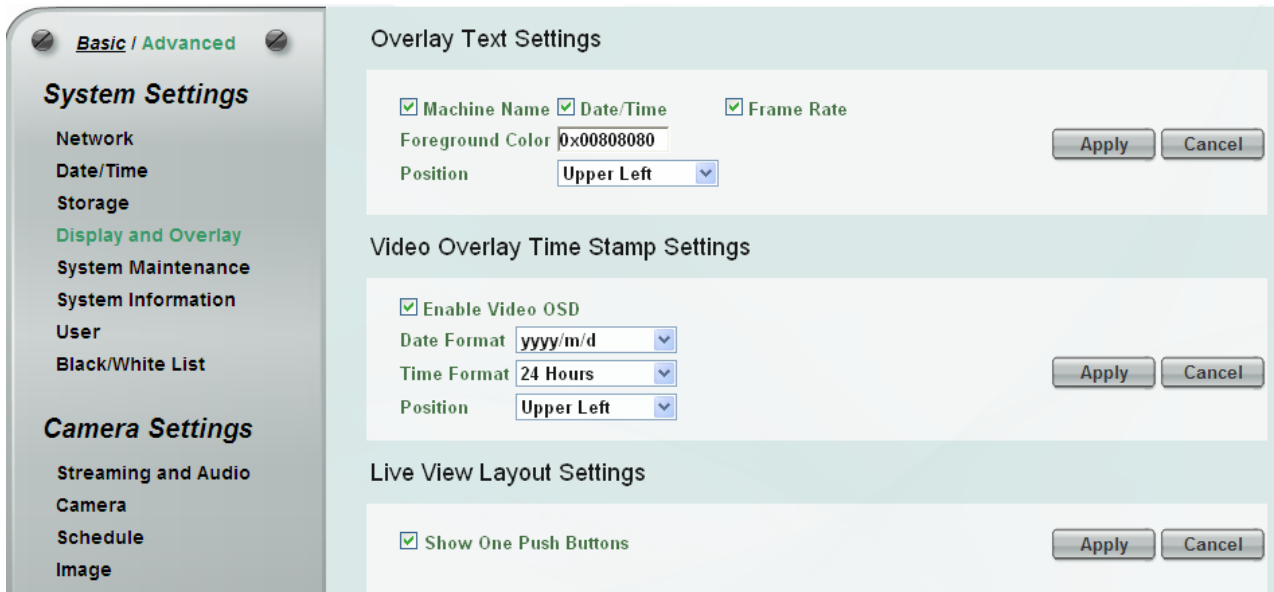

System Settings

- Basic / Advanced
- Network
- Date/Time
- Storage
- Display and Overlay
- System Maintenance
- System Information
- User
- Black/White List

Camera Settings

- Streaming and Audio
- Camera
- Schedule
- Image

Overlay Text Settings

☒ Machine Name
 ☒ Date/Time
 ☒ Frame Rate

Foreground Color:
 Position:

Video Overlay Time Stamp Settings

☒ Enable Video OSD

Date Format:
 Time Format:
 Position:

Live View Layout Settings

☒ Show One Push Buttons


【Overlay Text Settings】 Check the boxes to display the information on the Live View Page. To change the foreground color of the text, directly click on the box and then select a color. Select a position where you want the information to be displayed on the Live Window. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【Video Overlay Time Stamp Settings】 Check the **Enable Video OSD** box to enable displaying time/day information on the live view window. Select the desired Date/Time format and the position where you want the time/day information to be displayed on the Live View window. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【Live View Layout Settings】 Check the box if you want to show the One Push button on the Live View Page. Uncheck this box to hide the button. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

7.1.5 System Maintenance


You can configure the recording path / format, source video stream and SD card settings on this page.

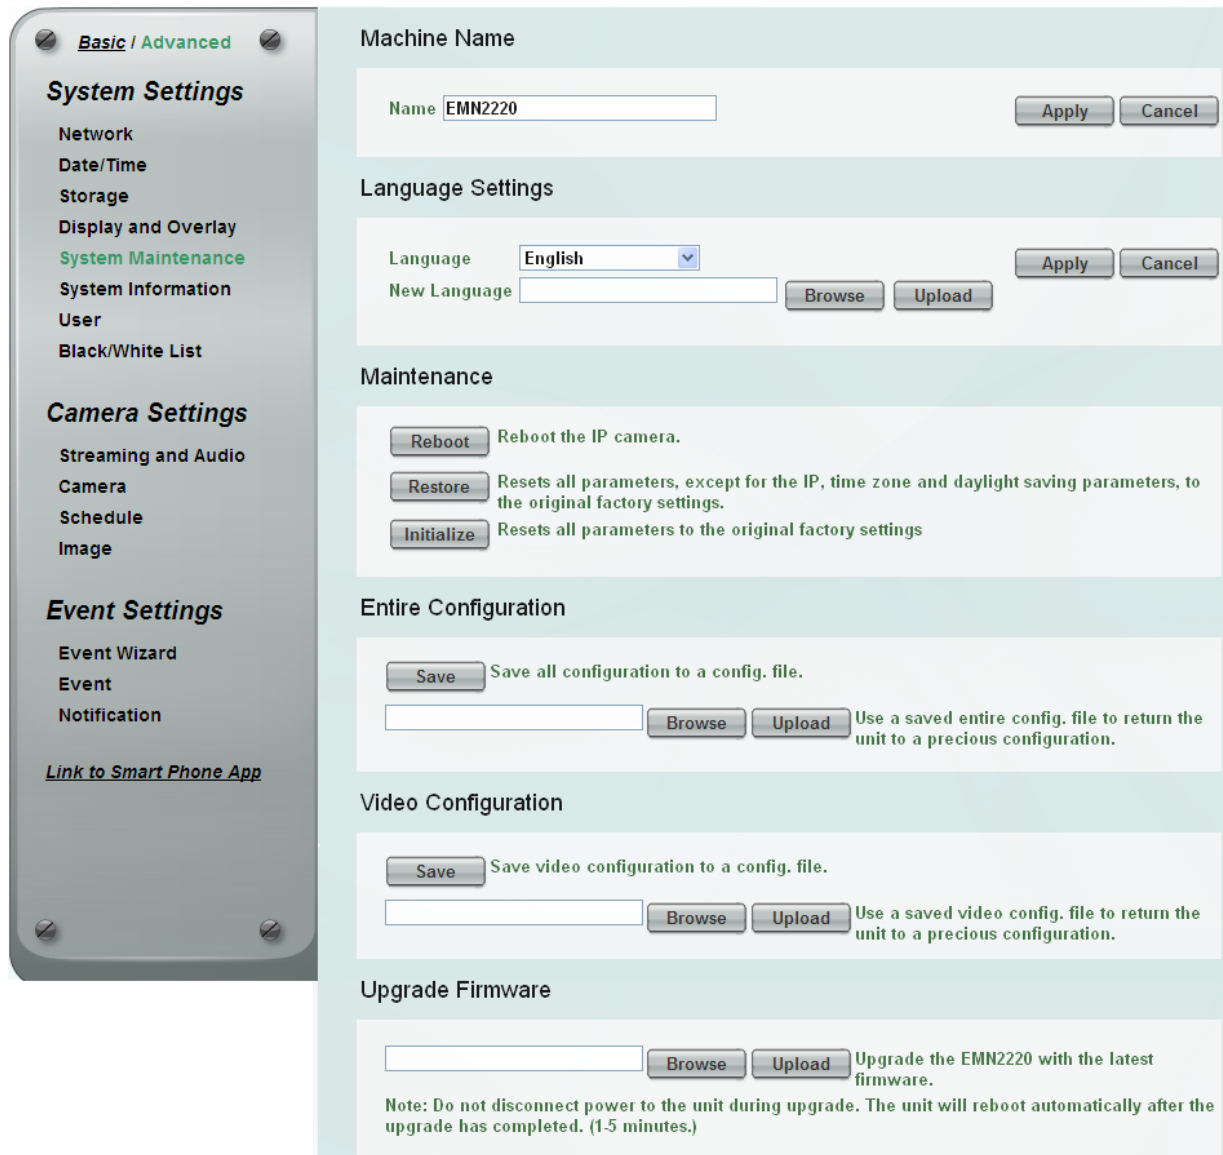

The screenshot shows the 'System Maintenance' page of the EMN2220 web interface. The left sidebar contains a menu with categories: System Settings, Camera Settings, and Event Settings. The 'System Settings' category is expanded, showing options like Network, Date/Time, Storage, Display and Overlay, System Maintenance (highlighted), System Information, User, and Black/White List. The main content area is divided into several sections:

- Machine Name:** A text field containing 'EMN2220' with 'Apply' and 'Cancel' buttons.
- Language Settings:** A dropdown menu set to 'English', a 'New Language' text field, and 'Browse' and 'Upload' buttons. 'Apply' and 'Cancel' buttons are also present.
- Maintenance:** Three buttons: 'Reboot' (Reboot the IP camera.), 'Restore' (Resets all parameters, except for the IP, time zone and daylight saving parameters, to the original factory settings.), and 'Initialize' (Resets all parameters to the original factory settings).
- Entire Configuration:** A 'Save' button (Save all configuration to a config. file.), a text field, and 'Browse' and 'Upload' buttons (Use a saved entire config. file to return the unit to a previous configuration.).
- Video Configuration:** A 'Save' button (Save video configuration to a config. file.), a text field, and 'Browse' and 'Upload' buttons (Use a saved video config. file to return the unit to a previous configuration.).
- Upgrade Firmware:** A text field, 'Browse' and 'Upload' buttons (Upgrade the EMN2220 with the latest firmware.), and a note: 'Note: Do not disconnect power to the unit during upgrade. The unit will reboot automatically after the upgrade has completed. (1.5 minutes.)'

【Machine Name】 C If required, enter a new name for the machine. This name will be visible in the Machine Name field of the IP Utility software, which is included in the software CD. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

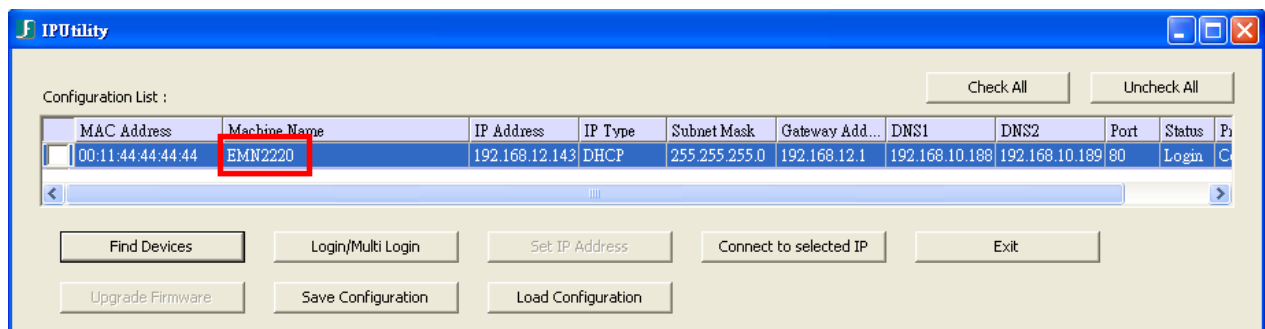

The screenshot shows the 'IP Utility' software interface. It features a 'Configuration List' table with columns: MAC Address, Machine Name, IP Address, IP Type, Subnet Mask, Gateway Add..., DNS1, DNS2, Port, Status, and P. The 'Machine Name' column for the first entry is highlighted with a red box and contains the value 'EMN2220'. Below the table are several buttons: 'Find Devices', 'Login/Multi Login', 'Set IP Address', 'Connect to selected IP', 'Exit', 'Upgrade Firmware', 'Save Configuration', and 'Load Configuration'.

【Language Settings】 Select the language to be displayed on the Web interface of the IP camera. The default language is English.

To add a new language not listed in the current Language list, click the **Browse** button to locate the new language file (.evb) on your computer and then click the **Upload** button. Updated language files might be available on the manufacturer's website. Contact your vendor if required.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

Note: Uploading a new language file will cause the system to reboot automatically. Please create a new network connection to the IP camera when the reboot is complete.

【Maintenance】

- **Reboot:** Click to reboot the unit without changing any of the settings. Use this function if the unit is not behaving as expected.
- **Restore:** Click to restart and reset most of the current settings to their factory default values. The only settings that will not be changed to default are: IP Settings and DDNS Settings.
- **Initialize:** This function can only be set up in the **Advanced** tab. This button should be used with caution. Clicking this button will return all of the camera's settings, including the IP address, to the factory default values. The camera will then have to be reconfigured.

【Entire Configuration】

- **Save:** To make a backup file of the machine's current configurations, click this button to save all the configurations to a configuration file. This will enable the user to reload these configuration settings if the settings are changed and there is unexpected behavior.
- **Upload:** This function can only be set up in the **Advanced** tab. To load a previously saved configuration, click the **Browse** button to locate the saved configuration file (see above) and then click the **Upload** button. The system's settings will be restored to the saved configuration.


【Video Configuration】

- **Save:** To make a backup file of the machine's video configurations, click this button to save the video configurations to a configuration file. This will enable the user to reload these configuration settings if the settings are changed and there is unexpected behavior.
- **Upload:** This function can only be set up in the **Advanced** tab. To load a previously saved video configuration, click the **Browse** button to locate the saved configuration file (see above) and then click the **Upload** button. The system's settings will be restored to the saved video configuration.

【Upgrade Firmware】 This function can only be set up in the **Advanced** tab. Click the **Browse** button to find a previously prepared firmware upgrade file. Click the **Upload** button to install the new firmware.


Note:

1. Do not disconnect power to the unit during the upgrade sequence. The unit will reboot automatically after the upgrade has completed (1-5 minutes).
2. During the upgrade process, all event recording actions will be stopped. Event recording actions will resume after the camera is rebooted.
3. If the “File Error, Please re-login!!” warning message appears when upgrading the firmware, please try the following instructions:
 - a. Go to Internet Explorer > Tools > Internet Option > Security > Custom.
 - b. Find and enable the **Include local directory path when uploading files to a server**.

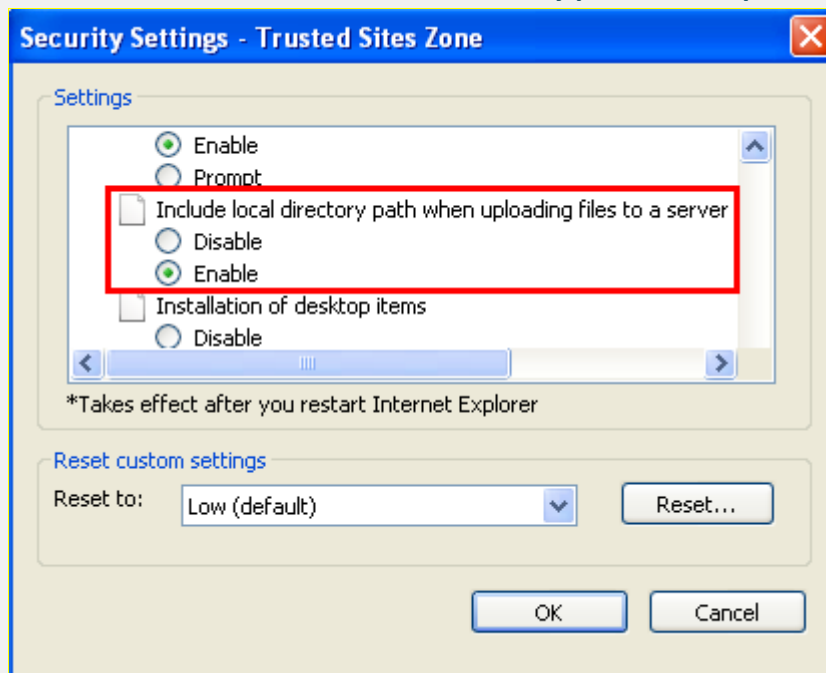

7.1.6 System Information

You can see the system information and log information displayed on this page.

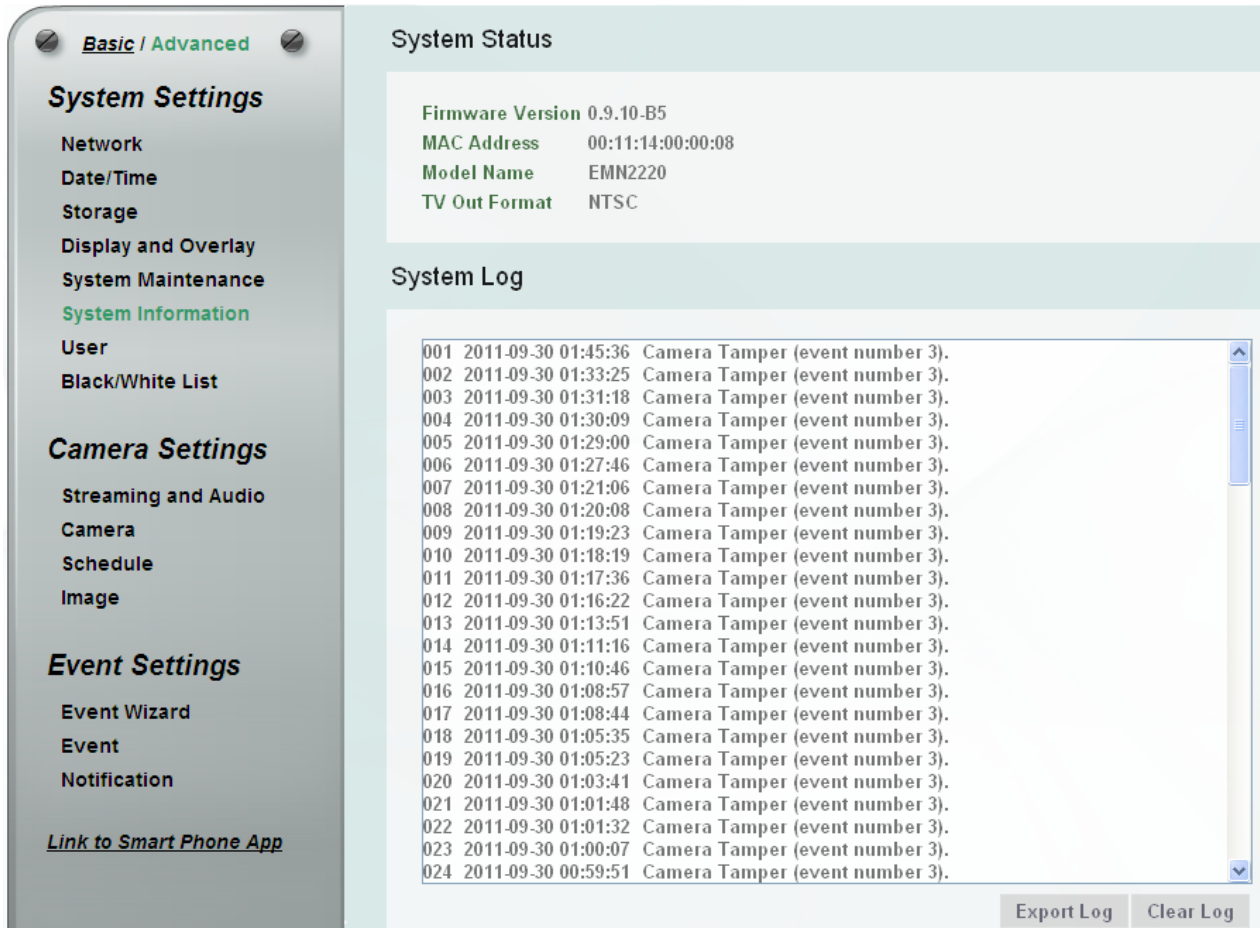

The screenshot displays the EverFocus web interface. On the left is a sidebar with navigation links: **Basic / Advanced** (with a lock icon), **System Settings** (with sub-links: Network, Date/Time, Storage, Display and Overlay, System Maintenance, System Information, User, Black/White List), **Camera Settings** (with sub-links: Streaming and Audio, Camera, Schedule, Image), **Event Settings** (with sub-links: Event Wizard, Event, Notification), and a [Link to Smart Phone App](#). The main content area is divided into two sections: **System Status** and **System Log**.

System Status displays the following information:

Firmware Version	0.9.10-B5
MAC Address	00:11:14:00:00:08
Model Name	EMN2220
TV Out Format	NTSC

System Log displays a list of 24 log events. Each event is numbered and includes a timestamp and a message:

001	2011-09-30 01:45:36	Camera Tamper (event number 3).
002	2011-09-30 01:33:25	Camera Tamper (event number 3).
003	2011-09-30 01:31:18	Camera Tamper (event number 3).
004	2011-09-30 01:30:09	Camera Tamper (event number 3).
005	2011-09-30 01:29:00	Camera Tamper (event number 3).
006	2011-09-30 01:27:46	Camera Tamper (event number 3).
007	2011-09-30 01:21:06	Camera Tamper (event number 3).
008	2011-09-30 01:20:08	Camera Tamper (event number 3).
009	2011-09-30 01:19:23	Camera Tamper (event number 3).
010	2011-09-30 01:18:19	Camera Tamper (event number 3).
011	2011-09-30 01:17:36	Camera Tamper (event number 3).
012	2011-09-30 01:16:22	Camera Tamper (event number 3).
013	2011-09-30 01:13:51	Camera Tamper (event number 3).
014	2011-09-30 01:11:16	Camera Tamper (event number 3).
015	2011-09-30 01:10:46	Camera Tamper (event number 3).
016	2011-09-30 01:08:57	Camera Tamper (event number 3).
017	2011-09-30 01:08:44	Camera Tamper (event number 3).
018	2011-09-30 01:05:35	Camera Tamper (event number 3).
019	2011-09-30 01:05:23	Camera Tamper (event number 3).
020	2011-09-30 01:03:41	Camera Tamper (event number 3).
021	2011-09-30 01:01:48	Camera Tamper (event number 3).
022	2011-09-30 01:01:32	Camera Tamper (event number 3).
023	2011-09-30 01:00:07	Camera Tamper (event number 3).
024	2011-09-30 00:59:51	Camera Tamper (event number 3).


At the bottom right of the System Log section, there are two buttons: **Export Log** and **Clear Log**.

【**System Status**】 Displayed the system information. The values cannot be changed on this page.

【**System Log**】 Displayed the sequence number, date, time and event messages of the log event. The log will display the last 256 log events. Click the **Export Log** button to export the system log event list into a “.txt” file and select the location where the exported log file will be saved to. Click the **Clear Log** to erase all the log data from the SD card. The system will be required to reboot after clicking the Clear Log button.

7.1.7 User

The system administrator can create up to ten user accounts on this page.

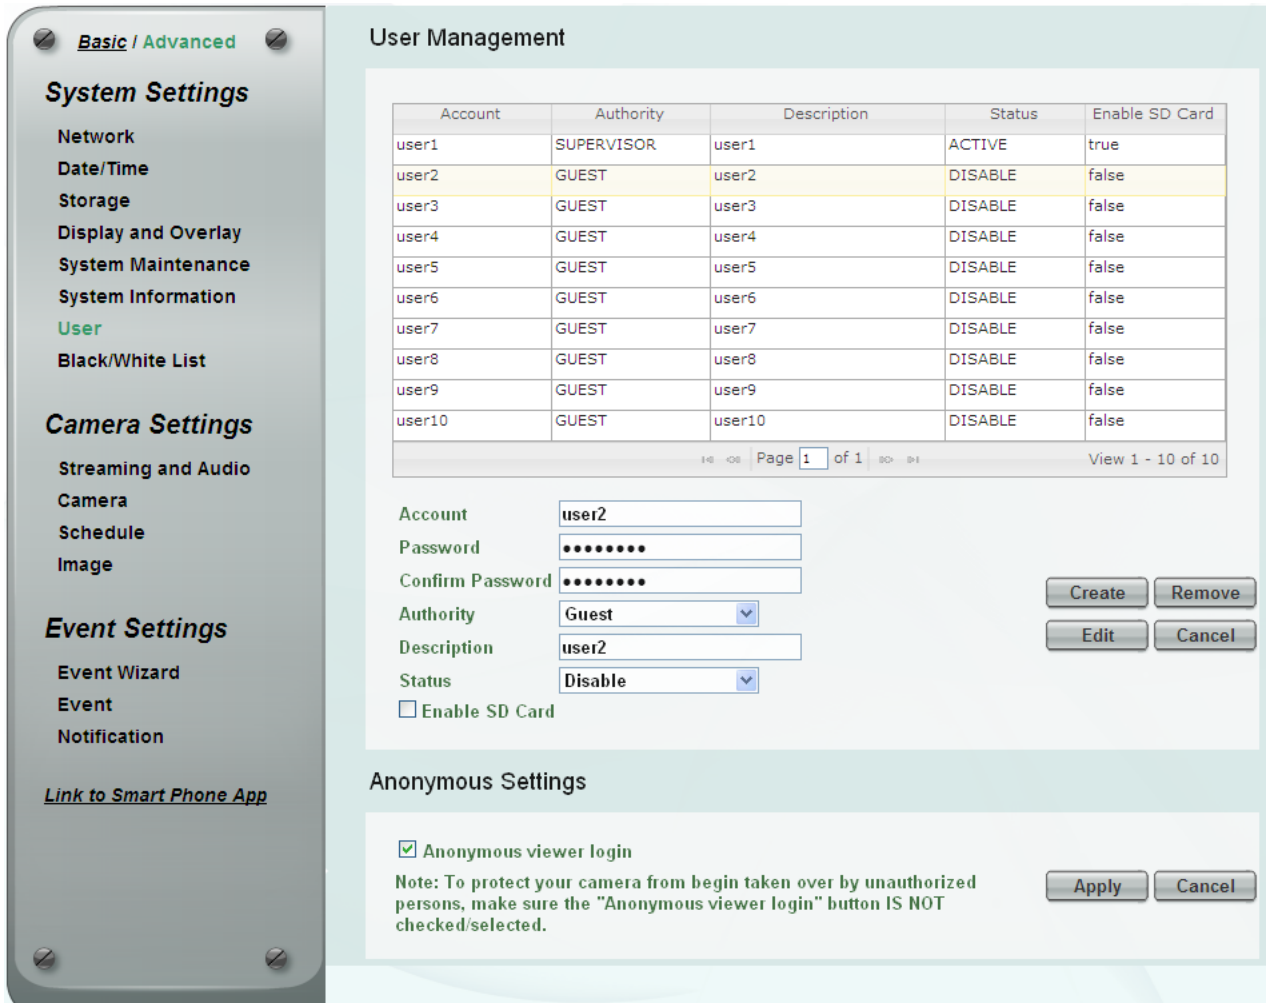

User Management

Account	Authority	Description	Status	Enable SD Card
user1	SUPERVISOR	user1	ACTIVE	true
user2	GUEST	user2	DISABLE	false
user3	GUEST	user3	DISABLE	false
user4	GUEST	user4	DISABLE	false
user5	GUEST	user5	DISABLE	false
user6	GUEST	user6	DISABLE	false
user7	GUEST	user7	DISABLE	false
user8	GUEST	user8	DISABLE	false
user9	GUEST	user9	DISABLE	false
user10	GUEST	user10	DISABLE	false

Page 1 of 1 View 1 - 10 of 10

Account: user2
 Password:
 Confirm Password:
 Authority: Guest
 Description: user2
 Status: Disable
☐ Enable SD Card

Create Remove
 Edit Cancel

Anonymous Settings

☒ Anonymous viewer login

Note: To protect your camera from being taken over by unauthorized persons, make sure the "Anonymous viewer login" button IS NOT checked/selected.

Apply Cancel

【User Management】 The system has automatically created ten user accounts.

To set up an user account:

1. Highlight a user account and its information will be displayed in the field below the account list.
2. Revise the account name, password and description. Select an authority level for the user account.
 - **Supervisor / Administrator:** The only difference between a supervisor and administrator is that a supervisor can edit an administrator's account and password, but an administrator cannot edit the supervisor's account and password. The supervisor and administrators all have unrestricted access to the Setting submenus and can determine the registration of all other users.

- **User:** A user can not only view the live view but also view/configure the below camera settings.

View	Configure
System Settings	
Network	Network > Protocol Settings
Date/Time	Date/Time > Date/Time Format Settings
Storage > Record to Local	Storage > Record to Local
Display and Overlay > Overlay Text Settings	Display and Overlay > Overlay Text Settings
Display and Overlay > Video Overlay Time Stamp Settings	Display and Overlay > Video Overlay Time Stamp Settings
System Maintenance > Language Settings	System Maintenance > Language Settings
System Information	System Information > Export Log
Camera Settings	
Streaming and Audio	-
Camera	-
Schedule	-
Image	-

- **Guest:** The lowest level of access, which only allows the user access to the live view page.
3. Select **Active** or **Disable** to active or disable the user account.
 4. Check the Enable SD Card box to allow the user to access the SD card playback function.
 5. Click the **Edit** button to save the changes.

Create: The button is only activated when the number of list is less than ten. Enter the account information and click the **Create** button, the new account will be listed in the account list.

Remove: Highlight an account and then click the **Remove** button to remove the highlighted account.

Edit: Highlight an account and enter the account information in the boxes below the account list. Click the **Edit** button and the account will be edited.


Cancel: Click the button to cancel the changes and return to the previous settings.

【Anonymous Settings】 Check the box to allow the unauthorized persons to log in the camera. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

7.1.8 Black/White List

Use this page to specify IP addresses that are allowed / denied to access this camera. By default, any IP address can access the camera.

Note: The Allowed IP addresses only become relevant when the Denied items contain a **Network** or **Range**, and the supervisor wants to allow one or more IP addresses within that excluded range or network. In such a scenario, the user would enter the excluded range or network for the Denied items, and enter the exceptions for the Allowed items.

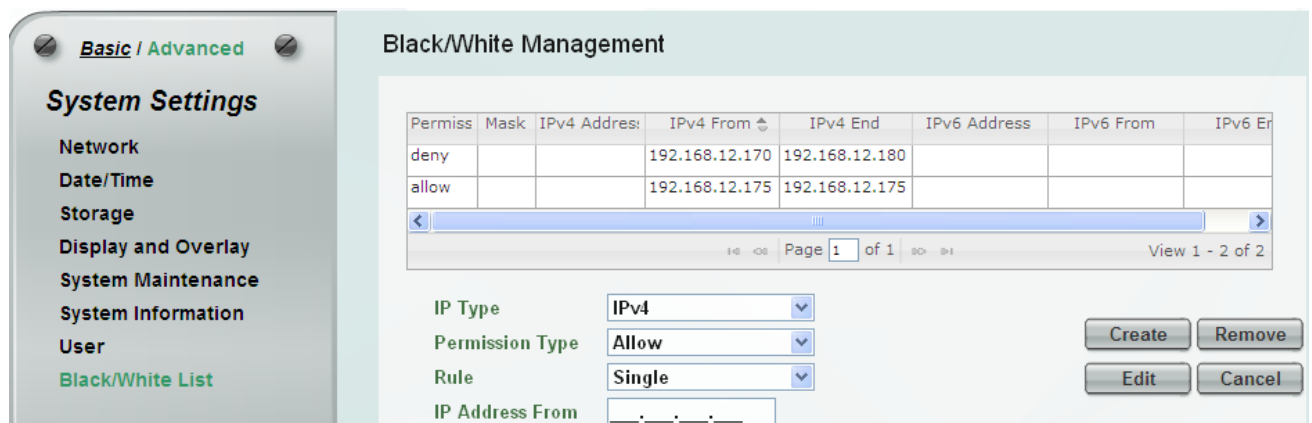

- **IP Type:** Select IPv4 or IPv6 from the drop-down list.
- **Permission Type:** Select **Deny** to deny the IP addresses configured below from accessing the camera. The **Allow** option is only relevant if you've set up at least one Deny item configured with Network or Range network rule from the Rule drop-down list.
- **Rule:** Select a network rule and then fill in the IP information in the below boxes.
 - **Single:** Type a single IP address in the IP Address field below.
 - **Network:** Type the IP address and subnet mask in the field below.
 - **Range:** Type a range for the IP addresses.

Create: Set up the IP information and click the **Create** button, the created IP information will be listed in the Black/White list.

Remove: Highlight an item in the list and then click the **Remove** button to remove the highlighted item.

Edit: Highlight an item in the list and set up the IP information in the boxes below the Black/White list. Click the **Edit** button and the item will be edited.

Cancel: Click the button to cancel the changes and return to the previous settings.

7.2 Camera Settings

You can configure camera related settings, such as video / audio, region of interest and privacy mask.

7.2.1 Streaming and Audio

Basic / Advanced

System Settings

- Network
- Date/Time
- Storage
- Display and Overlay
- System Maintenance
- System Information
- User
- Black/White List

Camera Settings

- Streaming and Audio
- Camera
- Schedule
- Image

Event Settings

- Event Wizard
- Event
- Notification

[Link to Smart Phone App](#)

Stream Settings

☒ Streaming Preview

Stream 1

☒ Enable Stream 1

Format:

Resolution:

Frame Rate:

Bit Rate

☒ Constant Bit Rate

☐ Variable Bit Rate Bit/s

Stream 2

☒ Enable Stream 2

Format:

Resolution:

Frame Rate:

Bit Rate

☒ Constant Bit Rate

☐ Variable Bit Rate Bit/s

Stream 3

☒ Enable Stream 3

Format:

Resolution:

Frame Rate:

Bit Rate

☒ Constant Bit Rate

☐ Variable Bit Rate Bit/s

Region of Interest Settings

☐ ROI Draw Tool

ROI 1 Quality	<input type="text" value="10(Normal)"/>		
ROI 2 Quality	<input type="text" value="10(Normal)"/>		
ROI 3 Quality	<input type="text" value="10(Normal)"/>		
ROI 4 Quality	<input type="text" value="10(Normal)"/>		
ROI 5 Quality	<input type="text" value="10(Normal)"/>		
ROI 6 Quality	<input type="text" value="10(Normal)"/>		
ROI 7 Quality	<input type="text" value="10(Normal)"/>		
ROI 8 Quality	<input type="text" value="10(Normal)"/>		

Privacy Mask Settings

☐ Privacy Mask Draw Tool

Color:

Level:


Area 1	<input type="text" value="PM1"/>	<input type="checkbox"/> Enable		
Area 2	<input type="text" value="PM2"/>	<input type="checkbox"/> Enable		
Area 3	<input type="text" value="PM3"/>	<input type="checkbox"/> Enable		
Area 4	<input type="text" value="PM4"/>	<input type="checkbox"/> Enable		

Audio Settings

☒ Enable Audio

Audio Input:

Input Volume:

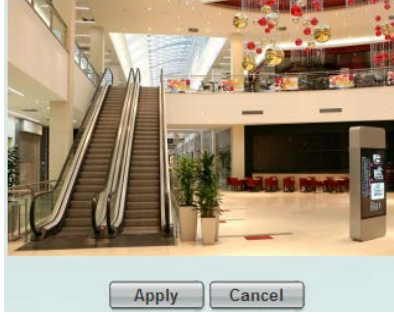

Apply Cancel

【Stream Settings】 This IP camera can output three video streams simultaneously. For each of these streams, the user can set the compression format, resolution, bit rate, and frame rate individually. Stream 1 is always enabled for live view. To enable Stream 2 and/or Stream 3, check the **Enable Stream 2 / Enable Stream 3** box.

Note: If you connect to the camera via the Internet and experience a delay (lag time) in the video feed, try to reduce the number of streams and the quality and resolution of the streams – but keep the frame rate at its maximum.

Format: Select the encoding format – H.264, MJPEG or MPEG4.

Resolution: Select the most suitable resolution for your needs.

Frame Rate: This function can only be set up in the **Advanced** tab. Select from 1 to 30 fps. Note that the maximum frame rate is 15 fps if the selected resolution is higher than 1920 x 1080.


Bit Rate: This function can only be set up in the **Advanced** tab. If required, select whether you want the stream to stream a **Constant Bit Rate** or a **Variable Bit Rate**, and set the values of whichever option you choose.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.


【Region of Interest Settings】 This function can only be set up in the **Advanced** tab. The Region of Interest (ROI) function allows users to set up multiple regions within an image with better quality and less distortion than the rest of the image. You can also use this function together with the Digital Zoom function on the Live View window to get a better image result. Up to eight ROIs can be configured in this field.




To set up an ROI region:

1. Enabled the **ROI Draw Tool** and click the **Draw** button .
2. On the left-side live image, move the cursor to the position where you want the ROI rectangle to start and then click. Move the cursor to the position (diagonally opposing corner) where you want the ROI rectangle to end and then click.
3. Select a quality value for the ROI from the Quality drop-down list.
4. Click the **Apply** button to apply the settings, or click the **Cancel** button to reset without saving the settings.

【Privacy Mask Settings】 This function can only be set up in the **Advanced** tab. The Privacy Mask can block out sensitive areas from view, covering the areas with colored or black and white boxes in both live view and recorded clips. This feature is useful when users' don't want the sensitive information visible. Up to four Privacy Masks can be configured.

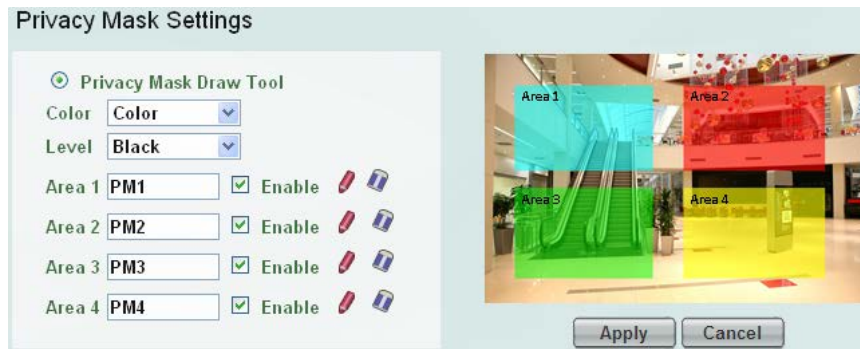


To set up a Privacy Mask:

1. Enabled the **Privacy Mask Draw Tool**.
2. From the Color drop-down list, select **Color** to make the masks appear as colored rectangles on the screen; or select **B/W** to make the masks appear as gray rectangles on the screen.
3. Select a color if you select **Color** from the color drop-down list. Select a level of grayness if you select B/W from the color drop-down list.
4. Check the **Enable** box to enable the configured privacy mask.
5. Click the **Draw** button  and move the cursor on the left-side live image.
6. Move the cursor to the position where you want the mask rectangle to start and then click. Move the cursor to the position (diagonally opposing corner) where you want the mask rectangle to end and then click.
7. Click the **Apply** button to apply the settings, or click the **Cancel** button to reset without saving the settings.

【Audio Settings】 The camera can transmit audio to your computer if you have connected an external microphone / line-in audio device to its audio Input. Check the **Enable Audio** box to enable the camera's audio input function. Select an audio input type from the Audio Input drop-down list and then adjust the audio input volume.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

7.2.2 Camera

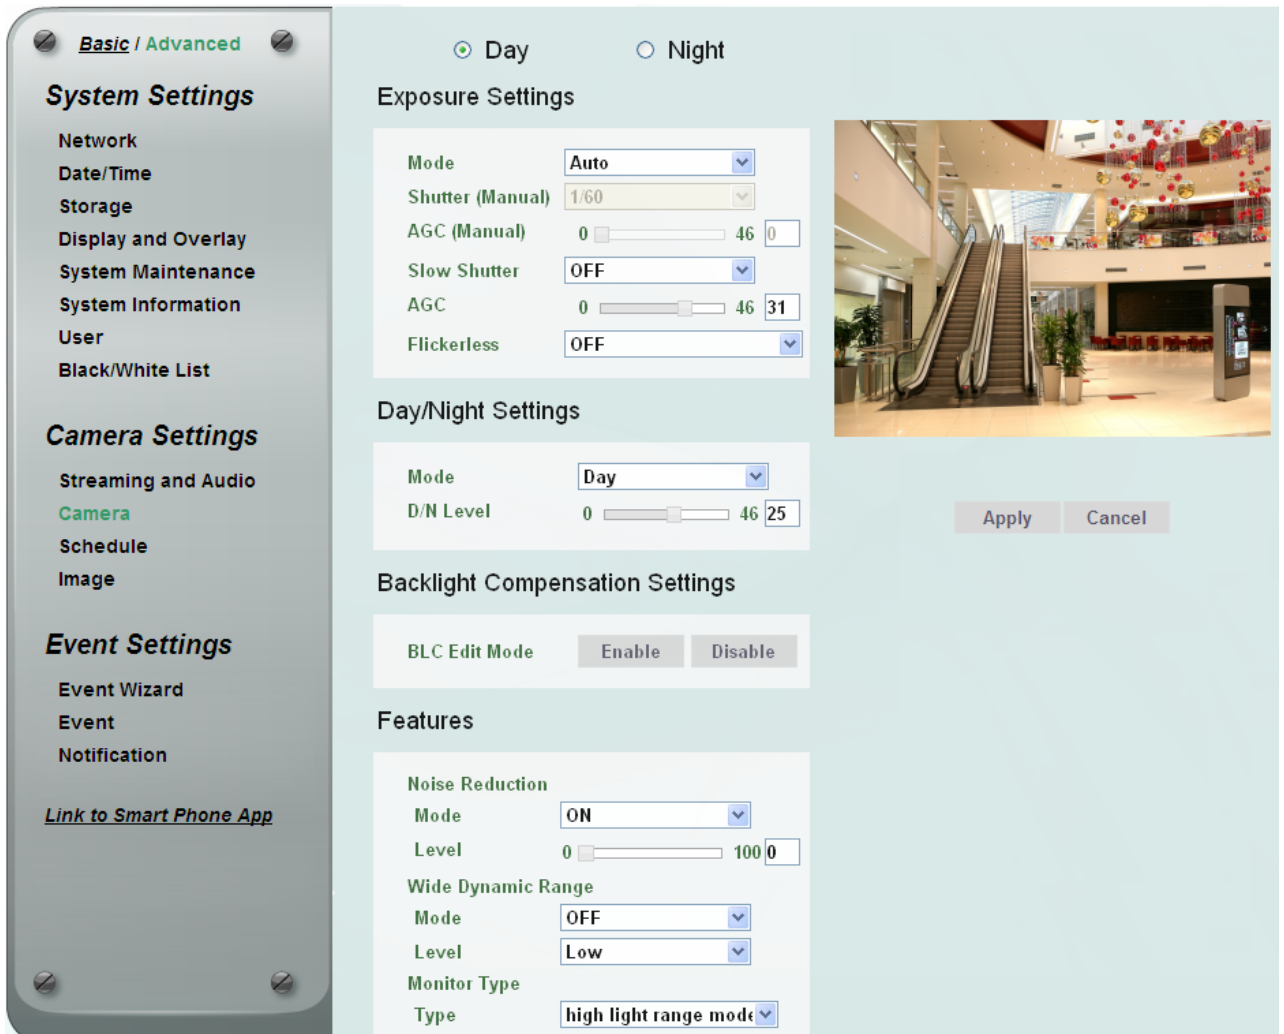

Basic / Advanced

System Settings

- Network
- Date/Time
- Storage
- Display and Overlay
- System Maintenance
- System Information
- User
- Black/White List

Camera Settings

- Streaming and Audio
- Camera**
- Schedule
- Image

Event Settings

- Event Wizard
- Event
- Notification

[Link to Smart Phone App](#)

Day **Night**

Exposure Settings

Mode: **Auto**

Shutter (Manual): **1/60**

AGC (Manual): **0** **46** **0**

Slow Shutter: **OFF**

AGC: **0** **46** **31**

Flickerless: **OFF**

Day/Night Settings

Mode: **Day**

D/N Level: **0** **46** **25**

Backlight Compensation Settings

BLC Edit Mode: **Enable** **Disable**

Features

Noise Reduction

Mode: **ON**

Level: **0** **100** **0**

Wide Dynamic Range

Mode: **OFF**

Level: **Low**

Monitor Type

Type: **high light range mode**

Apply **Cancel**

Day / Night: Select **Day** to configure the following settings for daytime and select **Night** to configure the following settings for nighttime. Click the **Apply** button to save the settings.

【Exposure Settings】 This function can only be set up in the **Advanced** tab. This setting is used to adapt to the amount or type of light used by the camera.

- **Mode:** Select a mode from the drop-down list.
 - **Auto:** Selecting Auto for the camera to automatically adjust the Shutter based on the measured light level.
 - **ALC (Shutter Priority):** Selecting ALC (Automatic Light Control) allows the camera circuitry to either take bright spots more into consideration (peak), bringing out detail in bright areas, or less into consideration (average) bringing out detail in shadows.
 - **Manual:** Select this option to manually set up the Shutter (Manual) and AGC (Manual) values.

- **Shutter (Manual):** The function is only activated if you select **ALC** or **Manual** in the Mode field. If enabled, this setting lets you set the shutter speed yourself (measured in fractions of a second).
- **AGC (Manual):** The function is only activated if you select **Manual** in the Mode field. Set the Auto Gain Control limit here. The lower the AGC level, the lower the video signal and the noise.
- **Slow Shutter:** The function is only activated if you select **Auto** in the Mode field.
- **AGC:** The function is only activated if you select **Auto** or **ALC** in the Mode field. Set the Auto Gain Control limit here. The lower the AGC level, the lower the video signal and the noise.
- **Flickerless:** The function is only activated if you select **Auto** in the Mode field. Choose between OFF, 50HZ, 60HZ, 50HZ (High Luminance) or 60HZ (High Luminance).

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【Day/Night Settings】

- **Mode:** Select a mode from the drop-down list.
 - **Auto:** Select to let the camera automatically switch to Night mode (black and white images) when the light levels fall to a specified level, and back to Day mode (color images) when the light levels rise to a specified level.
 - **Day:** Select to keep the camera in Day mode (color images), even in nighttime.
 - **Night:** Select to keep the camera in Night mode (black and white images), even in daytime.
 - **Schedule:** Select to let the camera to switch to Day mode or Night mode based on the day and night schedule settings (see 7.2.3 *Schedule*).
- **D/N Level:** The value represents the AGC level. Adjust the level for the camera to switch between Day mode and Night mode based on the configured value. Note that the level should be less than the AGC limit configured in the Exposure Settings field. For example, if you configure 10 for the AGC limit, and 14 for the D/N level, the D/N level will be inactivated as the AGC limit has set up between 0 and 10.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【**Backlight Compensation Settings**】 This function is useful when the background of the subject is very bright and the subject itself is dark.

- **BLC Edit Mode:** Click the **Enable** button, the BLC grids appear on the image. Click on the grids to enable / disable the BLC function. The selected grids (in green) will be applied with the BLC function. Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.


【Features】 This function can only be set up in the **Advanced** tab.

- **Noise Reduction (NR):** This limits the amount of digital “video noise” that is usually found in any video stream, and helps to reduce file size. Select **ON / OFF** to enable / disable the Noise Reduction function. Slide the Level bar to set up the level. The higher the level, the more the reduction.
- **Wide Dynamic Range (WDR):** The WDR function provides clearer images when both of the very bright and dark areas simultaneously appear on the camera view. There are three value options: OFF, ON and Auto. Note that when WDR is ON, some parts of the image may appear solarized. This is normal for WDR, and is not a camera malfunction.
- **Monitor Type:** Users can use this field to optimize video quality of the monitor.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

7.2.3 Schedule

The Schedule setup page is designed for users to configure the daytime and nighttime of each day. The Schedule setting is only functional if you select **Schedule** from the D/N Mode drop-down list on the Camera setup page.

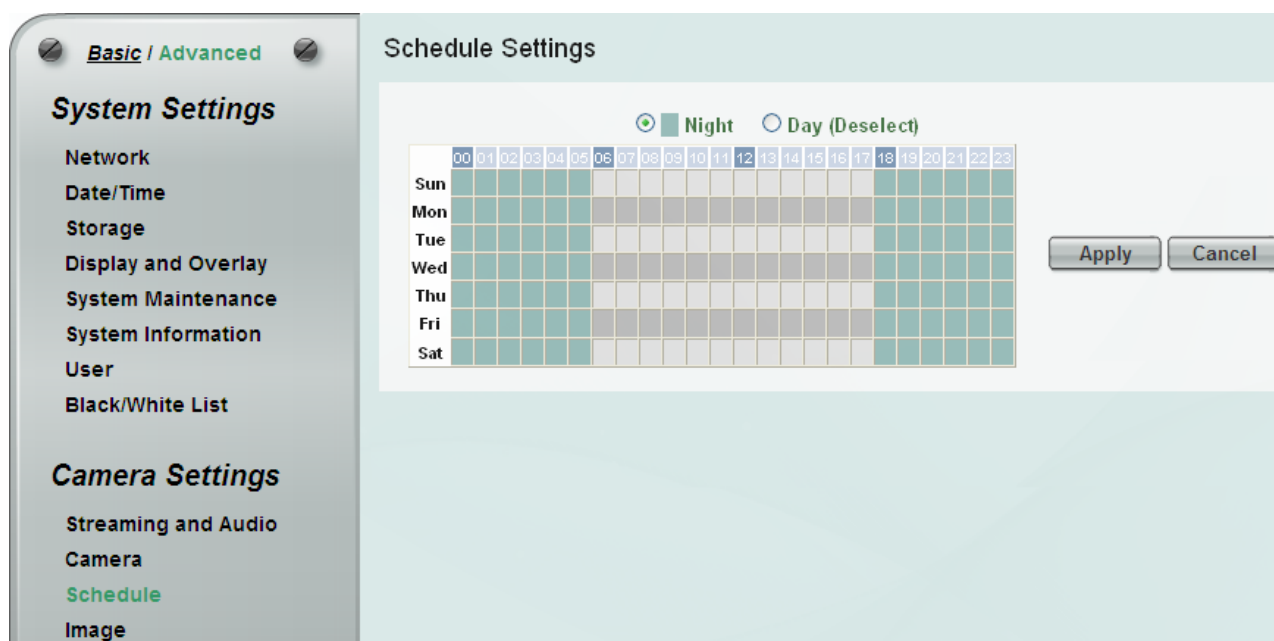


Select **Night** and then move the cursor on the desired time square, click and drag the cursor over the time squares to configure them to the Night mode (blue color). Select **Day** and then move the cursor on the desired time square, click on the time squares to configure them to the Day mode (gray color).

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

7.2.4 Image

This function can only be set up in the **Advanced** tab.

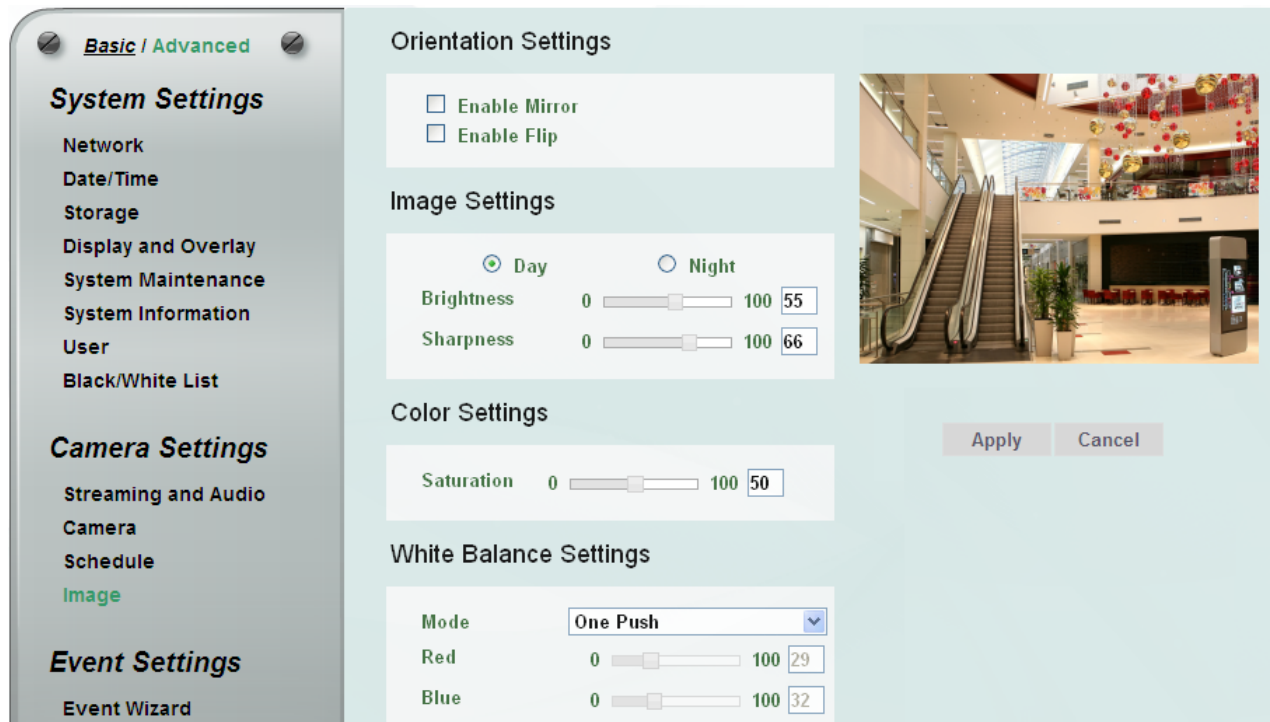

【Orientation Settings】

- **Enable Mirror:** Check the box to enable the mirror function. The image will be rotated horizontally around a vertical axis.
- **Enable Flip:** Check the box to enable the flip function. The image will be rotated vertically around a horizontal axis.

【**Image Settings**】 Select **Day** or **Night** and then adjust the slide bars below to configure the brightness and sharpness for daytime or nighttime.

【**Color Settings**】 Slide the bar to adjust the saturation.

【**White Balance Settings**】 Select a mode that delivers the best image quality for the camera's light environment.


- **Auto:** Select to let the camera automatically adjust the White Balance. In the Auto mode the camera computes the white balance value output using color information from the entire screen. It outputs the proper value using the color temperature radiating from a black subject based on a range of value from 3000 to 7500K.
- **Manual:** Select to adjust the Red and Blue values yourself in the fields below this field.
- **One Push:** Select to enable the **One Push** button on the Live View window. This will allow you to force the camera to readjust the white balance every time you push the **One Push** button.

7.3 Event Settings

You can set up the Motion Detection event or Tampering Detection event to automatically notify the users when an event occurs. You can also set up a schedule to automatically record the videos when an event occurs.

7.3.1 Event Wizard

The Event Wizard allows users to easily configure the event settings. Follow the on-screen instructions to complete the event settings.

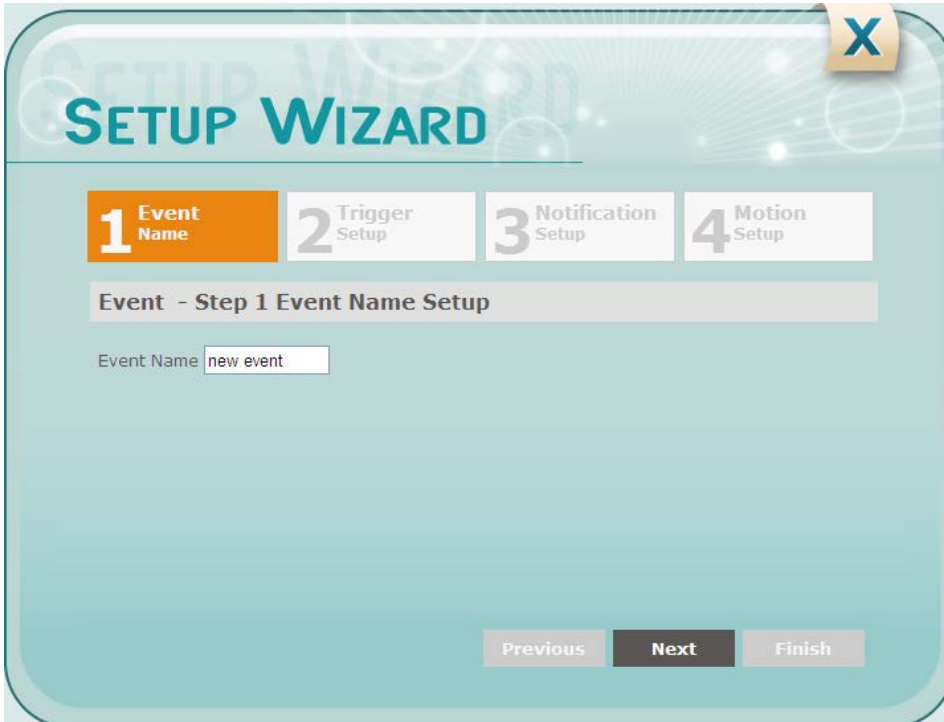

SETUP WIZARD

1 Event Name

2 Trigger Setup

3 Notification Setup

4 Motion Setup

Event - Step 1 Event Name Setup

Event Name

Previous

Next

Finish

7.3.2 Event

This function can only be set up in the **Advanced** tab. Except the Event Wizard, you can also configure the event settings along with the Recording Schedule on this page.

Basic / **Advanced**

System Settings
Network
Date/Time
Storage
Display and Overlay
System Maintenance
System Information
User
Black/White List

Camera Settings
Streaming and Audio
Camera
Schedule
Image

Event Settings
Event Wizard
Event
Notification

[Link to Smart Phone App](#)

Event Management

Name	Type	Notification	Enable
motion	VMD	syslog,SD,NA	true
Taipei	SR	syslog,FTP,SD	true
EF	badvideo	syslog,email,FTP,SD	true

View 1 - 3 of 3

Event Name

Event Trigger Type Tampering Detection Motion Area 1

☒ Enable This event
☐ Enable Re-trigger miniman interval between triggers second
☒ Enable Pre-trigger Buffer
☒ Enable Post-trigger Buffer

Notification Over
☒ Log
☐ Send Mail Notification
☒ Upload to FTP
☒ Record to SD Card
☒ Network Alarm

Create Remove
Edit Cancel

Trigger Options Settings

Pre-trigger Buffer second
Post-trigger Buffer second

Apply Cancel

Schedule Settings


☐ Event ☒ Schedule ☐ Event + Schedule ☐ Deselect

	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Sun																								
Mon																								
Tue																								
Wed																								
Thu																								
Fri																								
Sat																								

Apply Cancel

Motion Settings

Area 1 ☒ Enable
Sensitivity 5(Normal)
Area 2 ☒ Enable
Sensitivity 5(Normal)
Area 3 ☒ Enable
Sensitivity 5(Normal)
Area 4 ☒ Enable
Sensitivity 5(Normal)

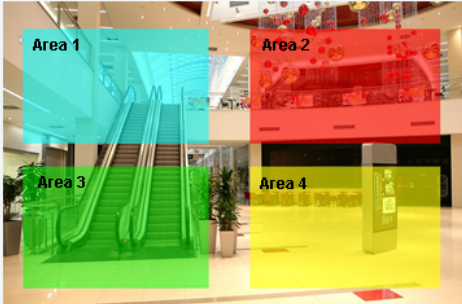

Apply Cancel

【Event Management】 You can set up the events such as Motion Detection or Tampering Detection to automatically notify the users when an event occurs.

Event Name: Type an event name.

- **Event Trigger Type:** Select an event for the to-be-specified-below reaction/s.
 - **Manual Trigger:** Select this option if you want to manually trigger the alarm by clicking the **Trigger Event** button on the Live View Page.
 - **Motion Detection:** Select this option to trigger the to-be-specified-below reaction/s when motion events occur. You have to pre-configure the Motion Settings for this function to work.
 - **Schedule Recording:** Select this option if you want the Schedule Recording periods configured in the Schedule Settings to activate this event. In this scenario, a preconfigured event reaction like a log entry will list the start and end times of each period. Actual recording will only be triggered if the event is preconfigured to do so.
 - **Tampering Detection:** Select this option if you want the camera's tampering detection sensor to trigger the to-be-specified-below reaction/s.
- **Enable This Event:** Check the box to activate the event.
- **Enable Re-trigger minimum interval between triggers xx second:** Check the box to set a minimum time after the event is triggered before the event can be triggered again.
- **Enable Pre-trigger Buffer:** Check the box if you want the Event reaction (as selected in the "Notification Over" field below) to be the activation of the video recording function, and if you want the recording to include the video feed from the time period (configurable in the Schedule Settings field) just before the Event trigger occurred.
- **Enable Post-trigger Buffer:** Check the box if you want the Event reaction (as selected in the Notification Over field) to be the activation of the video recording function, and if you want the recording to include the video feed from a time period (configurable in the Schedule Settings field) just after the Event trigger occurred.


Notification Over: Select to let the camera automatically adjust the White Balance.


- **Log:** Check the box if you want the camera to list the event's details in its log if the event is triggered.
- **Send Mail Notification:** Check the box if you want the camera to send an email text notification and one image file to the email address entered in the SMTP Settings field (see 7.3.3 *Notification*).
- **Upload to FTP:** Check the box if you want the camera to upload the recordings to the FTP server entered in the FTP Repository Settings (see 7.3.3 *Notification*).


- **Record to SD Card:** Check the box if you want the camera to start recording its video feed (when the event occurs) on an on-camera SD Card (if such a card has been inserted).


Note: The recording will only be as long as the combined Pre- and Post-trigger Buffers, so make sure you enable at least one of these buffers, especially the Post-trigger Buffer.

- **Network Alarm:** Check the box if you want the camera to send a network alarm signal (when the event occurs) to the CMS servers. Note that you have to configure the Network Alarm Settings for this function to work (see 7.3.3 *Notification*).

: Set up the Event information and click the **Create** button, the created Event information will be listed in the Event List.

: Highlight an item in the Event List and then click the **Remove** button to remove the highlighted item.

: Highlight an item in the Event List and edit the Event information on the left-side. Click the **Edit** button and the item will be edited.

: Click the button to cancel the changes and return to the previous settings.

【Trigger Options Settings】

- **Pre-trigger Buffer:** Select the duration for the buffer. This will determine the amount of footage (length of time) before the event trigger moment that will be included in an event-triggered video recording, if that buffer and video recording has been enabled in the Event Management field.

☒ **Enable Pre-trigger Buffer**

- **Post-trigger Buffer:** Select the duration for the buffer. This will determine the amount of footage (length of time) after the event trigger moment that will be included in an event-triggered video recording, if that buffer and video recording has been enabled in the Event Management field.

☒ **Enable Post-trigger Buffer**


Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【Schedule Settings】 Users can configure the recording schedule here. Select the desired recording types among the options below. Click and drag the cursor on the time block, which will be applied with the selected recording type.


- **Event Recording (Red):** Select for the camera to activate all the Event Recording set up in the Event Management field (Event Trigger Type), except the Schedule Recording.
- **Schedule Recording (Green):** Select for the camera to activate only the Schedule Recording set up in the Event Management field (Event Trigger Type).

- **Event + Schedule (Yellow):** Select for the camera to active both of the configured Event and Schedule Recordings.
- **Deselect (Grey):** Select for the camera to stop recording.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【Motion Settings】 Use this page to configure up to four areas in which motion will be detected. When a motion is detected by the camera, the motion detection icon  will appear at the top right corner on the Live page to alert the user. This function can also be linked with correctly configured Events to trigger Event reactions like the activation of video recording periods, snapshots, etc.

To set up the Motion area:

1. Check the **Enable** box to enable the selected area.
2. Select a sensitivity value of the motion detection sensor function.
3. Click the **Draw** button  and move the cursor on the left-side live image.
4. Move the cursor to the position where you want the motion rectangle to start and then click. Move the cursor to the position (diagonally opposing corner) where you want the motion rectangle to end and then click.
5. Click the **Apply** button to apply the settings, or click the **Cancel** button to reset without saving the settings.

7.3.3 Notification

This function can only be set up in the **Advanced** tab.

Basic / **Advanced**

System Settings

- Network
- Date/Time
- Storage
- Display and Overlay
- System Maintenance
- System Information
- User
- Black/White List

Camera Settings

- Streaming and Audio
- Camera
- Schedule
- Image

Event Settings

- Event Wizard
- Event
- Notification**

[Link to Smart Phone App](#)

SMTP (Email) Settings

SMTP Server
SMTP Port
☐ Authentication
Username
Password
Receiver Address
(use ; to separate addresses)
Sender Address
☒ Attach Image
☐ SSL Connection
Send Test Email

FTP Repository Settings

FTP Server
FTP Port
Recording Path
Username
Password
☐ PASV Mode
Test FTP Server

SNMP Settings

☐ Enable SNMP v1/v2/v2c
Read-Only Community
Read-Write Community
Trap Community
Trap Address
☐ Enable SMNP v3
Read-Only Username
Read-Only Auth. Method
Read-Only Auth. Key
Read-Only Privacy Method
Read-Only Privacy Key
Read-Write Username
Read-Write Auth. Method
Read-Write Auth. Key
Read-Write Privacy Method
Read-Write Privacy Key

Network Alarm Settings

Protocol
Unique ID
Server 2

Port No
Server 1
Server 3


【SMTP (Email) Settings】 This area is for configuring the mail server that is used to send e-mail text notifications and one image file from the camera to predefined addresses via SMTP. Note that to enable e-mail notification function, you have to check the **Send Mail Notification** box in the Event Management field (see 7.3.2 *Event*).



- **SMTP Server:** Enter the IP address or the host name of the SMTP server used to send e-mails.
- **SMTP Port:** Enter the port number for SMTP. The default is 25.
- **Authentication:** Check the box if the SMTP server requires authentication (user/password).
- **Username:** Input the user's login ID if the SMTP server requires authentication.
- **Password:** Input the user's login password if the SMTP server requires authentication.
- **Receiver Address:** Input the e-mail addresses for receiving an e-mail message when events occur. Please use ";" to separate multiple addresses.
- **Sender Address:** Input the sender's e-mail address, so that the receiver can recognize the sender when an event message is received.
 - **Attach Image:** Check the box if you want to attach an image when events occur.
 - **SSL Connection:** Check the box to enable the SSL function. Enable this function means you can access the camera through the SSL protocol that provides communication security over the Internet.
- **Send Test Email:** Click the **Test** button to send a testing email to the assigned address.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【FTP Repository Settings】 This area is for configuring the FTP server that is used to send alarm recordings from the camera to the preconfigured FTP server. Note that to enable uploading recordings to the FTP server function, you have to check the **Upload to FTP** box in the Event Management field (see 7.3.2 *Event*).

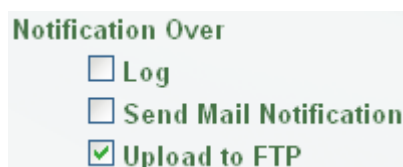

- **FTP Server:** Enter the IP address or the host name of the FTP server.
- **FTP Port:** Enter the port number for the FTP server. Default is 21.
- **Recording Path:** Assign the recording path.
- **Username:** Set FTP User's name.
- **Password:** Set FTP password.

- **PASV mode:** Check the box to enable Passive mode. Passive mode is normally enabled. If a connection cannot be established, uncheck "PASV Mode".
- **Test FTP Server:** Click the **Test** button to send a testing file to the assigned FTP server.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【SNMP Settings】 The default values for SNMP v1/v2/v2c and SNMP v3 are already filled in. Click either of the Enable buttons to enable either of the two. Make your changes as desired. Click on the Trap Address field to enter the digits, if required.

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

【Network Alarm Settings】 This function works with EverFocus CMS software. The camera can send a network alarm signal (when the event occurs) to the CMS servers. To establish the connection between the camera and CMS servers, the protocol and port number should match with each other. For more details, please refer to the CMS user's manual. Note that to enable the Network Alarm function, you have to check the **Network Alarm** box in the Event Management field (see 7.3.2 *Event*).


Notification Over

- ☐ Log
- ☐ Send Mail Notification
- ☐ Upload to FTP
- ☐ Record to SD Card
- ☒ Network Alarm

Click **Apply** to apply the changes or **Cancel** to cancel the changes and return to the previous settings.

7.4 Link to Smart Phone App

You can access camera live view or take a snapshot via your smart phone. This page is designed for users to download the mobile app to your mobile phone by scanning the QR code.

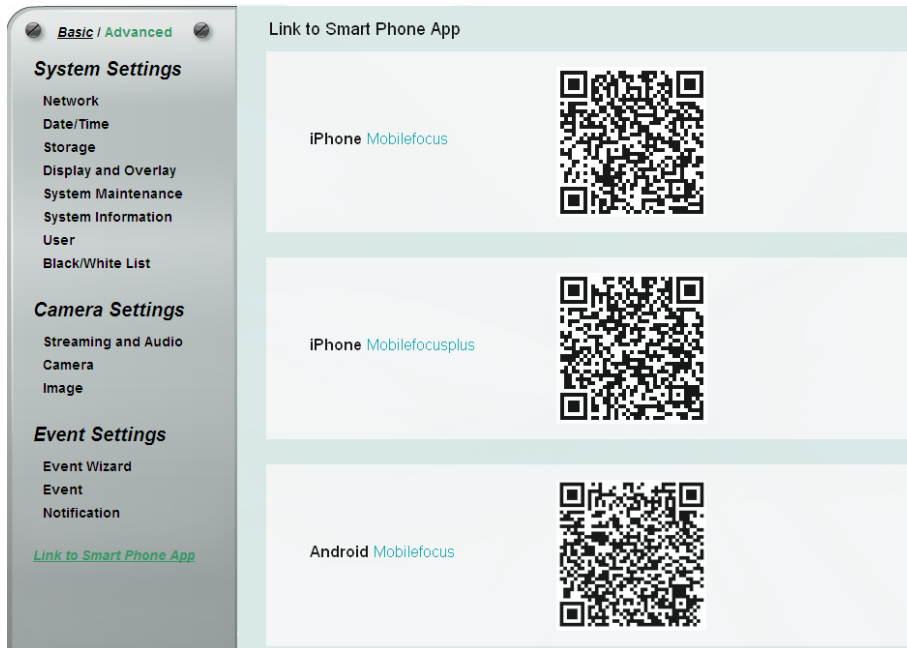


MobileFocus for iPhone



MobileFocusPlus for iPhone



MobileFocus for Android-based smart phone

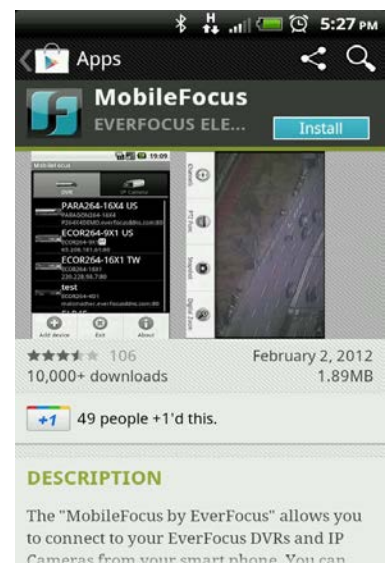


8. Upgrading Firmware Using IP Utility


You can upgrade the Firmware using the **IP Utility** software included in the software CD.



1. Install and then start the **IP Utility**. The following dialog box appears.

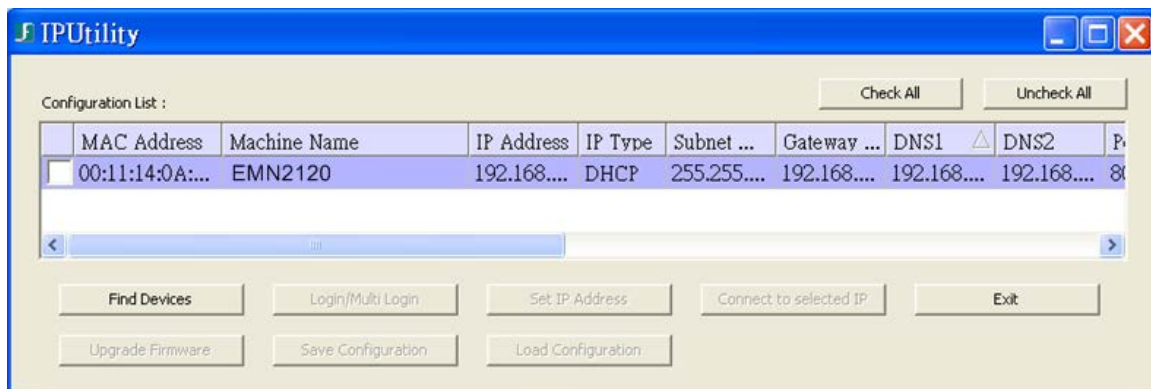

2. IPU will automatically search the cameras connected in the LAN. The default network values of the cameras will be displayed. By default, the network protocol of the camera is **DHCP**.
3. Select a camera and click **Login/Multi Login** to log in the camera.

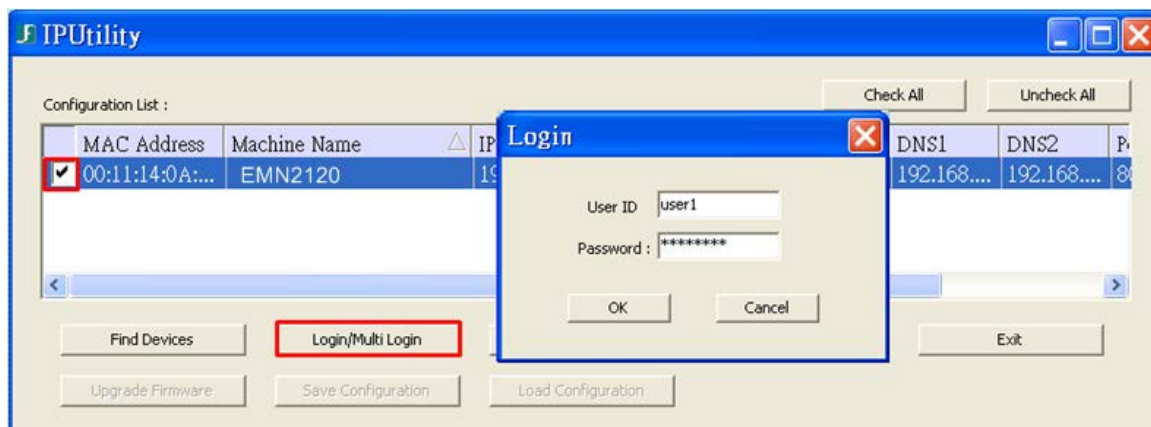


4. Type the user ID and password. Click **OK**.


Note:

1. The default user ID is **user1** and the default password is **11111111**.
2. If you select more than one camera that has the same user ID / password, you will be able to log in several cameras at once.

5. Select the camera and then click **Upgrade Firmware**. A browsing window appears.

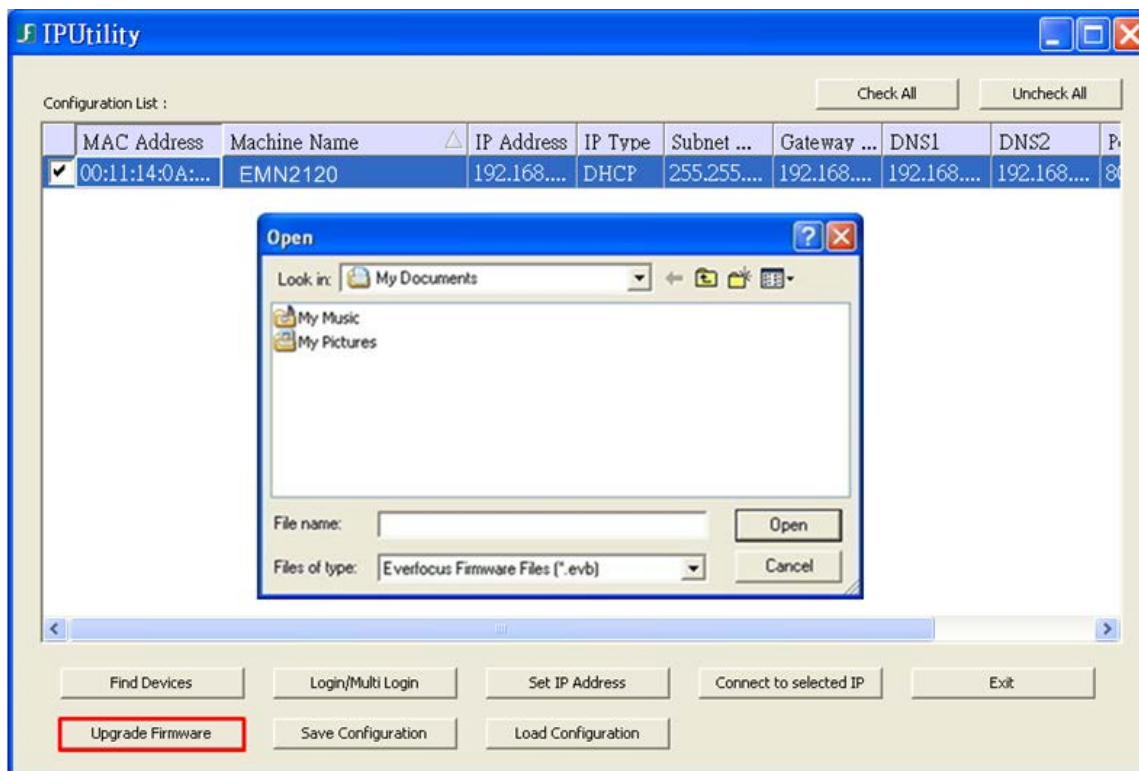

6. Select the **firmware file (.evb)** and then click **Open**. The IP Utility will automatically upgrade the firmware.

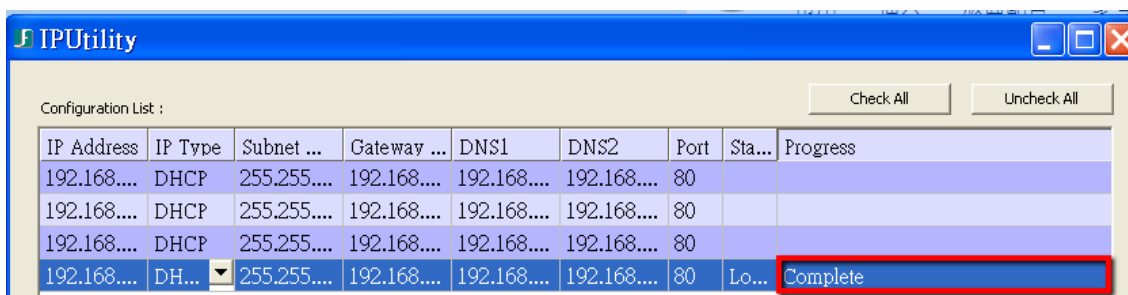

The camera will reboot once the update is complete. Click **Find Devices**, the new firmware version should be displayed in the last part of the Machine Name.

9. Specifications

Model		EMN2120	EMN2220	EMN2320
System Information				
CPU		Multimedia SoC (System-on-Chip)		
Flash		32 MB		
RAM		512 MB		
Camera				
Image Sensor		1/3" Progressive CMOS	1/3" Progressive CMOS	1/2.8" Progressive CMOS
Megapixel		1.3 MP	2 MP	3 MP
Max. Resolution		1280 x 960	1920 x 1080	2048 x 1536
Min. Illumination		0.45 lux		
Electronic Shutter		1/4 ~ 1/60,000 sec. (includes slow shutter)		
Scanning System		NTSC / PAL		
WDR		Yes		
Digital Zoom		10x		
Image Settings		Compression, Brightness, Sharpness, Contrast, Saturation, Hue, White Balance, Exposure Control, Backlight Compensation, Rotation, Mirroring of images, Text and Image Overlay, Auto Gain Control, Auto White Balance		
Event Trigger		Manual Trigger, Motion Detection, Tamper Detection		
Notification		E-mail notification, FTP uploading, record video to PC and network alarm		
Lens				
Lens Type		Fixed-focal		
Focal Length (Selectable)		2.8 mm / 3.6 mm / 6 mm / 8 mm		
Aperture		F1.8		
Day / Night		Electronic D/N		
Video				
Video Compression		H.264 and MJPEG	H.264, MPEG4 and MJPEG	
Resolution	NTSC	2048 x 1536, 1920 x 1200 (for EMN2320 only) 1920 x 1080 (for EMN2220 only), 1280 x 1024, 1280 x 960 (for EMN2120 only), 1280 x 720, 1024 x 768, 720 x 480, 704 x 480, 640 x 480, 352 x 240, 320 x 240, 160 x 128		
	PAL	2048 x 1536, 1920 x 1200 (for EMN2320 only) 1920 x 1080 (for EMN2220 only), 1280 x 1024, 1280 x 960 (for EMN2120 only), 1280 x 720, 1024 x 768, 720 x 576, 704 x 576, 640 x 480, 352 x 288, 320 x 288, 160 x 128		

Frame Rate		30 fps at 1280 x 960	30 fps at 1920 x 1080	15 fps at 2048 x 1536
S/N Ratio		Above 48dB		
Audio				
Audio Capability		Audio input		
Audio Compression		G.711, GSM-AMR, AAC		
Interface		Internal microphone and line-in		
Effective Range		5 meters		
Network				
Interface		10 / 100 Base-T Ethernet, LAN / PoE Cable		
Supported Protocols		TCP/IP, IPV6, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, SNMP, FTP, HTTP, HTTPs, PPPoE, UPnP, Bonjour, RTP, RTSP, RTCP, IGMP, ARP, ONVIF, PSIA		
Mechanical				
Memory Card		One built-in micro SD / SDHC card slot		
Test-Out Connector		One built-in DIP connector		
LAN / PoE Cable		Connects to a 10 / 100 Base-T Ethernet or PoE		
Power Cable		10-36 VDC input		
Audio Cable		Line-in cable		
Camera Angle Adjustment	Pan	-25° ~ 25°		
	Tilt	0° ~ 90°		
	Rotate	-90° ~ 90°		
General				
Power Source		10-36 VDC / PoE (IEEE802.3af)		
Power Consumption		7.5W (10-36 VDC / PoE)		
Operating Temperature		-40°C ~ 55°C / -40°F ~ 131°F (DC Power) -20°C ~ 55°C / -4°F ~ 131°F (PoE)		
Humidity		20% ~ 85% (no condensation)		
Safety		CE, FCC Class A, EN50155		
Vandal-Proof		IK10		
Weather-Proof		IP67-rated		
Dimensions (L x W x H)		110 x 100 x 45 mm / 4.3"x3.9"x1.8"		
Weight		300 g / 0.66 lbs		
Language		Czech, Dutch, English, French, German, Japanese, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Traditional Chinese		

EverFocus Electronics Corp.

EverFocus Taiwan:

12F, No.79, Sec. 1, Shin-Tai Wu Road,
Hsi-Chih, Taipei, Taiwan
TEL: +886 2 2698 2334
FAX: +886 2 2698 2380
www.everfocus.com.tw
marketing@everfocus.com.tw

EverFocus China - Beijing:

Room 609, Technology Trade Building,
Shangdi Information Industry Base,
Haidian District, Beijing 100085, China
TEL: +86 10 6297 3336~39
FAX: +86 10 6297 1423
www.everfocus.com.cn
marketing@everfocus.com.cn

EverFocus USA - California:

1801 Highland Avenue, Unit A, Duarte, CA 91010, USA
TEL: +1 626 844 8888
FAX: +1 626 844 8838
www.everfocus.com
sales@everfocus.com

EverFocus Japan:

5F, Kinshicho City Building, 2-13-4 Koto-Bashi, Sumida-Ku,
Tokyo, 130-0022, Japan
TEL: +81 3 5625 8188
FAX: +81 3 5625 8189
www.everfocus.co.jp
info@everfocus.co.jp

EverFocus India:

Suite 803, Housefin Bhavan, C-21,
Bandra Kurla Complex, Bandra (East),
Mumbai 400051, India
TEL: +91 22 6128 8700
FAX: +91 22 6128 8705
www.everfocus.in
sales@everfocus.in

EverFocus Europe - Germany:

Albert-Einstein-Strasse 1, D-46446
Emmerich, Germany
TEL: +49 2822 93940
FAX: +49 2822 939495
www.everfocus.de
info@everfocus.de

EverFocus China - Shenzhen:

4F, No. 2, D4 Building, Wan Yelong
Industrial Park, Tangtou Road, Shiyang,
Baoan, Shenzhen, Guangdong 518101, China
TEL: +86 755 2765 1313
FAX: +86 755 2765 0337
www.everfocus.com.cn
marketing@everfocus.com.cn

EverFocus USA - New York:

415 Oser Avenue, Unit S, Hauppauge, NY 11788, USA
TEL: +1 631 436 5070
FAX: +1 631 436 5027
www.everfocus.com
sales@everfocus.com

EverFocus Europe - UK:

Unit 12, Spitfire Business Park,
Hawker Road, Croydon Surrey, CR0 4WD, UK
TEL: +44 20 8649 9757 / +44 845 430 9999
FAX: +44 20 8649 9907
www.everfocusuk.co.uk
salesuk@everfocus.com



Your EverFocus product is designed and manufactured with high quality materials and components which can be recycled and reused. This symbol means that electrical and electronic equipment, at their end-of-life, should be disposed of separately from your household waste. Please, dispose of this equipment at your local community waste collection/recycling centre. In the European Union there are separate collection systems for used electrical and electronic product. Please, help us to conserve the environment we live in!

Ihr EverFocus Produkt wurde entwickelt und hergestellt mit qualitativ hochwertigen Materialien und Komponenten, die recycelt und wieder verwendet werden können. Dieses Symbol bedeutet, dass elektrische und elektronische Geräte am Ende ihrer Nutzungsdauer vom Hausmüll getrennt entsorgt werden sollen. Bitte entsorgen Sie dieses Gerät bei Ihrer örtlichen kommunalen Sammelstelle oder im Recycling Centre. Helfen Sie uns bitte, die Umwelt zu erhalten, in der wir leben!



EverFocus®

P/N: 4605PM2120B010A-Ver.A