






Holds displays with the following VESA mounting hole pattern:

- 100 x 100 mm
- 200 x 200 mm
- 200 x 300 mm
- 300 x 200 mm
- 300 x 300 mm
- 400 x 200 mm
- 400 x 300 mm
- 500 x 200 mm
- 500 x 300 mm
- 600 x 200 mm
- 600 x 300 mm
- 200 x 400 mm
- 300 x 400 mm
- 400 x 400 mm
- 500 x 400 mm
- 600 x 400 mm

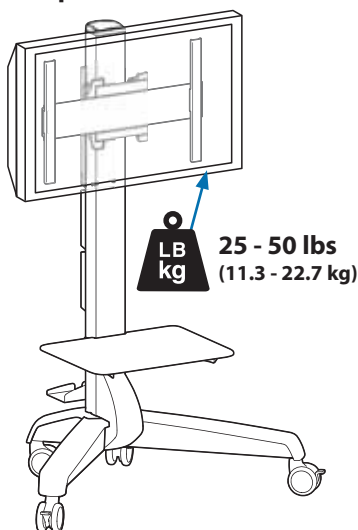

Holds displays with the following VESA mounting hole pattern:

- 75 x 75 mm
- 100 x 100 mm
- 200 x 100 mm
- 200 x 200 mm

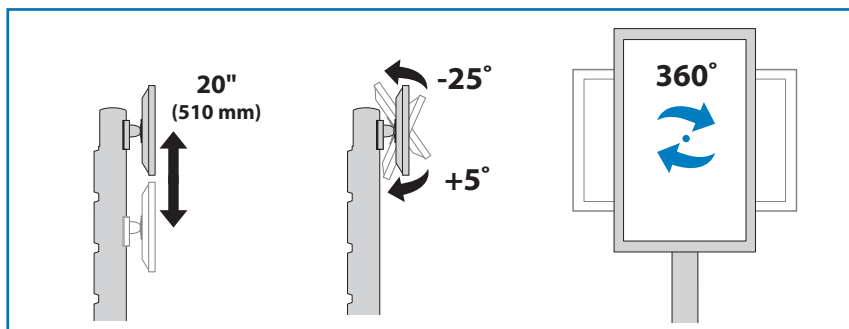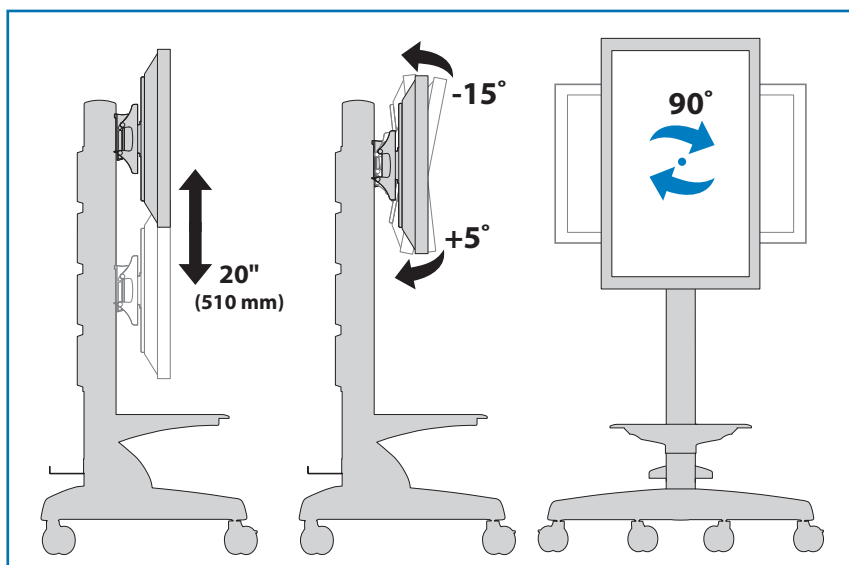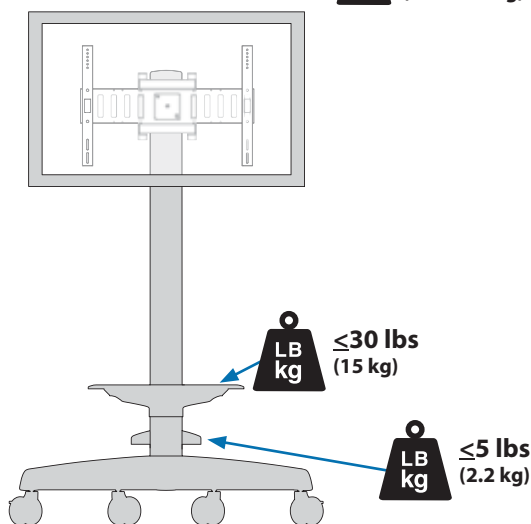


WARNING

Stored Energy Hazard: The lift mechanism in the tower is under tension and will move up rapidly, on its own, as soon as attached equipment is removed. For this reason, DO NOT remove equipment or make adjustments to lift tension unless the front assembly has been moved to the highest position on the tower! Failure to follow this instruction may result in serious personal injury and/or equipment damage!

警告 蓄積エネルギーの危険性: タワーのリフト機構には張力がかかっており、付属していた器具が取り外された瞬間に高速で上に移動します。このため、前面の部品がタワーの最高位置にきていない場合は、器具を取り外したり、張力を調節して増加させないようにしてください。この指示に従わない場合、重篤な身体傷害および/または器具の破損の原因となることがあります。

警告 储能危害：支柱中的升降机构有张力并会在拆除所安装的设备后自行快速上升。因此，在将前部装置移到支柱最顶端时，不要拆除设备或调节升降张力。不遵守本规定可能导致严重的人身伤害和/或设备损坏！

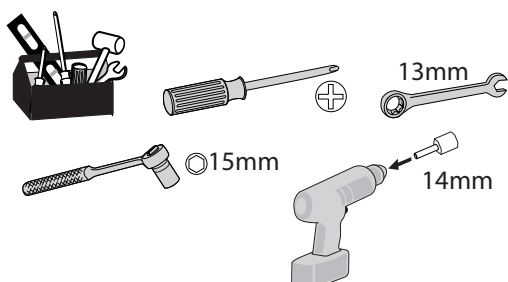

For service and warranty visit www.ergotron.com

Si desea información de servicio y garantía, visite www.ergotron.com

Pour toute question concernant la garantie ou le service client, consultez www.ergotron.com

Weitere Informationen zu Service und Gewährleistung erhalten Sie unter www.ergotron.com.

Ga voor service en garantie naar www.ergoton.com



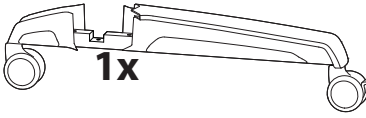
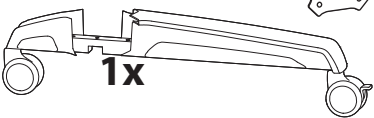
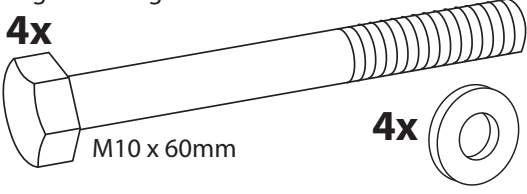




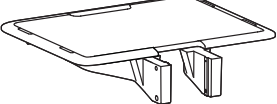





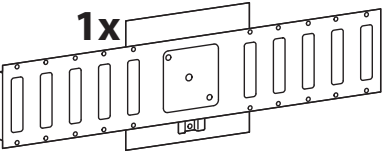





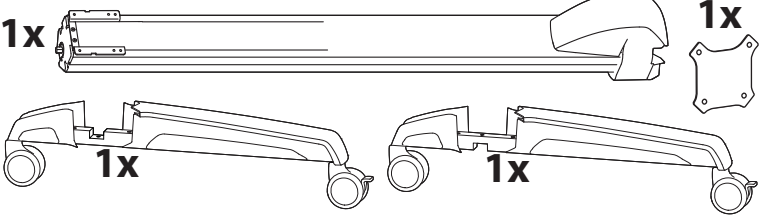





































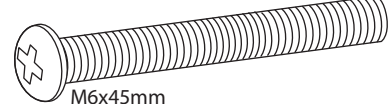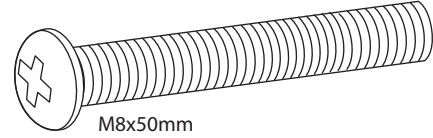



Per assistenza e la garanzia visitare www.ergotron.com

Gå in på www.ergotron.com för service och garanti

サービスおよび保証について詳しくは、www.ergotron.com をご覧ください。

有关服务和保修, 请访问 www.ergotron.com




A		B	
1	<div>1x </div> <div>1x </div> <div>1x </div> <div>1x </div>	<div>Leg Mounting Hardware</div> <div>4x  M10 x 60mm</div> <div>4x </div>	
2	<div>1x </div> <div>1x </div>	<div>Leg Cover Mounting Screws</div> <div>8x  M3.5 x 6mm</div>	
3	<div>1x </div>	<div>Shelf Mounting Hardware</div> <div>8x </div> <div>4x  M3 x 37mm</div> <div>2x </div>	
4	<div>1x </div> <div>2x </div> <div>1x </div>	<div>TM Mounting Hardware</div> <div>4x  M6x8mm</div> <div>2x </div> <div>4x </div> <div>4x  M8 x 14mm</div> <div>1x </div> <div>2x  M4 x 16mm</div>	
5	<div>2x </div>	<div>400mm Extension Hardware</div> <div>4x </div> <div>4x  M5 x 16mm</div>	
6	<div>4x  5.1(ID) x 10(OD) x 6mm</div> <div>4x  5.1(ID) x 10(OD) x 12mm</div> <div>4x  8.1(ID) x 16(OD) x 6mm</div> <div>4x  8.1(ID) x 16(OD) x 12mm</div> <div>4x  5.1(ID) x 10(OD) x 18mm</div> <div>4x  M4x20mm</div> <div>4x  M4x40mm</div> <div>4x  M5x20mm</div> <div>4x  M5x40mm</div> <div>8x  5.3(ID) x 16(OD) x 1.0mm</div> <div>4x  6.3(ID) x 14(OD) x 1.0mm</div>	<div>Large Display Cart Hardware</div> <div>4x  M6x20mm</div> <div>4x  M6x45mm</div> <div>4x  M8x25mm</div> <div>4x  M8x50mm</div>	
7	<div>1x </div> <div>4x  M5 x 10mm</div>	<div></div> <div>1x </div> <div>1x </div> <div>4x </div> <div>1x  M5 x 8mm</div> <div>4x  M4 x 12mm</div> <div>8x  M4 x 6mm</div> <div>6x  M6 x 14mm</div> <div>4x  M6 x 8mm</div> <div>6x  6mm</div>	
8	<div>1x </div> <div>2x </div> <div>2x  M5x9mm</div>		
9	<div>4x </div> <div>1x  M5x8mm</div> <div>1x </div> <div>2x </div> <div>2x </div>		
10	<div>1x </div> <div>1x </div> <div>1x  M5x8mm</div>		


1 a

1x

1x

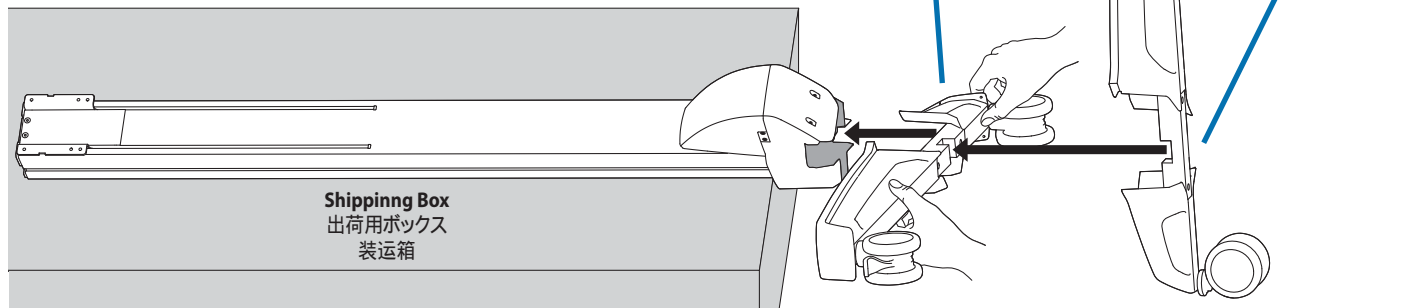

b

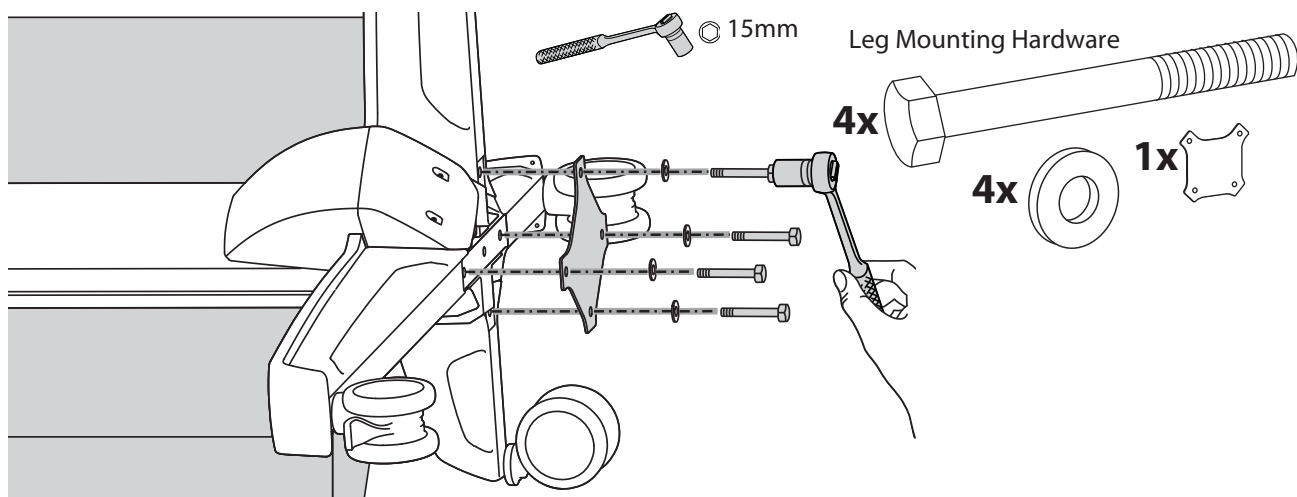

2


Leg Cover Mounting Screws

1x

1x

8x

M3.5 x 6mm




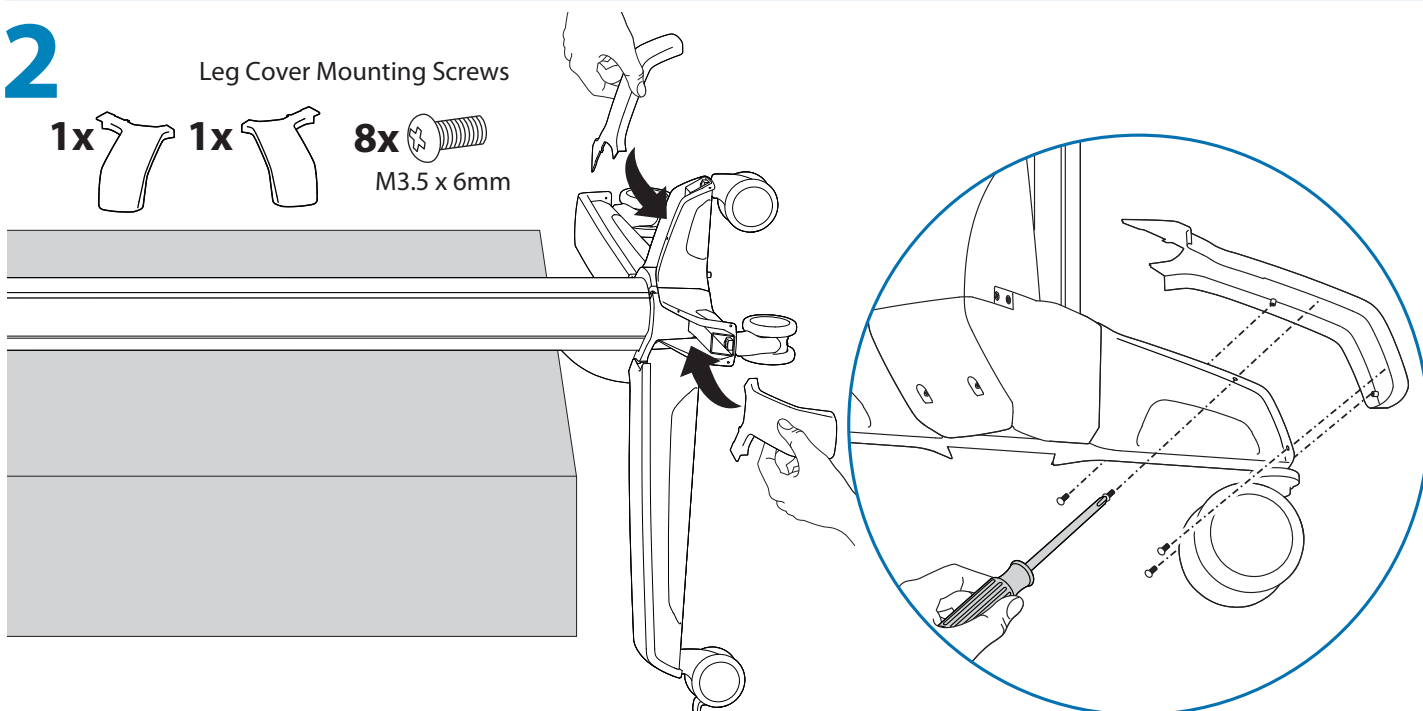


注意: 調節ネジは締めすぎないようにしてください。強く締め付けすぎると、器具が破損する原因となります。
 小心: 不要过度拧紧固定器。过度拧紧可能会损坏设备。


가

3 a

Shelf Mounting Hardware


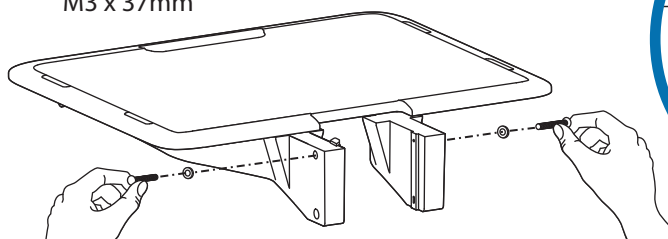



b

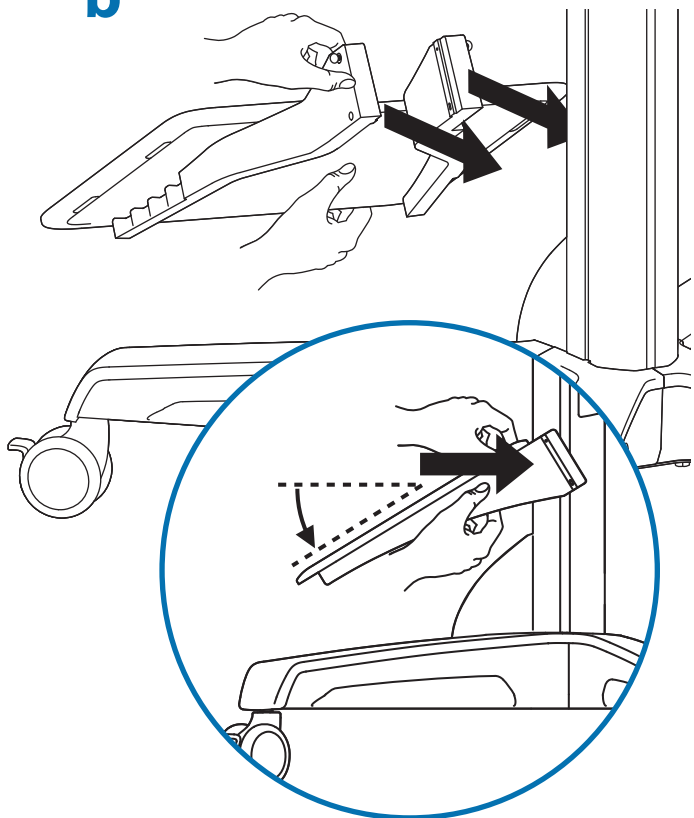


c


Shelf Mounting Hardware

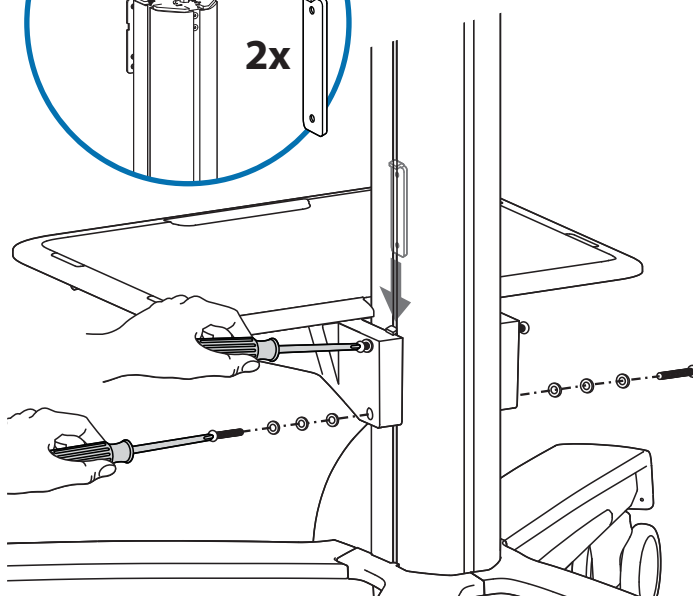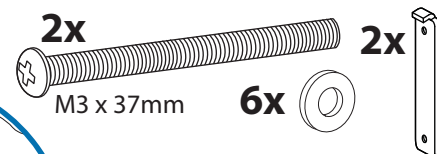

4

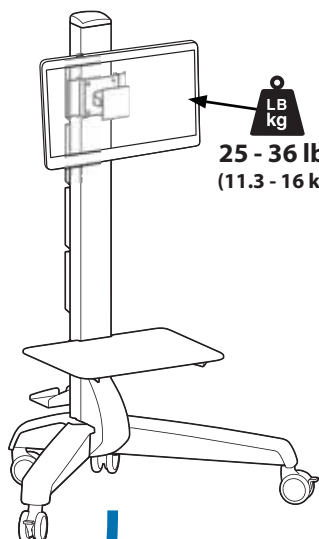


25 - 36 lbs
(11.3 - 16 kg)

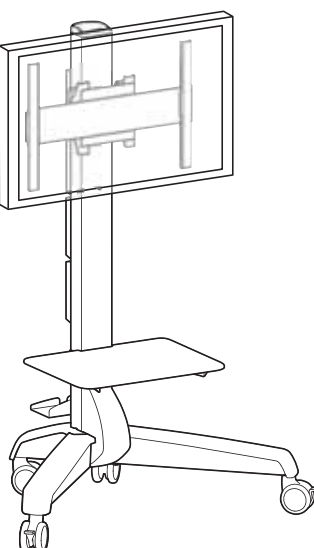


25 - 50 lbs
(11.3 - 22.7 kg)

Continue to Step 4 on page 8...
8 ページのステップ 4 へ続く...
继续至第 8 页中的第 4 步...

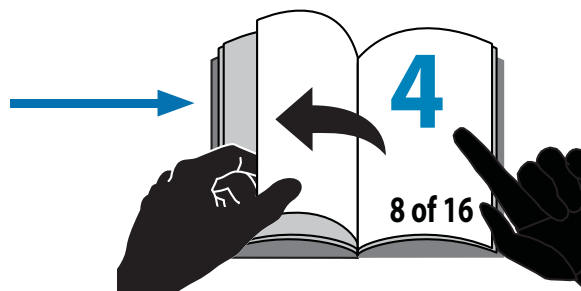


4

4x
M6 x 8mm

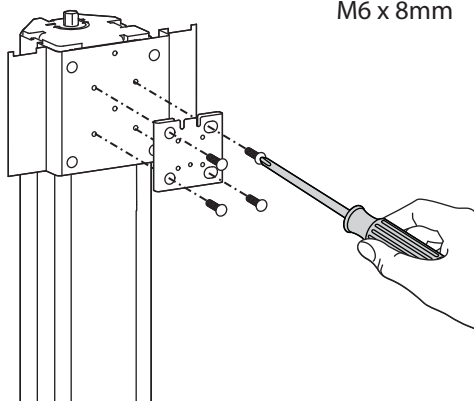



5

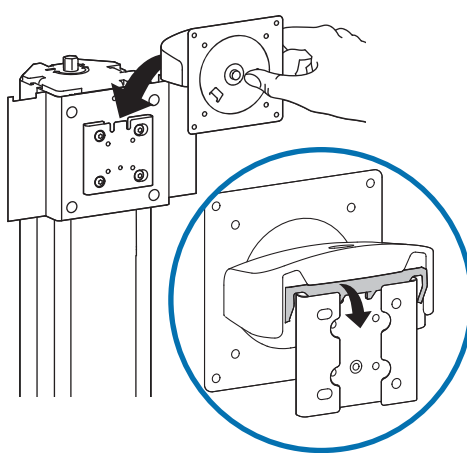


6

1x
M5 x 8mm

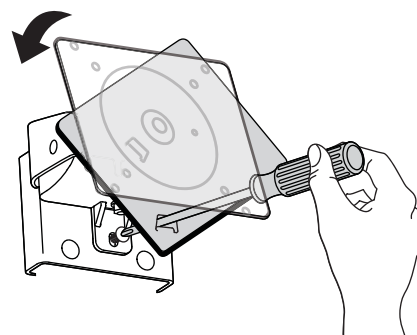




7



75x75mm
100x100mm


4x
M4 x 12mm

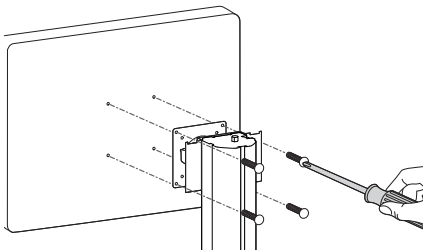

200x100mm

1


4x
M4 x 6mm

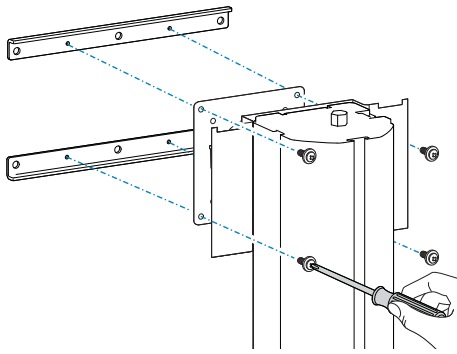

2

4x
M6 x 14mm


4x
6mm

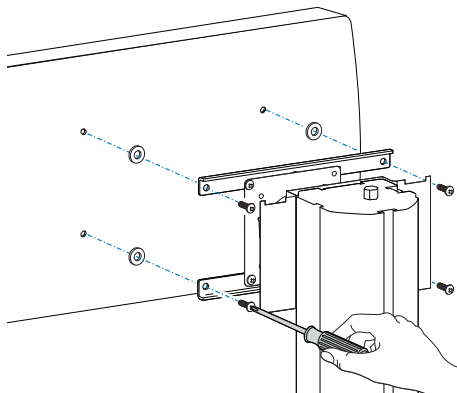

200x200mm


1

4x
M4 x 6mm

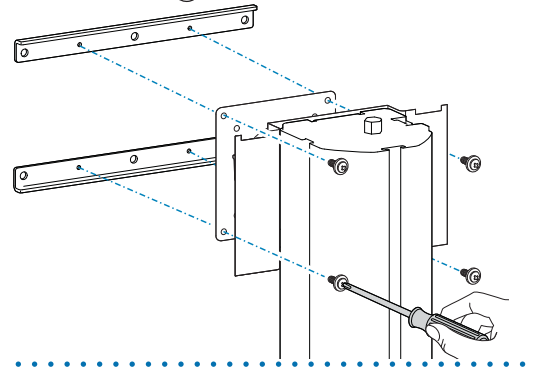

2


4x
M4 x 6mm

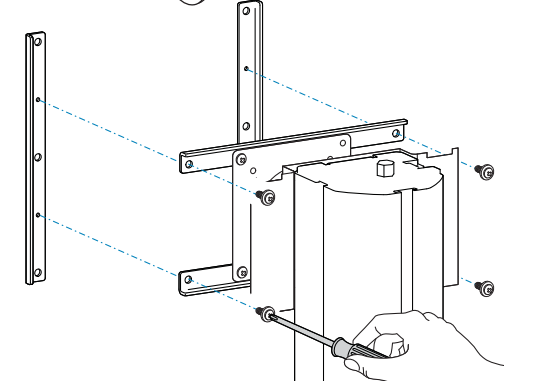


3

6x
M6 x 14mm

6x
6mm

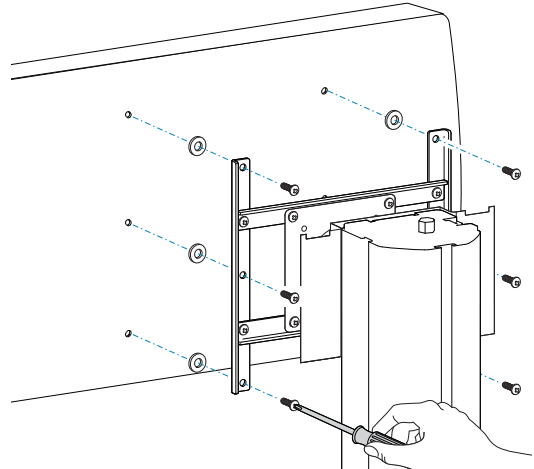



8

It is important that you adjust this product according to the weight of the mounted equipment as described in the following steps. Any time equipment is added or removed from this product, resulting in a change in the weight of the mounted load, you should repeat these adjustment steps to ensure safe and optimum operation. Adjustments should move smoothly and easily through the full range of motion and stay where you set it. If adjustments are difficult and do not stay in the desired position, follow the instructions to loosen or tighten the tension to create a smooth, easy adjustment motion. Depending on your product and the adjustment, it may take several turns to notice a difference.

び実行してください。

調整は可動域内でスムーズかつ簡単に動く必要があり、選定した位置にしっかり固定されなければなりません。調整の動きがごこちなく、選定位置で固定されない場合は、調整がスムーズにできるよう、説明書に従って張力を増減します。お使いの製品や調整によっては、違いがはっきりするまで何回か回さなければならないこともあります。

应当依照下列各步骤中描述的所安装设备的重量来调节本产品，这一点非常重要。任何时候，增减该产品上的设备都会导致安装负载重量的变化，您应当重复这些调节步骤，以确保在最优化条件下安全使用。

调节应当在整个动作范围内灵活自如，并能固定在所调整的位置。如果调节困难且不能固定在想要的位置上，请遵照说明书拧紧或拧松，使调节动作灵活自如。根据您所用产品及调节方式，可能需要旋转几圈后才能注意到差别。

It is important that you adjust this product according to the weight of the mounted equipment as described in the following steps. Any time equipment is added or removed from this product, resulting in a change in the weight of the mounted load, you should repeat these adjustment steps to ensure safe and optimum operation.


가

가



가

Lift – Up and down

リフト(上下)
升降(上下)
(/)

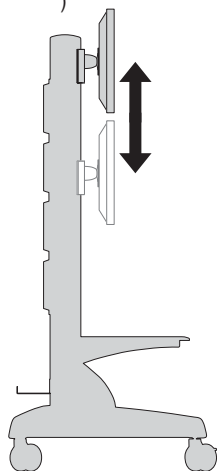


Follow these instructions to tighten or loosen tension.
圧力を増減するには次の手順に従います。
遵照这些说明拧紧或拧松。


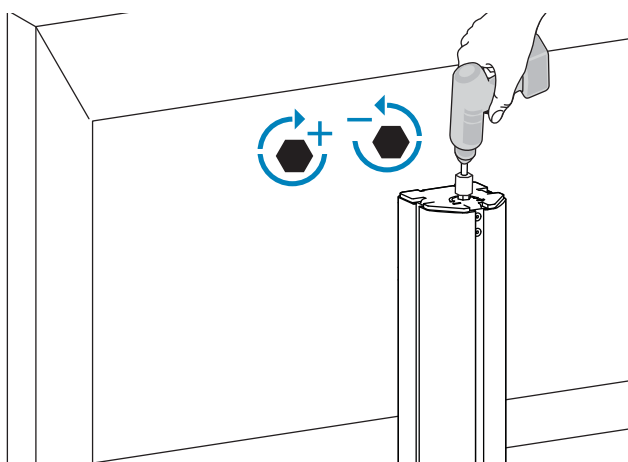


Tilt – Forward and Backward

チルト(前後)
傾斜(前后)




Follow these instructions to tighten or loosen tension.
圧力を増減するには次の手順に従います。
遵照这些说明拧紧或拧松。

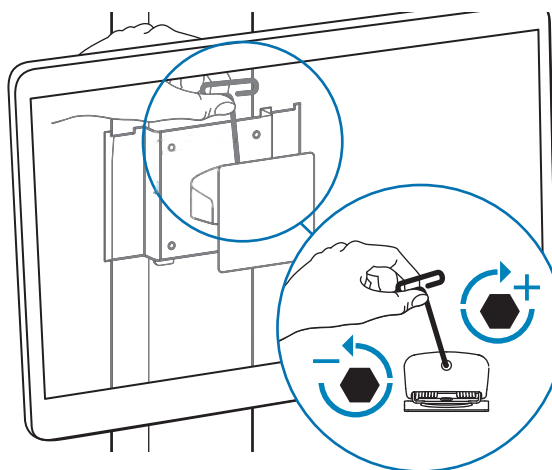

CAUTION! The bottom nut will turn during adjustment of the top nut; DO NOT apply any tool to the bottom nut. Serious damage to the Pivot may occur if these instructions are not followed.


注意! 上部のナットを調節する際に下部のナットも回転します。下部のナットには、工具などを一切使用しないでください。この指示を無視すると、重大な損傷を与える可能性があります。


注意! 調整上端螺母时底部螺母将会转动; 请勿在底部螺母上使用任何工具。不遵守此指示可能导致严重损坏。



9

Continue to Step 10 on page 13...
13 ページのステップ 10 へ続く...
继续至第 13 页中的第 10 步...

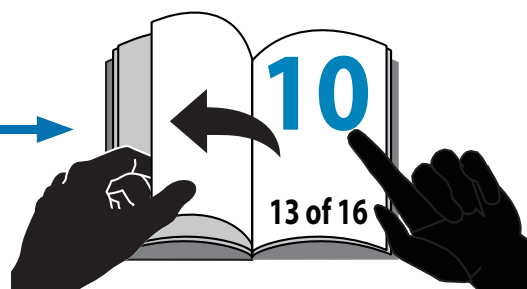

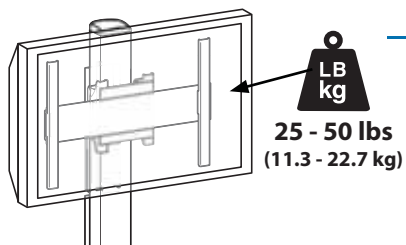


4 a

TM Mounting Hardware




b

TM Mounting Hardware

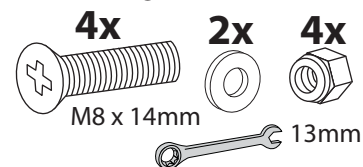

5





Continue to Step 6 on page 9...

9 ページのステップ 6 へ続く...


继续至第 9 页中的第 6 步...


6

9 of 16

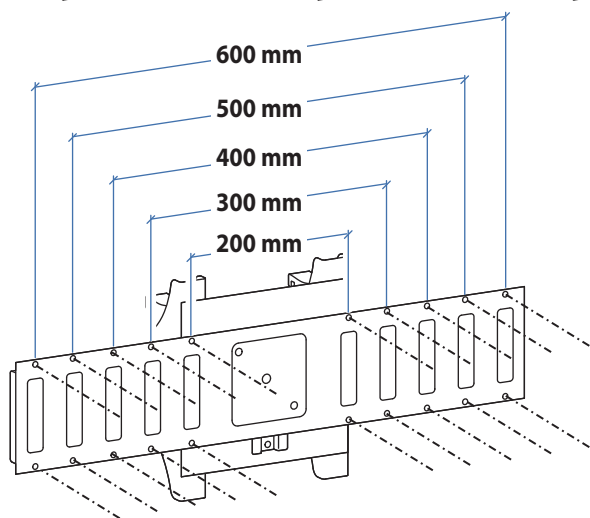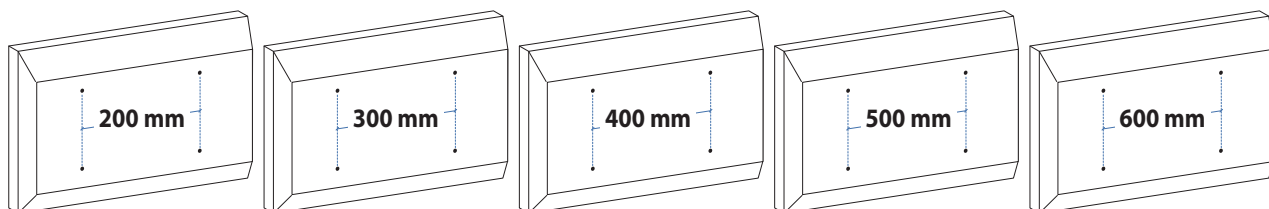

400mm Extension Hardware

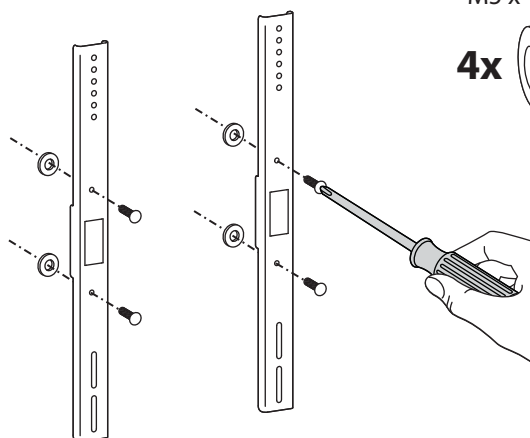













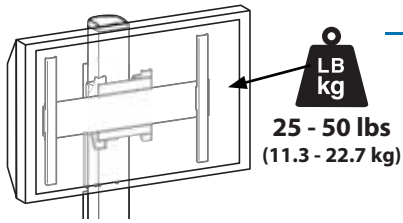


6

FIND APPROPRIATE FASTENERS FOR YOUR DISPLAY:


ディスプレイ用に適切なファスナーを見つける
为显示器找到合适的紧固件：

Large Display Cart Hardware

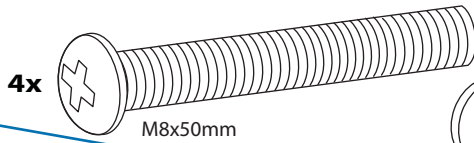


Screw Diameter


ネジの直径
螺丝直径




M4




M5



M6









M8



Screw Length

ネジの長さ
螺丝长度



IMPORTANT: To ensure screws have the minimum thread engagement in the display, tighten screws with at least six, full, 360° revolutions.






重要：ディスプレイのネジかみ合いを最小限度に抑えるため、ネジは少なくとも6回、360°回転させ、きつく締めてください。
重要说明：为确保螺丝在显示器中的螺纹啮合量最少，拧螺丝时应至少转六满圈。


CAUTION: DO NOT overtighten fasteners. Overtightening may cause damage to your equipment.

注意：調節ネジは締めすぎないようにしてください。強く締め付けすぎると、器具が破損する原因となります。
小心：不要过度拧紧固定器。过度拧紧可能会损坏设备。


Recessed Mount

くぼみつき
凹入

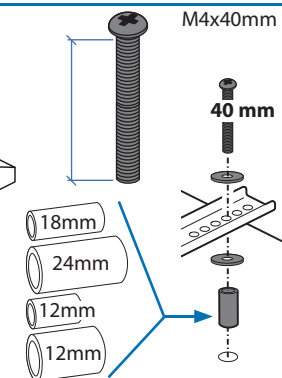


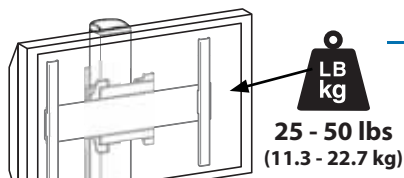

7










a

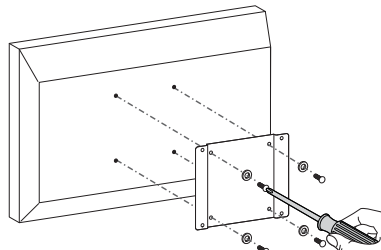

Use fastener chosen from Step 6.
ステップ6で選択したファスナーを使用します。
使用第 6 歩中选取的紧固件。

b


100x100mm VESA Plate Hardware

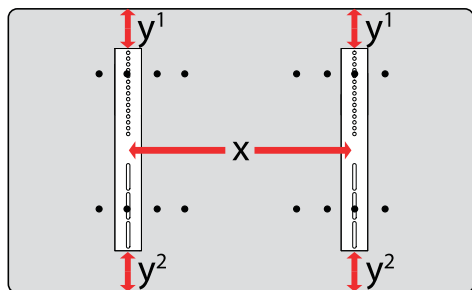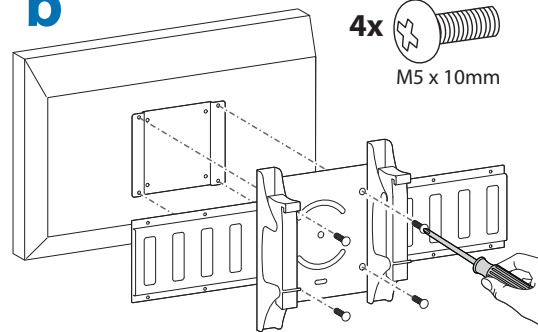

$y^1 = y^2$
 $x \leq 600\text{mm}$



Use fastener chosen from Step 6.
ステップ6で選択したファスナーを使用します。
使用第 6 歩中选取的紧固件。

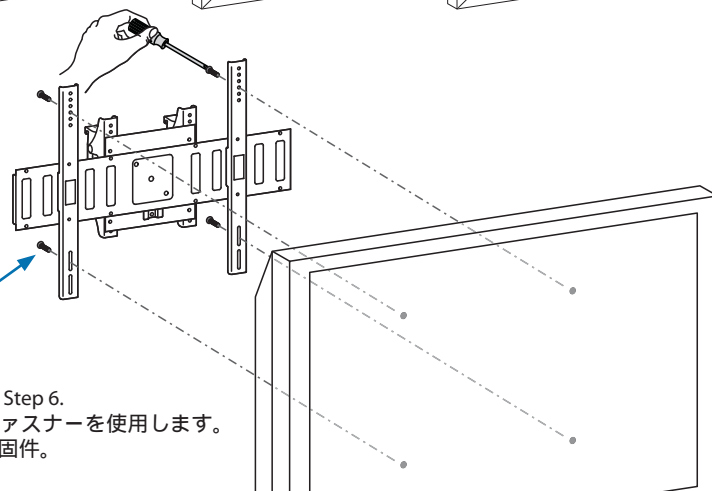

MINIMUM THREAD ENGAGEMENT

ねじ山の最小限のかみ合い

螺纹啮合最少量

4mm

4

40mm

4mm

20mm

4mm

5mm

5

40mm

5mm

20mm

5mm

6mm

6

45mm

6mm

20mm

6mm

8mm

8

50mm

8mm

25mm

8mm

g Tighten screws with at least six, full, 360° revolutions*, but do not over tighten; over tightening may cause damage to display and/or brackets.

* Six full turns will ensure a minimum thread engagement roughly equal to the diameter of the screw. For instance, if the screw diameter is 8mm, the minimum thread engagement is also 8mm.)

g 360°で少なくとも 6 回転*させてネジを締めます。ただし、締めすぎないようにしてください。ディスプレイおよび/またはブラケットの破損の原因となる場合があります。

* 完全に 6 回転すると、ネジ山の最小のかみ合いがネジの直径と大体同じになります。例えば、ネジの直径が 8mm の場合、ネジ山の最小かみ合いも 8mm になります。


g 至少360度6次的完全旋转*来拧紧螺丝，但不可过度拧紧；过度拧紧会对显示器及或支架造成损害。

* 六次完全旋转就能保证螺纹啮合大致与螺丝的直径相同。比如，如果螺丝的直径是 8mm，螺纹啮合也是 8mm。)


g 6 360°

* 6


8mm
8mm

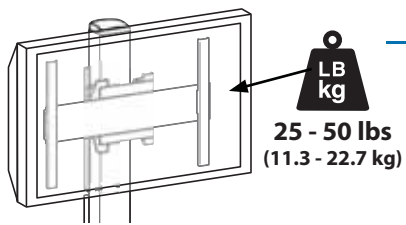


8 a

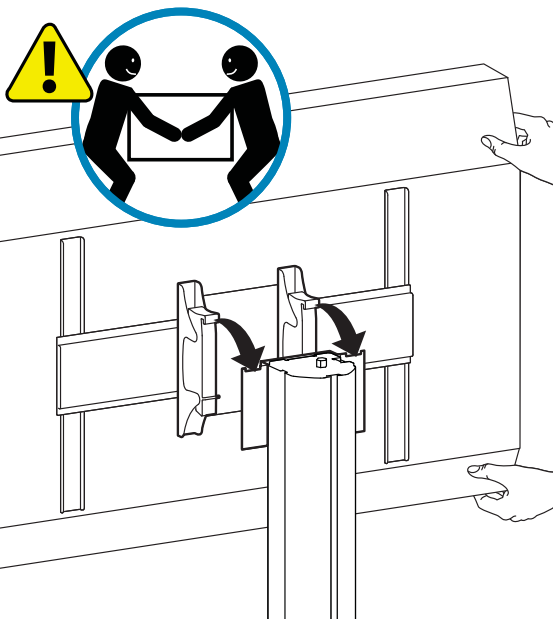

b


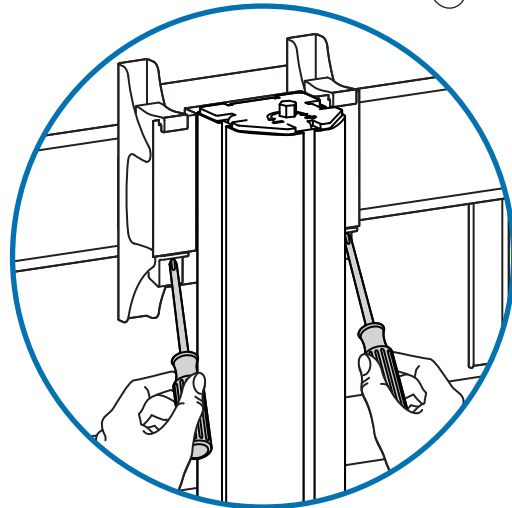


TM Mounting Hardware


2x  M4 x 16mm

c


TM Mounting Hardware

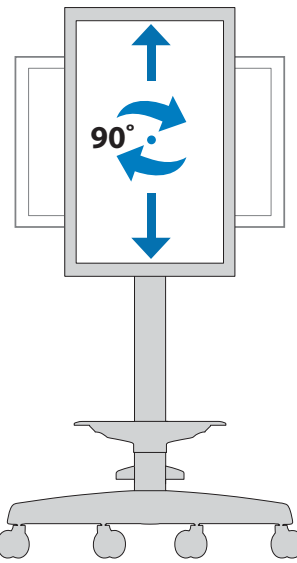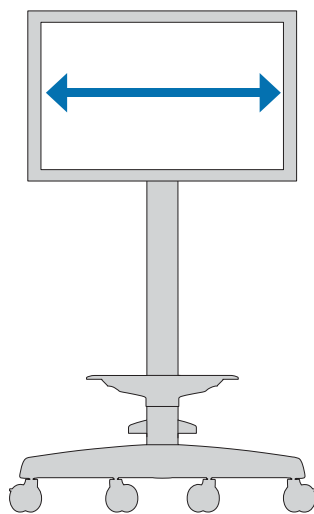


a

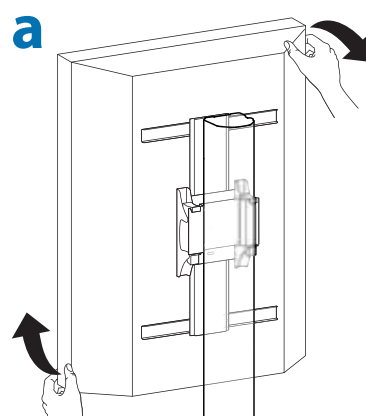

b

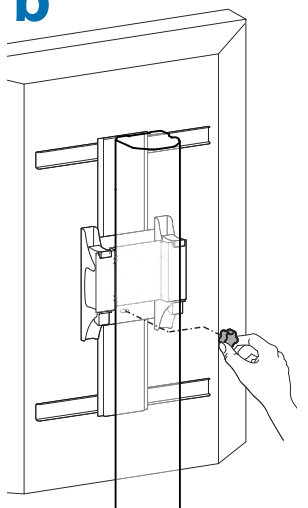

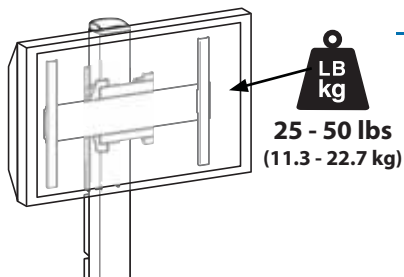

9 It is important that you adjust this product according to the weight of the mounted equipment as described in the following steps. Any time equipment is added or removed from this product, resulting in a change in the weight of the mounted load, you should repeat these adjustment steps to ensure safe and optimum operation. Adjustments should move smoothly and easily through the full range of motion and stay where you set it. If adjustments are difficult and do not stay in the desired position, follow the instructions to loosen or tighten the tension to create a smooth, easy adjustment motion. Depending on your product and the adjustment, it may take several turns to notice a difference.

び実行してください。

調整は可動域内でスムーズかつ簡単に動く必要があり、選定した位置にしっかり固定されなければなりません。調整の動きがぎこちなく、選定位置で固定されない場合は、調整がスムーズにできるよう、説明書に従って張力を増減します。お使いの製品や調整によっては、違いがはっきりするまで何回か回さなければならないこともあります。

应当依照下列各步骤中描述的所安装设备的重量来调节本产品，这一点非常重要。任何时候，增减该产品上的设备都会导致安装负载重量的变化，您应当重复这些调节步骤，以确保在最优条件下安全使用。

调节应当在整个动作范围内灵活自如，并能固定在所调整的位置。如果调节困难且不能固定在想要的位置上，请遵照说明书拧紧或拧紧，使调节动作灵活自如。根据您所用产品及调节方式，可能需要旋转几圈后才能注意到差别。

It is important that you adjust this product according to the weight of the mounted equipment as described in the following steps. Any time equipment is added or removed from this product, resulting in a change in the weight of the mounted load, you should repeat these adjustment steps to ensure safe and optimum operation.

가


가

가

Lift - Up and down

リフト(上下)
升降(上下)


(/)

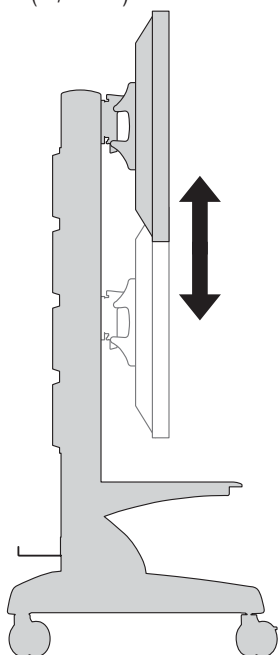

14mm



Follow these instructions to tighten or loosen tension.

圧力を増減するには次の手順に従います。
遵照这些说明拧紧或拧紧。

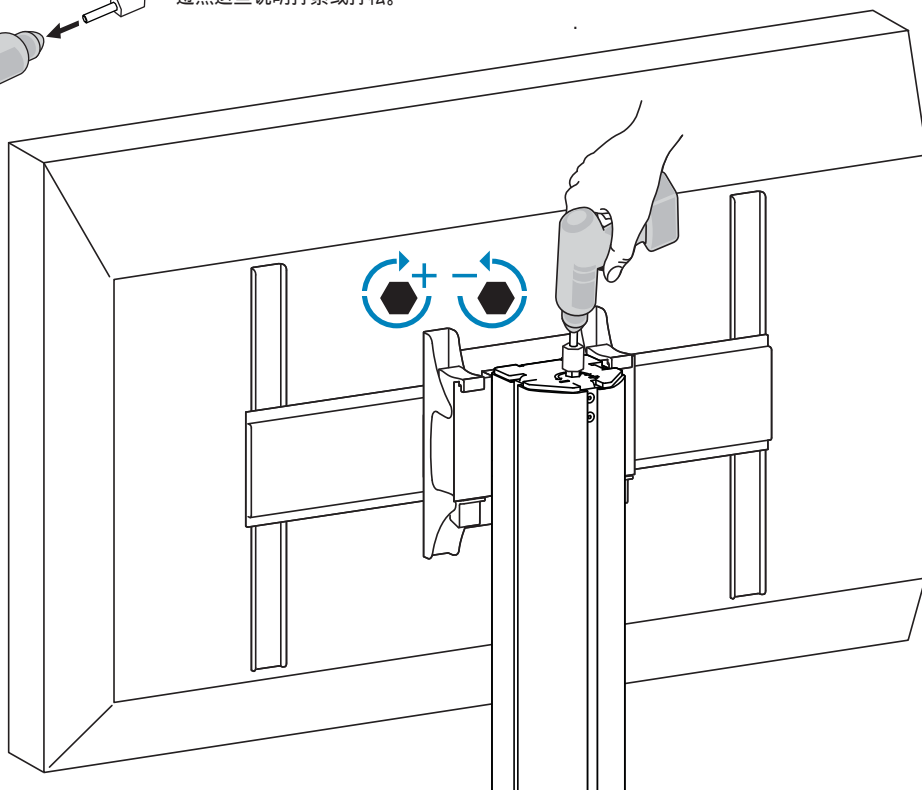


10a


Power Strip Hardware

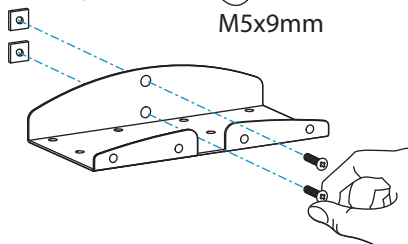


b

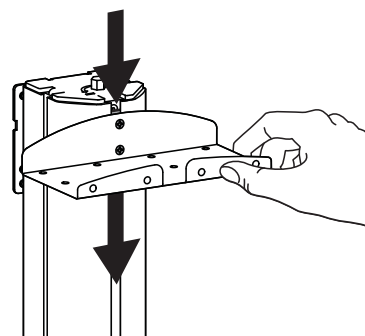


c

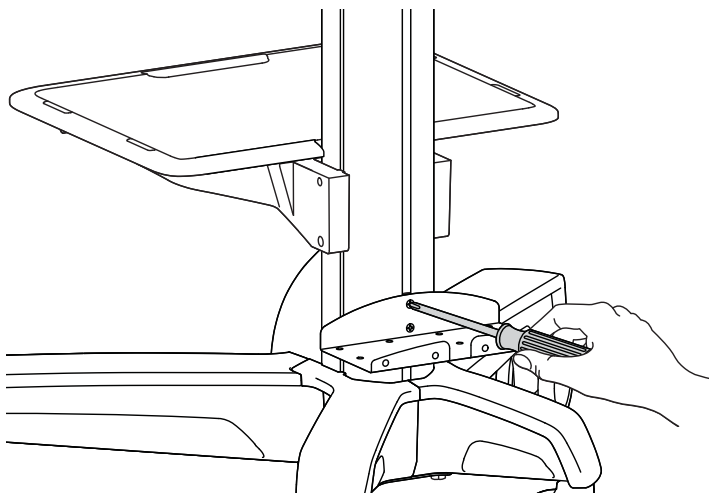

Cable Management Support Hardware




d

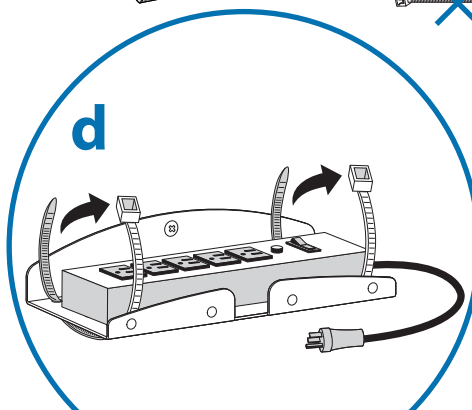


12


a

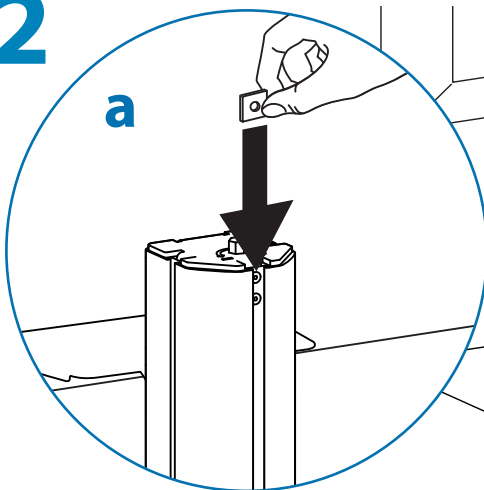


b

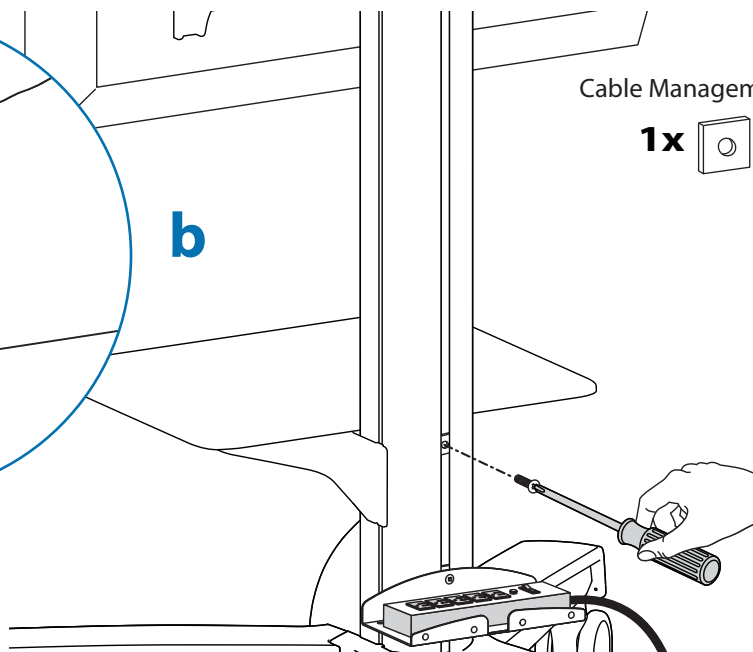

Cable Management Support Hardware



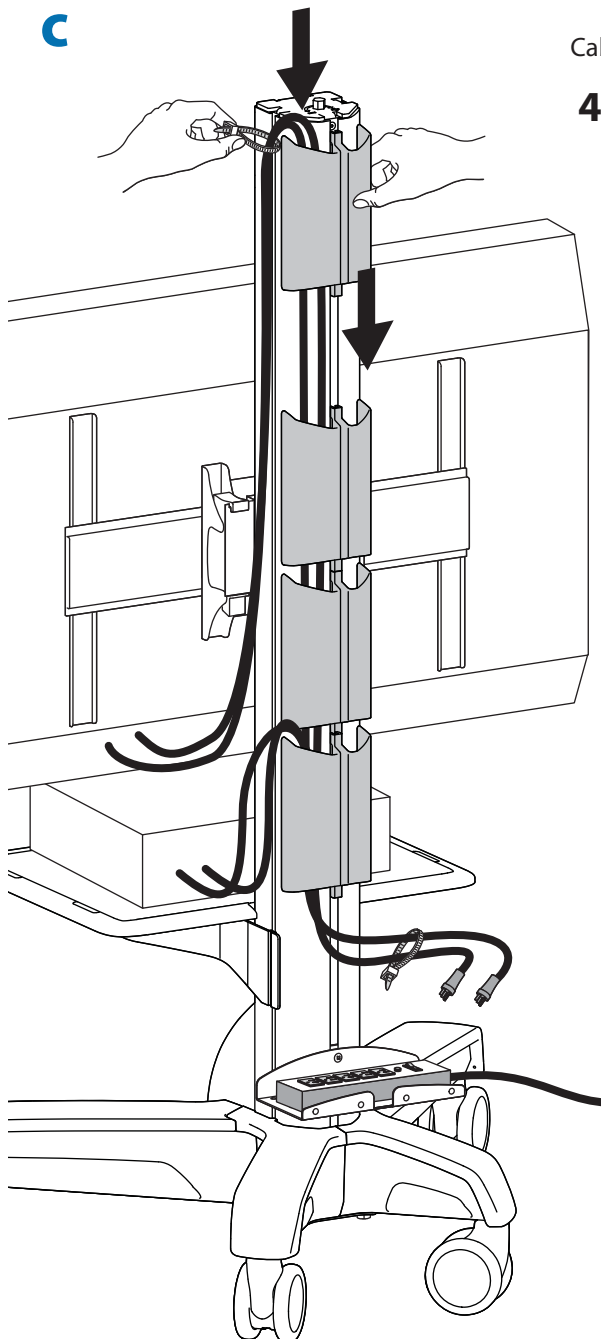c


Cable Management Support Hardware

4x**2x**

NOTE: Leave enough slack in cables to allow full range of motion.

ケーブル配線はアームの移動が自由に行えるよう、多少たるみを持たせてください。


让电缆保持松弛


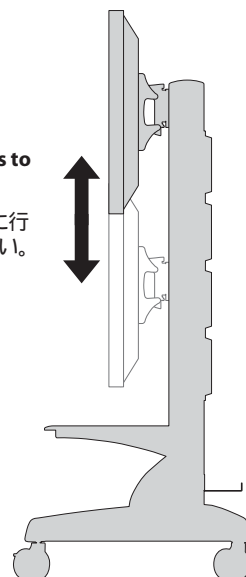
**d**

Top Cap Hardware

1x**1x**

M5x8mm

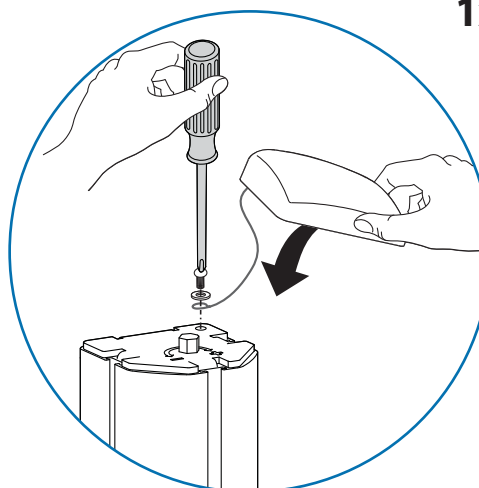1x

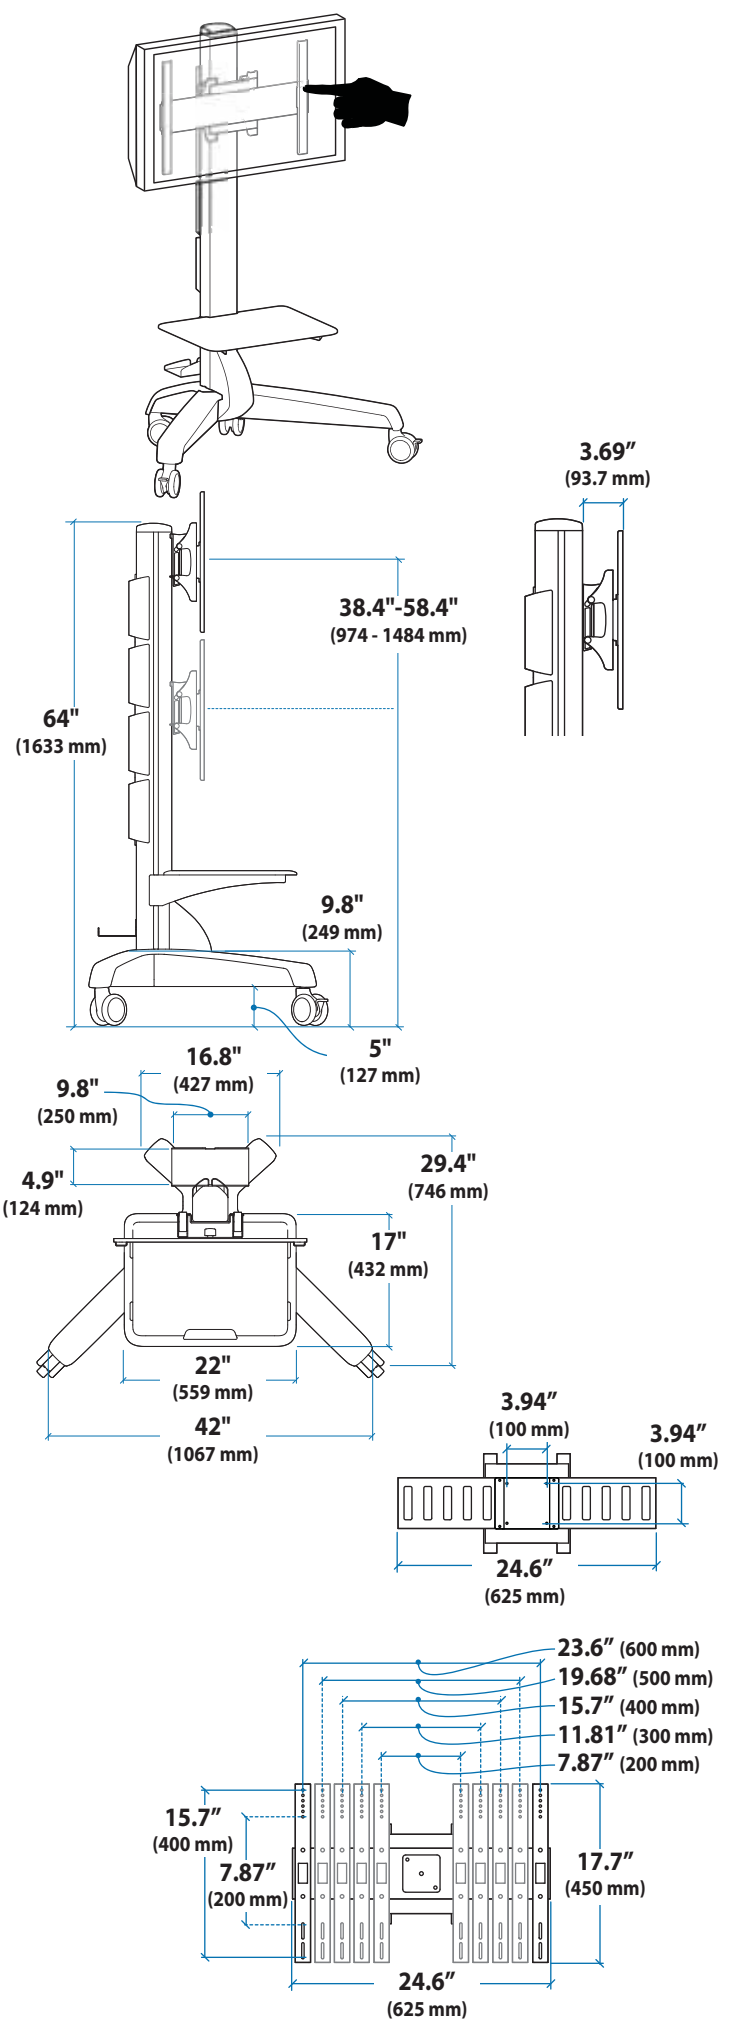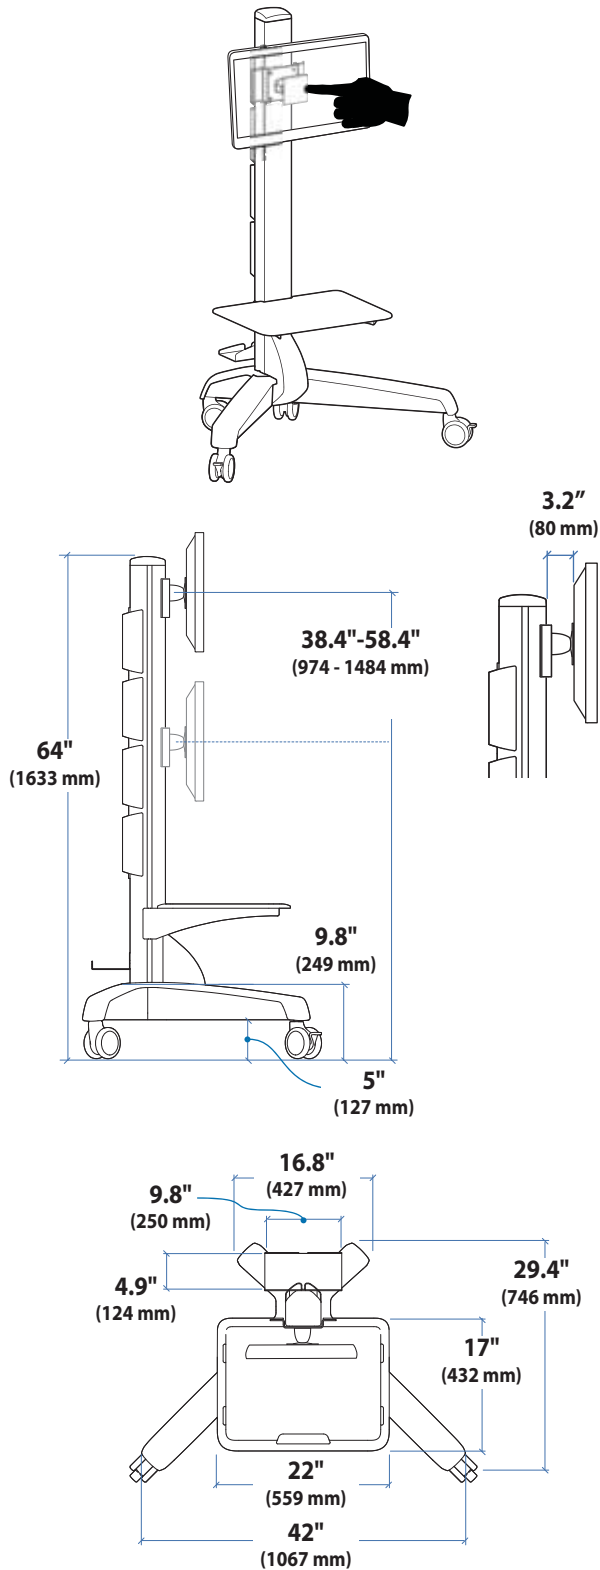

⚠ WARNING

STORED ENERGY HAZARD! DO NOT OPEN TOWER OR REMOVE SAFETY GUARD!

A primary mechanism within the tower is under tension and can be hazardous to people exposed to it under certain extreme conditions. DO NOT open the tower; DO NOT attempt to service the cart/stand. DO NOT remove safety guards or labels designed to protect or inform of possible hazards. Only Ergotron-approved installers may service or otherwise modify cart/stand. Failure to heed this Warning may result in serious Personal Injury and Damage both to the cart/stand and equipment.



⚠ WARNING

DO NOT load the Cart/Stand past maximum weight capacity. DO NOT mount a display larger than the recommended size. Failure to comply with warning may result in Cart/Stand instability leading to equipment damage or personal injury.




⚠ WARNING



TIPPING HAZARD!

DO NOT allow children on Cart / Stand.
DO NOT route electric cords or equipment cables within reach of children. LOCK CASTERS when Cart is stationary. Failure to comply with this warning may result in Cart / Stand instability leading to equipment damage or personal injury.

⚠ CAUTION



TIPPING HAZARD!

DO NOT move Cart with Display in highest position. DO NOT push Cart from front or back of Tower. DO NOT move Cart over cords or uneven, dirty, soft or sloping surfaces. DO NOT move Cart by pushing on Display. Failure to comply with this caution may result in Cart instability leading to equipment damage or personal injury.

TO MOVE CART

1. Push Display down to lowest position on Cart.
2. Disconnect power cord and attach to Tower.
3. Unlock casters; point casters in direction of travel.
4. Push Cart from side with hands on Tower.

822-025-00

Americas Sales and Corporate Headquarters

St. Paul, MN USA
(800) 888-8458
+1-651-681-7600
www.ergotron.com
sales@ergotron.com

EMEA Sales

Amersfoort, The Netherlands
+31 33 45 45 600
www.ergotron.com
info.eu@ergotron.com

APAC Sales

Tokyo, Japan
www.ergotron.com
apaccustomerservice@ergotron.com

Worldwide OEM Sales

www.ergotron.com
info.oem@ergotron.com



© 2011 Ergotron, Inc.
All rights reserved.

While Ergotron, Inc. makes every effort to provide accurate and complete information on the installation and use of its products, it will not be held liable for any editorial errors or omissions (including those made in the process of translation from English to another language), or for incidental, special or consequential damages of any nature resulting from furnishing this instruction and performance of equipment in connection with this instruction. Ergotron, Inc. reserves the right to make changes in the product design and/or product documentation without notification to its users. For the most current product information, or to know if this document is available in languages other than those herein, please contact Ergotron. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise without the prior written consent of Ergotron, Inc., 1181 Trapp Road, Eagan, Minnesota, 55121, USA. Patents Pending and Patented U.S. & Foreign. Ergotron is a registered trademark of Ergotron, Inc.