


虛線為對摺折線

DIMENSIONS

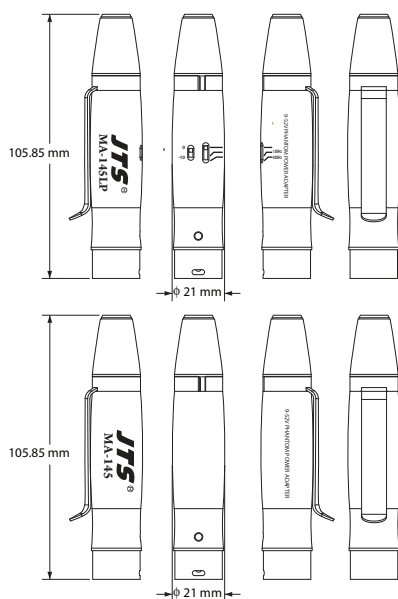


RoHS
conform

59010-077

JTS®

MA-145LP / MA-145 Phantom Power Adapter

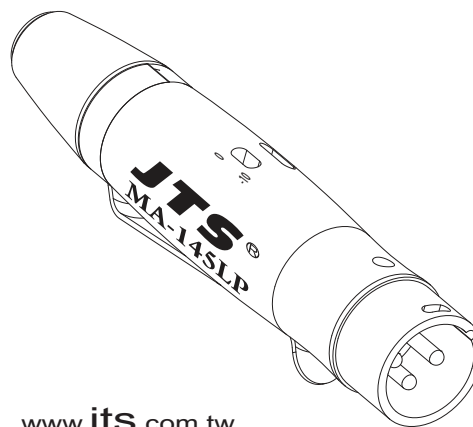

www.jts.com.tw

正面

實線為裁切線

FEATURES

This product provides power to miniature condenser microphones through phantom power. It works with all CM lavaliers, headset and ear-hook microphones.

MA-145LP

MIC Input..... 4P Mini XLR(Male)
Output..... XLR(Male)
Phantom Power..... 9~52V
PAD..... -10dB
Low Cut..... 400Hz -4dB
100Hz -6dB
Frequency Respond 35Hz~20KHz
Signal to Noise Ratio >110dB
THD%..... <0.065%
Dimension(mm)..... ϕ 21mm*105.85mm(H)
Net Weigh..... 51.3g


MA-145

MIC Input..... 4P Mini XLR(Male)
Output..... XLR(Male)
Phantom Power..... 9~52V
Frequency Respond 35Hz~20KHz
Signal to Noise Ratio >110dB
THD%..... <0.065%
Dimension(mm)..... ϕ 21mm*105.85mm(H)
Net Weigh..... 50.8g

POWER SUPPLY


MA-145/MA-145LP can be powered by JTS's PS-1, Phantom Power Supply or other 9V to 52V phantom power in the mixer.

MA-145 / MA-145LP Phantom Power Adapter

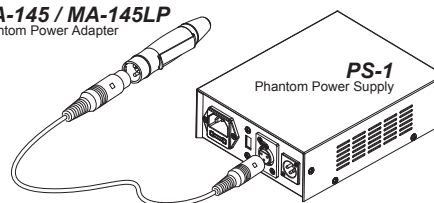


PIN CONFIGURATION

Input: 4P Mini XLR (Male)
Pin 1: GND
Pin 2: V+
Pin 3,4: Audio signal



Output: XLR (Male)
Pin 1: GND
Pin 2,3: Audio signal
(Phantom Power Supply)



裡面