



website: <http://biz.lgservice.com>




COLOR TV SERVICE MANUAL

CHASSIS : CW62B

MODEL: 21FS4RLX
21FS4RLX-ZV

CAUTION

BEFORE SERVICING THE CHASSIS,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.



更多难得资料请到江南家电维修论坛免费下载!
<http://bbs.520101.com>

P/NO : MFL31616401©

Jan., 2007
Printed in China

CONTENTS

Contents	2
Safety Precautions.....	3
Control Descriptions	4
Specifications.....	7
Adjustment Instructions.....	8
SVC Remocon	13
Trouble Shooting	14
Printed circuit board.....	17
Block Diagram.....	19
Exploded View.....	20
Exploded View Parts List	21
Replacement Parts List	22
SVC. Sheet.....	

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by $\triangle$ in the Schematic Diagram and Replacement Parts List.

It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards.

Do not modify the original design without permission of manufacturer.

General Guidance

An isolation Transformer should always be used during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this TV receiver is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

Due to high vacuum and large surface area of picture tube, extreme care should be used in handling the Picture Tube. Do not lift the Picture tube by its Neck.

X-RAY Radiation

Warning:

The source of X-RAY RADIATION in this TV receiver is the High Voltage Section and the Picture Tube.

For continued X-RAY RADIATION protection, the replacement tube must be the same type tube as specified in the Replacement Parts List.

To determine the presence of high voltage, use an accurate high impedance HV meter.

Adjust brightness, color, contrast controls to minimum.

Measure the high voltage.

The meter reading should indicate

23.5 $\pm$ 1.5KV: 14-19 inch, 26 $\pm$ 1.5KV: 19-21 inch,

29.0 $\pm$ 1.5KV: 25-29 inch, 30.0 $\pm$ 1.5KV: 32 inch

If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.

Before returning the receiver to the customer,

always perform an AC leakage current check on the exposed metallic parts of the cabinet, such as antennas, terminals, etc., to be sure the set is safe to operate without damage of electrical shock.

Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between 1M Ω and 5.2M Ω .

When the exposed metal has no return path to the chassis the reading must be infinite.

Any other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

Do not use a line Isolation Transformer during this check.


Connect 1.5K/10watt resistor in parallel with a 0.15uF capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which corresponds to 0.5mA.


In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

Leakage Current Hot Check circuit

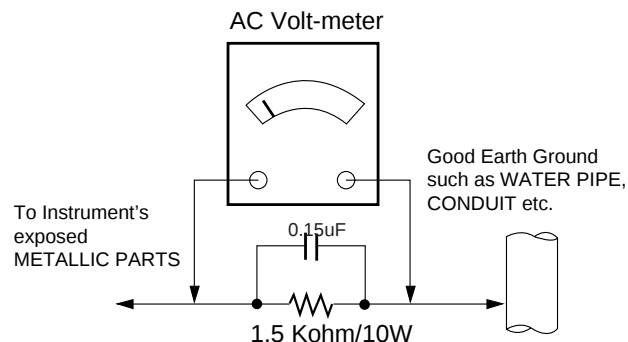


DESCRIPTION OF CONTROLS

All the functions can be controlled with the remote control handset. Some functions can also be adjusted with the buttons on the front panel of the set.

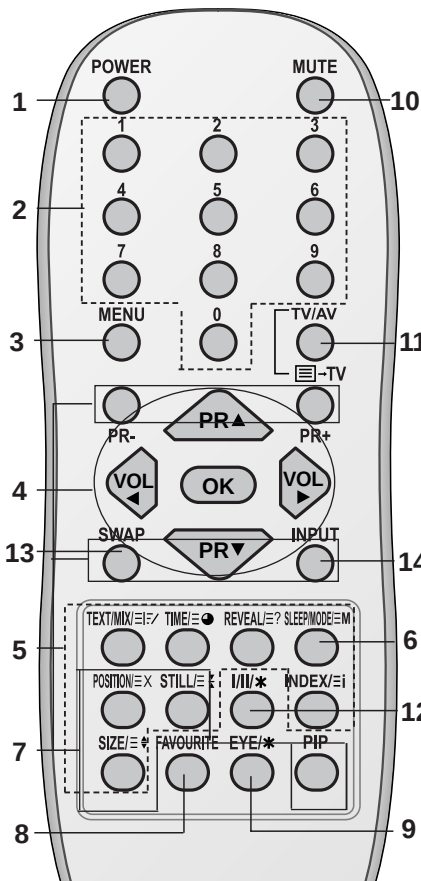

(With TELETEXT / PIP)

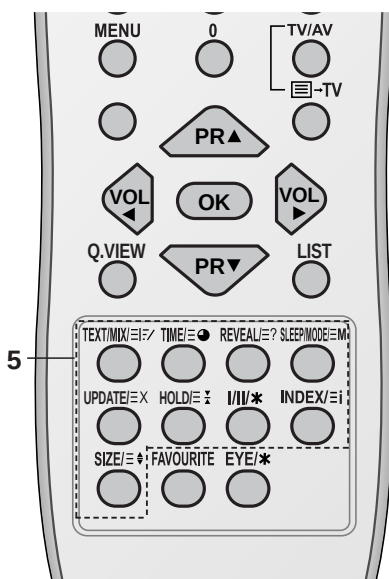

(With TELETEXT / Without PIP)

Remote control handset


Before you use the remote control handset, please install the batteries. See the next page.

1. **POWER**
switches the set on from standby or off to standby.
2. **NUMBER BUTTONS**
Switches the set on from standby or directly select a number.
3. **MENU**
selects a menu.
4. **▲ / ▼ (Programme Up/Down)**
selects a programme or a menu item.
switches the set on from standby.
scans programmes automatically.
◀ / ▶ (Volume Up/Down)
adjusts the volume.
adjusts menu settings.
OK
accepts your selection or displays the current mode.
5. **TELETEXT BUTTONS (option)**
These buttons are used for teletext.
For further details, see the 'Teletext' section.
6. **SLEEP**
sets the sleep timer.
7. **PIP BUTTONS (option)**
PIP
switches the sub picture on or off.
PR +/-
selects a programme for the sub picture.
SWAP
alternates between main and sub picture.
INPUT
selects the input mode for the sub picture.
SIZE
adjusts the sub picture size.
STILL
freezes motion of the sub picture.
POSITION
relocates the sub picture in clockwise direction.


- 8. FAVOURITE**
selects a favorite programme.
- 9. EYE/★ (option)**
switches the eye function on or off.
- 10. MUTE**
switches the sound on or off.
- 11. TV/AV**
selects TV or AV mode.
switches the set on from standby.
exits the Teletext mode(option).
- 12. I/II/★**
selects the language during dual language broadcast.
selects the sound output (option).
- 13. Q.VIEW (or SWAP)**
returns to the previously viewed programme.
- 14. LIST (or INPUT)**
displays the programme table.

★ : No function


COLOURED BUTTONS : These buttons are used for teletext (only TELETEXT models) or programme edit.

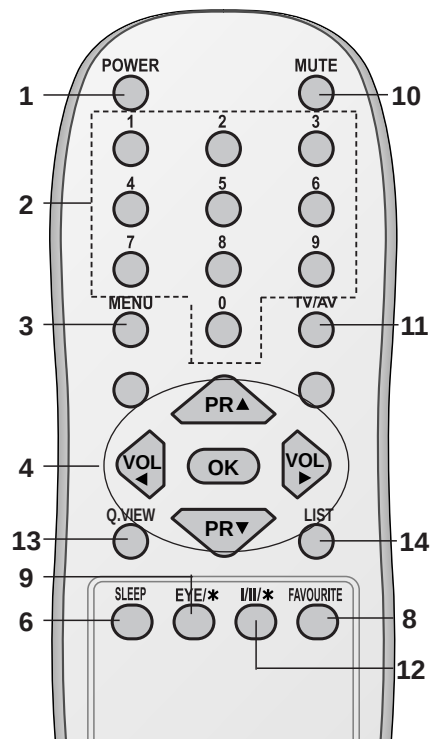

(Without TELETEXT / PIP)

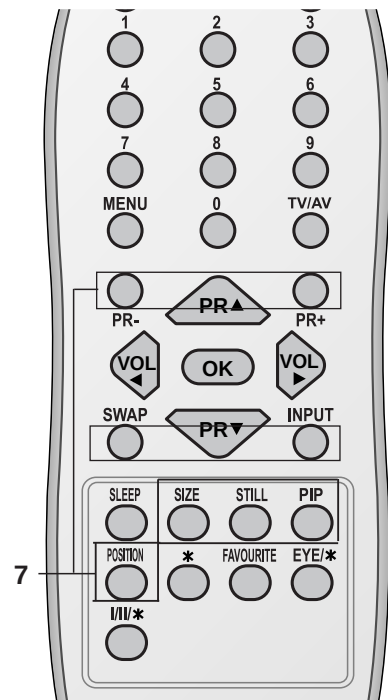


(With PIP / Without TELETEXT)

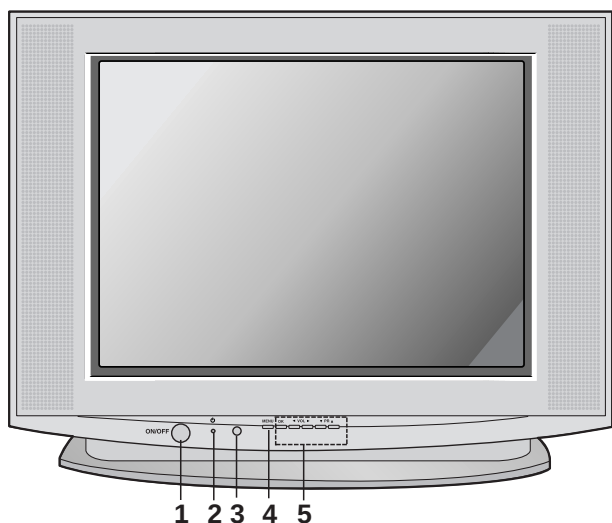

1. **MAIN POWER (ON/OFF)**
switches the set on or off.
2. **POWER/STANDBY INDICATOR**
illuminates brightly when the set is in standby mode.
dims when the set is switched on.
3. **REMOTE CONTROL SENSOR**
Note : Only use the supplied remote control handset. (When you use others, they won't be able to function.)
4. **MENU (option)**
selects a menu.
5. **OK (option)**
accepts your selection or displays the current mode.
◀ / ▶ (Volume Up/Down) (option)
adjusts the volume.
adjusts menu settings.
▲ / ▼ (Programme Up/Down) (option)
selects a programme or a menu item.
switches the set on from standby.
6. **AUDIO (or AUDIO-L/R)/VIDEO IN SOCKETS (AV IN2) (option)**
Connect the audio/video out sockets of external equipment to these sockets.
7. **EYE (option)**
adjusts picture according to the surrounding conditions.

Side panel

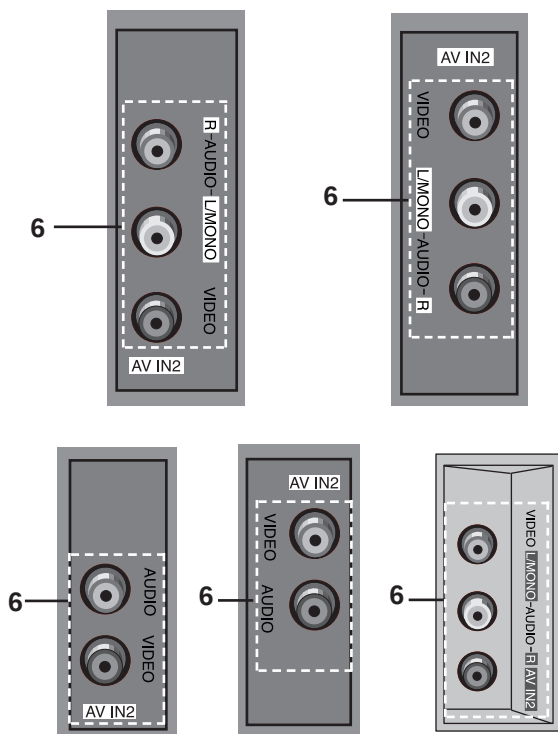

Note : Shown is a simplified representation of front or side panel. What is shown here may be somewhat different from your set or can not be supplied on your area.

SPECIFICATIONS

Note : Specification and others are subject to change without notice for improvement.

•Scope

This specification can be applied to all the television related to CW62B Chassis.

•Test and Inspection Method

- 1) performance : Follow the Standard of LG TV test
- 2) Standards of Etc. requirement
 - Safety: IEC60065
 - EMC: EN55020,EN55013

• Test Condition

- 1) Temperature : $20 \pm 5^{\circ}\text{C}$ (CST : $40 \pm 5^{\circ}\text{C}$)
- 2) Relative Humidity : $65 \pm 10\%$
- 3) Power voltage : AC110-240V~, 50/60Hz (Middle East/Africa)
AC 230V~50/60Hz (EU/CIS)
- 4) Follow each drawing or spec for spec and performance of parts, based upon P/N of B.O.M
- 5) Warm up TV set for more than 20min. before the measurement.

•General Specification

No	Item	Specification	Remark
1	Receiving System	PAL, SECAM BG PAL/SECAM DK PAL-I/I NTSC M NTSC 4.43(AV) SECAM-L/L' NTSC M/ PAL M/N	EU/ Non EU OPTION
2	Available Channel	VHF : E2 ~ E12 UHF : E21 ~ E69 CATV : S1 ~ S20 HYPER : S21 ~ S41	Non EU/ EU
		VHF : 02 ~ 13 UHF : 14 ~ 69 CATV : 02 ~ 71	NTSC-M
3	Input Voltage	AC 110-240V, 50/60Hz AC 230V, 50/60Hz	Non EU EU
4	Market	EU, CIS, China, Asia, Africa, Middle East	
5	Screen Size	Flat 21"	
6	Tuning System	FVS 100Program	PAL 200 PR(W/O TXT)
7	Operating Environment	1) Temp : $0 \sim 45^{\circ}\text{deg}$ 2) Humidity : below 85%	
8	Storage Environment	1) Temp : $-20 \sim 60^{\circ}\text{deg}$ 2) Humidity : below 85%	

ADJUSTMENT INSTRUCTIONS

1. Application Object


These instructions are applied to all of the color TV, CW62B.

2. Notes

- (1) Because this is not a hot chassis, it is not necessary to use an isolation transformer. However, the use of isolation transformer will help protect test instrument.
- (2) Adjustment must be done in the correct order. But the adjustment can be changed by consideration of mass production.
- (3) The adjustment must be performed in the circumstance of $25 \pm 5^\circ\text{C}$ of temperature and $65 \pm 10\%$ of relative humidity if there is no specific designation.
- (4) The input AC voltage of the receiver must keep rating voltage in adjusting.
- (5) The receiver must be operated for about 20 minutes prior to the adjustment.
- (6) Signal: Received, the standard color signal. ($65\text{dB} \pm 1\text{dB uV}$)
LG standard signal means the digital pattern (PAL_EU 05CH, NTSC_US 13CH).

3. Focus adjustment

- (1) Receive the Cross-Hatch Pattern (Fig 1).
- (2) Set the picture condition on "DYNAMIC(CLEAR)" mode.
- (3) Adjust the Focus volume of FBT, made the focus of the 1/4 part vertical line is best.

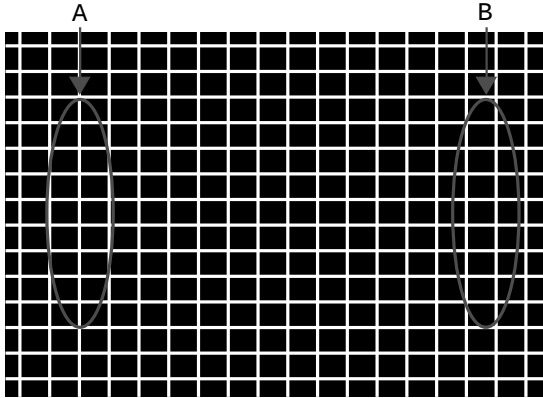


<Fig. 1> Cross-Hatch Pattern (NTSC : US 09CH, PAL : E-7CH)

4. Purity & Convergence adjustment

Adjustment should be operated when using the CPT (without ITC from CPT manufacturing place)

This adjustment must be done in the order of the following flowchart.

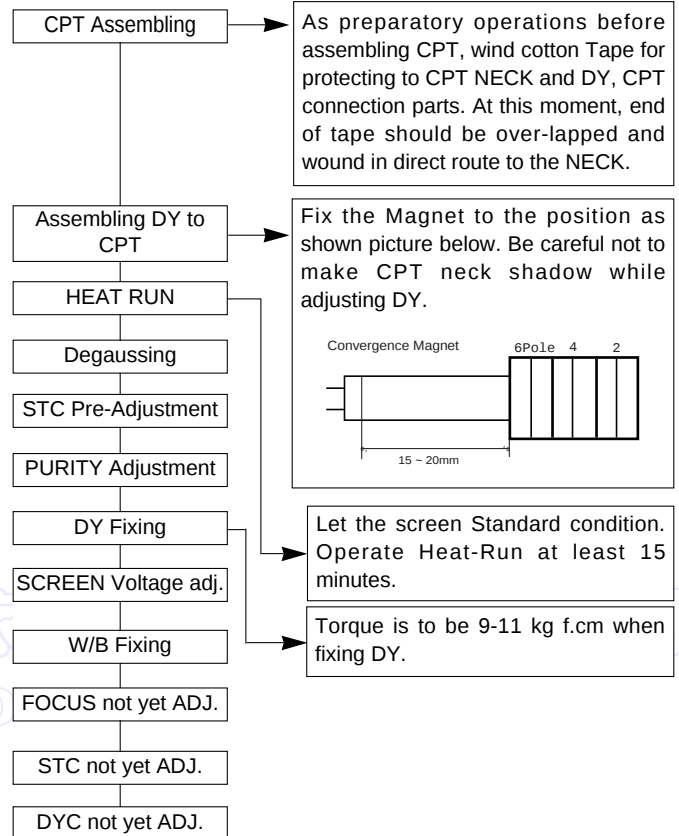

4.1. Color purity adjustment

- (1) It makes CPT or CABINET enough to demagnetization.
- (2) Receive the signal of red raster.
- (3) Unfasten DY and push DY to FUNNEL direction.
- (4) Make R-Land be centered as cross Purity Magnet. That time, 4 & 6 pole magnet should keep free gauss status.
- (5) Make uniform RED Raster as moving DY, Check there is purity problem or not on R/G/B, white Raster. Then fix screw of DY.
(At this time, be careful about inclination and DY should be fixed keeping horizontality.)
- (6) Check the TV set in direction of EAST, WEST, SOUTH, NORTH. Adjust with supporting MAGNET when adjustment is not operated.

4.2. Convergence adjustment

These adjustments should be operated at the best condition of focus after finished purity adjustment.

- (1) Receive the signal of cross hatch that BACK RASTER is black.
- (2) Adjust brightness so that there are 9 ~ 12 dots.

- (3) Widen two tabs of 4pole Magnet with equal angles and accord red,blue vertical lines at the center of screen.
- (4) With keeping angle of "c.clause",rotate tab and accord red/blue,green vertical lines at the center of screen.
- (5) Widen two tabs of 6pole Magnet with equal angles and accord red,blue vertical lines at the center of screen.
- (6) With keeping angle of "e.clause",repeat the adjustment from c to e keeping in mind the movement of red,blue,green when the horizontal lines are twisted.
- (7) Move the DY up,down,left,right and make the convergence to be optimal condition and stick rubber wedge to CPT so that the DY not to move.

5. Screen voltage adjustment

SCREEN manual adjust method(Used the remote controller)

- (1) RF Mode,input the PAL or SECAM(NTSC)signal,every channel is OK.
- (2) First LINE SVC MODE(IN-START KEY) and push the ADJ KEY change to the SCREEN adjustment MODE.
- (3) Adjust the SCREEN VOL of the FBT,then TV picture will be have a horizontal line,manual adjust the FBT SCREEN VOL,when the horizontal line just disappear is OK
(Press the TV/AV button to exit SVC mode)

6. White balance adjustment

- (1) Receive 100% white pattern.
- (2) From the initial data,adjust BLO-R(R CUT),BLO-G(G CUT) keep X,Y coordinate settle for the below list,adjust the LOW LIGHT(4.5FL).
- (3) From the initial data:BG(B-DRIVE) is 32,adjust RG(R-DRIVE),GG(G-DRIVE) keep X,Y coordinate settle for the below list,adjust the HIGH LIGHT(35FL).

※HIGH LIGHT,LOW LIGHT adjust reiterative.

※W/B adjust initial data maybe difference by different model,so please refer to the model adjust TABLE.

<Table 1> White Balance Coordinate(By market)

Item	EU	N-EU
X	288	268
Y	295	273
Chroma	9000	13000

<Table 2> White Balance Initial Data

	Menu	Range	DATA	
			PAL	NTSC
LOW LIGHT	BLO-R(R CUT)	0 ~ 63	32	32
	BLO-G(G CUT)	0 ~ 63	32	32
	BLO-B(B CUT)	0 ~ 63	32	32
HIGH LIGHT	RG(R DRIVE)	0 ~ 63	32	32
	GG(G DRIVE)	0 ~ 63	32	32
	BG (B DRIVE)	0 ~ 63	32	32

<Table 3> White Balance Initial Data

1. IC PARAMETER

	Name	Maker	Algorithm			
VCD IC			0	0	0	0
EP_ROM						

2. White balance IIC Parameter(Address)

Program	Win31_wb	TWB		Win31_wb	TWB	Speed	Delay
Vcd Slave		8A	Eeprom_Slave		A0	1	30

Program	B(R)_Amp		B(R)_Cut		G_Amp		G_Cut	
	Win31_wb	TWB	Win31_wb	TWB	Win31_wb	TWB	Win31_wb	TWB
Sub Add		20		17		21		18
Start Bit		5		5		5		5
Stop Bit		0		0		0		0
Offset		0		0		0		0
Polarity		1		1		0		0
EP_Rom_S		36		33		37		34

Speed/ Plus	2	2	2	2
-------------	---	---	---	---

7. Deflection setting Data Adjustment

7.1 Adjustment preparation

- (1) TV set to receive an Digital pattern(PAL:E5ch.,NTSC: US-12).
- (2) Deflection data setting used remote.
- (3) press the LINE SVC MODE(IN-START KEY) into SERVICE MENU,Choice SERVICE2 to adjustment mode.
- (4) Press CH+,CH- KEY chooice adjust item.
- (5) Press VOL+,VOL - KEY increase or decrease DATA.

7.2 Adjustment

- (1) First,adjust deflection at 50Hz,of PAL signal. then,adjust deflection at 60Hz, of NTSC signal.
- (2) Korea Model only used the N60Hz,adjustment . Adjust vertical inclination of screen.
- (3) Central or South America Model first N60Hz adjustment and then N50(PAL-N) adjustment.
- (4) when finish the adjustment and press"ENTER" KEY,save data andexit adjustment Mode.

※Deflection adjustment small item

(1) V SLOPE

The cutting part(below) of picture transfer to Blanking.
Adjust the geometric vertical center of the CPT is in accord lower blanking.

(2) VS (Vertical Shift)

Adjust so that the horizontal center line of a digital circle pattern is in accord with geometric horizontal center of the CPT.

(3) VL (Vertical Linearity)

Adjust so that the boundary line between upper and lower half is in accord with geometric horizontal center of the CPT(PAL : E5ch., NTSC : US-13.).

(4) VA (Vertical Amplitude)

Adjust so that the circle of a digital circle pattern may be located within the effective screen of the CPT.

※ NTSC signal : Adjust NTSC 13CH circle as an inscribed circle of vertical outer boundary of the effective screen of the CPT.




<Fig. 2 >

(5) HS (Horizontal Shift)

Adjust so that the vertical center line of a digital circle pattern is in accord with geometric vertical center of the CPT.

(6) EW (Horizontal Width)

Adjust so that a digital circle pattern looks like exact circle.(PAL:0~25%,NTSC: 2.5~3.0)

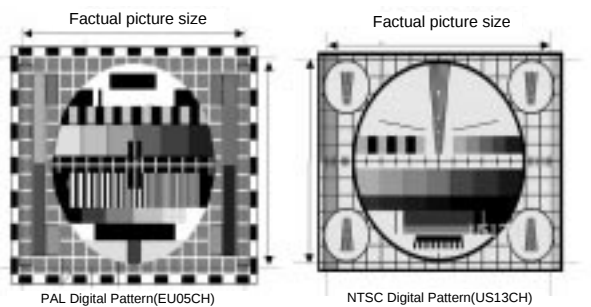

<Fig. 3> Cross-Hatch Pattern

(7) EP (East-west Parabolar)


Adjust so that middle portion of the outermost left and right vertical line looks like parallel with vertical lines of the CPT.

(8) ET (East-west Trapezium)

Adjust to make the length of top horizontal line same with it of the bottom horizontal line.

(9) EW UPCOR & EW LOCOR

Adjust until symmetrize upper&lower coner of the screen.

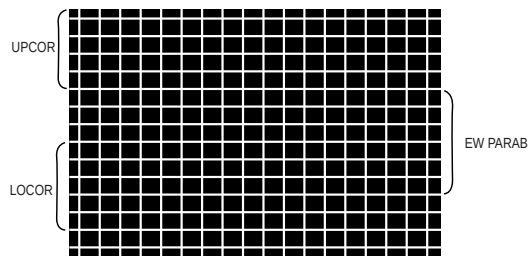

<Fig. 4> Cross-Hatch Pattern(NTSC:US 9CH,PAL:E-7CH)

(10) BOW

Adjust the left and right crooked line on upper and lower side.

(11) H ANGLE

Adjust the vertical slope

(12) S CORRECT (S CORRECTION)

Adjust the receive Patter, keep the lattice's range same(Top/Center/Bottom)

※ This decided by DY data,so according to the CPT's Default data(Initial data) Setting.

(13) V SCROLL

Adjust the center vertical line of the geometrical with the CPT center vertical line same.

(14) V ZOOM (fixed) : VERTICAL ZOOM.

(15) WBR (fixed) : Timing of wide Blanking

(16) WBF (fixed) : Timing of wide Blanking

(17) V SYNSLI (fixed) : Vertical slicing level

(18) OVRVOLIN (fixed) : Over voltage input mode

(19)V GUARD (fixed) : Vertical guard mode

8. initial data for deflection

<Table 4> Initial data for deflection by model (SERVICE 2)-PAL

Item	Description	21" S-SLIM		21" FLAT		Adjust or not
		50Hz	60Hz	50Hz	60Hz	
V SLOPE	Vertical slope	15	16	24	18	YES
V SHIFT	Vertical shift	48	45	48	40	YES
V LINEAR	Vertical linearity	43	44	43	33	YES
V AMPLIT	Vertical amplitude	29	31	19	44	YES
H-SHIFT	Horizontal shift	30	35	34	31	YES
EW WIDTH	EW width	46	52	46	35	YES
EW PARAB	Parabola adj	25	36	25	24	YES
EW TRAPE	Trapezoid adj	19	23	19	28	YES
EW UPCOR	Upper corner adj	35	50	35	44	YES
EW LOCOR	Lower corner adj	46	53	46	48	YES
H BOW	Bow	35	34	35	35	YES
H PARALL	Horizontal parallelogram	26	37	32	28	YES
SCORRECT	S correction	36	35	36	30	NO
V SCROLL	Vertical scroll	27	21	21	21	Adjust if need
V ZOOM	Vertical zoom	25	25	25	25	NO
WBR	Timing of wide Blanking	2	2	2	2	NO
WBF	Timing of Wide Blanking	2	2	2	2	NO
V SYNSLI	Vertical slicing level	0	0	0	0	NO
OVRVOLIN	Over voltage input mode	0	0	0	0	NO
V GUARD	Vertical guard mode	1	0	1	1	NO

● After PAL50Hz adjustment for Pal mode,NTSC60Hz apply deflection redress data,but you need confirm the adjustment condition in NTSC System again,if it is no good,you need readjust it in NTSC mode.

9. SVC DEFAULT DATA

(manage DATA by EEPROM MASTER)

[Table 5] SERVICE 1

ITEM	DESCRIPTION	CW62B	
		N-EU	EU
AGC	ACG take over	25	25
RG	Red Gain	32	32
GG	Green Gain	32	32
BG	Blue Gain	32	32
BLO-R	Black level offset Red	32	32
BLO-G	Black level offset Green	32	32
CDL	Cathode Drive Level	8	8
L-DLY PA	Luminance delay time for PAL	2	2
L-DLY SE	Luminance delay time for secam	13	13
RGB-BRI	OSD/TEXT BRIGHTNESS	27	27

[Table 6] SERVICE 3

ITEM	DESCRIPTION	CW62B		Remark
		EU	NEU	
OVMADAPT	OVER MODULATION ADAPT	1	1	
OVMTHR	OVER MODULATION THRESHOLD	1	1	
ADC LEV	ADC LEVEL(-16~15)-ADCLEV	16	16	
DEC LEV	DEC LEVEL(-16~15)-DECLEV	18	18	FM pre-scaler
MONO LEV	MONO LEVEL (-16~15)MONLEV	18	18	(stereo L/R) FM pre-scaler
NICAMLEV	NICAM LEVEL(-16~15)-NICEV	22	22	(Mono)
FILTBW	FILTER BANDWIDTH	0	0	
BAMA FC	BAMA FC	60	60	NICAM pre-scaler
AUX3 VOL	AUX3 VOL (SCART1 RF SOUND OUT)	84	89	
FMWINDOW	FM WINDOW FILTER(FMWS)	1	1	Scart pre-scaler
BOOSTVAL	BOOSTER	0	0	
MAX VOL	MAX VOLUME	100	100	
DCXO VAL	DCXO	50	50	
DCXOA	DCXO	0	0	
TEXT-V	TEXT V POSITION	40	40	
TEXT-H	TEXT H POSITION	4	4	

[Table 7] SERVICE 4

ITEM	Description	N-EU	EU	Refer
WS	WHITE STRETCH	1	1	
BKS	BLACK STRETCH	1	1	
BSD	BLACK STRATCH DEPTH	0	0	
DSK	DYNAMIC SKIN CONTROL	1	1	
COR	VIDEO DEPENDENT CORING	2	2	
PF	PEAKING FREQUENCY DELAY	2	0	
RPO	RATION POSITIVE/ NEGATIVE PEAKS	2	2	
RPA	RATION PRE/AFTER SHOOT	2	2	
PWLDAC	PEAK WHITE LIMITER DAC	8	8	
IFOFF	IF DEMODULATOR	37	37	
CHSE	CHROMA SENSITIVITY	1	1	
ACL	AUTO COLOR LIMITING	1	1	
CLPDEL50	Clamping delay 50	18	-	PIP data
CLPDEL60	Clamping delay 60	18	-	
CLPLEN	Clamping Pulse Length	3	-	
CLMPID	Clamping Duration	3	-	
PIP H	PIP H position	10	-	

[Table 8] option 1,2,3,4

	ITEM	Description
OPTION1	INCH	Flat/slim/ultra/Conventional
	SYSTEM	BG/DK/I/M - no EU, BG/DK/I/L - EU
	200PR	W/O TXT=>200PR,W/TXT=>100PR
	TOP	FLOF - other Nation TOP - Germany, Swiss, Austria, Italy
	ACMS	Off - Australia only/ On - other Area
	CH-AU	China & Australia Frequency table
	BOOSTER	Booster off/on
OPTION2	SOUND	RF stereo / AV stereo / Mono Dual
	PIP	PIP option
	RESERVED	Reserved option
	VOL CURVE	Eu low curve/ Non EU high Curve
	A2 STEREO	Nicam check & FM stereo/ Dual act or not
	I/I SAVE	Dual sound setting save or not
	HIDEVIAT	Sound high deviation apply
OPTION3	SCART	countermeasure or not SCART option
	DVD	DVD option
	XWAVE	FM TX option
	EYE	EYE option
	4KEY	4 Key option
	TILT	TILT option
	DEGAUSS	Degaussing option
OPTION4	OSD LANG	Refer to the next page(table.8)
	TXT LANG	Refer to the next page(table.8)
OPTION5	REMOCON	Large type Remocon / Small type Remocon
	HOTEL	HOTEL option
	TURBOSCH	Turbo search
	TURBOP/S	Turbo picture/ sound
	BLUEBACK	Blue back option
	TEXT	Teletext option

◆OPTION DATA BOM example

LEVEL	PART NO.	SPECIFICATION	DESCRIPTION
1.	3141VM382A	MAIN CHASSIS ASSY	[112.68.164.32.8]

<Table 9> OSD & TEXT LANGUAGES

1. East EU Area	OSD lang	0	ENGLISH
		1	East EU
		2	Russian
	TXT LANG	0	EU WEST
		1	EU EAST
		2	Russian W
		3	Russian E
		4	UKRAINIAN
		5	BYELORUSSI
2. Arab - Farsi	OSD lang	6	GREEK
		0	English
		1	Arabic
		2	Farsi
	TXT LANG	3	Arab all
		0	EU West
		1	EU East
		2	Arabic
3. ASIA	OSD lang	3	Farsi
4. West EU	OSD lang		
	TXT LANG		

10. IN-STOP Condition

<Table 10>

No.	ITEM	Condition	Mark
1	Power	OFF	
2	Input	TV	
3	MEMORY CHANNEL	CH.MEMORY	
4	SOUND	30STEPS	
5	MUTE	OFF	
6	PSM	DYNAMIC	
7	XD	ON	
8	SSM	FLAT	
9	TURBO SOUND	FLAT	
10	AVL	OFF	
11	BALANCE	0	
12	ON/OFF TIME	OFF	
13	AUTO SLEEP	OFF	
14	CHILD LOCK	OFF	
15	DEGAUSS	OFF	
16	EYE	OFF	OPTION
17	TILT	0	OPTION
18	BLUE BACK	OFF	OPTION

<Table 11> PSM MODE DATA SETTING (PAL)
Picture mode DATA SETTING

PSM	Dynamic	Standard	Mild	Game
CONTRAST	100	90	60	50
BRIGHT	60	55	55	55
COLOR	60	55	55	60
SHARPNESS	60	60	50	50

<Table 12> APC MODE DATA SETTING (NTSC)
Picture mode DATA SETTING

PSM	Clear	Optimum	Soft
CONTRAST	100	70	55
BRIGHT	55	45	45
COLOR	50	45	40
SHARPNESS	50	40	30

11. OPTION Adjustment (PAL)

- 1) OPTION Adjustment need by Model name, used the remote controller press the IN-START KEY and start adjust. Choice OPTION 1,2,3,4,5 adjust one by one.
- 2) OPTION1 ???(0~255), OPTION2 ???(0~255), OPTION3 ???(0~250), OPTION4 ???(0~337), OPTION5 ???(0~252)


12. SOUND PRE-SCALER

This SVC data settin by every buyer's spec., so can't change it.

※Audio Out Level SPEC

- ◆ PAL B/G, D/K, I : 500m Vrms at 54% modulation ratio.
- ◆ SECAM B/G, D/K, L/L : 500m Vrms at 54% modulation ratio.
- ◆ NTSC-M : 500m Vrms at 100% modulation ratio.


SVC REMOCON

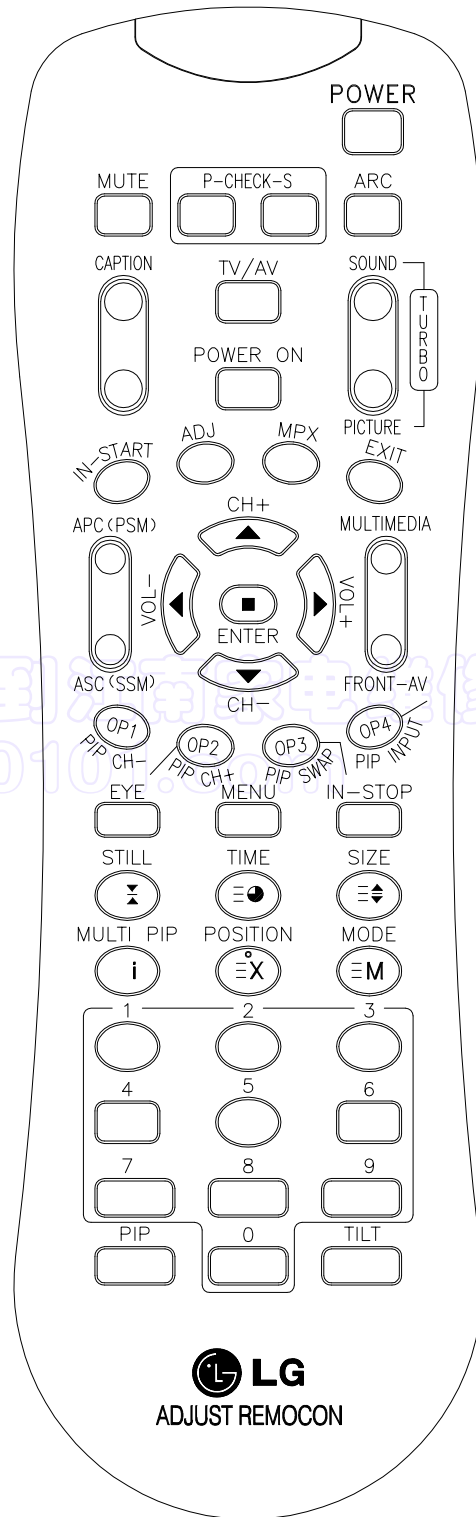


TROUBLE SHOOTING

1. RF-STEREO MODEL


1) PICTURE OK / NO SOUND

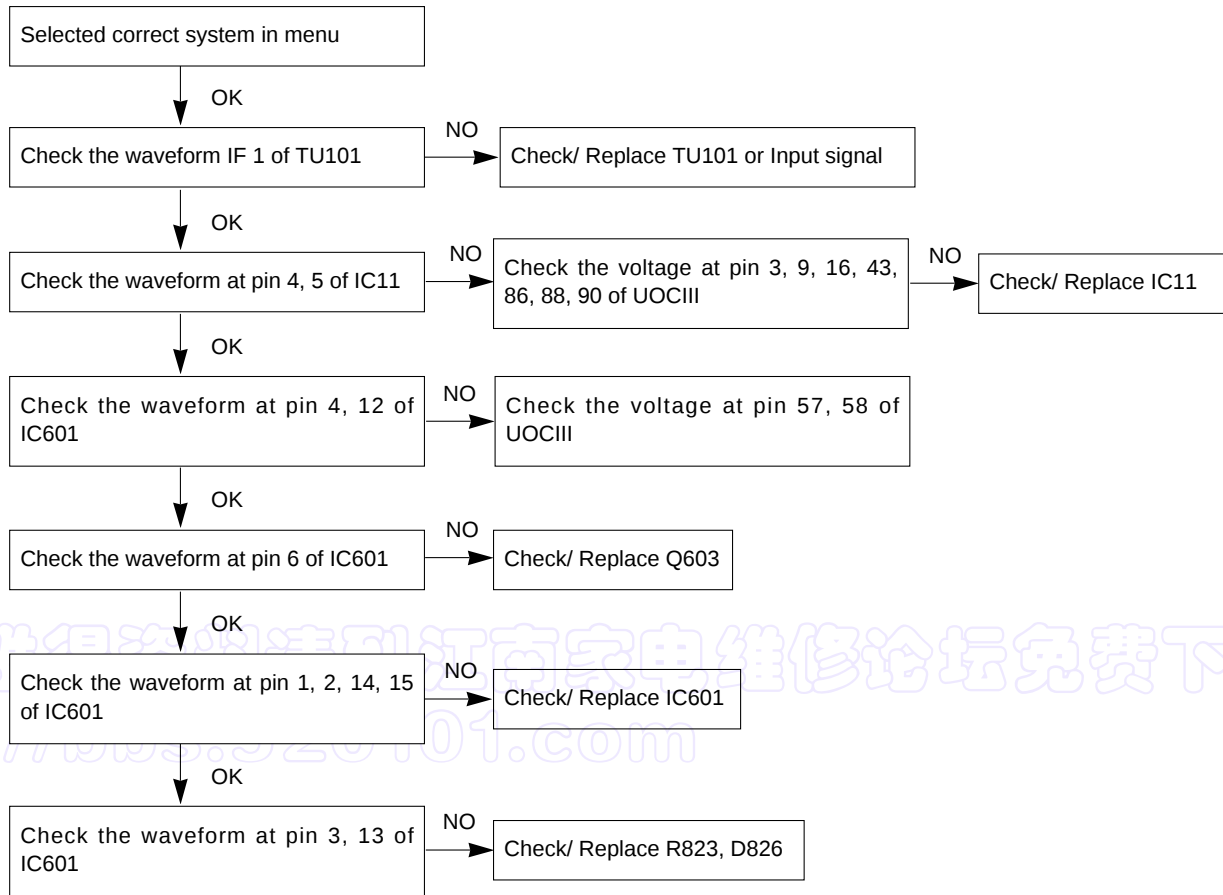


2) No Raster / Sound OK(1/2)

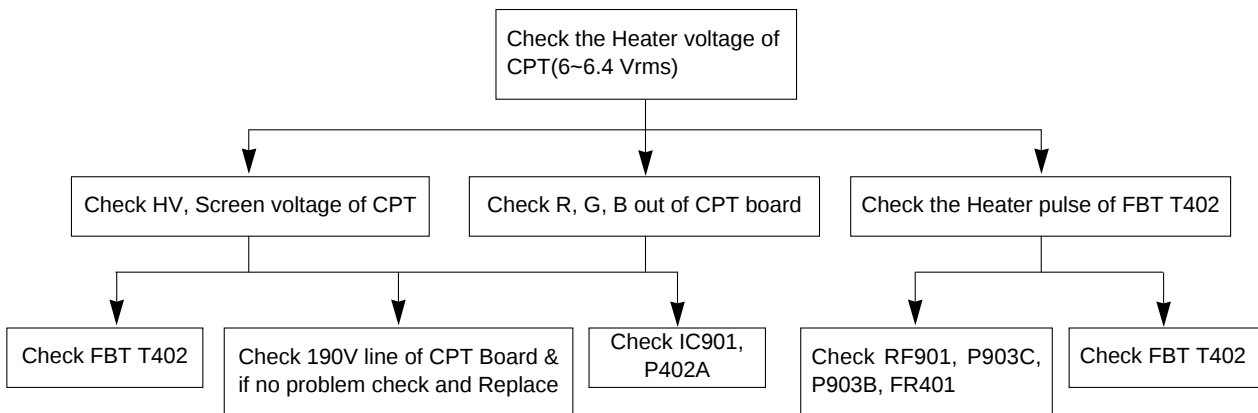

3) No Raster (2/2)

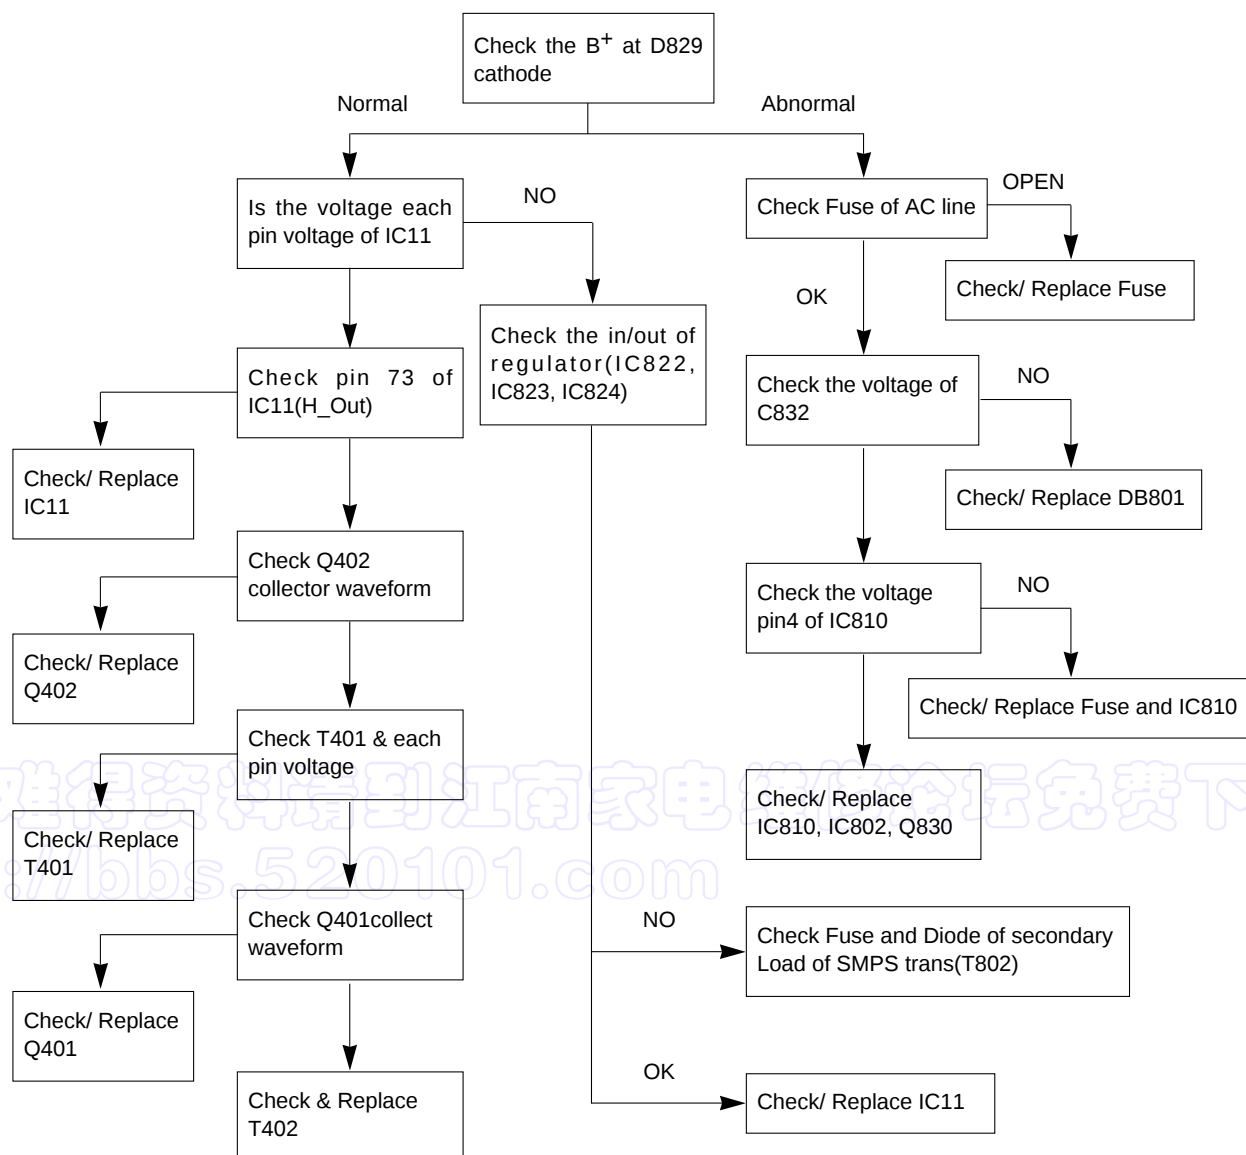


4) No Picture/ No Sound

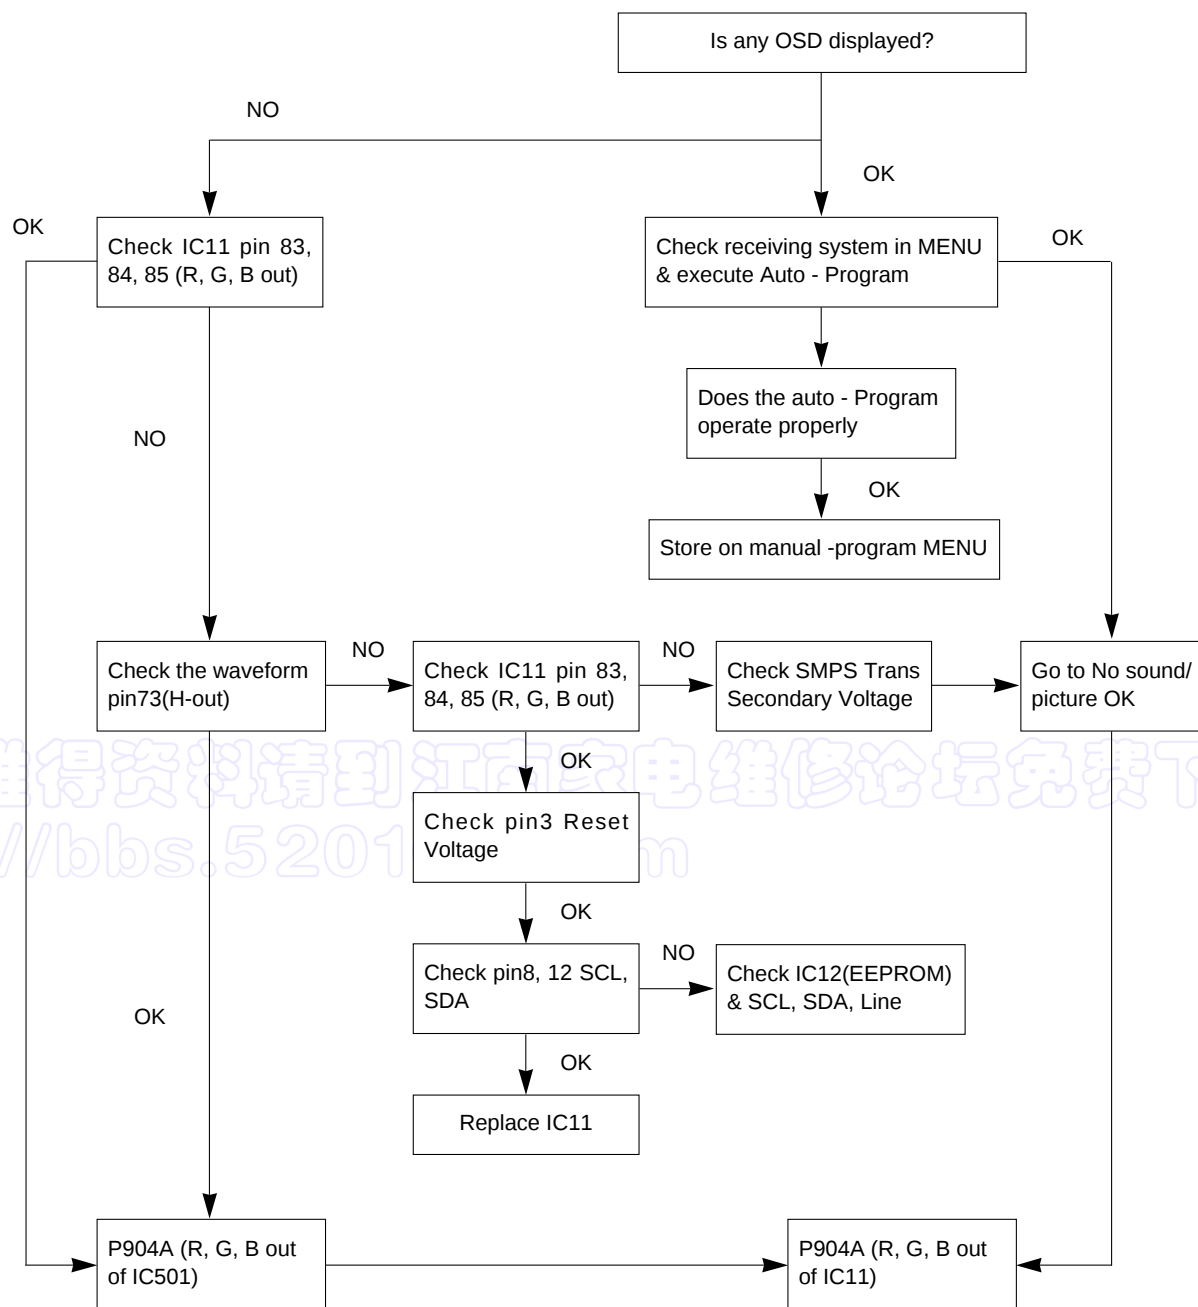


PRINTED CIRCUIT BOARD

MAIN

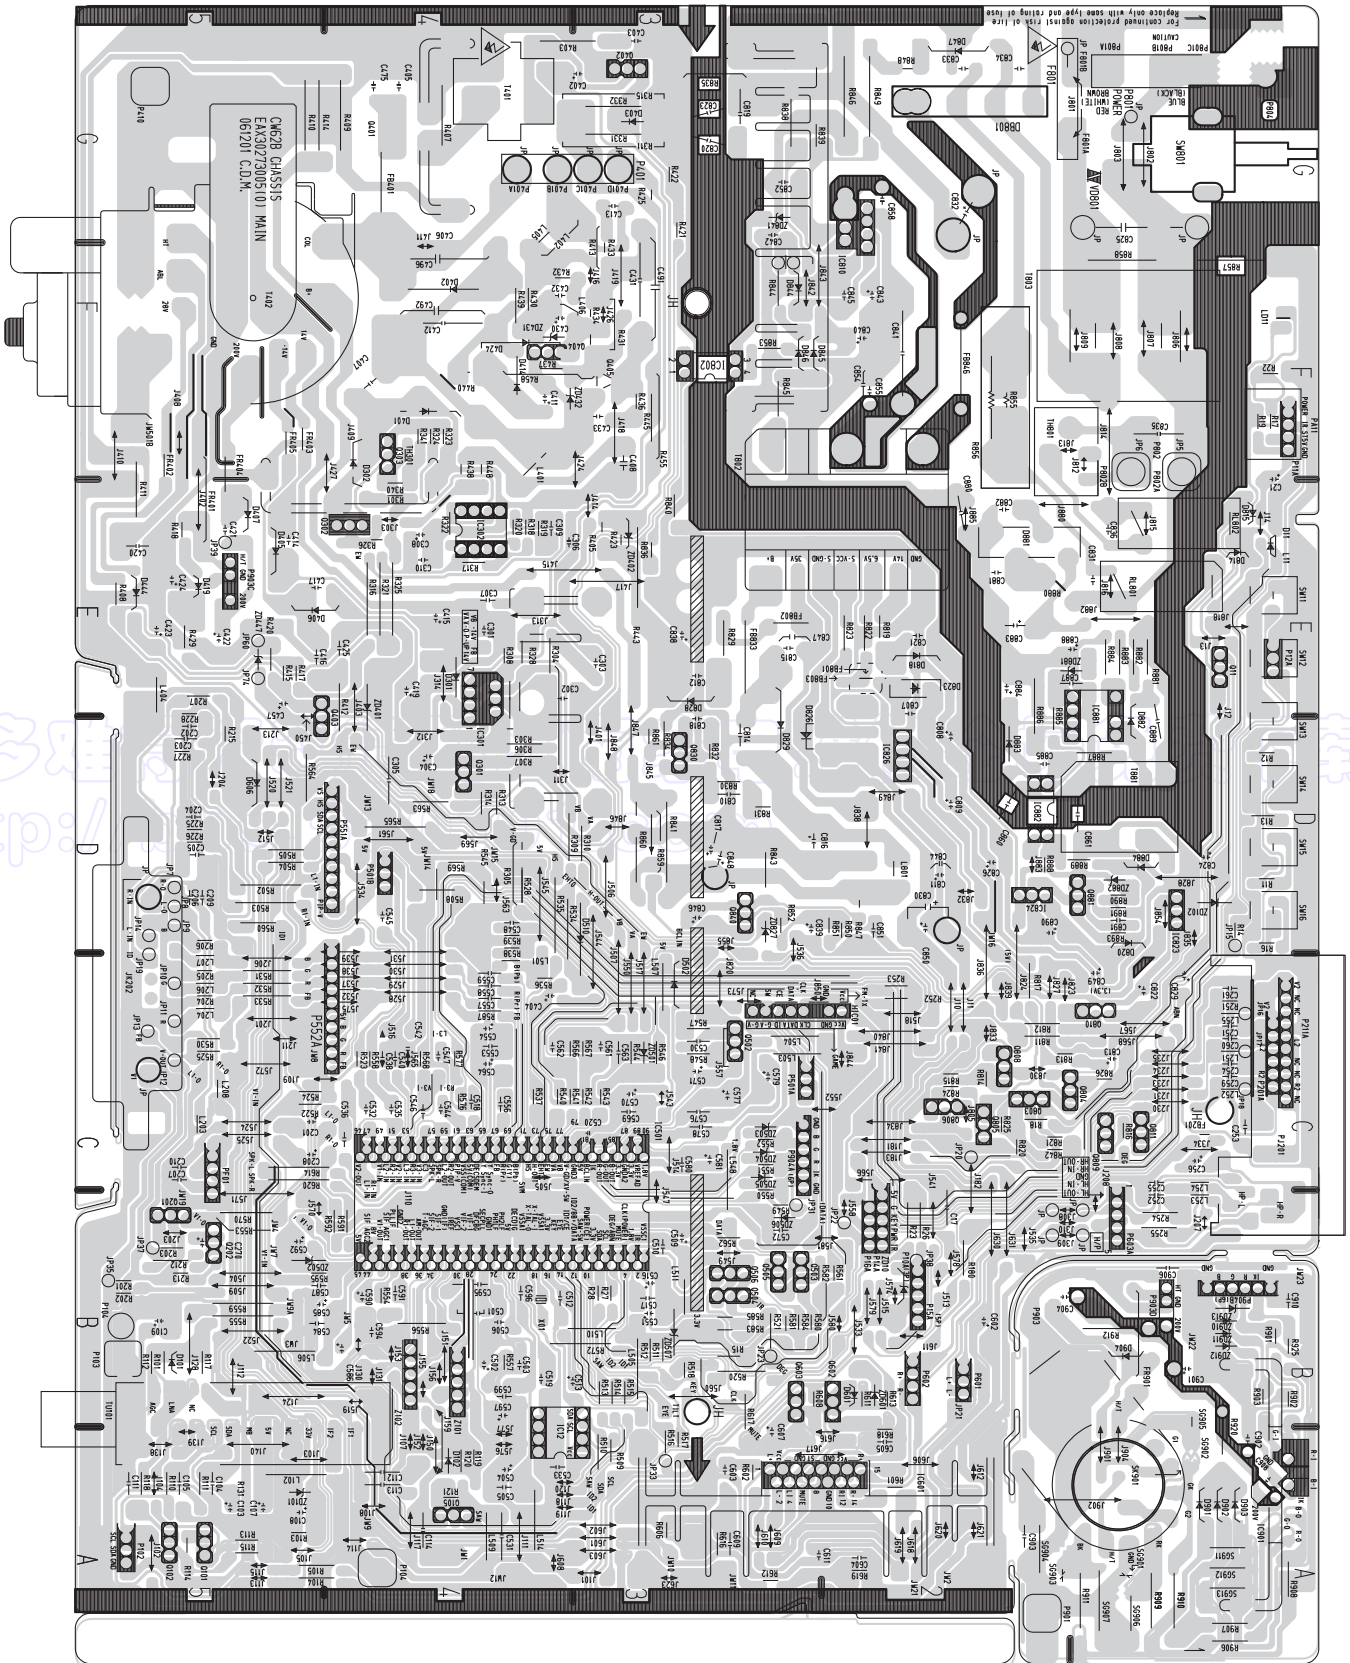


SIDE A/V

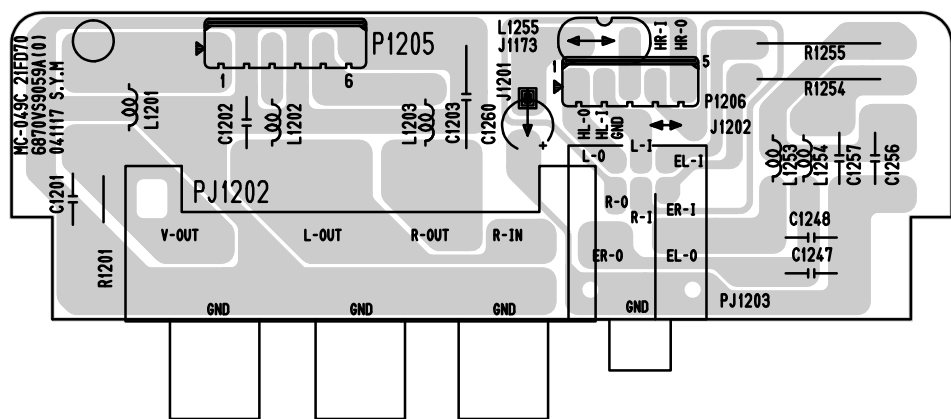

更多难得资料请到江南家电维修论坛免费下载!
<http://bbs.520101.com>

EXPLODED VIEW

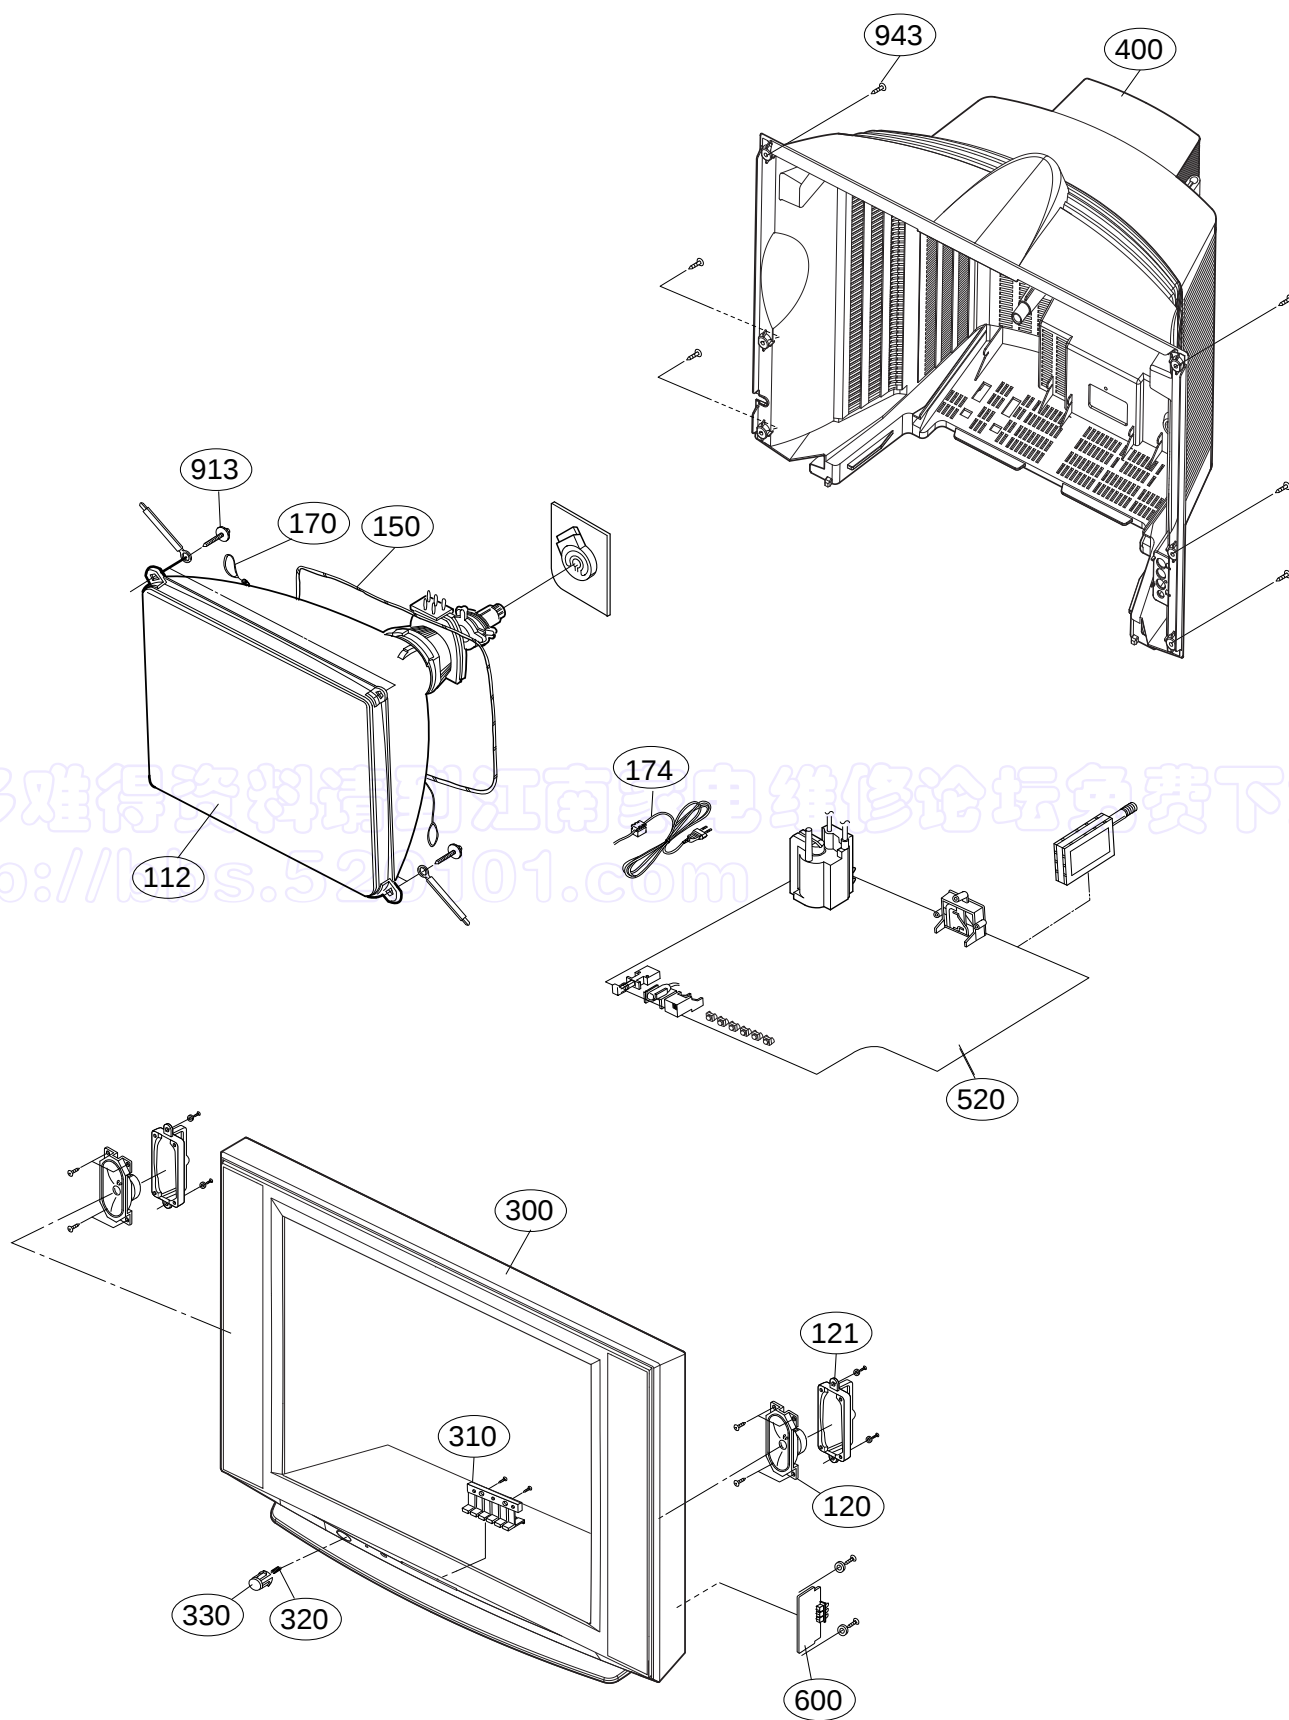

EXPLODED VIEW PARTS LIST

The components identified by mark Δ is critical for safety.
Replace only with part number specified.

LOCA. No.	PART No.	DESCRIPTIONS
105	4810900072A	Bracket MOLD HIPS CRT 21FS2 SUPER SLIM
Δ 112	6335921002B	CPT,ITC A51ERS420X 21INCH FLAT 0.4_0.0G
	6335921002A	CPT,ITC A51ERS420X 21INCH FLAT 0.5_0.0
120	EAB30823901	Speaker Fullrange JF 24 FERRITE 7W 8OHM 82DB 170HZ
121	4810900054A	Bracket MOLD PP SPEAKER 21FC1 MC049B PP
Δ 150	6140VC2007N	6140VC2007N 11OHM AL 44T 0.6mM SQUARE
Δ 170	170-A01D	Drawing,Assembly CPT EARTH UL1015 AWG22 21INCH NORM
	6858V21001A	Drawing,Assembly EARTH SPRING 21INCH 64T RT-21F
Δ 174	6410VEH001E	Power Cord YP-204 ZH.B 2.41M 300MM 250V 2.5A
300	30919D0039B	Cover Assembly 21FS4RG MC059C 21 SY LOCAL DVD
	30919D0039D	Cover Assembly 21FS4RG-TS MC059C 21" SY LOCAL
	ACQ31198803	Cover Assembly 21FS4 059C 20"/21" LGEMA TOOL
310	5020900071A	Button CONTROL 21FS4 ABS, HF-380 6KEY
	MBG32951302	Button Mold ABS HF380 CONTROL 21FS4
320	320-062H	Spring CUTTING STSC304 COIL
330	5020900070A	Button POWER 21FS4 ABS, HF-380 NON
	MBG32952502	Button MOLD ABS HF380 POWER 21FS4 ABS
400	3809900182H	Cover Assembly 21FS4RLX-ZV CW62B 21" SY -C/SKD
	3809900182B	Cover Assembly 21FS4RG MC059C 21" SY -AK SY
	3809900182F	Cover Assembly 21FS4RG-TS MC059C 21" SY-LGEAL
	ACQ31198903	Cover Assembly 21FS4 MC059C 20"/21" MA TOOL
520	EBR33932901	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV KDRLLLEY
	EBR33932910	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV KDR
	EBR3392711	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV QUPLLC
	EBR3392712	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV QDRLLBK
	EBR3392715	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV QUHLLCP
	EBR3392723	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV QDL
	EBR3392725	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV QDR
	EBR3392726	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV QUR
	EBR3392738	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV QEULCCK
	EBR3392744	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV.UDLLCCK
	EBR3392746	PCB Assembly, Main MAIN M.I CW62B 21FS4RLX-ZV.QUHLCCK
600	EBR33412201	PCB Assembly, Sub SUB M.I CW62B 21FS2/FS4 SIDE AV
	EBR33968401	PCB Assembly, Sub SUB M.I CW62B 21FS2/FS4 . SIDE AV
913	FAB30021402	Screw, Assembly FAB30021402 TAPTITE P TYPE D5.0
943	FAB30006309	Screw, Taptite 1SZZ9PB012A TH +P 4MM 16MM MSWR10

REPLACEMENT PARTS LIST

For Capacitor & Resistors,
the characters at 2nd and 3rd
digit in the P/No. means as
follows;

CC, CX, CK, CN : Ceramic
CQ : Polyester
CE : Electrolytic

RD : Carbon Film
RS : Metal Oxide Film
RN : Metal Film
RF : Fusible

LOCA. NO	PART NO	DESCRIPTION
IC		
IC12	OIAL241610B	AT24C16A-10PU-2.7 16KBIT 2KX8BIT 2.7
IC301	OIPMGPH002A	TDA4863A 9.0VTO30.0V - 3.2W - DBS ST
IC302	OIKE455800E	KIA4558 36V +-18V 6mV - - 500MW 30uV
IC601	OILNR00189A	TDA7297SA 6TO18V 0 0.10% 15W 30W 56D
IC802	OILI817000G	LTV-817M-VB 6V 35V 35V 50MA 100NA 60
IC810	OIPMGSK016B	STR-W6754 16.3TO19.9V 8.8TO10.6V SWI
IC823	OIMCRAU004A	S1117-33PIC 4.8TO12V 3.3V 2W TO220 S
IC824	OIMCRKE020A	KIA78S06P 8.1TO21V 6V 600MW TO92 ST
IC826	OIMCRKE018A	KIA78R05API 6TO12V 5V 1.5W TO220IS
IC901	OIPRP00747A	TDA6107AJF 180TO210V 6mA 5.5M SIP ST
Q602	OIFA754207A	KA75420ZTA(KA7542ZTA) 0.3TO15V 4.2V
Q830	OIMCRFA007A	KA431AZ 2.47TO2.52V 36V 770MW TO92
SW	SAA30112702	3.00 5276 EUROPE FLASH ROM CW62B EAS
TRANSISTOR		
Q105	OTR102009AB	KRC102M(KRC1202) NPN 30V - 50V 100MA
Q11	OTR198009BA	2SA1980Y PNP -5V -50V -50V -0.15A
Q201	OTR198009BA	2SA1980Y PNP -5V -50V -50V -0.15A
Q301	OTR198009BA	2SA1980Y PNP -5V -50V -50V -0.15A
Q302	OTR205900AB	KTD2059-Y NPN 5V 100V 100V 5A 100UA
Q303	OTR127409AB	KTA1274-Y PNP -5V -80V -80V -0.4A
Q401	OTRSA10005A	2SC6090LS NPN 5V 1.5KV 700V 10A 10UA
Q402	OTR233109AA	KSC2331Y NPN 8V 80V 60V 700MA 100NA
Q404	OTR322809AB	KTC3228-Y(KTC2383) NPN 6V 160V 160V
Q502	OTR198009BA	2SA1980Y PNP -5V -50V -50V -0.15A
Q503	OTR319809AA	KTC3198(KTC1815) NPN 5V 60V 50V 150M
Q504	OTR319809AA	KTC3198(KTC1815) NPN 5V 60V 50V 150M
Q505	OTR127009AA	KTA1270-Y(KTA562TM) PNP -5V -35V -30
Q506	OTR127009AA	KTA1270-Y(KTA562TM) PNP -5V -35V -30
Q603	OTR534309AA	2SC5343Y NPN 5V 60V 50V 150MA 100NA
Q803	OTR102009AB	KRC102M(KRC1202) NPN 30V - 50V 100MA
Q804	OTR534309AA	2SC5343Y NPN 5V 60V 50V 150MA 100NA
Q805	OTR102009AB	KRC102M(KRC1202) NPN 30V - 50V 100MA
Q806	OTR127409AB	KTA1274-Y PNP -5V -80V -80V -0.4A -0
Q809	OTR319809AA	KTC3198(KTC1815) NPN 5V 60V 50V 150M
Q810	OTR319809AA	KTC3198(KTC1815) NPN 5V 60V 50V 150M
Q811	OTR534309AA	2SC5343Y NPN 5V 60V 50V 150MA 100NA
Q840	OTR421009CA	BF421 PNP -5V -0.3KV -0.3KV -0.05A -
DIODE		
D101	ODS141489AB	1N4148 1V 100V 150MA 500MA 4NSEC 500
D102	ODSVH00019A	BA282 1V 35V 100MA 350A 1SEC 350W DO
D11	ODS141489AB	1N4148 1V 100V 150MA 500MA 4NSEC 500
D301	ODRDC00014M	1N4005 600V 1.1V 5UA 30A 1.5USEC DO4
D302	ODS141489AB	1N4148 1V 100V 150MA 500MA 4NSEC 500
D401	ODRDC00014G	RU4AM 600V 1.3V 10UA 70A 100NSEC DO2
D402	EAH30754301	RU4DS 1.8V 1.3KV 1.5A 50A 400NSEC 0W

LOCA. NO	PART NO	DESCRIPTION
D403	ODS141489AB	1N4148 1V 100V 150MA 500MA 4NSEC 500
D405	ODRDC00014D	RGP15J 600V 1300MV 5UA 50A 250NSEC D
D406	ODRDC00014D	RGP15J 600V 1300MV 5UA 50A 250NSEC D
D407	ODR060009AA	TVR06J 600V 1300MV 5UA 25A 250NSEC D
D414	ODRDC00014D	RGP15J 600V 1300MV 5UA 50A 250NSEC D
D444	ODR060009AA	TVR06J 600V 1300MV 5UA 25A 250NSEC D
D606	ODS141489AB	1N4148 1V 100V 150MA 500MA 4NSEC 500
D815	ODS141489AB	1N4148 1V 100V 150MA 500MA 4NSEC 500
D818	ODR060009AA	TVR06J 600V 1300MV 5UA 25A 250NSEC D
D820	ODR060009AA	TVR06J 600V 1300MV 5UA 25A 250NSEC D
D823	EAH30560501	SFAF504G 200V 975MV 10UA 125A 35NSEC
D826	ODRTW00141A	SFAF504G 200V 975MV 10UA 125A 35NSEC
D828	ODR060009AA	TVR06J 600V 1300MV 5UA 25A 250NSEC D
D829	ODRDC00014F	RU3AM 600V 1100MV 10UA 50A 90NSEC DO
D844	ODRDC00014J	EU1Z 200V 2.5V 10UA 15A 50NSEC DO41
D845	ODRDC00014Q	EU1ZS 200V 2.5V 10UA 15A 120NSEC DO4
D846	ODRDC00014J	EU1Z 200V 2.5V 10UA 15A 50NSEC DO41
D847	ODR060009AA	TVR06J 600V 1300MV 5UA 25A 250NSEC D
D901	ODR060009AA	TVR06J 600V 1300MV 5UA 25A 250NSEC D
D902	ODR060009AA	TVR06J 600V 1300MV 5UA 25A 250NSEC D
D903	ODR060009AA	TVR06J 600V 1300MV 5UA 25A 250NSEC D
D904	ODRDC00014E	1N4004A 400V 1100MV 5UA 30A - DO41 T
DB801	ODRTW00071A	TS4B05G-1021 600V 1V 5UA 120A TS4B S
ZD101	0DZ330009DG	GDZJ33B 33V 30.32TO31.88V 65OHM 500M
ZD102	0DZ910009BD	GDZJ9.1B . 9.1V 8.57TO9.01V 25OHM 50
ZD401	0DZ510009BF	GDZ5.1B 5.1V 4.94TO5.2V 20OHM 500MW
ZD431	0DZ470009EF	GDZJ4.7B 4.7V 4.55TO4.8V 90OHM 500MW
ZD432	0DZ120009BG	GDZJ12B 12V 11.44TO12.03V 30OHM 500M
ZD501	0DZ510009AK	GDZJ5.1B 5.1V 4.94TO5.2V 80OHM 500MW
ZD502	0DZ820009BF	GDZJ8.2B 8.2V 7.78TO8.19V 20OHM 500M
ZD503	0DZ910009BD	GDZJ9.1B . 9.1V 8.57TO9.01V 25OHM 50
ZD504	0DZ910009BD	GDZJ9.1B . 9.1V 8.57TO9.01V 25OHM 50
ZD505	0DZ910009BD	GDZJ9.1B . 9.1V 8.57TO9.01V 25OHM 50
ZD506	0DZ910009BD	GDZJ9.1B . 9.1V 8.57TO9.01V 25OHM 50
ZD507	0DZ910009BD	GDZJ9.1B . 9.1V 8.57TO9.01V 25OHM 50
ZD601	0DZ820009BF	GDZJ8.2B 8.2V 7.78TO8.19V 20OHM 500M
ZD827	0DZ750009BE	GDZJ7.5B 7.5V 7.07TO7.45V 20OHM 500M
ZD841	0DZ620009AH	MTZJ6.2A 6.2V 5.78TO6.09V 30OHM 500M
ZD910	0DZ510009BF	GDZ5.1B 5.1V 4.94TO5.2V 20OHM 500MW
ZD911	0DZ510009BF	GDZ5.1B 5.1V 4.94TO5.2V 20OHM 500MW
ZD912	0DZ510009BF	GDZ5.1B 5.1V 4.94TO5.2V 20OHM 500MW
CAPACITOR		
C103	0CE475DK618	EGR475M050T1G1C11G 4.7uF 20% 50V 50M
C107	0CE227DD618	EGR227M010T1G1E11G 220uF 20% 10V 255
C108	0CE475DK618	EGR475M050T1G1C11G 4.7uF 20% 50V 50M
C109	0CE226DK618	SMS5.0TP50VB22M 22uF 20% 50V 108MA -
C111	OCN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C112	OCN1030F679	RH EP050 Y103M-B-B 10nF 20% 16V X5R

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
--	---	--

LOCA. NO	PART NO	DESCRIPTION
C113	0CN1030F679	RH EP050 Y103M-B-B 10nF 20% 16V X5R
C114	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C1202	0CN1010K519	RH UP050 B101K-B-B 100pF 10% 50V Y5P
C1203	0CN1010K519	RH UP050 B101K-B-B 100pF 10% 50V Y5P
C17	0CN1030F679	RH EP050 Y103M-B-B 10nF 20% 16V X5R
C201	0CE226DF618	EGR226M016T1G1C11G 22uF 20% 16V 75MA
C202	0CN4710K519	RH UP050 B471K-B-B 470pF 10% 50V Y5P
C203	0CN1010K519	RH UP050 B101K-B-B 100pF 10% 50V Y5P
C204	0CN4710K519	RH UP050 B471K-B-B 470pF 10% 50V Y5P
C205	0CN1010K519	RH UP050 B101K-B-B 100pF 10% 50V Y5P
C206	0CN1010K519	RH UP050 B101K-B-B 100pF 10% 50V Y5P
C207	0CN4710K519	RH UP050 B471K-B-B 470pF 10% 50V Y5P
C208	0CE226DF618	EGR226M016T1G1C11G 22uF 20% 16V 75MA
C209	0CN4710K519	RH UP050 B471K-B-B 470pF 10% 50V Y5P
C21	0CE107DD618	SMS5.0TP10VB100M 100uF 20% 10V 157MA
C210	0CN4710K519	RH UP050 B471K-B-B 470pF 10% 50V Y5P
C270	0CE227DD618	EGR227M010T1G1E11G 220uF 20% 10V 255
C303	0CQ1041N409	310M 2A 104 J 100nF 5% 100V PE -40TO
C304	0CE107DK618	EGR107M050T6G1G11G 100uF 20% 50V 270
C306	0CQ3331N509	PEI333K2AT 33nF 10% 100V PE -40TO+85
C308	0CE476DK618	SMS5.0TP50VB47M 47uF 20% 50V 181MA
C309	0CN4710K519	RH UP050 B471K-B-B 470pF 10% 50V Y5P
C310	0CQ1031N509	PEI103K2AT 10nF 10% 100V PE -40TO+85
C402	0CE475DK618	EGR475M050T1G1C11G 4.7uF 20% 50V 50M
C403	0CQ1521N509	PEI152K2AT 1.5nF 10% 100V PE -40TO+8
C404	0CE106DF618	SMS5.0TP16VB10M 10uF 20% 16V 72MA
C405	181-091Y	LYRM28681KXA 680pF 10% 2000V Y5R -25
C407	181-009S	PPN273K2DH 27nF 10% 200V PP -40TO+85
C408	0CE685BK652	KM5.0MC50VBBP-S6.8M 6.8uF 20% 50V 44
C411	0CE105BR618	ESM105M250T1G5E11G 1uF 20% 250V 15MA
C413	0CK2220W515	DCM222K34Y5PL6FJ5A 2.2nF 10% 500V Y5
C414	181-091C	DEHR33A471KN2A 470pF 10% 1000V Y5R -
C415	0CE108DH618	SMS5.0TP25VB1000M 1000uF 20% 25V 1.3
C416	181-009R	PPN223K2DH 22nF 10% 200V PP -40TO+85
C417	0CK2710W515	DCM271K20Y5PL6FJ5A 270pF 10% 500V Y5
C419	0CE108DH618	SMS5.0TP25VB1000M 1000uF 20% 25V 1.3
C420	181-009R	PPN223K2DH 22nF 10% 200V PP -40TO+85
C421	0CK2710W515	DCM271K20Y5PL6FJ5A 270pF 10% 500V Y5
C422	0CE475DR618	EGR475M250T1G1G11G 4.7uF 20% 250V 70
C423	0CE107DJ618	SMS5.0TP35VB100M 100uF 20% 35V 291MA
C430	0CE106BK618	ESM106M050T1G5C11G 10uF 20% 50V 55MA
C432	181-091Q	LYRM5471KHA 470pF 10% 1000V Y5R -25T
C433	0CQ1021N509	PEI102K2AT 1nF 10% 100V PE -40TO+85C
C491	0CF1241Y460	0.12uF D 630V 5% M/PP 85C BULK
C492	0CF2741U460	0.27uF D 400V 5% M/PP 85C BULK
C496	181-834B	BUP16X183JHES01 18nF 5% 1.6KV MPP -2
C501	0CF2241L438	PCMT 365 76224 220nF 5% 63V MPE -40T
C502	0CE225DK618	EGR225M050T1G1C11G 2.2uF 20% 50V 20M
C503	0CQ6821N509	PEI682K2AT 6.8nF 10% 100V PE -40TO+8
C504	0CE107DD618	SMS5.0TP10VB100M 100uF 20% 10V 157MA
C505	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C506	0CQ1031N509	PEI103K2AT 10nF 10% 100V PE -40TO+85

LOCA. NO	PART NO	DESCRIPTION
C509	0CE106DF618	SMS5.0TP16VB10M 10uF 20% 16V 72MA
C510	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C512	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C513	0CE337DD618	SMS5.0TP10VB330M 330uF 20% 10V 386MA
C516	0CE226DD618	EGR226M010T1G1C11G 22uF 20% 10V 75MA
C519	181-007F	ECQ-V1H224JL3(TR) 220nF 5% 50V MPE
C520	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C530	0CN2220F569	RH EP050 X222K-B-B 2.2nF 10% 16V X7R
C531	0CN2230H949	RH TP050 F223Z-B-B 22nF -20TO+80% 25
C532	0CF4741L438	PCMT 365 76474 470nF 5% 63V MPE -40T
C533	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C535	0CF4741L438	PCMT 365 76474 470nF 5% 63V MPE -40T
C536	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C538	0CN1030F679	RH EP050 Y103M-B-B 10nF 20% 16V X5R
C540	0CN1030F679	RH EP050 Y103M-B-B 10nF 20% 16V X5R
C544	0CF4741L438	PCMT 365 76474 470nF 5% 63V MPE -40T
C546	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C547	0CF4741L438	PCMT 365 76474 470nF 5% 63V MPE -40T
C548	0CN2220F569	RH EP050 X222K-B-B 2.2nF 10% 16V X7R
C551	0CE226DD618	EGR226M010T1G1C11G 22uF 20% 10V 75MA
C553	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C554	0CE107DD618	SMS5.0TP10VB100M 100uF 20% 10V 157MA
C556	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C557	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C558	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C559	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C561	0CQ3931N509	PEI393K2AT 39nF 10% 100V PE -40TO+85
C562	0CQ3931N509	PEI393K2AT 39nF 10% 100V PE -40TO+85
C563	0CN1010K519	RH UP050 B101K-B-B 100pF 10% 50V Y5P
C564	0CE106DK618	SMS5.0TP50VB10M 10uF 20% 50V 72MA -4
C569	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C570	0CE107DF618	EGR107M016T1G1C11G 100uF 20% 16V 160
C571	0CE336DD618	EGR336M010T1G1C11G 33uF 20% 10V 85MA
C572	0CN4710K519	RH UP050 B471K-B-B 470pF 10% 50V Y5P
C576	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C577	0CE106DF618	SMS5.0TP16VB10M 10uF 20% 16V 72MA
C578	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C579	0CE106DF618	SMS5.0TP16VB10M 10uF 20% 16V 72MA
C580	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C581	0CE107DD618	SMS5.0TP10VB100M 100uF 20% 10V 157MA
C584	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C585	0CE225DK618	EGR225M050T1G1C11G 2.2uF 20% 50V 20M
C586	0CE225DK618	EGR225M050T1G1C11G 2.2uF 20% 50V 20M
C587	0CN1030F679	RH EP050 Y103M-B-B 10nF 20% 16V X5R
C590	0CE225DK618	EGR225M050T1G1C11G 2.2uF 20% 50V 20M
C591	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C592	0CE107DD618	SMS5.0TP10VB100M 100uF 20% 10V 157MA
C595	181-301C	NPP100V154J10F 150nF 5% 100V PP -40T
C596	0CN1040K949	CH UP050 F104Z-B-B Z 100nF -20TO+80%
C597	0CE106DF618	SMS5.0TP16VB10M 10uF 20% 16V 72MA
C599	0CN2230H949	RH TP050 F223Z-B-B 22nF -20TO+80% 25
C602	0CE108DH618	SMS5.0TP25VB1000M 1000uF 20% 25V 1.3

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;

CC, CX, CK, CN : Ceramic	RD : Carbon Film
CQ : Polyester	RS : Metal Oxide Film
CE : Electrolytic	RN : Metal Film
	RF : Fusible

LOCA. NO	PART NO	DESCRIPTION
C603	0CF2241L438	PCMT 365 76224 220nF 5% 63V MPE -40T
C604	0CN6810K519	RH UP050 B681K-B-B 680pF 10% 50V Y5P
C605	0CN1030F679	RH EP050 Y103M-B-B 10nF 20% 16V X5R
C607	0CE476DH618	SMS5.0TP25VB47M 47uF 20% 25V 131MA -
C609	0CN6810K519	RH UP050 B681K-B-B 680pF 10% 50V Y5P
C611	0CF2241L438	PCMT 365 76224 220nF 5% 63V MPE -40T
C807	181-091Q	LYRM5471KHA 470pF 10% 1000V Y5R -25T
C808	0CE477DH618	EGR477M025T1G1H15G 470uF 20% 25V 640
C809	0CE228BF618	ESM228M016T1G5K25G 2200uF 20% 16V 97
C812	0CK47101515	DCH471K26Y5PN6FJ5A 470pF 10% 1000V Y
C813	0CE476DD618	EGR476M010T1G1C11G 47uF 20% 10V 105M
C814	181-091W	LYRM27471KX1A 470pF 10% 2000V Y5R -2
C816	0CE227DP61A	EGR227M160T1G1M32G 220uF 20% 160V 81
C818	0CQ2231N509	PEI223K2AT 22nF 10% 100V PE -40TO+85
C822	0CE108DD618	SMS5.0TP10VB1000M 1000uF 20% 10V 854
C823	181-120K	SDE222M16FS1 2.2nF 20% 4000V Y5U -25
C825	0CQZVBK002C	PCX2 335 91592 0.22uF 10% 275V MPP -
C826	0CE108DD618	SMS5.0TP10VB1000M 1000uF 20% 10V 854
C829	0CE476DD618	EGR476M010T1G1C11G 47uF 20% 10V 105M
C830	0CE228DH61A	EGR228M025T1G1L25G 2200uF 20% 25V
C832	181-001V	LTW227M450S1A5S40G 220uF 20% 450V
	0CE337KV6A0	Capacitor,AL,Radial LTW337M450S1A5S45G
C833	0CK10202515	DCH102K39Y5PP7FJ5A 1nF 10% 2000V Y5P
C834	0CK10202515	DCH102K39Y5PP7FJ5A 1nF 10% 2000V Y5P
C835	0CQZVBK002A	PCX2 335 M9729 0.1uF 20% 275V MPP -4
C836	0CK4710W515	DCM471K20Y5PL6FJ5A 470pF 10% 500V Y5
C838	0CE227BK618	ESM227M050T1G5H17G 220uF 20% 50V 400
C839	0CE106DH618	SMS5.0TP25VB10M 10uF 20% 25V 72MA -4
C840	0CE226BK618	ESM226M050T1G5C11G 22uF 20% 50V 85MA
C841	181-011B	MPPS102J3VD 1nF 5% 1.6KV MPP -40TO+8
C842	0CK1520K515	DCT152K22Y5PF6FJ5A 1.5nF 10% 50V Y5P
C843	0CE105DK618	EGR105M050T1G1C11G 1uF 20% 50V 10MA
C844	0CK1020K515	DCT102K20Y5PF6FJ5A 1nF 10% 50V Y5P -
C845	0CK8210K515	DCT821K20Y5PF6FJ5A 820pF 10% 50V Y5P
C846	0CE107DD618	SMS5.0TP10VB100M 100uF 20% 10V 157MA
C848	0CE107CP618	SHL5.0TP160VB100M 100uF 20% 160V 541
C849	0CE477DD618	EGR477M010T6G1G11G 470uF 20% 10V 425
C851	0CN1020K519	RH UP050 B102K-B-B 1nF 10% 50V Y5P
C852	181-007C	ECQV1H104JL3 100nF 5% 50V MPE -40TO+
C901	0CE475DR618	EGR475M250T1G1G11G 4.7uF 20% 250V 70
C903	181-033S	DCH122K39Y5PP7VK7A 1.2nF 10% 2000V Y
C904	0CE475DR618	EGR475M250T1G1G11G 4.7uF 20% 250V 70
C906	0CN1030F679	RH EP050 Y103M-B-B 10nF 20% 16V X5R
C908	0CH3104P56C	C4532X7R2J104KT 100nF 10% 630V X7R
C910	0CN5610K519	RH UP050 B561K-B-B 560pF 10% 50V Y5P
J565	0CN1030F679	RH EP050 Y103M-B-B 10nF 20% 16V X5R
COIL & INDUCTOR		
J549	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
J578	0LA0102K119	Inductor,Wire Wound,Axial LAL02TB100K
L102	0LA0102K139	Inductor,Wire Wound,Axial LAL04TB100K
L1202	0LA0102K119	Inductor,Wire Wound,Axial LAL02TB100K

LOCA. NO	PART NO	DESCRIPTION
L1203	0LA0102K119	Inductor,Wire Wound,Axial LAL02TB100K
L204	0LA0102K119	Inductor,Wire Wound,Axial LAL02TB100K
L206	0LA0102K119	Inductor,Wire Wound,Axial LAL02TB100K
L207	0LA0102K119	Inductor,Wire Wound,Axial LAL02TB100K
L401	150-717J	Coil,Choke RN-29FB50 560uH 50V 0A 18X30MM
L402	6140VY0020C	Coil,Linearity JS-E016 24uH - - 18X31MM LEAD -
L501	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
L503	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
L504	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
L505	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
L506	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
L507	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
L509	0LA0102K119	Inductor,Wire Wound,Axial LAL02TB100K
L511	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
L514	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
L548	0LA0121K119	Inductor,Wire Wound,Axial LAL02TB1R2K
L801	150-C02E	Coil,Choke 50uH 50V 0A 12X17MM LEAD -
T401	151-C02M	Transformer,Linear EI19 10V 100V 200MH 1A 1A
T402	6174V-5003R	Transformer,FBT BSC25 -N1537
T802	61709MC017C	Transformer,Switching EER4215
CONNECTOR		
G1	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G13	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G14	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G19	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G2	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G20	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G21	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G22	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G24	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G26	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G27	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G29	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G30	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G31	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G32	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G36	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G37	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G38	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G39	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G42	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G43	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G44	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G45	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G47	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G48	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G49	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G50	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G51	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G52	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G53	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
--	---	--

LOCA. NO	PART NO	DESCRIPTION
G54	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G55	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G56	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G57	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G58	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G59	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G6	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G61	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G62	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G7	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G75	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G76	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G77	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G78	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G8	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G80	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G81	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G84	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G85	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G86	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G87	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G88	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G89	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G9	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G90	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G91	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G94	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G95	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G96	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G97	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
G98	336-072C	BSP(C2600R) 1P LUG STRAIGHT DIP TP S
H1	6631V25014D	GIL-G GIL-G-03 35097-9702_35098-9702
H2	6631V25034E	TJC25-4Y TJC25-4Y 35097-9702_35098-9
H3	387-917J	387-917J 35740-8610 35740-8610 500mM
P102	366-921B	GIL-G-03P-S3T2-E 3P 2.54MM 1R STRAIG
P1205	387-A06H	6P(H-B) GIL-G-06 GIL-J-06 450mM 2.50
P201A	366-921E	GIL-G-06P-S3T2-E 6P 2.50MM 1R STRAIG
P401	366-043K	35929-0410 4P 10.00MM 1R STRAIGHT DI
P601	366-921B	GIL-G-03P-S3T2-E 3P 2.54MM 1R STRAIG
P602	366-921C	GIL-G-04P-S3T2-E 4P 2.54MM 1R STRAIG
P801A	366-043B	35929-0210 2P 10.00MM 1R STRAIGHT DI
P802A	366-043B	35929-0210 2P 10.00MM 1R STRAIGHT DI
P903	366-009D	366-009D 1P PIN HEADER STRAIGHT DIP
P903D	6631V25A16G	GIL-J-04 GIL-J-04 400mM 2.50MM 4P UL
P904A	366-921E	GIL-G-06P-S3T2-E 6P 2.50MM 1R STRAIG
P904B	387-B06H	H-B GIL-G GIL-J 450MM 2.50MM 6P UL11
RESISTOR		
FR402	ORP0050H709	SPF92T1KR050 0.05OHM 10% 1/2W 3.2X2.
FR403	ORP0050H709	SPF92T1KR050 0.05OHM 10% 1/2W 3.2X2.
FR404	ORP0050H709	SPF92T1KR050 0.05OHM 10% 1/2W 3.2X2.
FR405	ORP0050H709	SPF92T1KR050 0.05OHM 10% 1/2W 3.2X2.

LOCA. NO	PART NO	DESCRIPTION
FR901	0RF0470K607	FNS02T3JR470 0.47OHM 5% 2W 12.0X4.0M
J230	0RD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
J231	0RD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
L203	0RD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
L208	0RD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
L510	0RD0222A609	RDM92T1J22R0 22OHM 5% 1/2W 6.5X2.3MM
R101	0RD3902F609	RD-96T1J39K0 39KOHM 5% 1/6W 3.2X1.8M
R103	0RD2202F609	RD-96T1J22K0 22KOHM 5% 1/6W 3.2X1.8M
R11	0RD3601F609	RD-96T1J36K0 3.6KOHM 5% 1/6W 3.2X1.8
R110	0RD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R111	0RD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R112	0RD6802F609	RD-96T1J68K0 68KOHM 5% 1/6W 3.2X1.8M
R117	0RD1002F609	RD-96T1J10K0 10KOHM 5% 1/6W 3.2X1.8M
R119	0RD3301F609	RD-96T1J33K0 3.3KOHM 5% 1/6W 3.2X1.8
R12	0RD2401F609	RD-96T1J24K0 2.4KOHM 5% 1/6W 3.2X1.8
R120	0RD4701F609	RD-96T1J47K0 4.7KOHM 5% 1/6W 3.2X1.8
R121	0RD2201F609	RD-96T1J22K0 2.2KOHM 5% 1/6W 3.2X1.8
R13	0RD1801F609	RD-96T1J18K0 1.8KOHM 5% 1/6W 3.2X1.8
R14	0RD1501F609	RD-96T1J15K0 1.5KOHM 5% 1/6W 3.2X1.8
R15	0RD1002F609	RD-96T1J10K0 10KOHM 5% 1/6W 3.2X1.8M
R16	0RD5601F609	RD-96T1J56K0 5.6KOHM 5% 1/6W 3.2X1.8
R17	0RD3300F609	RD-96T1J330R 330OHM 5% 1/6W 3.2X1.8M
R19	0RD1301F609	RD-96T1J13K0 1.3KOHM 5% 1/6W 3.2X1.8
R203	0RD0682F609	RD-96T1J68R0 68OHM 5% 1/6W 3.2X1.8MM
R204	0RD0752F609	RD-96T1J75R0 75OHM 5% 1/6W 3.2X1.8MM
	0RD0912F609	Resistor,Carbon Film RD-96T1J91R0 91OHM
R205	0RD0752F609	RD-96T1J75R0 75OHM 5% 1/6W 3.2X1.8MM
R206	0RD0752F609	RD-96T1J75R0 75OHM 5% 1/6W 3.2X1.8MM
R207	0RD5602F609	RD-96T1J56K0 56KOHM 5% 1/6W 3.2X1.8M
R212	0RD1201A609	RDM92T1J1K20 1.2KOHM 5% 1/2W 6.5X2.3
R213	0RD1201F609	Resistor,Carbon Film RD-96T1J1K20
R215	0RD2402F609	RD-96T1J24K0 24KOHM 5% 1/6W 3.2X1.8M
R225	0RD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R226	0RD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
R227	0RD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
R228	0RD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R23	0RD0151A609	RDM92T1J1R50 1.5OHM 5% 1/2W 6.5X2.3M
R252	0RD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R253	0RD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R301	0RD2701F609	RD-96T1J27K0 2.7KOHM 5% 1/6W 3.2X1.8
R303	0RD2400A609	RDM92T1J240R 240OHM 5% 1/2W 6.5X2.3M
R304	0RD0561A609	RDM92T1J5R60 5.6OHM 5% 1/2W 6.5X2.3M
R306	0RD1002F609	RD-96T1J10K0 10KOHM 5% 1/6W 3.2X1.8M
R307	0RD3601F609	RD-96T1J36K0 3.6KOHM 5% 1/6W 3.2X1.8
R308	0RD4302F609	RD-96T1J43K0 43KOHM 5% 1/6W 3.2X1.8M
R309	0RD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R310	0RD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R311	ORN0301J607	RN-01T3J3R00 30HM 5% 1W 12.0X4.0MM N
R313	0RD2001F609	RD-96T1J2K00 2KOHM 5% 1/6W 3.2X1.8MM
R314	0RD4701F609	RD-96T1J47K0 4.7KOHM 5% 1/6W 3.2X1.8
R315	ORN0301J607	RN-01T3J3R00 30HM 5% 1W 12.0X4.0MM N
R316	0RD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M

For Capacitor & Resistors,
the characters at 2nd and 3rd
digit in the P/No. means as
follows;

CC, CX, CK, CN : Ceramic	RD : Carbon Film
CQ : Polyester	RS : Metal Oxide Film
CE : Electrolytic	RN : Metal Film
	RF : Fusible

LOCA. NO	PART NO	DESCRIPTION
R317	ORD2702F609	RD-96T1J27K0 27KOHM 5% 1/6W 3.2X1.8M
R318	ORN2001F409	RN-96T1F2K00 2KOHM 1% 1/6W 3.2X1.8MM
R319	ORN3902F409	RN-96T1F39K0 39KOHM 1% 1/6W 3.2X1.8M
R320	ORD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
R321	ORD0561A609	RDM92T1J5R60 5.6OHM 5% 1/2W 6.5X2.3M
R322	ORD1501F609	RD-96T1J1K50 1.5KOHM 5% 1/6W 3.2X1.8
R323	ORD2702F609	RD-96T1J27K0 27KOHM 5% 1/6W 3.2X1.8M
R324	ORD4700F609	RD-96T1J470R 470OHM 5% 1/6W 3.2X1.8M
R325	ORS2701H609	RS-92T1J2K70 2.7KOHM 5% 1/2W 9.0X3.0
R326	ORD1501A609	RDM92T1J1K50 1.5KOHM 5% 1/2W 6.5X2.3
R328	ORD4302F609	RD-96T1J43K0 43KOHM 5% 1/6W 3.2X1.8M
R403	ORD5600A609	RDM92T1J560R 560OHM 5% 1/2W 6.5X2.3M
R407	ORD0332A609	RDM92T1J33R0 33OHM 5% 1/2W 6.5X2.3MM
R408	ORD6801F609	RD-96T1J6K80 6.8KOHM 5% 1/6W 3.2X1.8
R409	ORS2202H609	RS-92T1J22K0 22KOHM 5% 1/2W 9.0X3.0M
R411	ORS1001H609	RS-92T1J1K00 1KOHM 5% 1/2W 9.0X3.0MM
R412	ORD7501A609	RDM92T1J7K50 7.5KOHM 5% 1/2W 6.5X2.3
R413	ORD1801A609	RDM92T1J1K80 1.8KOHM 5% 1/2W 6.5X2.3
R414	ORS6202J607	RS-01T3J62K0 62KOHM 5% 1W 12.0X4.0MM
R415	ORD1002F609	RD-96T1J10K0 10KOHM 5% 1/6W 3.2X1.8M
R417	ORD3303F609	RD-96T1J33K0 33KOHM 5% 1/6W 3.2X1.8
R421	ORD3600F609	RD-96T1J360R 360OHM 5% 1/6W 3.2X1.8M
R422	ORD1002F609	RD-96T1J10K0 10KOHM 5% 1/6W 3.2X1.8M
R425	ORS2200K619	SMR02R1J220R 220OHM 5% 2W 8.6X3.5MM
R430	ORD1503F609	RD-96T1J150K 150KOHM 5% 1/6W 3.2X1.8
R431	ORD1003A609	RDM92T1J100K 100KOHM 5% 1/2W 6.5X2.3
R432	ORD4703F609	RD-96T1J470K 470KOHM 5% 1/6W 3.2X1.8
R434	ORD1003A609	RDM92T1J100K 100KOHM 5% 1/2W 6.5X2.3
R436	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R437	ORD1002F609	RD-96T1J10K0 10KOHM 5% 1/6W 3.2X1.8M
R438	ORS0221K619	SML02R0J2R20 2.2OHM 5% 2W 8.6X3.5MM
R439	ORD4301F609	RD-96T1J4K30 4.3KOHM 5% 1/6W 3.2X1.8
R440	ORMZVBK002D	RSR05V-J15K0 15KOHM 5% 5W 14X9.5X25.
R443	ORS1001K607	RSD02T3J1K00 1KOHM 5% 2W 12.0X4.0MM
R509	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R510	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R511	ORD3301F609	RD-96T1J3K30 3.3KOHM 5% 1/6W 3.2X1.8
R512	ORD3301F609	RD-96T1J3K30 3.3KOHM 5% 1/6W 3.2X1.8
R513	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R518	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R521	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R522	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R523	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R524	ORD0752F609	RD-96T1J75R0 75OHM 5% 1/6W 3.2X1.8MM
R525	ORD0752F609	RD-96T1J75R0 75OHM 5% 1/6W 3.2X1.8MM
R534	ORD1504F609	CR18TB1M5J 1.5MOHM 5% 1/8W 3.2X1.8M
R536	ORD1801F609	RD-96T1J1K80 1.8KOHM 5% 1/6W 3.2X1.8
R537	ORD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
R538	ORD1803F609	RD-96T1J180K 180KOHM 5% 1/6W 3.2X1.8
R539	ORD1003F609	RD-96T1J100K 100KOHM 5% 1/6W 3.2X1.8
R540	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R543	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M


LOCA. NO	PART NO	DESCRIPTION
R545	ORD0752F609	RD-96T1J75R0 75OHM 5% 1/6W 3.2X1.8MM
R547	ORD1203F609	RD-96T1J120K 120KOHM 5% 1/6W 3.2X1.8
R548	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R549	ORD3301F609	RD-96T1J3K30 3.3KOHM 5% 1/6W 3.2X1.8
R550	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R551	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R552	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R553	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R554	ORD1501F609	RD-96T1J1K50 1.5KOHM 5% 1/6W 3.2X1.8
R555	ORD6800F609	RD-96T1J680R 680OHM 5% 1/6W 3.2X1.8M
R556	ORN3902F409	RN-96T1F39K0 39KOHM 1% 1/6W 3.2X1.8M
R557	ORD1202F609	RD-96T1J12K0 12KOHM 5% 1/6W 3.2X1.8M
R558	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R562	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R563	ORD1501A609	RDM92T1J1K50 1.5KOHM 5% 1/2W 6.5X2.3
R566	ORN4701F409	RN-96T1F4K70 4.7KOHM 1% 1/6W 3.2X1.8
R567	ORN4701F409	RN-96T1F4K70 4.7KOHM 1% 1/6W 3.2X1.8
R568	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R569	ORD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
R572	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R576	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R577	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R580	ORD4701F609	RD-96T1J4K70 4.7KOHM 5% 1/6W 3.2X1.8
R581	ORD4701F609	RD-96T1J4K70 4.7KOHM 5% 1/6W 3.2X1.8
R582	ORD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R583	ORD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R584	ORD0101F609	RD-96T1J1R00 1OHM 5% 1/6W 3.2X1.8MM
R585	ORD0101F609	RD-96T1J1R00 1OHM 5% 1/6W 3.2X1.8MM
R587	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R591	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R592	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R595	ORD6800F609	RD-96T1J680R 680OHM 5% 1/6W 3.2X1.8M
R606	ORD8202F609	RD-96T1J82K0 82KOHM 5% 1/6W 3.2X1.8M
R608	ORD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R611	ORD1202F609	RD-96T1J12K0 12KOHM 5% 1/6W 3.2X1.8M
R612	ORD8202F609	RD-96T1J82K0 82KOHM 5% 1/6W 3.2X1.8M
R613	ORD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R616	ORD7502F609	RD-96T1J75K0 75KOHM 5% 1/6W 3.2X1.8M
R617	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R618	ORD4702F609	RD-96T1J47K0 47KOHM 5% 1/6W 3.2X1.8M
R619	ORD7502F609	RD-96T1J75K0 75KOHM 5% 1/6W 3.2X1.8M
R811	ORD1002F609	RD-96T1J10K0 10KOHM 5% 1/6W 3.2X1.8M
R812	ORD4701F609	RD-96T1J4K70 4.7KOHM 5% 1/6W 3.2X1.8
R813	ORD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
R816	ORD4701F609	RD-96T1J4K70 4.7KOHM 5% 1/6W 3.2X1.8
R817	ORD4701F609	RD-96T1J4K70 4.7KOHM 5% 1/6W 3.2X1.8
R819	ORP0050H709	SPF92T1KR050 0.05OHM 10% 1/2W 3.2X2
R820	ORD1000F609	RD-96T1J100R 100OHM 5% 1/6W 3.2X1.8M
R821	ORD4701F609	RD-96T1J4K70 4.7KOHM 5% 1/6W 3.2X1.8
R822	ORP0020J809	SPF01T1MR020 0.02OHM 20% 1W 6.5X2.3M
R823	ORP0020J809	SPF01T1MR020 0.02OHM 20% 1W 6.5X2.3M
R824	ORD2701F609	RD-96T1J2K70 2.7KOHM 5% 1/6W 3.2X1.8

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION
R825	ORD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
R826	ORD0472F609	RD-96T1J47R0 47OHM 5% 1/6W 3.2X1.8MM
R829	ORP0050H709	SPF92T1KR050 0.05OHM 10% 1/2W 3.2X2.
R830	ORN1803F409	RN-96T1F180K 180KOHM 1% 1/6W 3.2X1.8
R831	ORN3002F409	RN-96T1F30K0 30KOHM 1% 1/6W 3.2X1.8M
R832	ORD3902F609	RD-96T1J39K0 39KOHM 5% 1/6W 3.2X1.8M
R834	ORN4701F409	RN-96T1F4K70 4.7KOHM 1% 1/6W 3.2X1.8
R835	ORKZVTA001C	RN-92T1J8M20 8.2MOHM 5% 1/2W 9.0X3.0
R836	ORD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
R838	ORD2200A609	RDM92T1J220R 220OHM 5% 1/2W 6.5X2.3MM
R839	ORD1003F609	RD-96T1J100K 100KOHM 5% 1/6W 3.2X1.8
R841	ORF0221K607	FNS02T3J2R20 2.2OHM 5% 2W 12.0X4.0MM
R842	ORD2201F609	RD-96T1J2K20 2.2KOHM 5% 1/6W 3.2X1.8
R843	ORD2203F609	RD-96T1J220K 220KOHM 5% 1/6W 3.2X1.8
R844	ORD1501F609	RD-96T1J1K50 1.5KOHM 5% 1/6W 3.2X1.8
R845	ORD0332F609	RD-96T1J33R0 33OHM 5% 1/6W 3.2X1.8MM
R846	180-A01D	PRW02T3JR160 0.16OHM 5% 2W 12.0X4.0MM
R847	ORD4300F609	RD-96T1J430R 430OHM 5% 1/6W 3.2X1.8M
R848	ORS4702K619	SML02R0J47K0 47KOHM 5% 2W 8.6X3.5MM
R849	ORS4702K607	RSD02T3J47K0 47KOHM 5% 2W 12.0X4.0MM
R850	ORD4701F609	RD-96T1J4K70 4.7KOHM 5% 1/6W 3.2X1.8
R851	ORD8202F609	RD-96T1J82K0 82KOHM 5% 1/6W 3.2X1.8M
R852	ORD1003F609	RD-96T1J100K 100KOHM 5% 1/6W 3.2X1.8
R853	ORD1001F609	RD-96T1J1K00 1KOHM 5% 1/6W 3.2X1.8MM
R856	180-822N	RWR07PDJ1R00 1OHM 5% 7W 36X9.5X9.5MM
R858	ORKZVTA001K	RN-92T1J470K 470KOHM 5% 1/2W 9.0X3.0
R859	ORD1002A609	RDM92T1J10K0 10KOHM 5% 1/2W 6.5X2.3MM
R860	ORF0221K607	FNS02T3J2R20 2.2OHM 5% 2W 12.0X4.0MM
R861	ORD3901F609	RD-96T1J3K90 3.9KOHM 5% 1/6W 3.2X1.8
R901	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R902	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R903	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
R906	ORD1201A609	RDM92T1J1K20 1.2KOHM 5% 1/2W 6.5X2.3
R907	ORD1201A609	RDM92T1J1K20 1.2KOHM 5% 1/2W 6.5X2.3
R908	ORD1201A609	RDM92T1J1K20 1.2KOHM 5% 1/2W 6.5X2.3
R909	ORS2201H609	RSD92T1J2K20 2.2KOHM 5% 1/2W 6.5X2.3
R910	ORS2201H609	RSD92T1J2K20 2.2KOHM 5% 1/2W 6.5X2.3
R911	ORS2201H609	RSD92T1J2K20 2.2KOHM 5% 1/2W 6.5X2.3
R912	ORD2204A609	RDM92T1J2M20 2.2MOHM 5% 1/2W 6.5X2.3
R920	ORD4703A609	RDM92T1J470K 470KOHM 5% 1/2W 6.5X2.3
R925	ORD2200F609	RD-96T1J220R 220OHM 5% 1/6W 3.2X1.8M
SWITCH		
SW11	140-315A	THVH472GBC 1C1P 12VDC 0.05A VERTICAL
SW12	140-315A	THVH472GBC 1C1P 12VDC 0.05A VERTICAL
SW13	140-315A	THVH472GBC 1C1P 12VDC 0.05A VERTICAL
SW14	140-315A	THVH472GBC 1C1P 12VDC 0.05A VERTICAL
SW15	140-315A	THVH472GBC 1C1P 12VDC 0.05A VERTICAL
SW16	140-315A	THVH472GBC 1C1P 12VDC 0.05A VERTICAL
SW801	6600VM1001A	SDKLA1 AC 250VAC 5A 1PCS 1C1P
SPARK GAP, AXIAL		

LOCA. NO	PART NO	DESCRIPTION
SG901	165-004A	152F-L3N/S-23 RADIAL 1.5KV 1.5KV
SG902	165-004A	152F-L3N/S-23 RADIAL 1.5KV 1.5KV
SG903	165-004A	152F-L3N/S-23 RADIAL 1.5KV 1.5KV
SG904	6918VAX002H	WSP-122N AXIAL 1.2KV 1.2KV
SG911	6918VAX002E	WSP-351M AXIAL 350V 350V - 7.5MM TP
SG912	6918VAX002E	WSP-351M AXIAL 350V 350V - 7.5MM TP
SG913	6918VAX002E	WSP-351M AXIAL 350V 350V - 7.5MM TP
FILTER & CRYSTAL		
FB401	125-022K	125-022K 200HM 3.5X6MM AXIAL TP
FB802	125-022K	125-022K 200HM 3.5X6MM AXIAL TP
FB803	125-022K	125-022K 200HM 3.5X6MM AXIAL TP
FB833	125-022K	125-022K 200HM 3.5X6MM AXIAL TP
FB846	125-022R	BI 3857 300HM 3.6X5.7MM AXIAL TP
T803	150-F06W	150-F06W 27MH 32X22X38MM SQE2930S RA
X01	156-A01Z	HC-49/U 24.576MHZ 50PPM 24.576MHZ 50
Z101	166-A01B	K3953M 33.90MHZ 38.90MHZ 17X3.9X8.7M
Z102	6200QL3003G	K9650M(B39389-K9650-M100) 33.90
MISCELLANEOUS		
B1	MAY30424101	BOX DW 644 440 497 2 COLOR 21F
	3890900401E	BOX DWR2 652 462 505 2 COLOR 21FS4
B2	3890900096D	BOX DW2 1074 1104 1080 1 COLOR MC049
B3	3890900097D	BOX DW2 1094 1124 100 1 COLOR MC049B
B4	3890V00067F	PC-63A NON CARTON DIGITAL SW
B5	MAY34548001	BOX DWR2 652 462 505 2 COLOR 21FS4
F801	0FS4001B51D	Fuse,Time Delay 0218 004. GLASS 250V 4A
JK202	6612M000005A	Jack,Scart UPJ-R1-027 21P 21P/1C 3.81MM
	6612VJH023D	Jack,RCA PPJ126-04 15MM 3RX3C ANGLE
PA11	6726VV0006H	Receiver ModuleTSOP2238NN1 4.5TO5.5V
PJ1202	6613V00004B	Jack,RCA PJ6054B 14.0MM 3RX1C ANGLE
Q405	0TFFC00011B	FETFQPF11N40C-YDTU N-CHANNEL
RL802	6920VB1001K	Relay,Contact JZC-36F-005-HL AC250V/DC30V
SK901	6620VBC003A	Socket,CRT PCS030A 8P STRAIGHT
TH801	163-058D	Thermistor,PTC J503P83D070M290X
TU101	6700MF0018A	Tuner,Analog TAEA-G011D PAL-B/G+I+M+D/K
VD801	164-003G	VaristorTVR14621 620V 10% 250pF 14MM
ACCESSORIES		
A1	MFL30441112	Manual,Owners EU PL 30036801/2/3/4 TX
	MFL30441113	Manual,Owners CW62B RO
	MFL30441120	Manual,Owners EU BALT ES/LV/LT
	MFL30441122	Manual,EU UKR/ BZ03 RU/EN 30036801/2/3/4 TX
	MFL30441125	Manual,Owners HU/BU/SE/EN30036801/2/3/4
	MFL30441126	Manual, EN/SE/HU/BU/LV/LT/ES/SK/CZ/RO/PL
A2	MKJ30036802	Remote Controller MOLD HIPS 60HR CW62A
A3	5010V00004D	Antenna,Rod 3SECTION 750MM NTSC
	5010V00004B	5010V00004B SINGLE 2.5DB 300OH

SCHEMATIC DIAGRAM OF CW62B

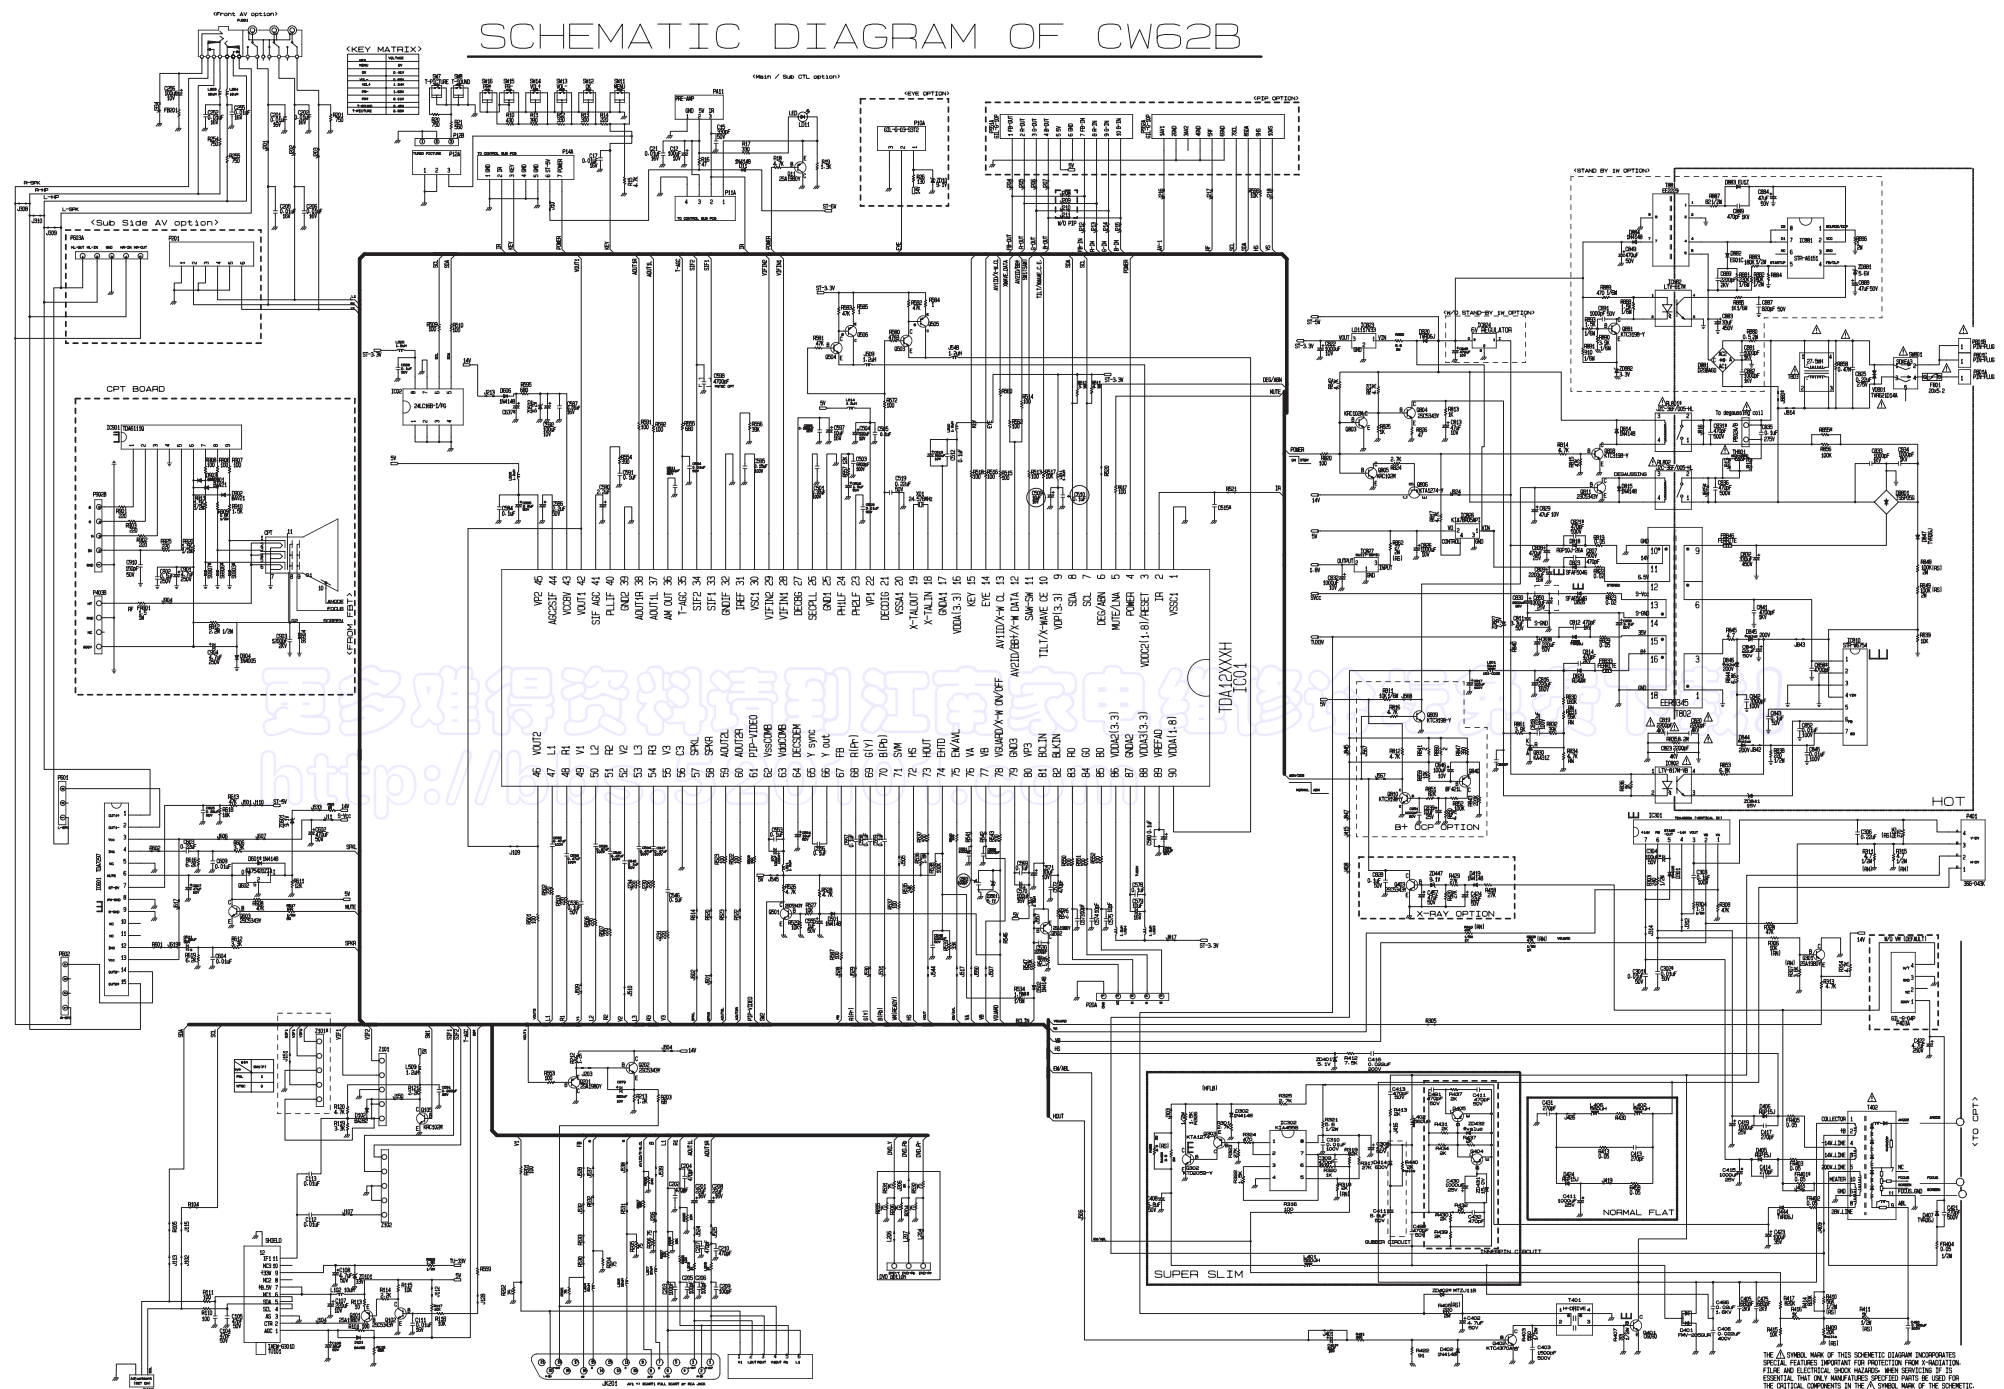

SVC. SHEET : EBY31683801-S

更多难得资料请到江南家电维修论坛免费下载!
<http://bbs.520101.com>