

## 0.8 $\mu$ A Low Power Consumption Dual Voltage Regulator

### ■ GENERAL DESCRIPTION

The XC6411/XC6412 series is a dual LDO regulator manufactured using CMOS process. The series achieves very low supply current 0.8  $\mu$ A typical by channel and consists of a reference voltage source, an error amplifier, a current foldback circuit, and a phase compensation circuit plus a driver transistor. The XC6411P series in SOT-25 packages, the XC6412B series in SOT-26 packages make high density mounting possible. Therefore, the series is ideally suited for applications where high density mounting is required such as mobile equipment.

Each output voltage of two regulators VR1 and VR2 is selectable in 0.1V increments within a range of 0.9V to 5.0V by laser trimming. The series is compatible with low ESR ceramic capacitors, which provides stable outputs. The VR1 and VR2 are completely isolated so that a cross talk during load fluctuation is minimized. The current limiter's foldback circuit also operates as a short protection for the output pin.


### ■ APPLICATIONS

- MP3 players, Portable AV equipment
- Mobile phones
- Cordless phones,  
Wireless communication equipment
- Portable games
- Cameras, Video recorders
- PDAs

### ■ FEATURES

- Maximum Output Current** : 200mA (300mA Limit TYP.)  
@  $V_{OUT}=3.0V$ ,  $V_{IN}=4.0V$
- Dropout Voltage** : 320mV @  $I_{OUT} = 100mA$   
@  $V_{OUT} = 3.0V$
- Input Voltage Range** : 1.5V ~ 6.0V
- Output Voltage Range** : 0.9V ~ 5.0V (0.1V increments)
- Highly Accurate** :  $\pm 2\%$  ( $1.5 < V_{OUT(T)} \leq 5.0V$ )  
 $\pm 0.03V$  ( $0.9 < V_{OUT(T)} \leq 1.5V$ )
- Low Power Consumption** : 0.8  $\mu$ A / ch.(TYP.)
- Operating Temperature Range** : - 40 ~ 85
- Low ESR Capacitor Compatible**: Ceramic capacitor
- Current Limiter Circuit Built-In**
- Small Packages** : SOT-25 (XC6411P)  
: SOT-26 (XC6412B)

### ■ TYPICAL APPLICATION CIRCUIT

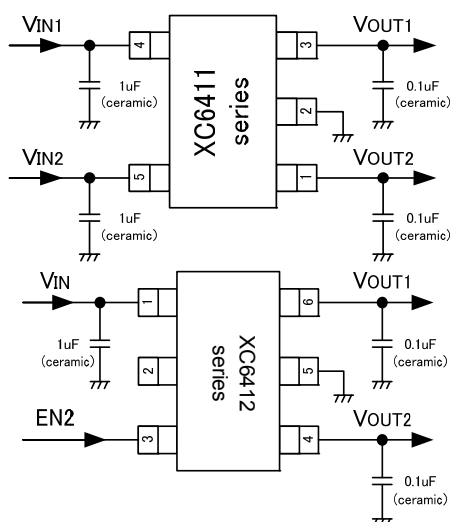


### ■ TYPICAL PERFORMANCE CHARACTERISTICS


- Supply Current vs. Input Voltage

VR1/VR2: 3.0V


$C_{IN}=1.0\mu F$ (ceramic),  $C_L=0.1\mu F$ (ceramic)

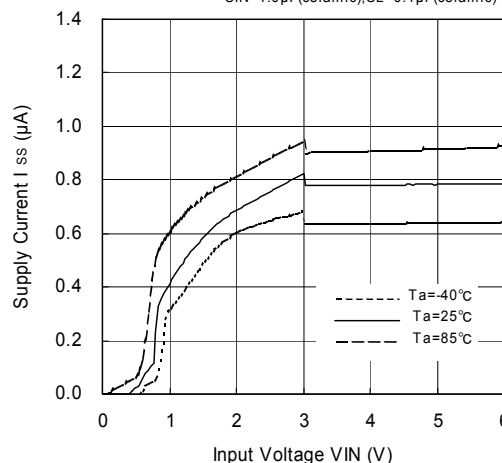

## PIN CONFIGURATION



XC6411P series  
SOT-25  
( TOP VIEW )



XC6412B series  
SOT-26  
( TOP VIEW )

## PIN ASSIGNMENT

| PIN NUMBER |                  | PIN NAME | FUNCTION                |
|------------|------------------|----------|-------------------------|
| XC6411     | XC6412B (SOT-26) |          |                         |
| 1          | 4                | VOUT2    | Output 2                |
| 2          | 5                | VSS      | Ground                  |
| 3          | 6                | VOUT1    | Output 1                |
| -          | 1                | VIN      | Power Input             |
| 4          | -                | VIN1     | Power Input 1           |
| 5          | -                | VIN2     | Power Input 2           |
| -          | 3                | EN2      | ON / Off Switch (ch. 2) |
| -          | 2                | NC       | No Connection           |

\* When using an SOT-26 package for the XC6412B series, please note that No. 1 pin is common input voltage.

## PRODUCT CLASSIFICATION


### Ordering Information

XC6411P \_\_\_\_\_  
XC6412B \_\_\_\_\_


| DESIGNATOR | DESCRIPTION        | SYMBOL | DESCRIPTION                                                                                          |
|------------|--------------------|--------|------------------------------------------------------------------------------------------------------|
|            | Output Voltage     | 001~   | : Serial number for VR1 and VR2 voltage combination<br>Factory set range: 0.9~5.0V (0.1V increments) |
|            | Package            | M      | : SOT-25 (XC6411P)<br>: SOT-26 (XC6412B)                                                             |
|            | Device Orientation | R      | : Embossed tape, standard feed                                                                       |
|            |                    | L      | : Embossed tape, reverse feed                                                                        |

## ■ BLOCK DIAGRAMS

### ● XC6411P Series

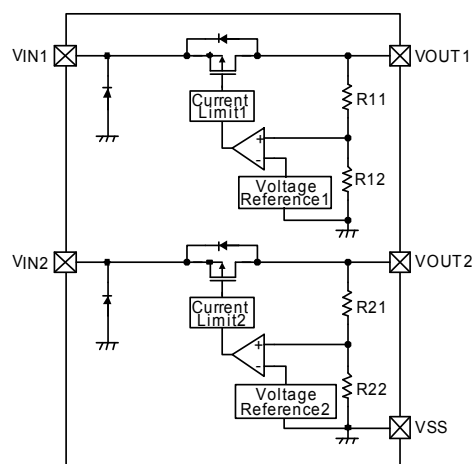

### ● XC6412B Series (SOT-26)

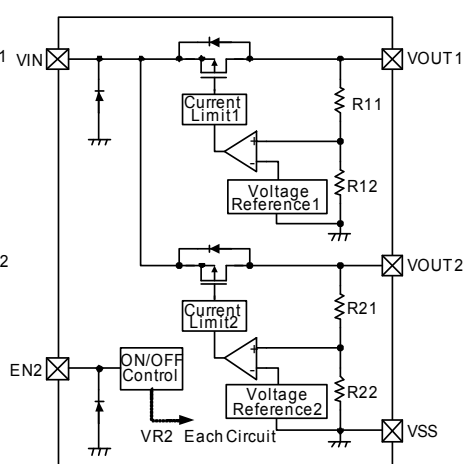

\* Diodes shown in the above circuit are ESD protection diodes and parasitic diodes.

## ■ ABSOLUTE MAXIMUM RATINGS

Ta = 25

| PARAMETER                   |        | SYMBOL | RATINGS               | UNITS |
|-----------------------------|--------|--------|-----------------------|-------|
| Input Voltage               |        | VIN    | - 0.3 ~ + 7.0         | V     |
| Input Voltage 1             |        | VIN1   | - 0.3 ~ + 7.0         | V     |
| Input Voltage 2             |        | VIN2   | - 0.3 ~ + 7.0         | V     |
| Output Current 1            |        | IOUT1  | 500 (*1)              | mA    |
| Output Current 2            |        | IOUT2  | 500 (*1)              | mA    |
| Output Voltage 1            |        | VOUT1  | VSS - 0.3 ~ VIN + 0.3 | V     |
| Output Voltage 2            |        | VOUT2  | VSS - 0.3 ~ VIN + 0.3 | V     |
| EN2 Pin Voltage             |        | VEN2   | VSS - 0.3 ~ 0.7       | V     |
| Power Dissipation           | SOT-25 | Pd     | 250                   | mW    |
|                             | SOT-26 |        |                       |       |
| Operating Temperature Range |        | Topr   | - 40 ~ + 85           |       |
| Storage Temperature Range   |        | Tstg   | - 55 ~ +125           |       |

Note: \*1: Please use the XC6411P (SOT-25) series with following to the equation;

$$Pd > [(VIN1 - VOUT1) \times IOUT1 + (VIN2 - VOUT2) \times IOUT2]$$

Please use the XC6412B (SOT-26) series with following to the equation;

$$Pd > [(VIN - VOUT1) \times IOUT1 + (VIN - VOUT2) \times IOUT2]$$

## ■ ELECTRICAL CHARACTERISTICS

XC6411P/XC6412 Series, Regulator 1 and Regulator 2

Ta = 25

| PARAMETER                                  | SYMBOL                                                      | CONDITIONS                                                                                                    | MIN.     | TYP.  | MAX. | UNITS | CIRCUIT |
|--------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------|-------|------|-------|---------|
| Output Voltage (*2)                        | V <sub>OUT(E)</sub>                                         | V <sub>IN</sub> =V <sub>OUT(T)</sub> (*1) + 1.0V,<br>I <sub>OUT</sub> =1mA                                    | E-0 (*6) |       |      | V     |         |
| Maximum Output Current                     | I <sub>OUTMAX</sub>                                         | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> =0.9V                                      | 50       | 70    | -    | mA    |         |
|                                            |                                                             | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> =1.0V ~ 1.1V                               | 60       | 80    | -    |       |         |
|                                            |                                                             | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> =1.2V ~ 1.3V                               | 80       | 110   | -    |       |         |
|                                            |                                                             | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> =1.4V ~ 1.6V                               | 100      | 140   | -    |       |         |
|                                            |                                                             | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> =1.7V ~ 2.2V                               | 120      | 150   | -    |       |         |
|                                            |                                                             | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> =2.3V ~ 2.9V                               | 150      | 195   | -    |       |         |
|                                            |                                                             | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> 3.0V                                       | 200      | 300   | -    |       |         |
| Load Regulation                            | ΔV <sub>OUT</sub>                                           | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V,<br>V <sub>OUT(T)</sub> = 0.9V<br>1mA I <sub>OUT</sub> 50mA       | -        | 15    | 70   | mV    | ①       |
|                                            |                                                             | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> = 1.0V ~ 1.1V<br>1mA I <sub>OUT</sub> 60mA |          |       |      |       |         |
|                                            |                                                             | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> = 1.2V~1.3V<br>1mA I <sub>OUT</sub> 80mA   |          |       |      |       |         |
|                                            |                                                             | V <sub>IN</sub> =V <sub>OUT(T)</sub> + 1.0V<br>V <sub>OUT(T)</sub> 1.4V<br>1mA I <sub>OUT</sub> 100mA         |          |       |      |       |         |
| Dropout Voltage (*3)                       | V <sub>dif</sub>                                            | V <sub>OUT(T)</sub> = 0.9V,<br>I <sub>OUT</sub> = 50mA                                                        | E-1(*6)  |       |      | mV    | ①       |
|                                            |                                                             | V <sub>OUT(T)</sub> = 1.0V ~ 1.1V,<br>I <sub>OUT</sub> = 60mA                                                 |          |       |      |       |         |
|                                            |                                                             | V <sub>OUT(T)</sub> = 1.2V ~ 1.3V,<br>I <sub>OUT</sub> = 80mA                                                 |          |       |      |       |         |
|                                            |                                                             | V <sub>OUT(T)</sub> 1.4V,<br>I <sub>OUT</sub> = 100mA                                                         |          |       |      |       |         |
| Line Regulation                            | ΔV <sub>OUT</sub> /<br>ΔV <sub>IN</sub> . V <sub>OUT</sub>  | V <sub>OUT(T)</sub> = 0.9V,<br>1.5V V <sub>IN</sub> 6.0V,<br>I <sub>OUT</sub> = 1mA                           | -        | 0.05  | 0.15 | % / V |         |
|                                            |                                                             | V <sub>OUT(T)</sub> = 1.0V~1.2V,<br>V <sub>OUT(T)</sub> + 0.5V V <sub>IN</sub> 6.0V<br>I <sub>OUT</sub> = 1mA |          |       |      |       |         |
|                                            |                                                             | V <sub>OUT(T)</sub> 1.3V,<br>V <sub>OUT(T)</sub> + 0.5V V <sub>IN</sub> 6.0V<br>I <sub>OUT</sub> = 30mA       |          |       |      |       |         |
| Input Voltage                              | V <sub>IN</sub>                                             | -                                                                                                             | 1.5      | -     | 6.0  | V     | -       |
| Output Voltage Temperature Characteristics | ΔV <sub>OUT</sub> /<br>ΔT <sub>opr</sub> . V <sub>OUT</sub> | V <sub>IN</sub> = V <sub>OUT(T)</sub> + 1.0V,<br>I <sub>OUT</sub> = 30mA,<br>- 40 ≤ T <sub>opr</sub> ≤ 85     | -        | ± 100 | -    | ppm / |         |

## ■ ELECTRICAL CHARACTERISTICS (Continued)

XC6411P/XC6412 Series, Regulator 1 and Regulator 2 (Continued)

Ta = 25

| PARAMETER             | SYMBOL | CONDITIONS                                                                                  | MIN. | TYP. | MAX. | UNITS | CIRCUIT |
|-----------------------|--------|---------------------------------------------------------------------------------------------|------|------|------|-------|---------|
| Current Limit         | ILIM   | $V_{OUT}=V_{OUT(E)} \times 0.95$<br>$V_{OUT(T)}=0.9V$<br>$V_{IN}=V_{OUT(T)}+2.0V$           | 100  | 300  | -    | mA    |         |
|                       |        | $V_{OUT}=V_{OUT(E)} \times 0.95$<br>$V_{OUT(T)}=1.0V \sim 1.1V$<br>$V_{IN}=V_{OUT(T)}+2.0V$ | 120  | 300  | -    |       |         |
|                       |        | $V_{OUT}=V_{OUT(E)} \times 0.95$<br>$V_{OUT(T)}=1.2V \sim 1.3V$<br>$V_{IN}=V_{OUT(T)}+2.0V$ | 160  | 300  | -    |       |         |
|                       |        | $V_{OUT}=V_{OUT(E)} \times 0.95$<br>$V_{OUT(T)}=1.4V \sim 2.9V$<br>$V_{IN}=V_{OUT(T)}+2.0V$ | 200  | 300  | -    |       |         |
|                       |        | $V_{OUT}=V_{OUT(E)} \times 0.95$<br>$V_{OUT(T)}=3.0V$<br>$V_{IN}=V_{OUT(T)}+1.0V$           | 200  | 300  | -    |       |         |
| Short Circuit Current | Ishort | $V_{IN}=V_{OUT(T)}+1.0V$ ,<br>$V_{OUT}=0V$                                                  | -    | 50   | -    | mA    |         |

NOTE: \*1:  $V_{OUT(T)}$ : Setting output voltage

\*2:  $V_{OUT(E)}$  = Effective output voltage

(i.e. the output voltage when " $V_{OUT(T)} + 1.0V$ " is provided at the VIN pin while maintaining a certain IOUT value).

\*3:  $V_{dif} = \{ V_{IN0}^{(*4)} - V_{OUT0}^{(*5)} \}$

\*4:  $V_{IN0}$  = The input voltage when  $V_{OUT0}$  appears as input voltage is gradually decreased.

\*5:  $V_{OUT0}$  = A voltage equal to 98% of the output voltage whenever an amply stabilized IOUT { $V_{OUT(T)} + 1.0V$ } is input.

\*6: Refer to "VOLTAGE CHART".

\*7: Unless otherwise stated,  $V_{EN2}=V_{IN}$  for the XC6412 series.

\*8: When the series are the XC6411P and XC6412C series, "VIN" shown in the conditions represents  $V_{IN1}$  or  $V_{IN2}$ .

## ■ ELECTRICAL CHARACTERISTICS (Continued)

XC6411P Series: Regulator 1, Regulator 2 (each channel)

Ta = 25

| PARAMETER      | SYMBOL | CONDITIONS                         | MIN. | TYP. | MAX. | UNITS | CIRCUIT |
|----------------|--------|------------------------------------|------|------|------|-------|---------|
| Supply Current | IDD    | VIN=VOUT(T) + 1.0V<br>VOUT(T) 3.9V | -    | 0.8  | 1.5  | μA    | ②       |
|                |        | VIN=VOUT(T) + 1.0V<br>VOUT(T) 4.0V |      | 1.0  | 1.8  | μA    | ②       |

XC6412B Series (SOT-26)

Ta = 25

| PARAMETER             | SYMBOL | CONDITIONS                                      | MIN.  | TYP. | MAX. | UNITS | CIRCUIT |
|-----------------------|--------|-------------------------------------------------|-------|------|------|-------|---------|
| Supply Current 2 (*8) | IDD2   | VIN=VOUT(T) + 1.0V,<br>VEN2=VIN<br>VOUT(T) 3.9V | -     | 1.6  | 3.0  | μA    | ②       |
|                       |        | VIN=VOUT(T) + 1.0V,<br>VEN2=VIN<br>VOUT(T) 4.0V | -     | 2.0  | 3.6  | μA    | ②       |
| Supply Current 3 (*9) | IDD3   | VIN=VOUT(T) + 1.0V,<br>VEN2=VIN<br>VOUT(T) 3.9V | -     | 0.8  | 1.6  | μA    | ②       |
|                       |        | VIN=VOUT(T) + 1.0V,<br>VEN2=VIN<br>VOUT(T) 4.0V | -     | 1.0  | 1.9  | μA    | ②       |
| EN 'H' Level Voltage  | VENH   | VIN=VOUT(T)+1.0V                                | 1.0   | -    | 6.0  | V     |         |
| EN 'L' Level Voltage  | VENL   | VIN=VOUT(T)+1.0V                                | -     | -    | 0.3  | V     |         |
| EN 'H' Level Current  | IENH   | VIN=VOUT(T)+1.0V,<br>VEN2=VIN                   | - 0.1 | -    | 0.1  | μA    |         |
| EN 'L' Level Current  | IENL   | VIN=VOUT(T)+1.0V,<br>VEN2=VIN                   | - 0.1 | -    | 0.1  | μA    |         |

NOTE:

\*8: Supply current of the IC: (VR1 supply current + VR2 supply current)

\*9: Supply current of the IC when VR2 is in stand-by mode: (VR1 supply current + VR2 stand-by current)

## ■ ELECTRICAL CHARACTERISTICS (Continued)

● Voltage Chart


Ta = 25

| PARAMETER              | E-0                |       | E-1                    |      |
|------------------------|--------------------|-------|------------------------|------|
|                        | OUTPUT VOLTAGE (V) |       | DROPOUT VOLTAGE 1 (mV) |      |
| SETTING OUTPUT VOLTAGE | VOUT               |       | Vdif                   |      |
| VOUT(T)                | MIN.               | MAX.  | TYP.                   | MAX. |
| 0.9                    | 0.870              | 0.930 | 870                    | 1000 |
| 1.0                    | 0.970              | 1.030 | 860                    | 1000 |
| 1.1                    | 1.070              | 1.130 | 780                    | 950  |
| 1.2                    | 1.170              | 1.230 | 800                    | 1000 |
| 1.3                    | 1.270              | 1.330 | 720                    | 900  |
| 1.4                    | 1.370              | 1.430 | 750                    | 960  |
| 1.5                    | 1.470              | 1.530 | 700                    | 890  |
| 1.6                    | 1.568              | 1.632 | 680                    | 860  |
| 1.7                    | 1.666              | 1.734 | 650                    | 830  |
| 1.8                    | 1.764              | 1.836 | 630                    | 800  |
| 1.9                    | 1.862              | 1.938 | 610                    | 780  |
| 2.0                    | 1.960              | 2.040 | 580                    | 740  |
| 2.1                    | 2.058              | 2.142 | 580                    | 740  |
| 2.2                    | 2.156              | 2.244 | 580                    | 740  |
| 2.3                    | 2.254              | 2.346 | 510                    | 650  |
| 2.4                    | 2.352              | 2.448 | 510                    | 650  |
| 2.5                    | 2.450              | 2.550 | 450                    | 580  |
| 2.6                    | 2.548              | 2.652 | 450                    | 580  |
| 2.7                    | 2.646              | 2.754 | 450                    | 580  |
| 2.8                    | 2.744              | 2.856 | 450                    | 580  |
| 2.9                    | 2.842              | 2.958 | 450                    | 580  |
| 3.0                    | 2.940              | 3.060 | 320                    | 420  |
| 3.1                    | 3.038              | 3.162 | 320                    | 420  |
| 3.2                    | 3.136              | 3.264 | 320                    | 420  |
| 3.3                    | 3.234              | 3.366 | 320                    | 420  |
| 3.4                    | 3.332              | 3.468 | 320                    | 420  |
| 3.5                    | 3.430              | 3.570 | 320                    | 420  |
| 3.6                    | 3.528              | 3.672 | 320                    | 420  |
| 3.7                    | 3.626              | 3.774 | 320                    | 420  |
| 3.8                    | 3.724              | 3.876 | 320                    | 420  |
| 3.9                    | 3.822              | 3.978 | 320                    | 420  |
| 4.0                    | 3.920              | 4.080 | 290                    | 380  |
| 4.1                    | 4.018              | 4.182 | 290                    | 380  |
| 4.2                    | 4.116              | 4.284 | 290                    | 380  |
| 4.3                    | 4.214              | 4.386 | 290                    | 380  |
| 4.4                    | 4.312              | 4.488 | 290                    | 380  |
| 4.5                    | 4.410              | 4.590 | 290                    | 380  |
| 4.6                    | 4.508              | 4.692 | 290                    | 380  |
| 4.7                    | 4.606              | 4.794 | 290                    | 380  |
| 4.8                    | 4.704              | 4.896 | 290                    | 380  |
| 4.9                    | 4.802              | 4.998 | 290                    | 380  |
| 5.0                    | 4.900              | 5.100 | 230                    | 310  |


## ■ TEST CIRCUITS

### ● XC6411 Series

Circuit

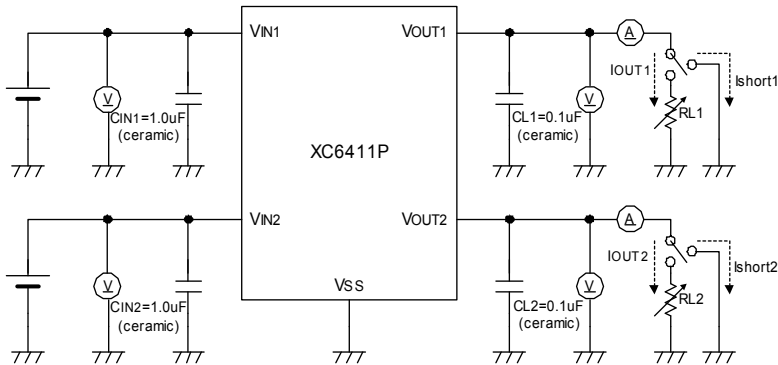


Circuit

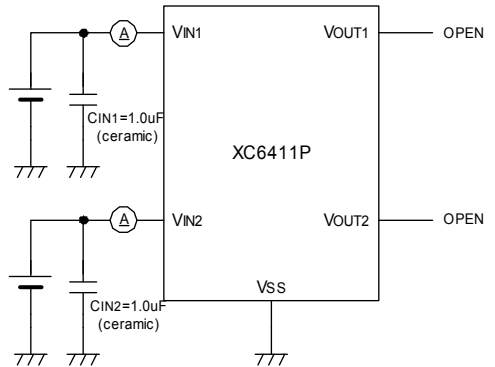


### ● XC6412B Series (SOT-26)

Circuit

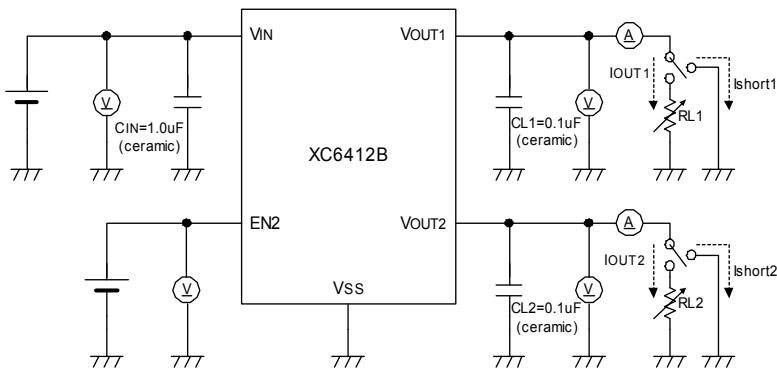


Circuit

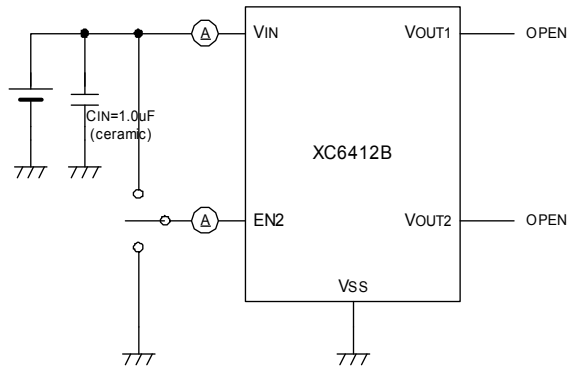

## ■ OPERATIONAL EXPLANATION

### <Output Voltage Control>

The voltage, divided by resistors R11 & R12 for a regulator 1 and R21 & R22 for a regulator 2 is compared with the internal reference voltage by the error amplifier. These resistors are connected to the VOUT pin. The P-channel MOSFET connected to the VOUT pin is then driven by the subsequent output signal. The output voltage at the VOUT pin is controlled and stabilized by a system of negative feedback. The current limit circuit operates when the load current reaches the current limit level.

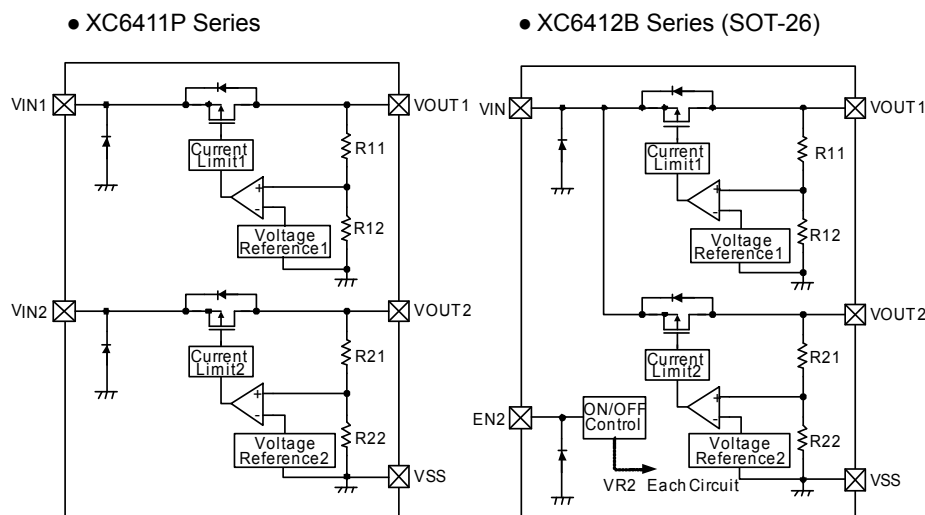

\* Diodes shown in the above circuit are ESD protection diodes and parasitic diodes.

### <Dual Inputs>

In the XC6411P series, the two input voltage pins are separated. The two regulators 1 and 2 can operate independently so that it offers design flexibility.

### <Short Protection Circuit>

The XC6411P/6412 series' regulator offers short-circuit protection by means of a built-in foldback circuit. When the load current reaches the current limit level, the fixed current limiter circuit operates and output voltage drops. As a result of this drop in output voltage, the foldback circuit operates, the output voltage drops further and output current decreases. When the output voltage pin is shorted, a current of about 50mA flows.

### <EN2 Pin>

The regulator 2's internal circuitry can be operated or shutdown via the signal from the EN2 pin with the XC6412 series. In so doing the regulator 1 maintains an operational state constantly. In shutdown mode, output at the VOUT2 pin will be pulled down to the Vss level via R21 & R22. Note that the XC6412 series' regulator is "High Active/No Pull-Down", operations will become unstable with the EN2 pin open. We suggest that you use this IC with either a VIN voltage or a Vss voltage input at the EN2 pin. If this IC is used with the correct specifications for the EN pin, the operational logic is fixed and the IC will operate normally. However, supply current may increase as a result of through current in the IC's internal circuitry.







## ■ NOTES ON USE

1. Please use this IC within the stated absolute maximum ratings. The IC is liable to malfunction should the ratings be exceeded.
2. Where wiring impedance is high, operations may become unstable due to noise and/or phase lag depending on output current.
3. As for the XC6412 series, internally achieved phase compensation makes a stable operation of the IC possible even when there is no output capacitor (CL). In order to stabilize the VIN's voltage level, we recommend that an input capacitor (CIN) of about 0.1 to 1.0  $\mu$ F be connected between each VIN pin and the Vss pin. Moreover, during transient response, so as to prevent an undershoot or overshoot, we recommend that the output capacitor (CL) of about 0.1 to 1.0  $\mu$ F be connected between each VOUT pin and the Vss pin. However, please wire the input capacitor (CIN) and the output capacitor (CL) as close to the IC as possible.

## ■ TYPICAL PERFORMANCE CHARACTERISTICS



### ● XC6411P/6412 Series

#### (1) Output Voltage vs. Output Current

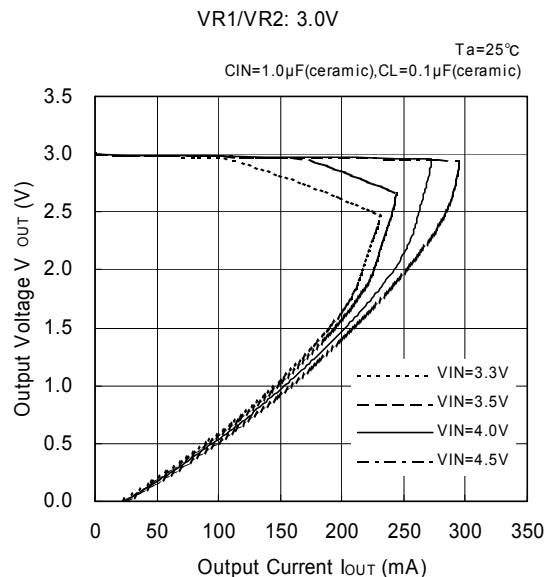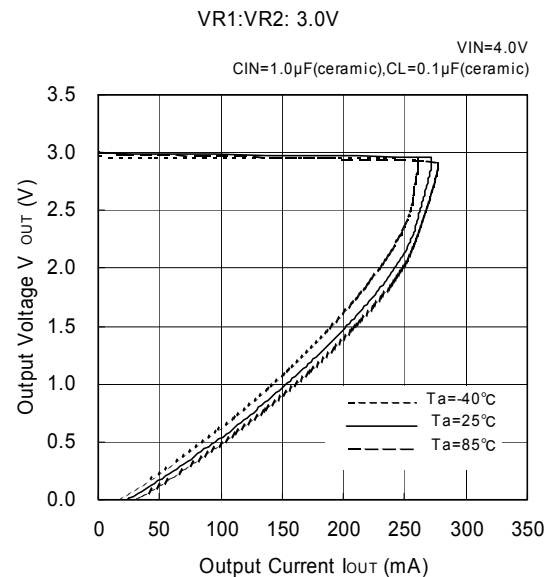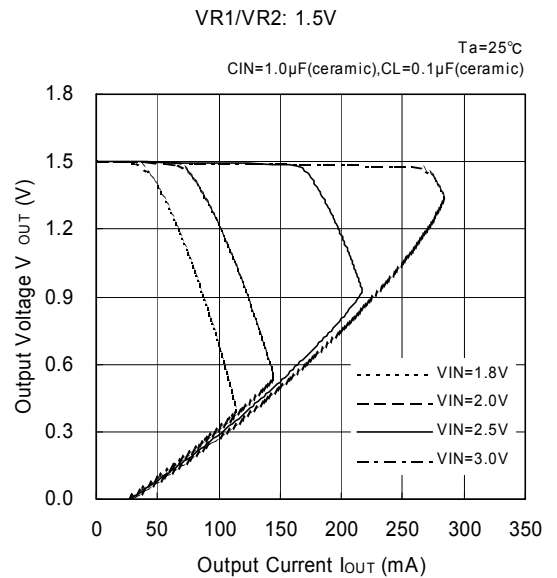
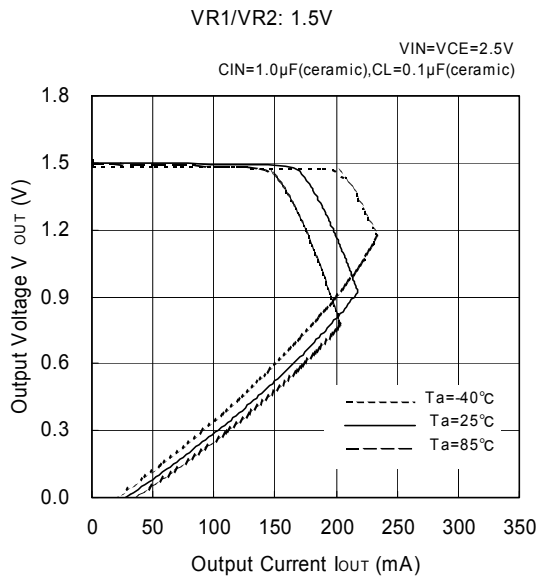
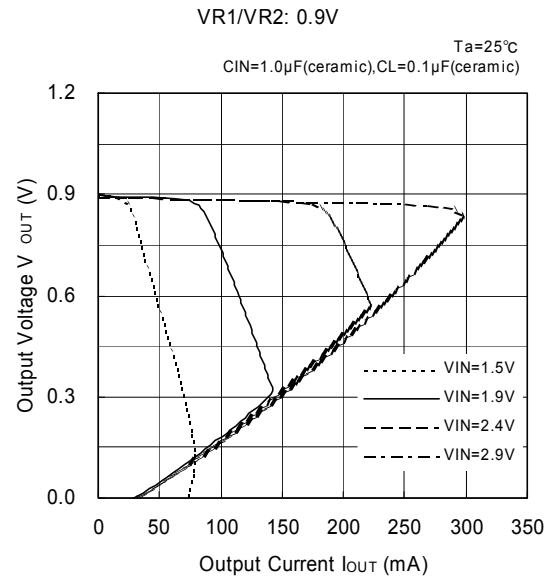
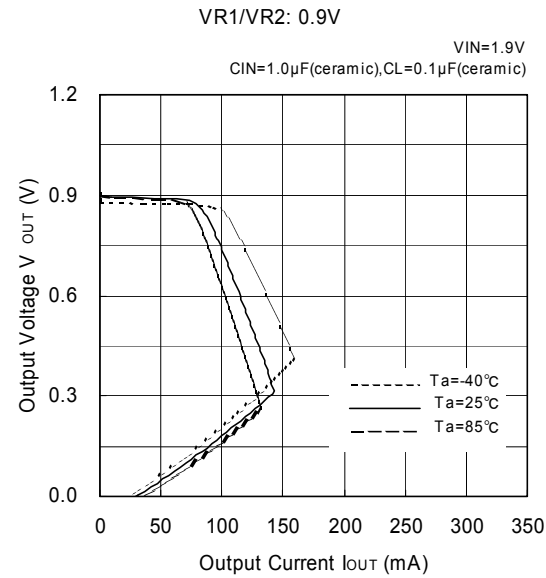


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (1) Output Voltage vs. Output Current (Continued)

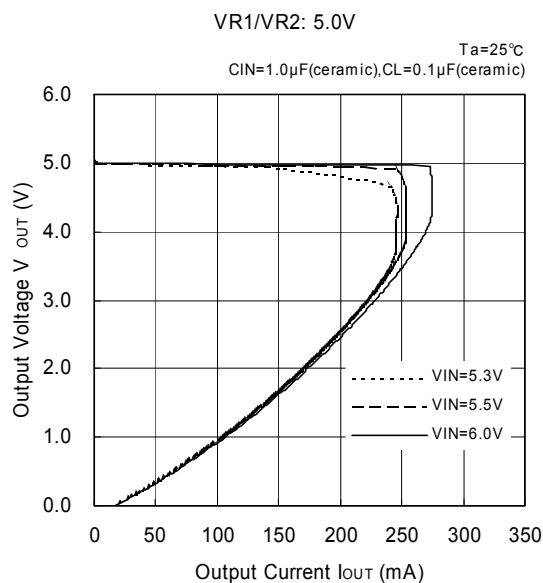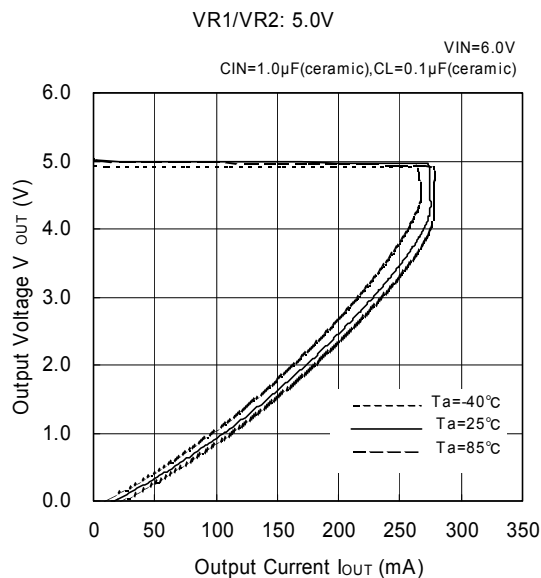


### (2) Output Voltage vs. Input Voltage

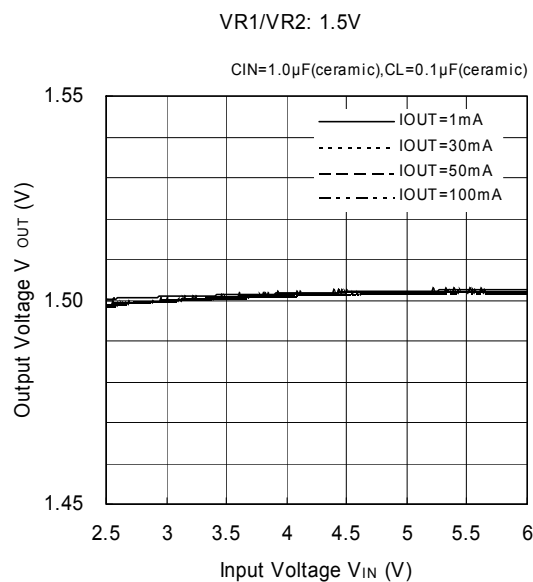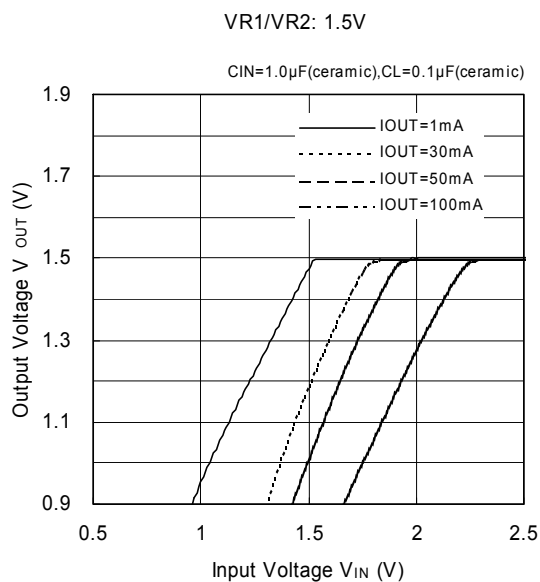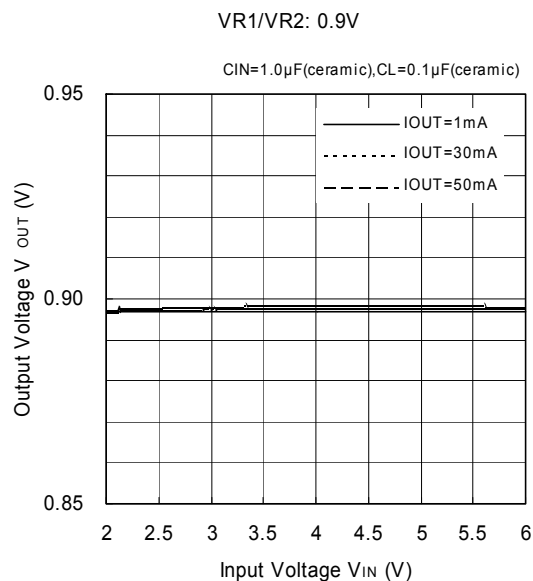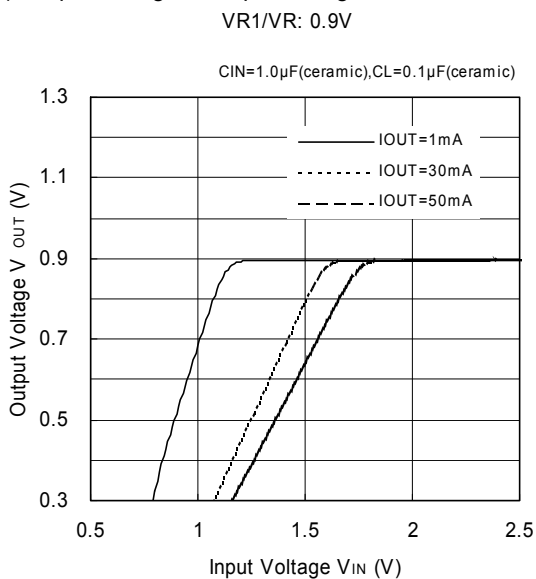


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (2) Output Voltage vs. Input Voltage (Continued)


VR1/VR2: 3.0V

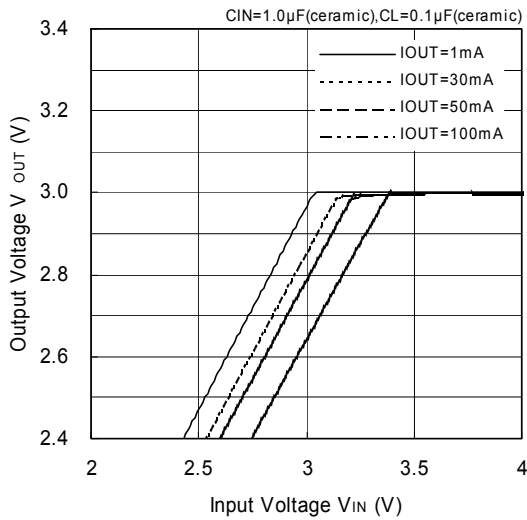


VR1/VR2: 3.0V

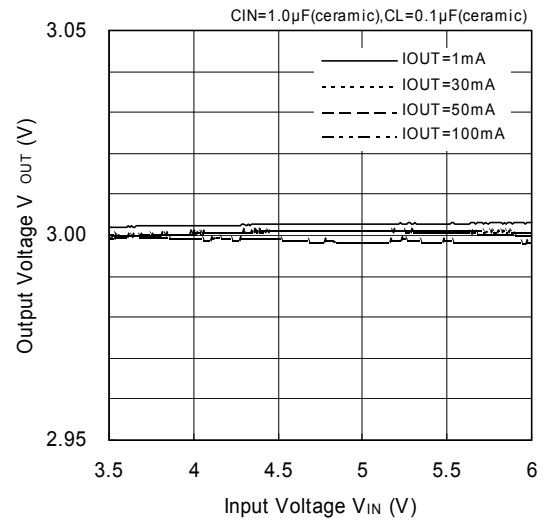

VR1/VR2: 5.0V

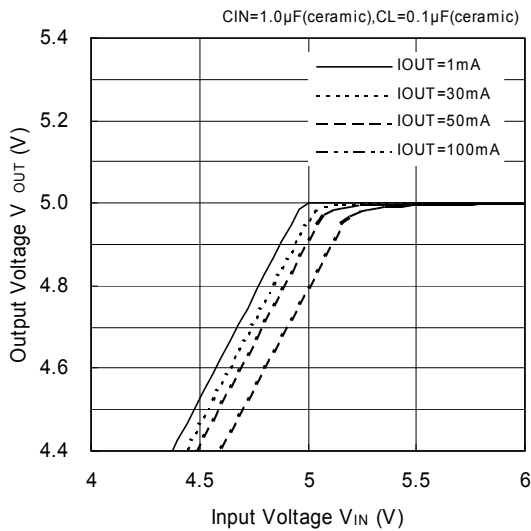


VR1/VR2: 5.0V

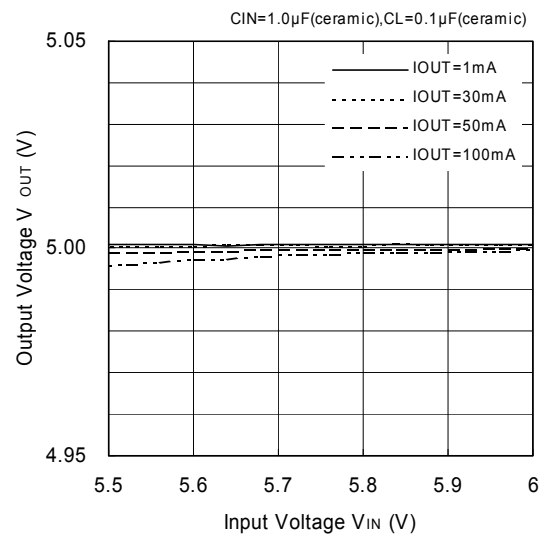


### (3) Dropout Voltage vs. Output Current

VR1/VR2: 0.9V

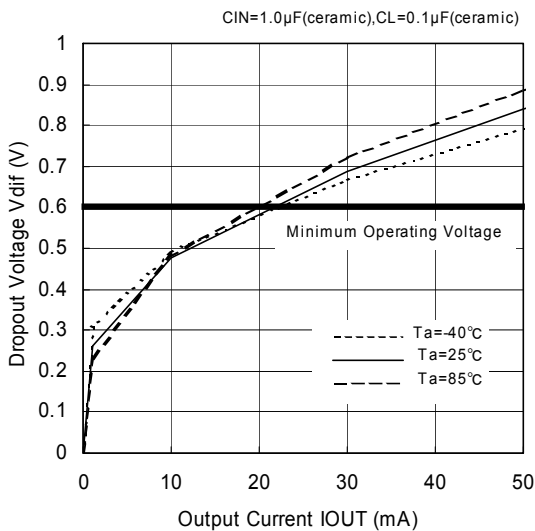


VR1/VR2: 1.5V

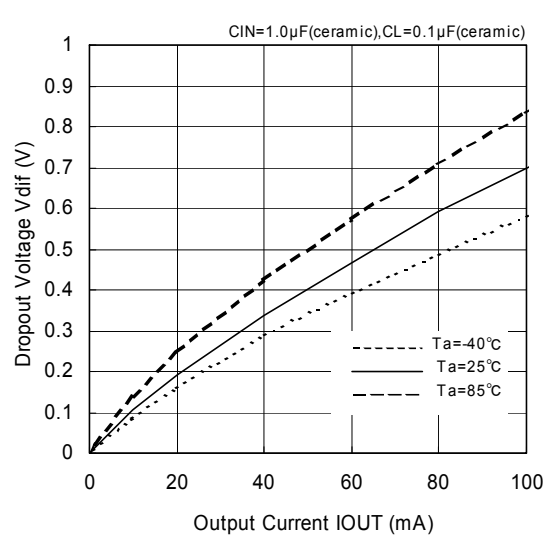


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (3) Dropout Voltage vs. Output Current (Continued)

VR1/VR2: 3.0V

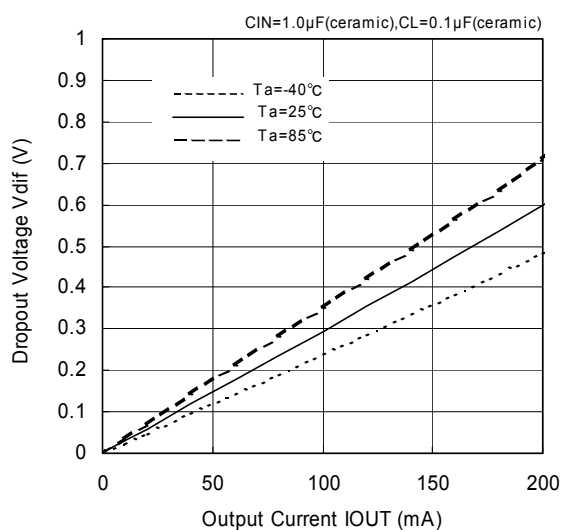


VR1/VR2: 5.0V

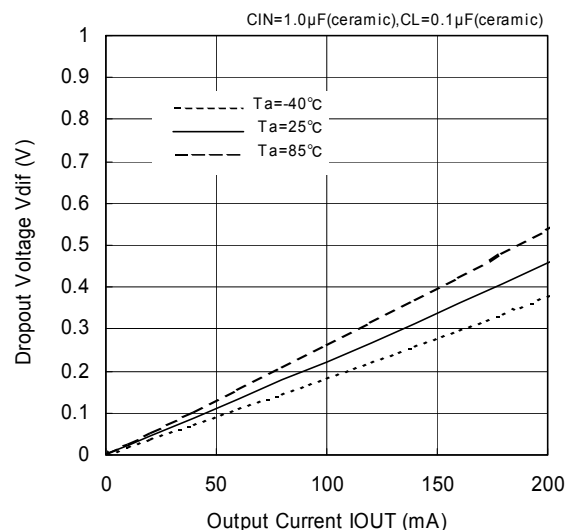


### (4) Supply Current vs. Input Voltage


VR1/VR2: 0.9V

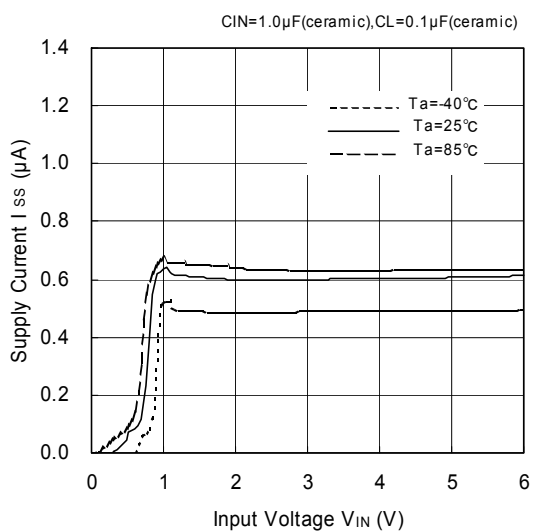


VR1/VR2: 1.5V

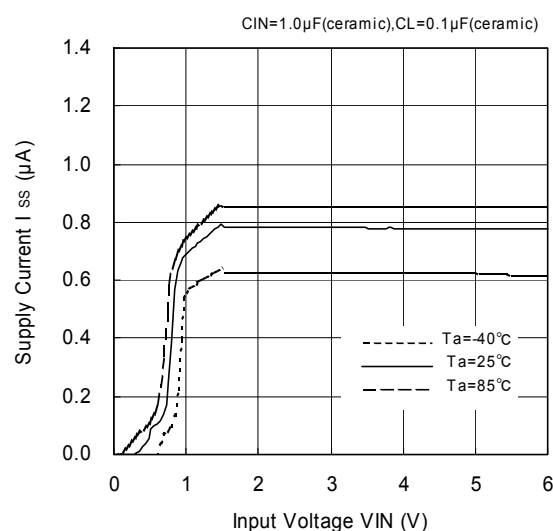

VR1/VR2: 3.0V

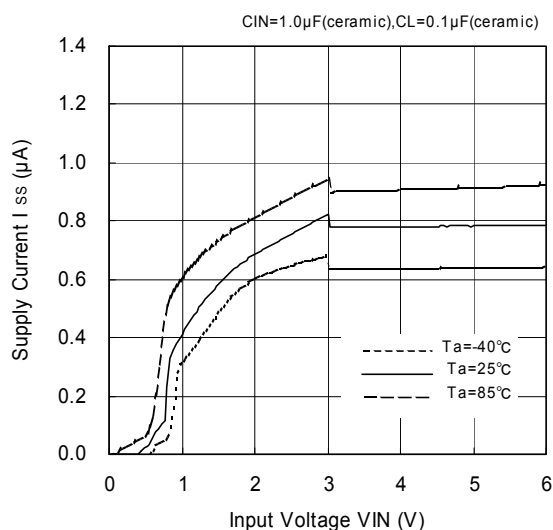


VR1/VR2: 5.0V

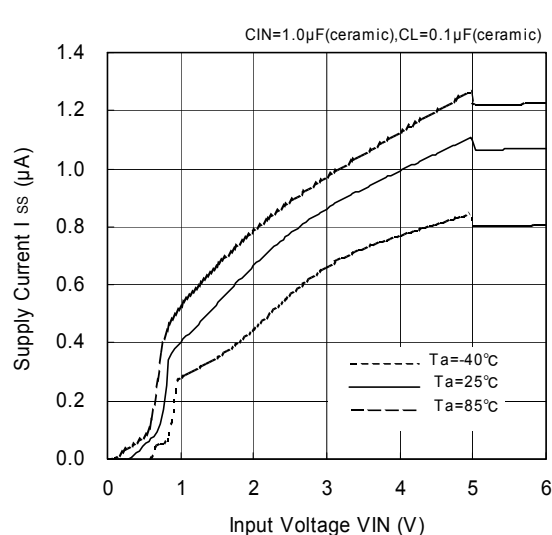




## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(5) Output Voltage vs. Ambient Temperature

VR1/VR2: 0.9V

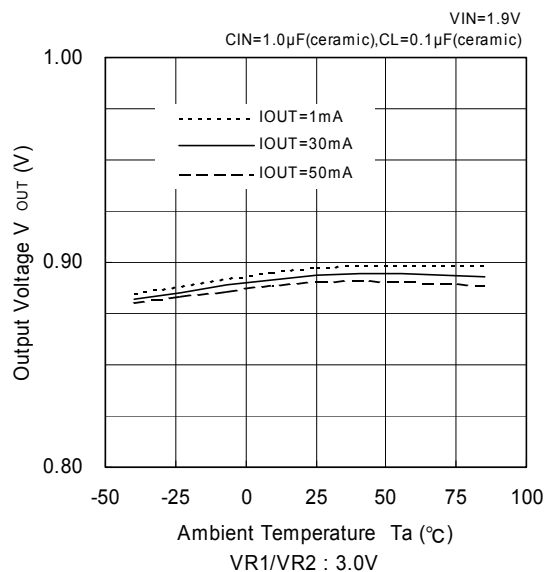


VR1/VR2: 1.5V

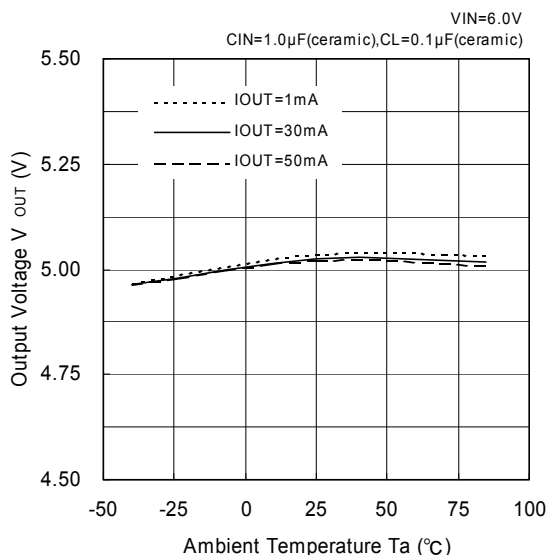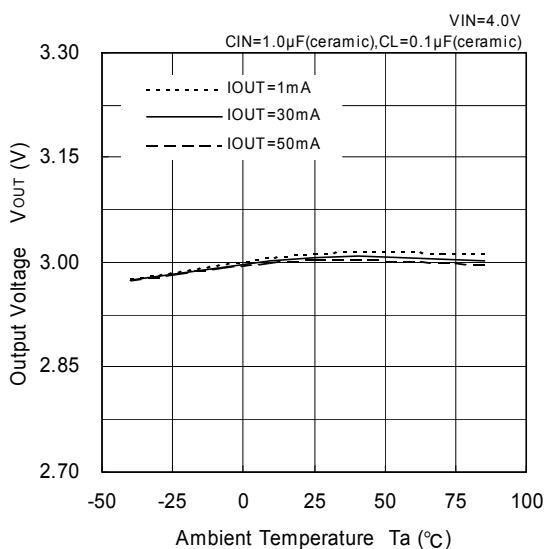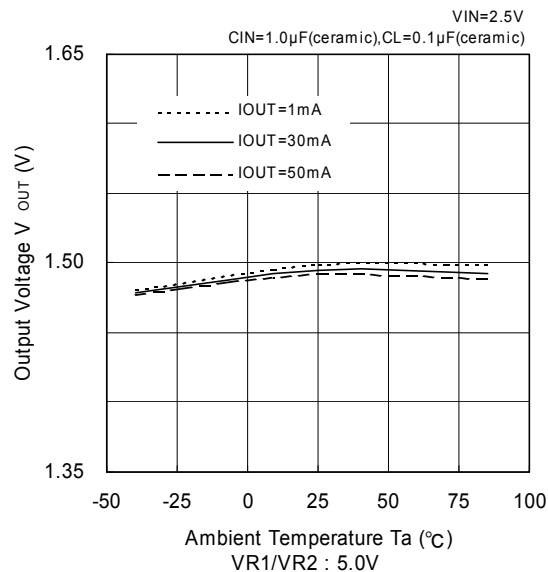


(6) Supply Current vs. Ambient Temperature

VR1/VR2: 0.9V

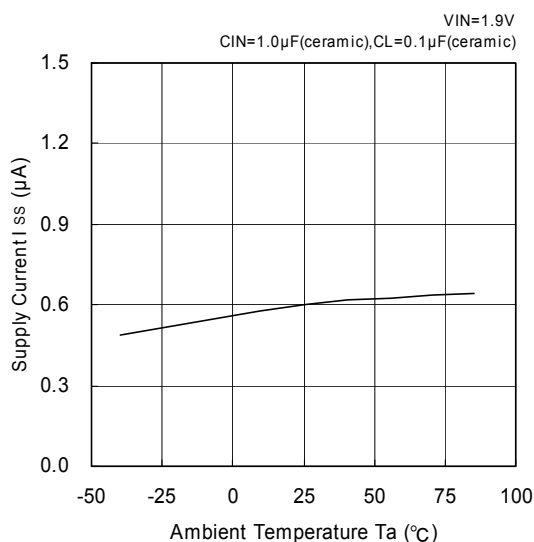


VR1/VR2: 1.5V

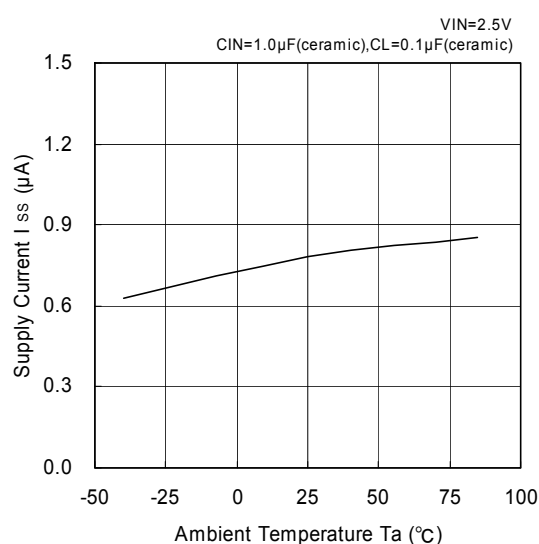


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(6) Supply Current vs. Ambient Temperature (Continued)

VR1/VR2: 3.0V

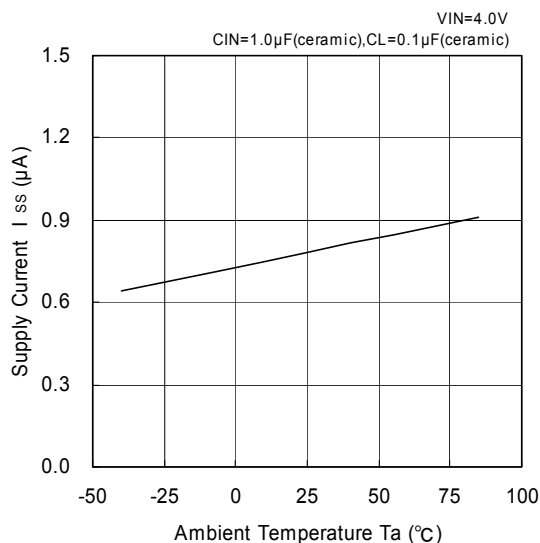


VR1/VR2: 5.0V

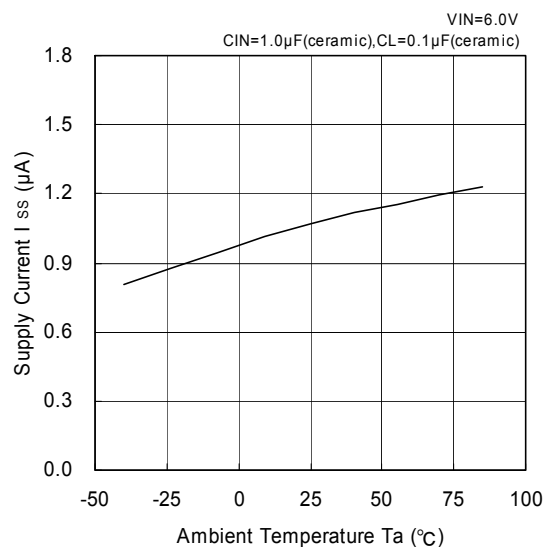


(7) EN2 Threshold Voltage vs. Ambient Temperature (XC6412 series)


XC6412B (VR2: 0.9V)

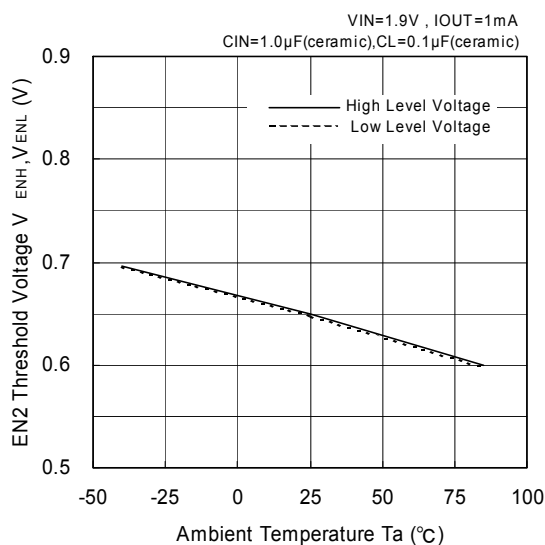


XC6412B (VR2: 1.5V)

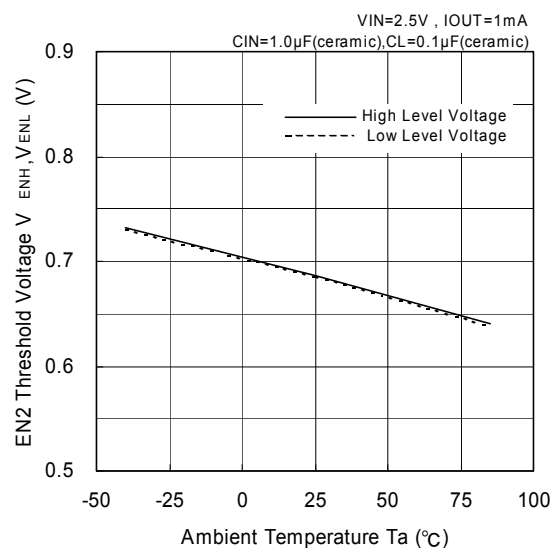

XC6412B (VR2: 3.0V)






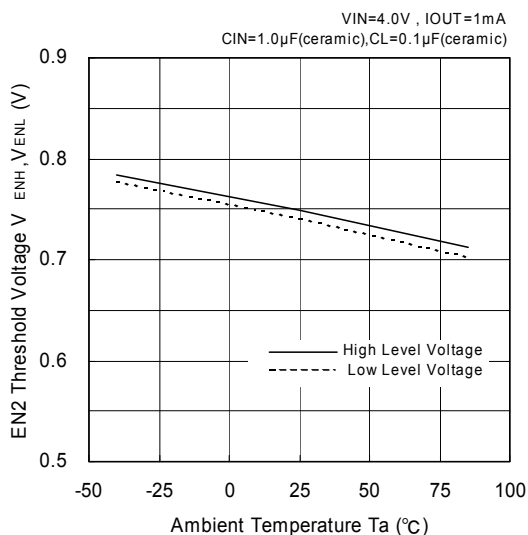


XC6412B (VR2: 5.0V)

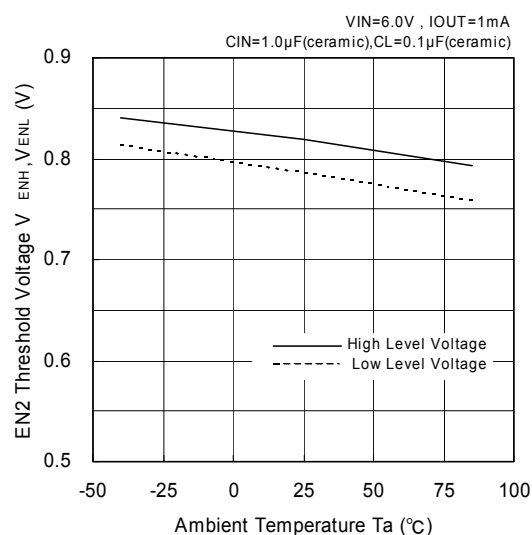







## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Input Transient Response

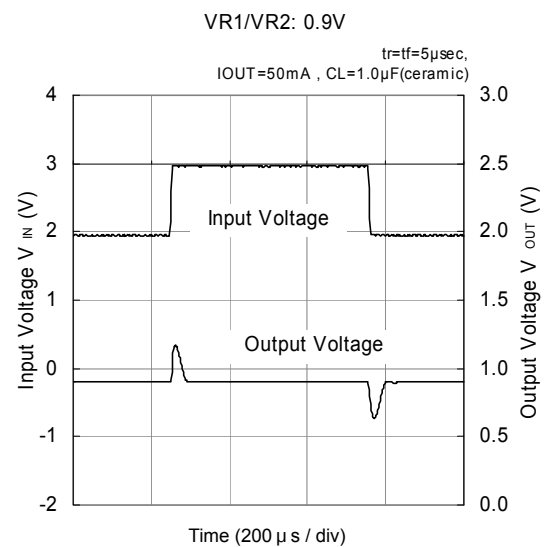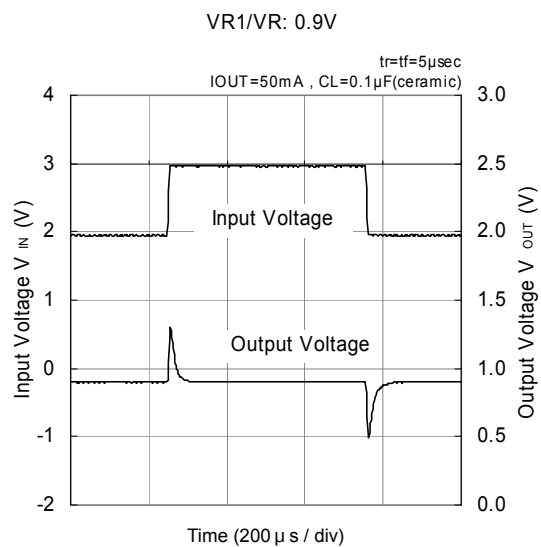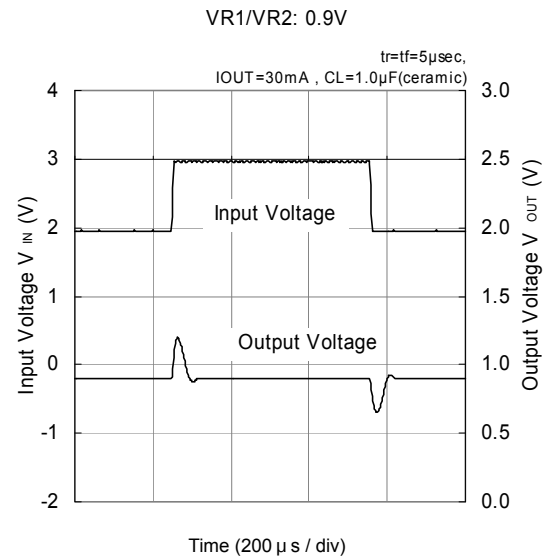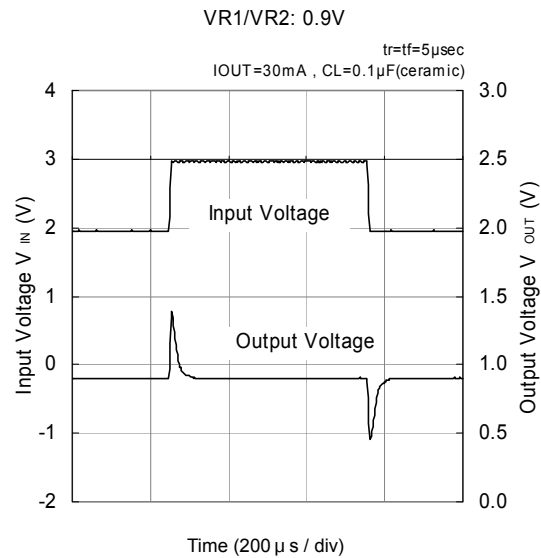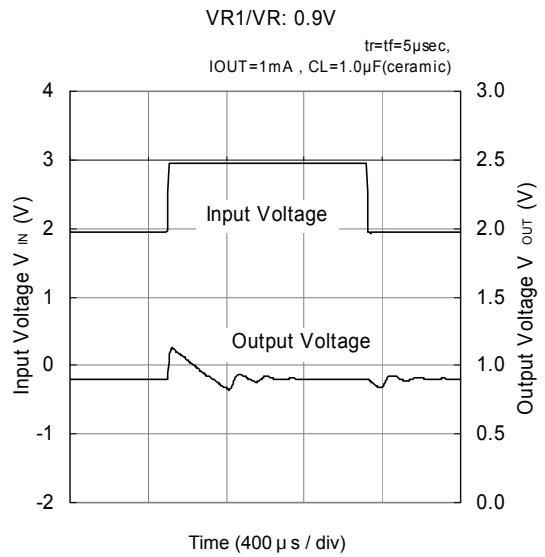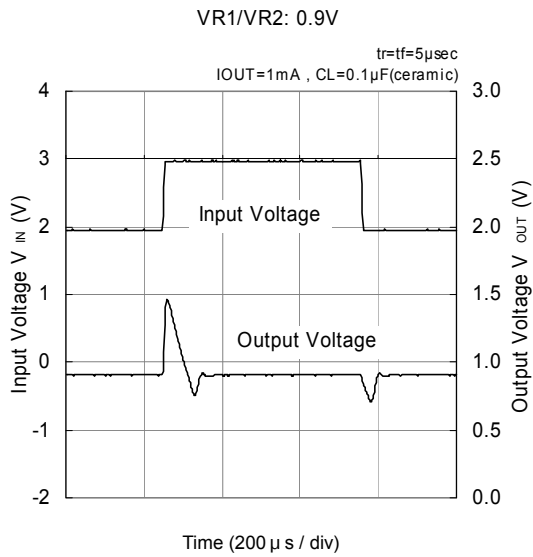







## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Input Transient Response (Continued)

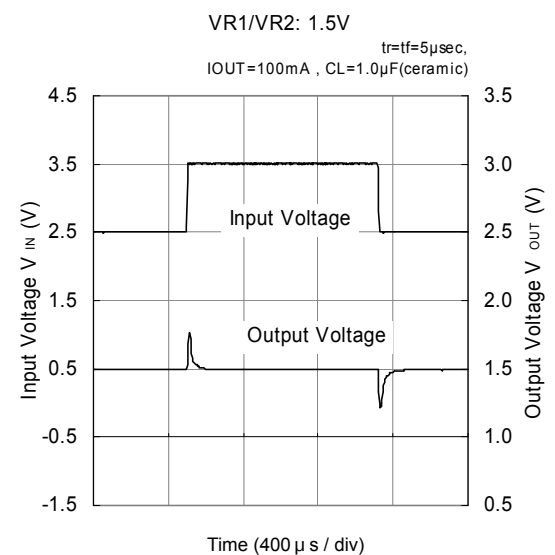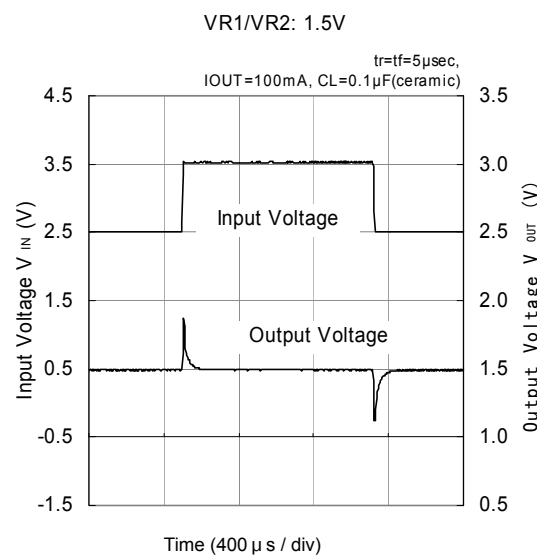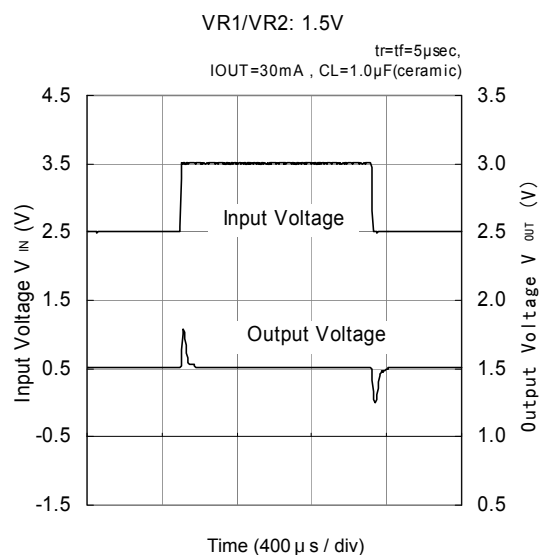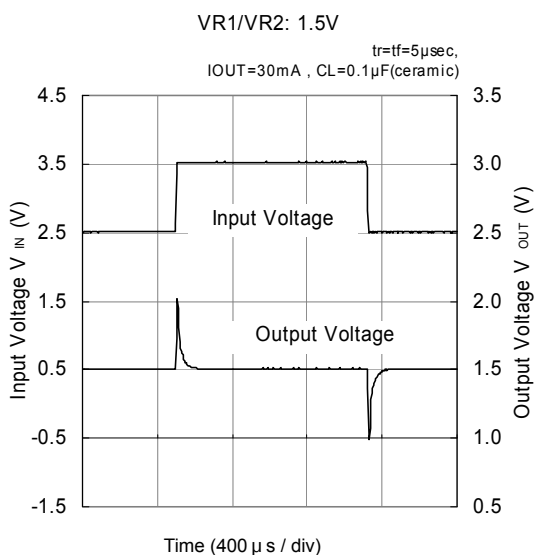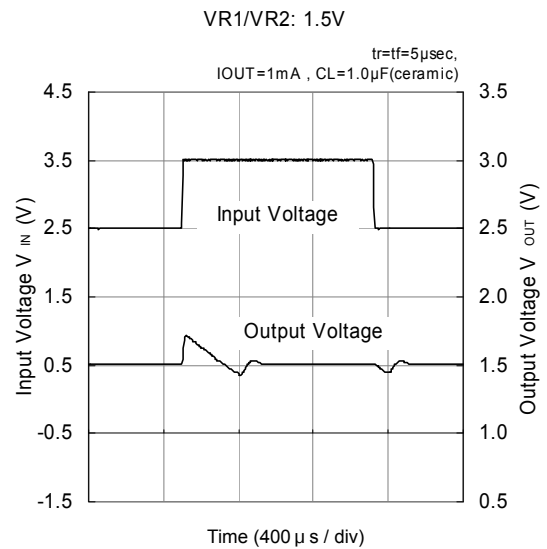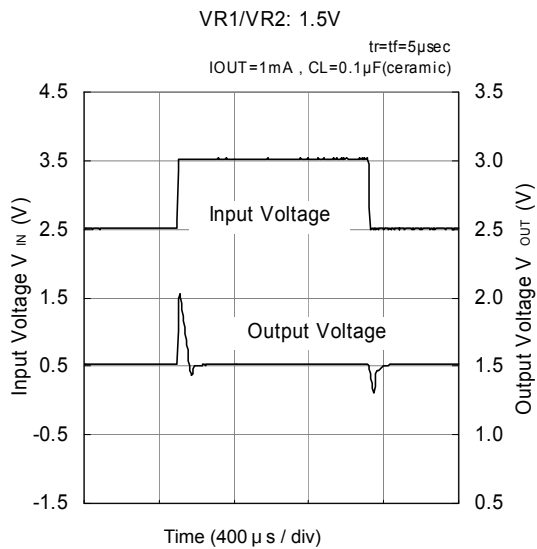







## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Input Transient Response (Continued)

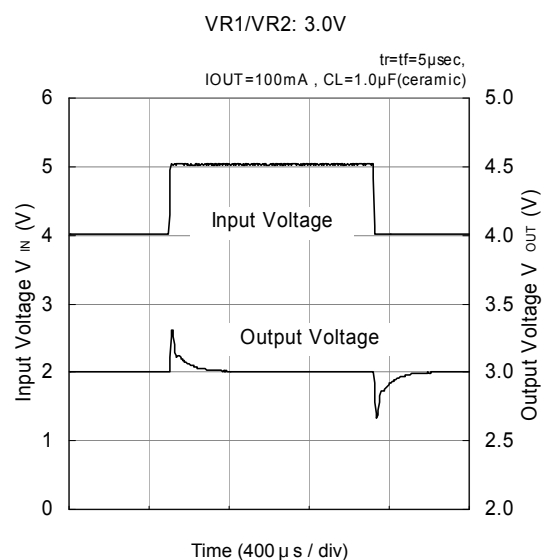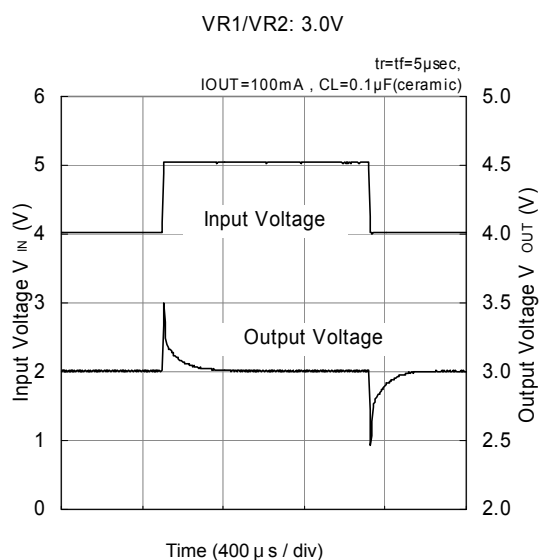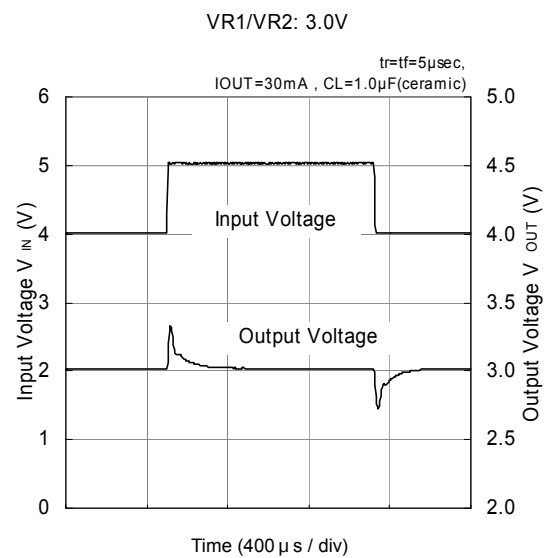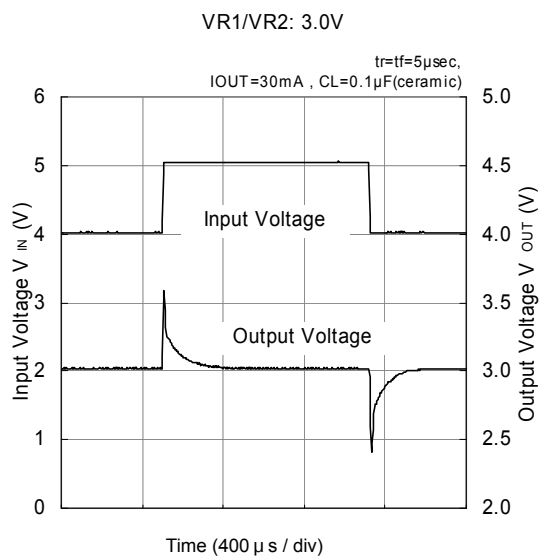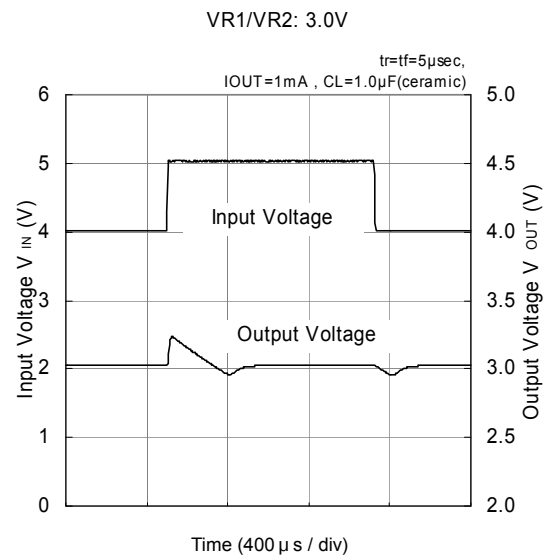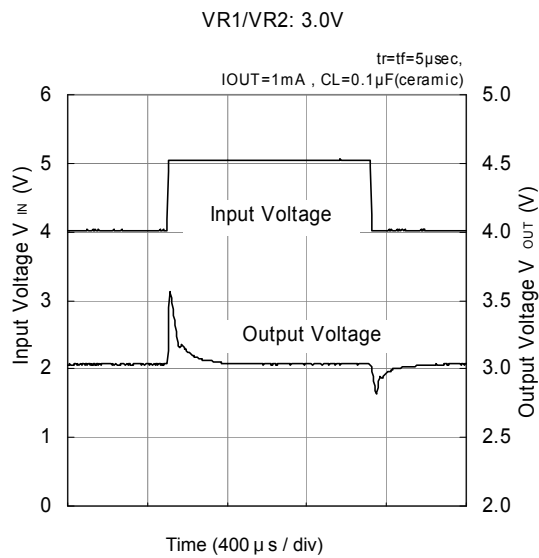







## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Input Transient Response (Continued)

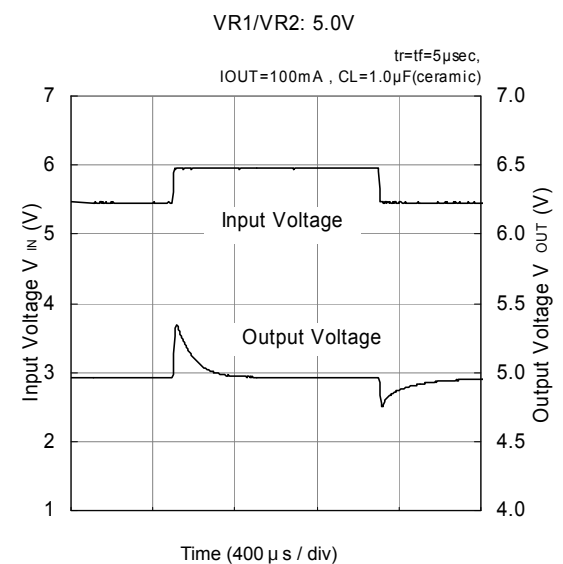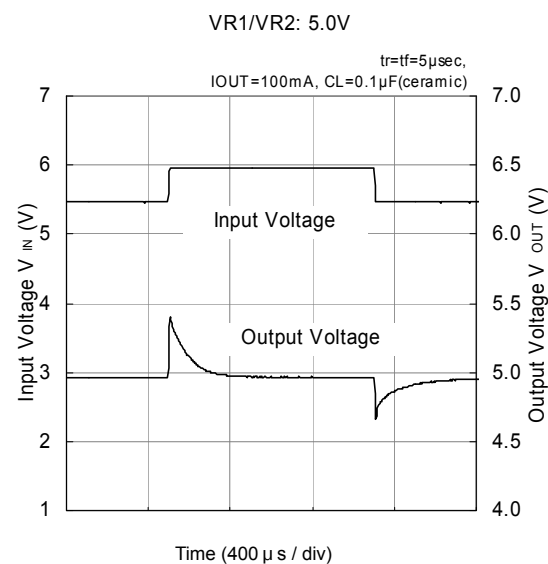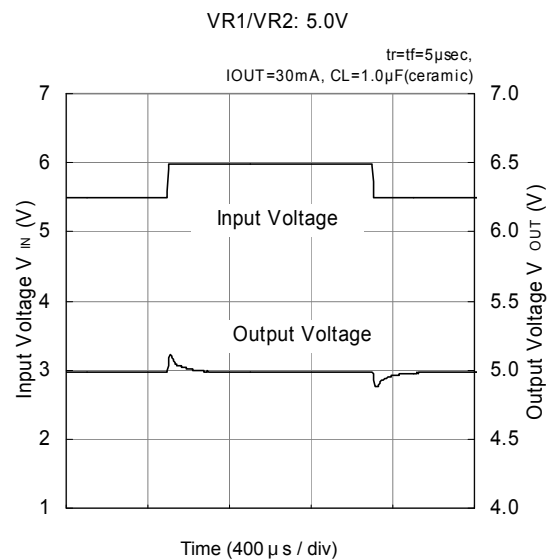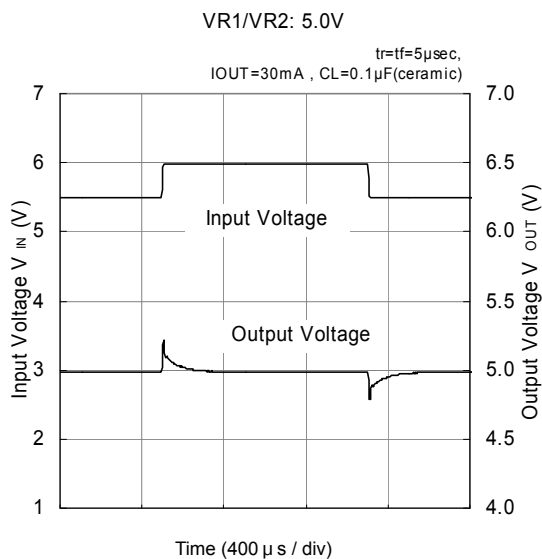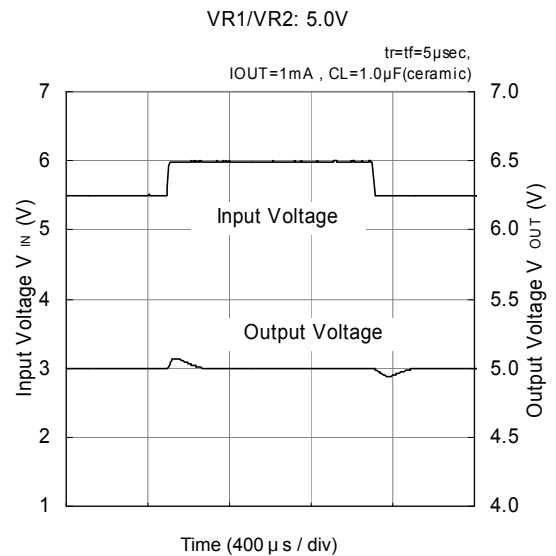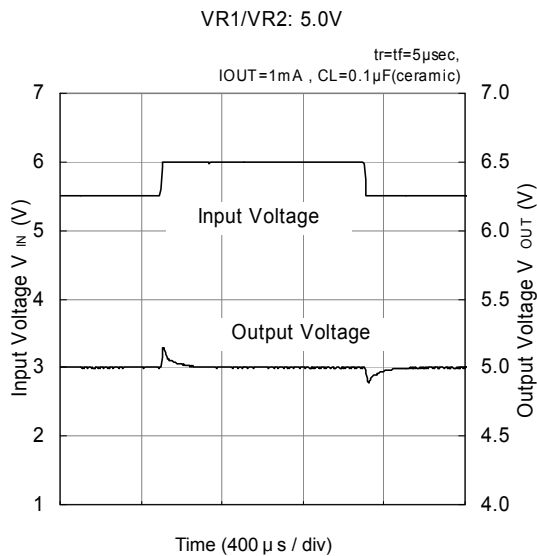







## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (9) Load Transient Response

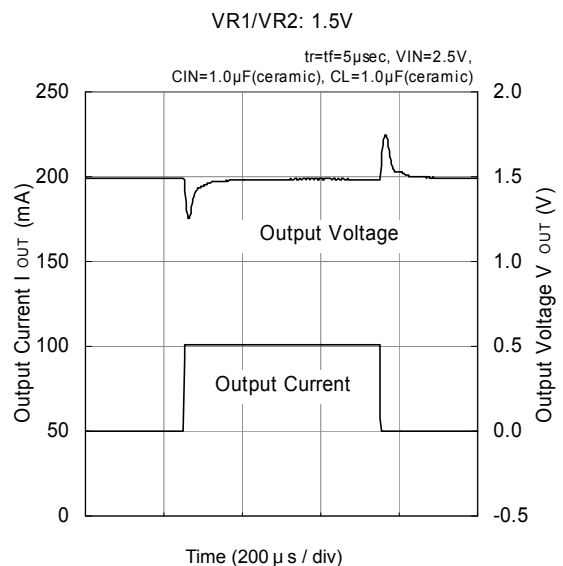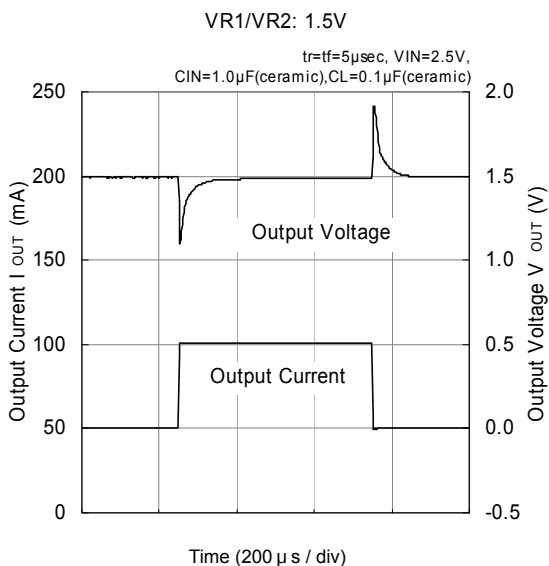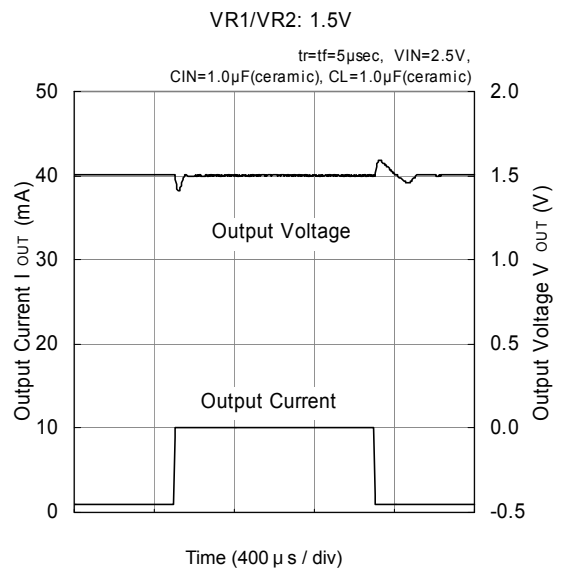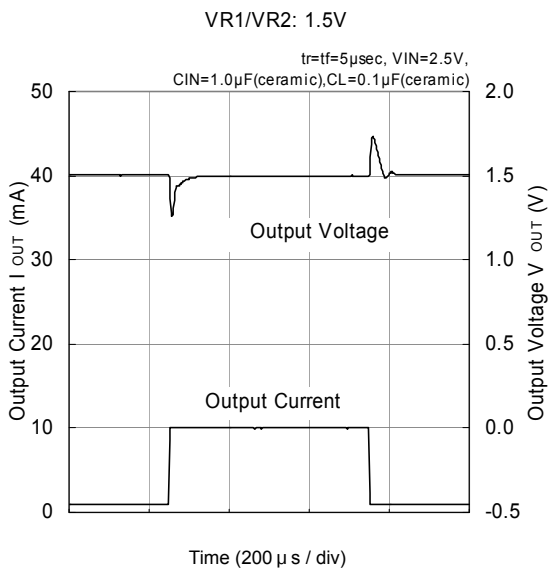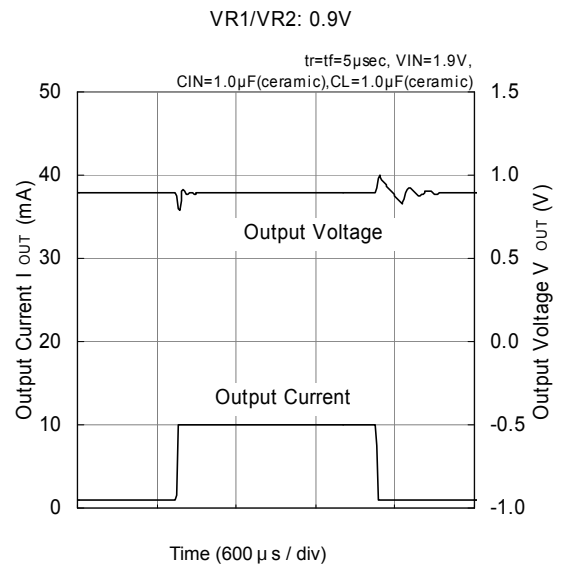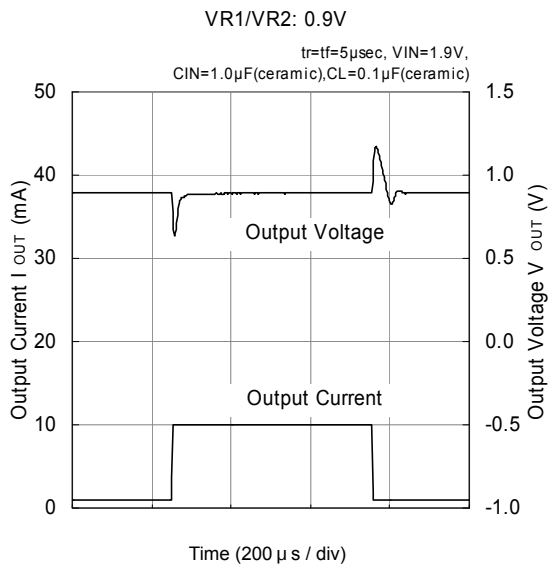



## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (9) Load Transient Response (Continued)

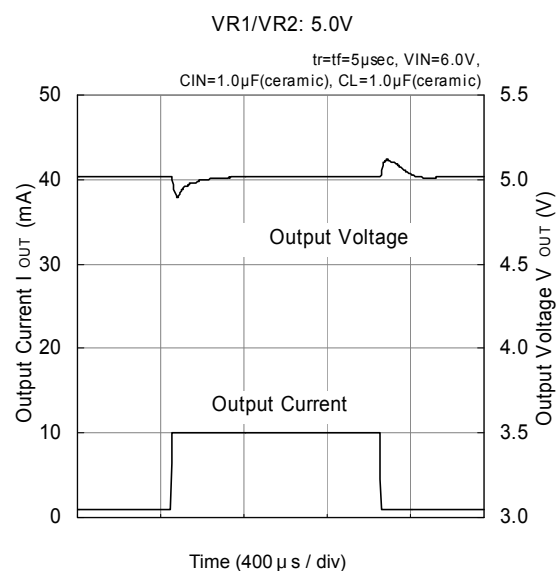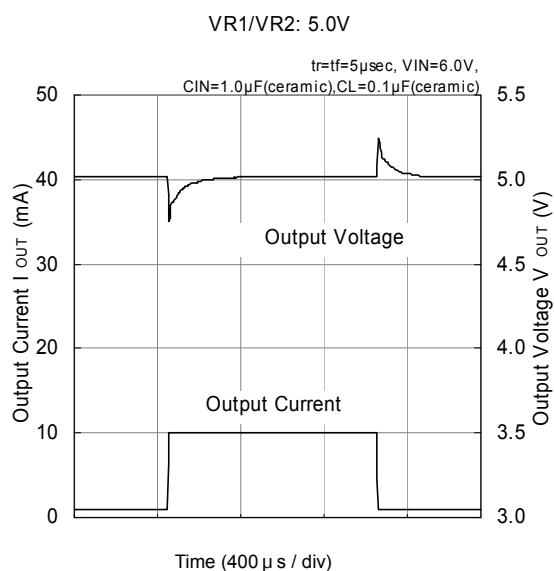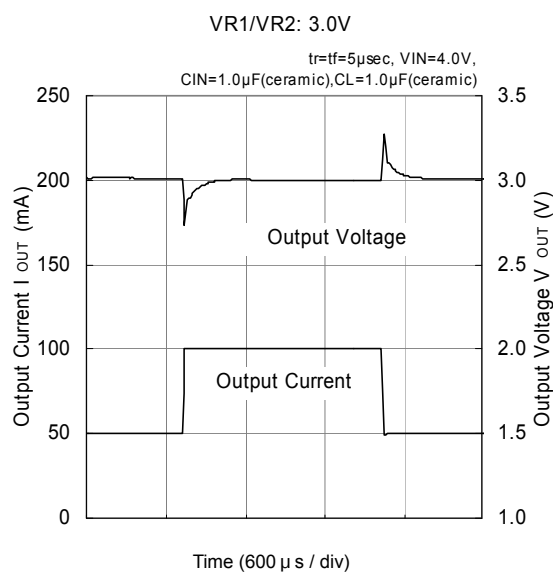
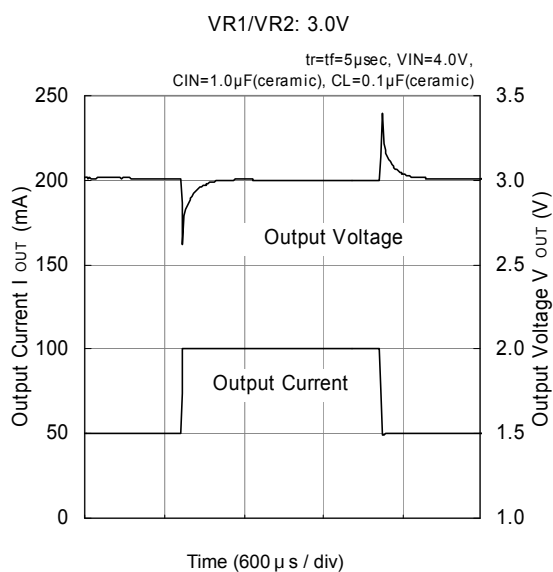
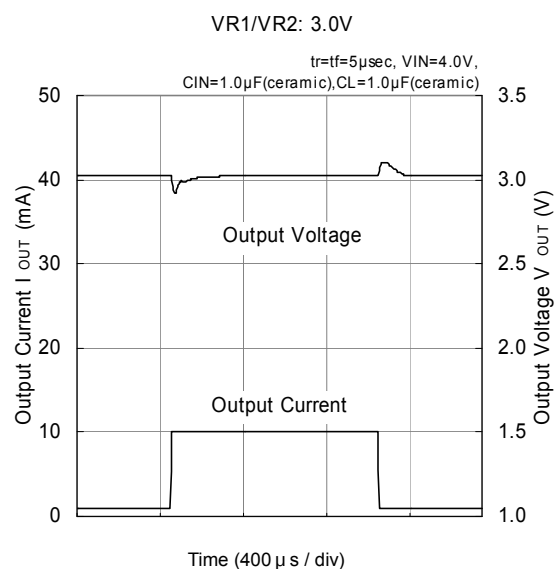
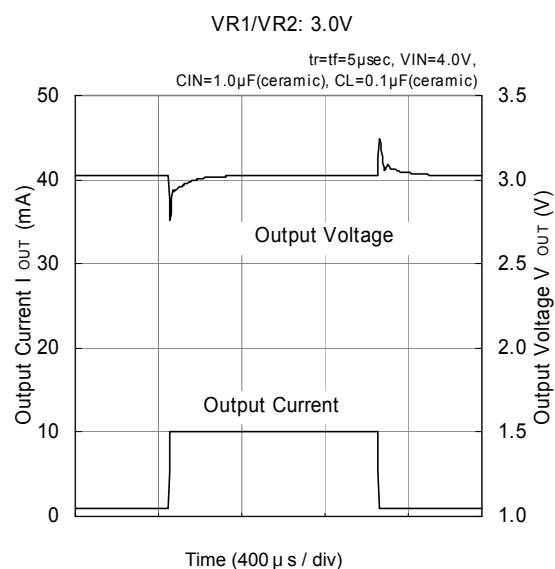


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (9) Load Transient Response (Continued)





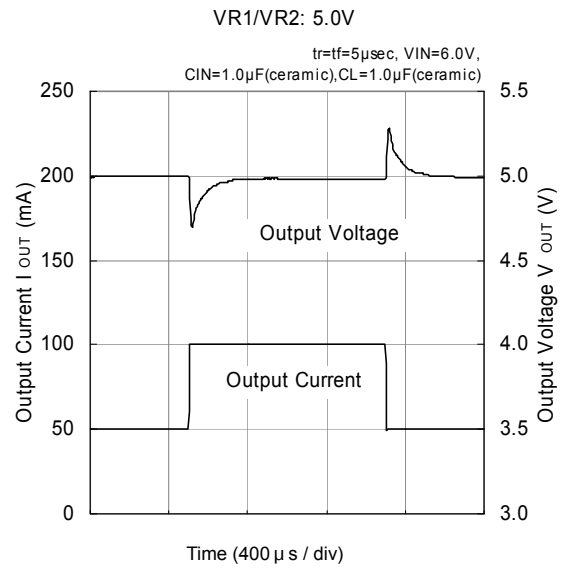
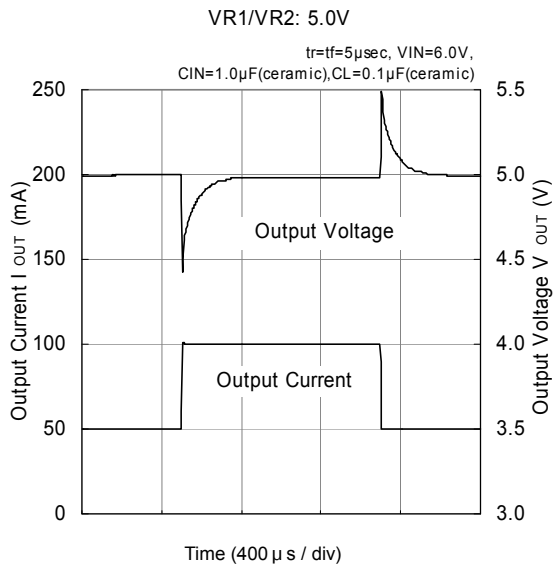


### (10) Rising Response Time

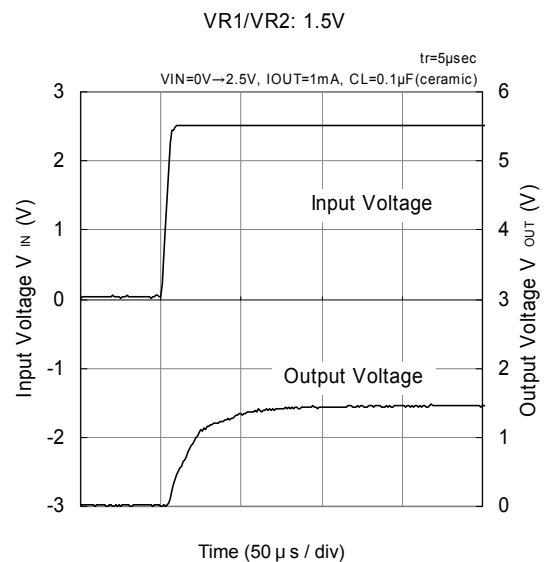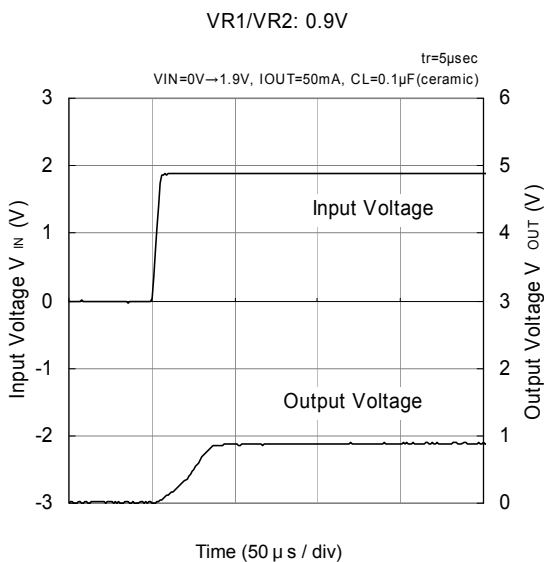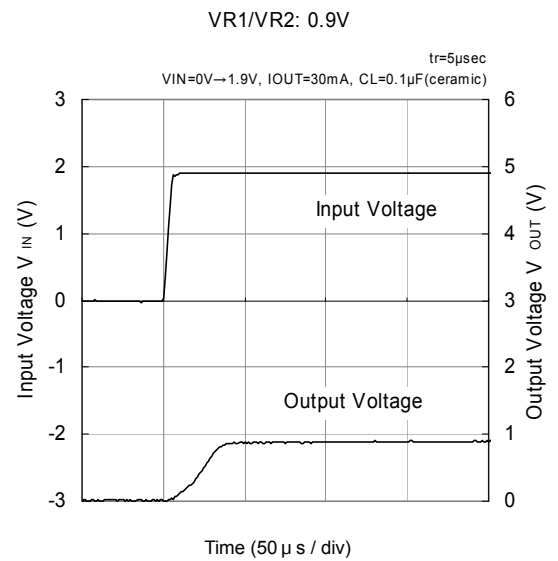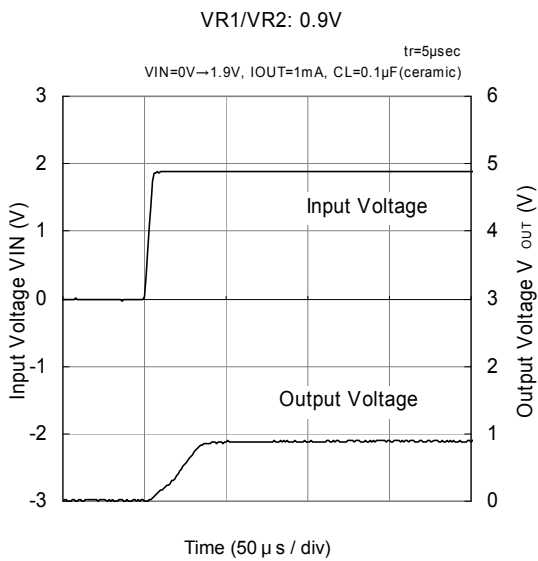



## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (10) Rising Response Time (Continued)

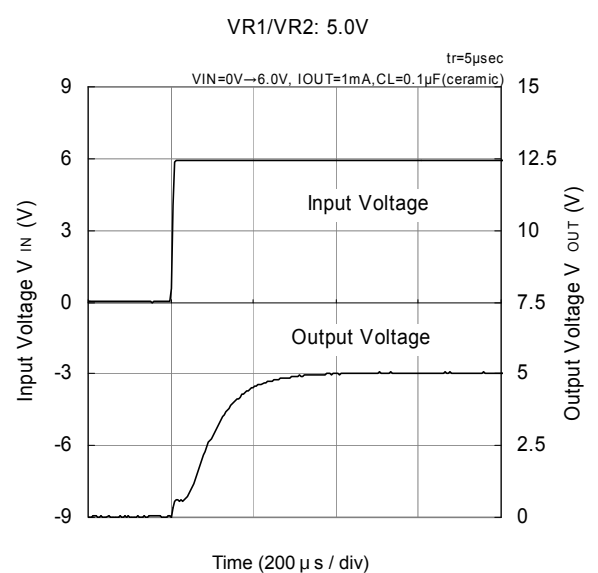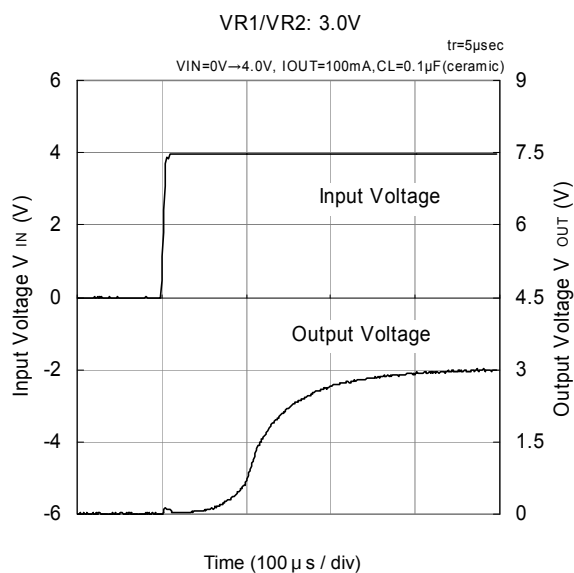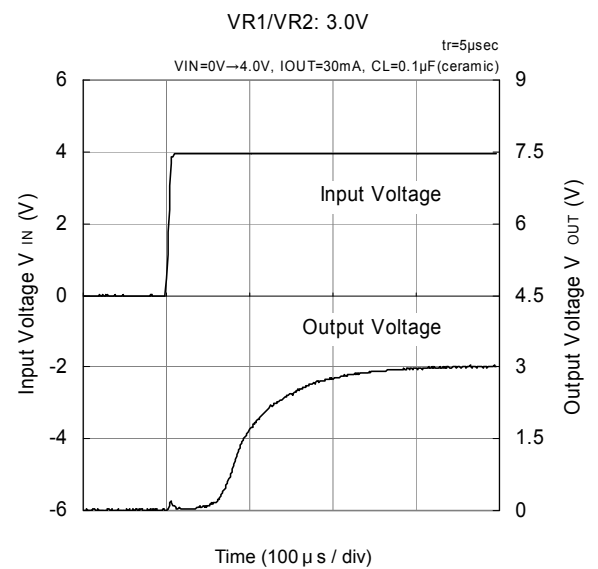
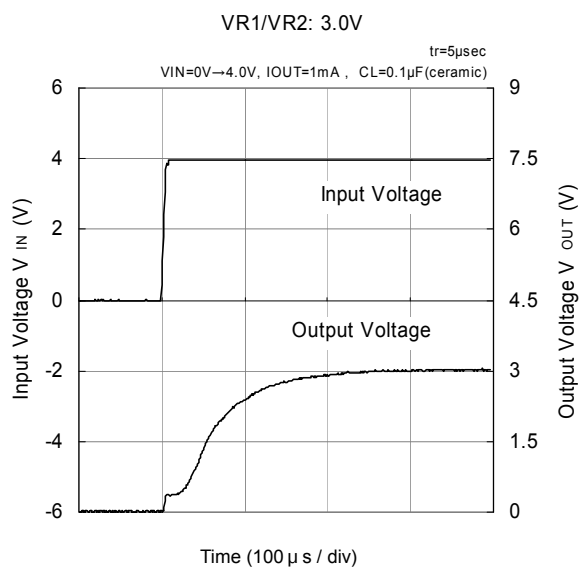
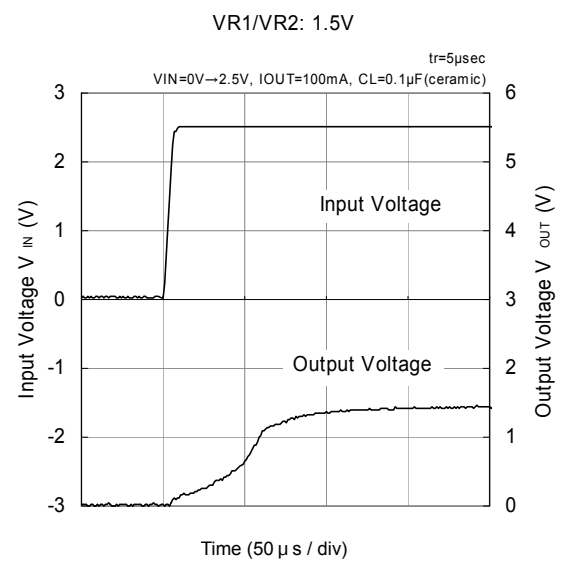
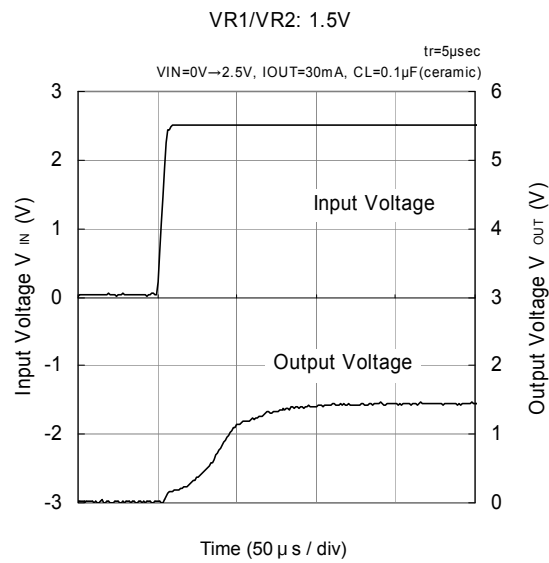


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (10) Rising Response Time (Continued)

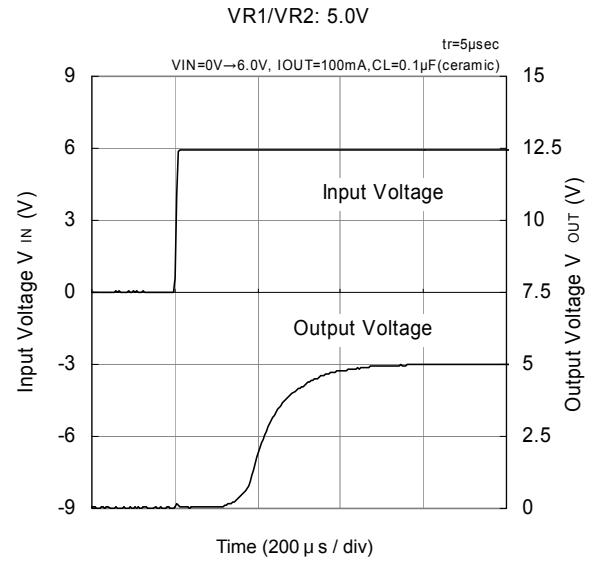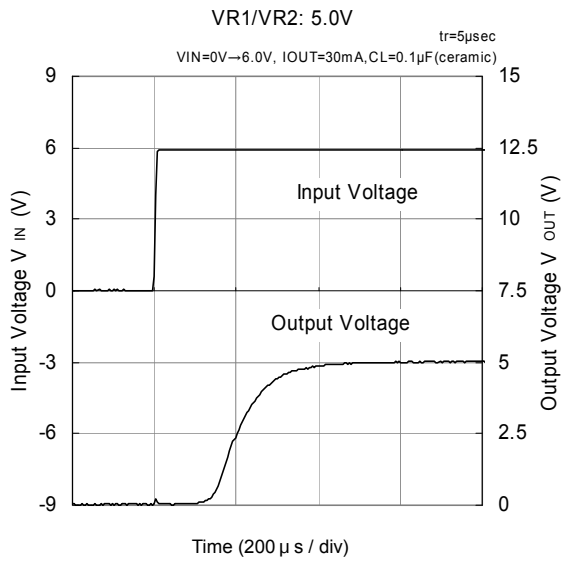


### (11) EN2 Rising Response Time (For XC6412 series)

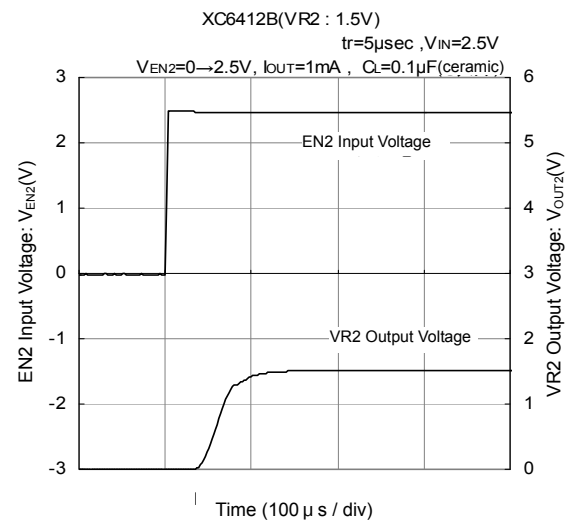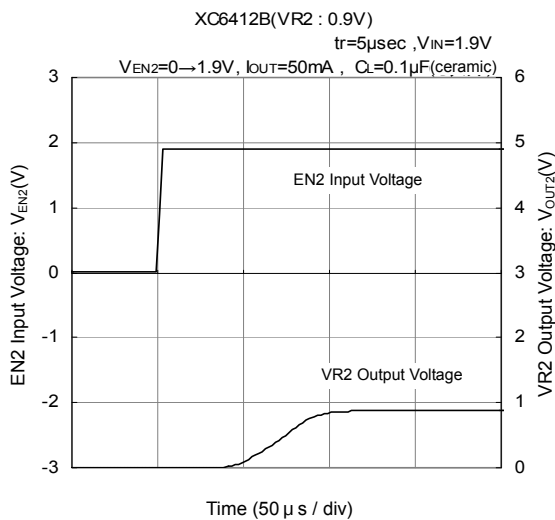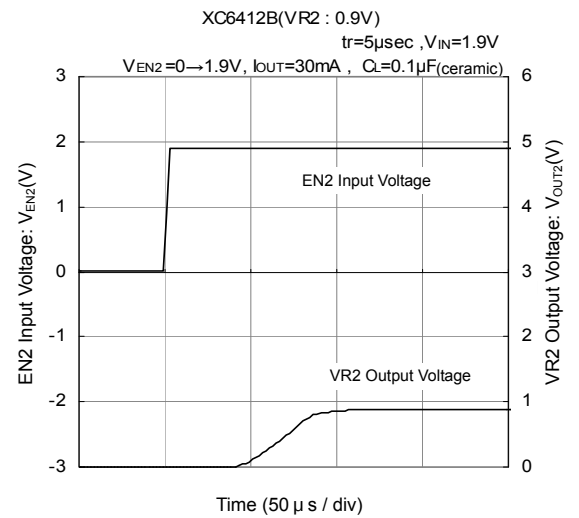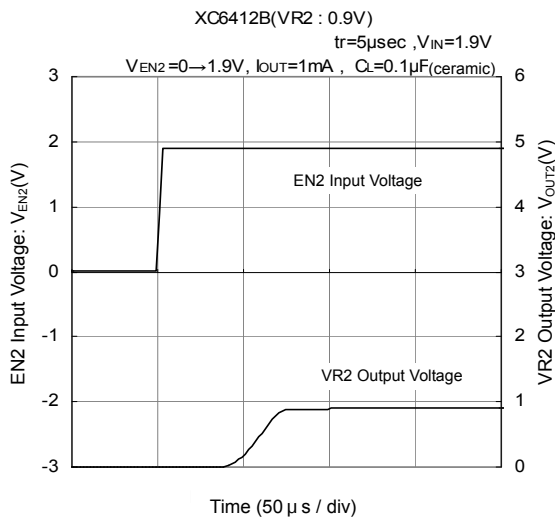


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (11) EN2 Rising Response Time (For XC6412 series) (Continued)


XC6412B (VR2: 1.5V)

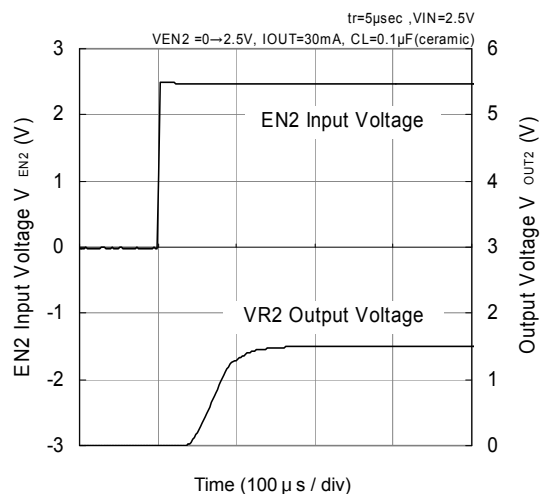


XC6412B (VR2: 1.5V)

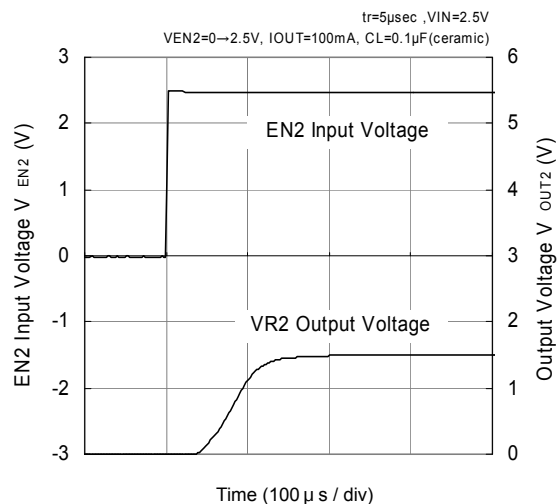


XC6412B (VR2: 3.0V)

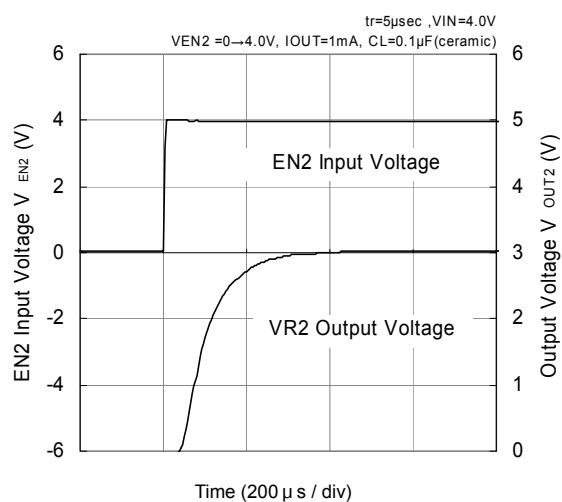


XC6412B (VR2: 3.0V)

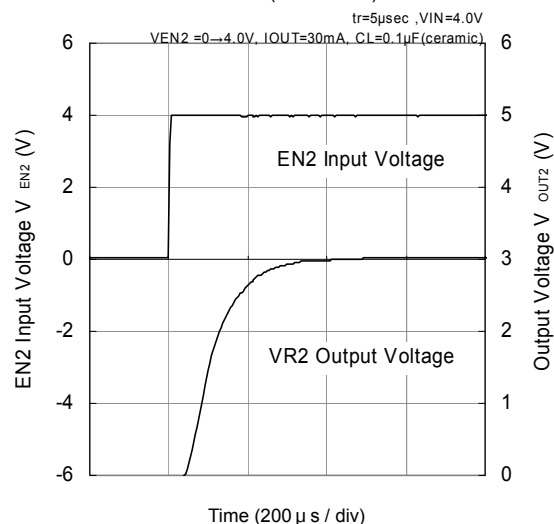

XC6412B (VR2: 3.0V)


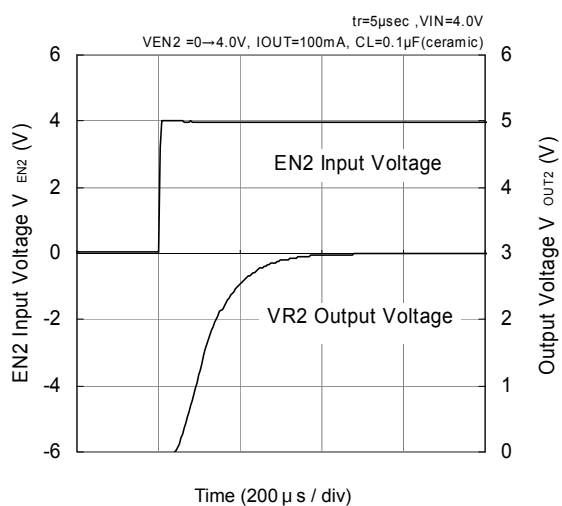


XC6412B (VR2: 5.0V)




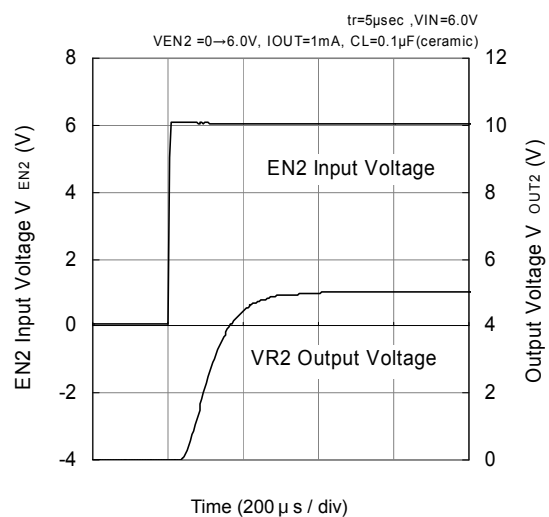


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(11) EN2 Rising Response Time (For XC6412 series)

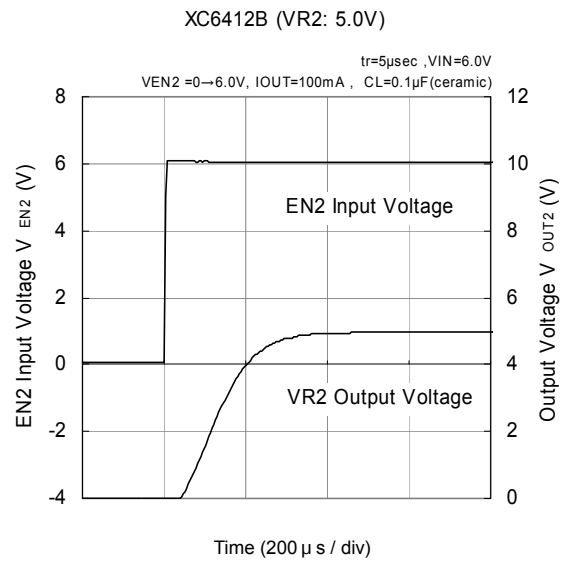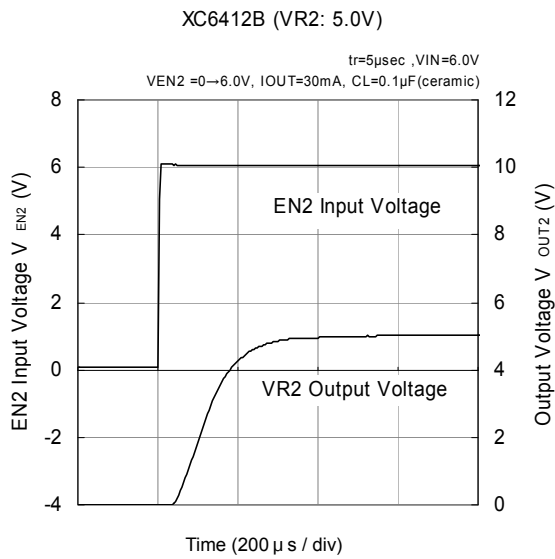


(12) Ripple Rejection Rate

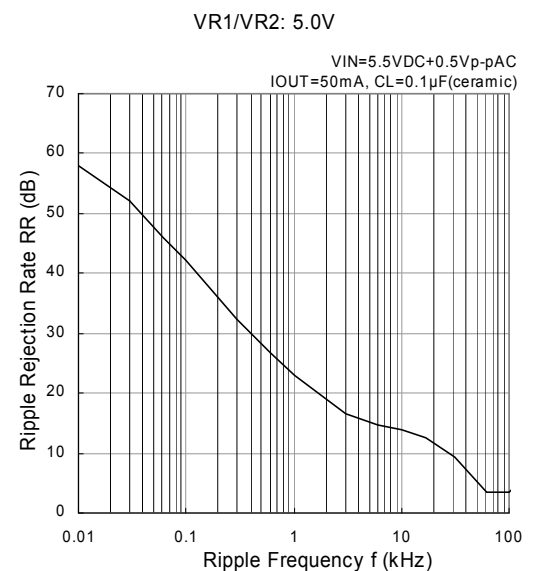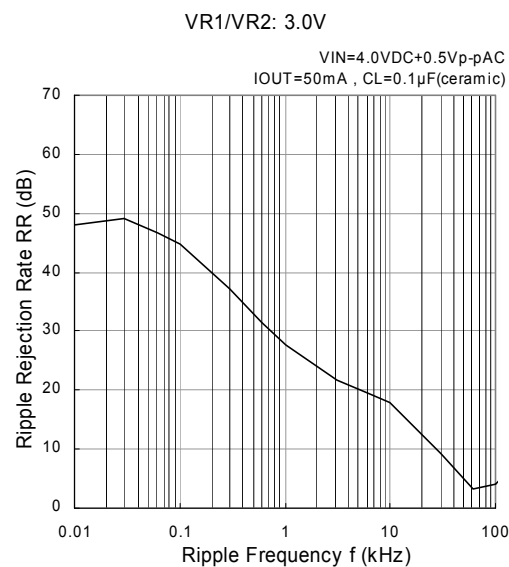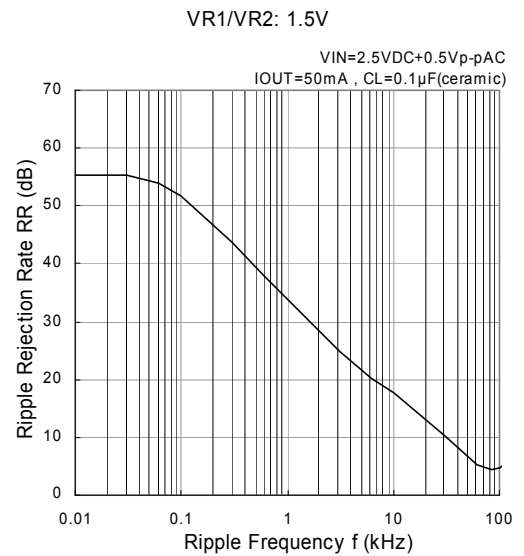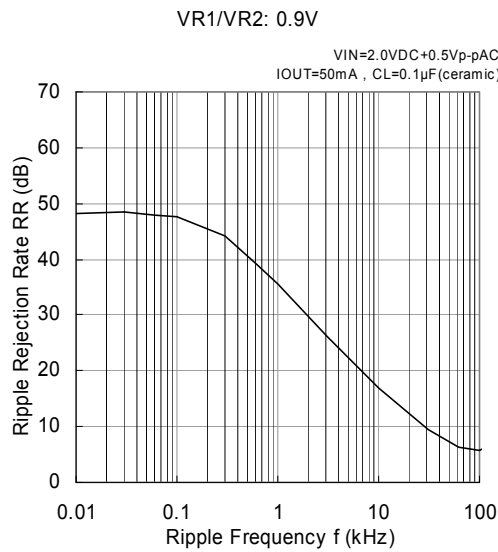


■ PACKAGING INFORMATION

● SOT-25

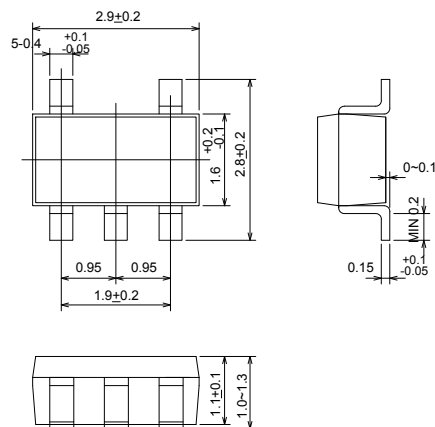

● SOT-26

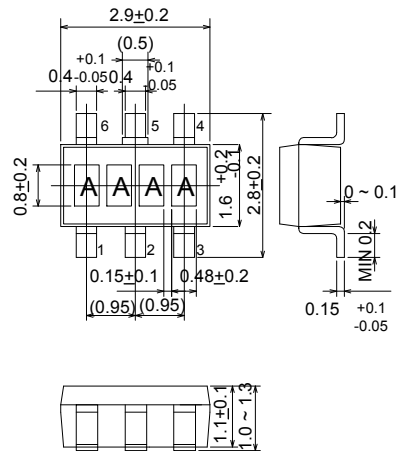

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this catalog is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this catalog.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this catalog.
4. The products in this catalog are not developed, designed, or approved for use with such equipment whose failure or malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.  
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this catalog within the specified ranges.  
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this catalog may be copied or reproduced without the prior permission of Torex Semiconductor Ltd.

**TOREX SEMICONDUCTOR LTD.**