LIMIT 124 ANO / LIMIT 124 EVG DIM ANO
LIMIT 224 ANO / LIMIT 224 EVG DIM ANO

DEEL
PARTIE
TEIL
PART
PARTE
PARTE


A

CE

DELTALIGHT

Delta Light® nv.
Muizelstraat 2
B- 8560 Wevelgem (Moorsele)
Belgium
Phone: +32(0)56 435 735
Fax: +32(0)56 435 736
E-mail: info@deltalight.com
www.deltalight.com

L.E.B. A3

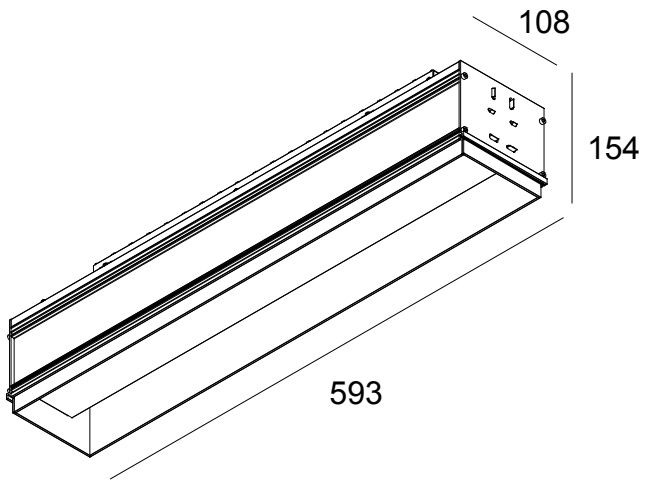


LIMIT 124 ANO
274 30 124 ANO

G5 / 230-240V / 0|50-60 Hz / 1x 1~ECG
1 x T16 24W

LIMIT 124 EVG DIM ANO
274 30 124 ED ANO

DIMMING BY SWITCH DIM / DSI
G5 / 230-240V / 0|50-60 Hz / 1x 1~ECG DIM
1 x T16 24W

CE F 850°C

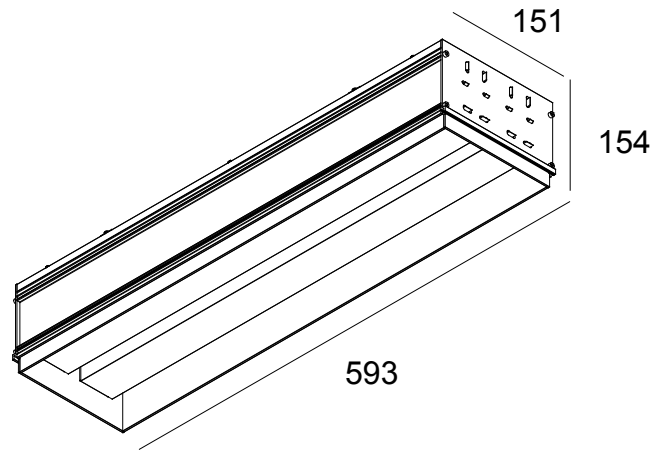

LIMIT 224 ANO
274 35 224 ANO


G5 / 230-240V / 0|50-60 Hz / 1x 2~ECG
2 x T16 24W

LIMIT 224 EVG DIM ANO
274 35 224 ED ANO


DIMMING BY SWITCH DIM / DSI
G5 / 230-240V / 0|50-60 Hz / 1x 2~ECG DIM
2 x T16 24W

CE F 850°C


ACCESSORIES / OPTIONS:



LIMIT 124 BOX
274 10 98 124




LIMIT 224 BOX
274 15 98 224



LIMIT 24 PC
274 38 72 RED
274 38 74 YELLOW
274 38 78 BLUE

WAARSCHUWING	Lees de algemene gebruiksvoorwaarden : **DEEL B**
AVERTISSEMENT	Lire attentivement les conditions générales d'utilisation : **PARTIE B**
WARNUNG	Lesen Sie die allgemeinen Gebrauchsanweisungen : **TEIL B**
WARNING	Read the general directions : **PART B**
AMMONIZIONE	Leggere attentamente le condizioni generali di utilizzazione : **PARTE B**
EDVERTENCIA	Leer atentamente las condiciones generales de uso : **PARTE B**



F Verlichtingstoestellen die geschikt zijn voor rechtstreekse montage op ontvlambare oppervlakken
Luminaires appropriés à un montage direct sur des surfaces inflammables
Für direkte Montage auf entflammbaren Flächen geeignete Lampen
Luminaires suitable for direct mounting on flammable surfaces
Luminarias aptas para montaje directo sobre superficies inflamables
Apparecchi di illuminazione adatti a essere montati direttamente su superfici infiammabili

850°C Gloeitest
Fil incandescent
Glowtest
Glühtest
Ensayo de recocido
Filo incandescente

Bevestiging wand + plafond inbouw
Montage mur + plafond encastré
Montage wand + decke eingebaut
Fixation wall + ceiling recessed
Montaje pared + techo empotrado
Montaggio parete + soffitto incasso

Installeer het armatuur enkel in ruimten waar direct contact met water onmogelijk is.
Cet équipement doit être installé dans des pièces hors de toute projection d'eau.
Diese Leuchte darf nur in Räumen verwendet werden, in denen ein direkter kontakt mit wasser nicht möglich ist
This fitting should only be installed in rooms where direct contact with water is impossible
Este aparato solamente puede ser instalado en habitaciones donde el contacto directo con el agua sea imposible
Questo apparecchio di illuminazione deve essere installato solamente in locali in cui il contatto con l'acqua è impossibile.

Wijzigingen in ontwerp, technische specificaties en handleiding voorbehouden.
Sous réserve de modifications au niveau de la conception, des spécifications techniques et de la notice.
Änderungen von Entwurf, technischen Daten und Bedienungsanleitungen bleiben vorbehalten.

Alterations in design, technical specifications and manuals reserved.
El fabricante se reserva el derecho de realizar modificaciones en el diseño, las especificaciones técnicas y el folleto.
Sotto riserva di modifica per quanto riguarda la concezione, le specifiche tecniche e la nota informativa.


LIMIT 124 ANO / LIMIT 124 EVG DIM ANO
LIMIT 224 ANO / LIMIT 224 EVG DIM ANO

INSTALLATION INSTRUCTIONS - PART A

LIMT 124

01 MAKE A RESERVATION IN THE CEILING AND USE THE OPTION **LIMIT 124 BOX**

MAKE BOX WITH **SAME INNER DIMENSIONS**

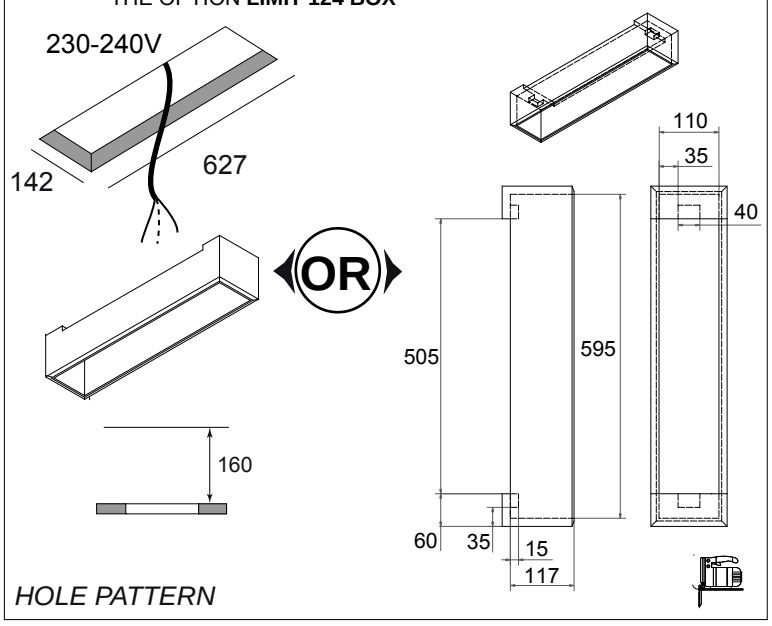


HOLE PATTERN

LIMT 224

01 MAKE A RESERVATION IN THE CEILING AND USE THE OPTION **LIMIT 224 BOX**


MAKE BOX WITH **SAME INNER DIMENSIONS**

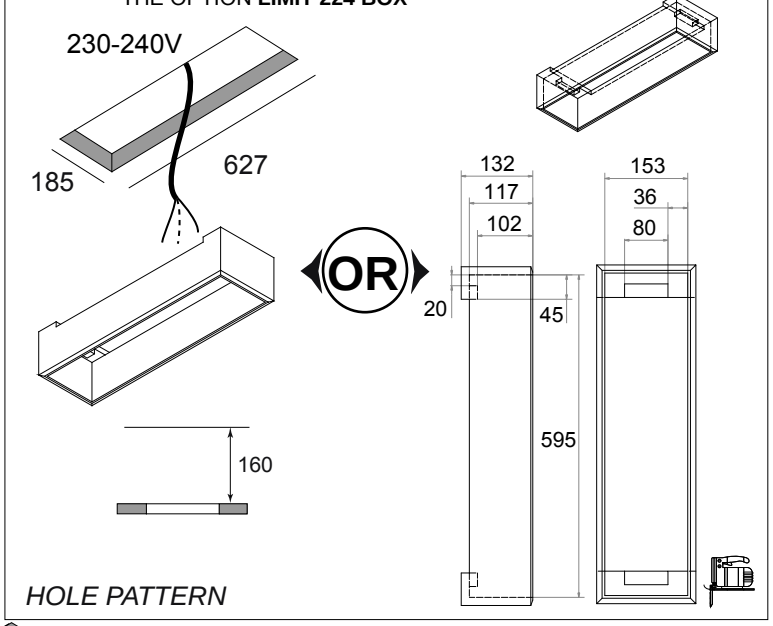


HOLE PATTERN

01. MAKE AN OPENING IN CEILING OR INSTALL RECOMMENDED LIMIT BOX
02. UNSCREW COVER WITH BALLAST
03. MAKE THE ELECTRICAL CONNECTION
04. RESCREW COVER WITH BALLAST
05. INSERT DEVICE IN THE CEILING
06. SCREW PC(S) + DEVICE IN BOX
07. INSERT / REPLACE LAMP(S)
08. PLACE PC('S)
09. SWITCH ON




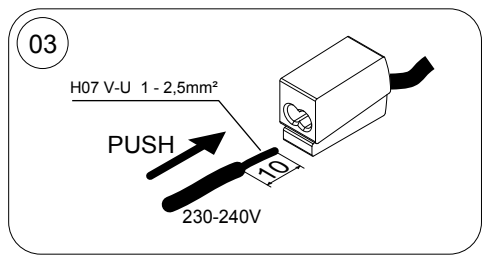

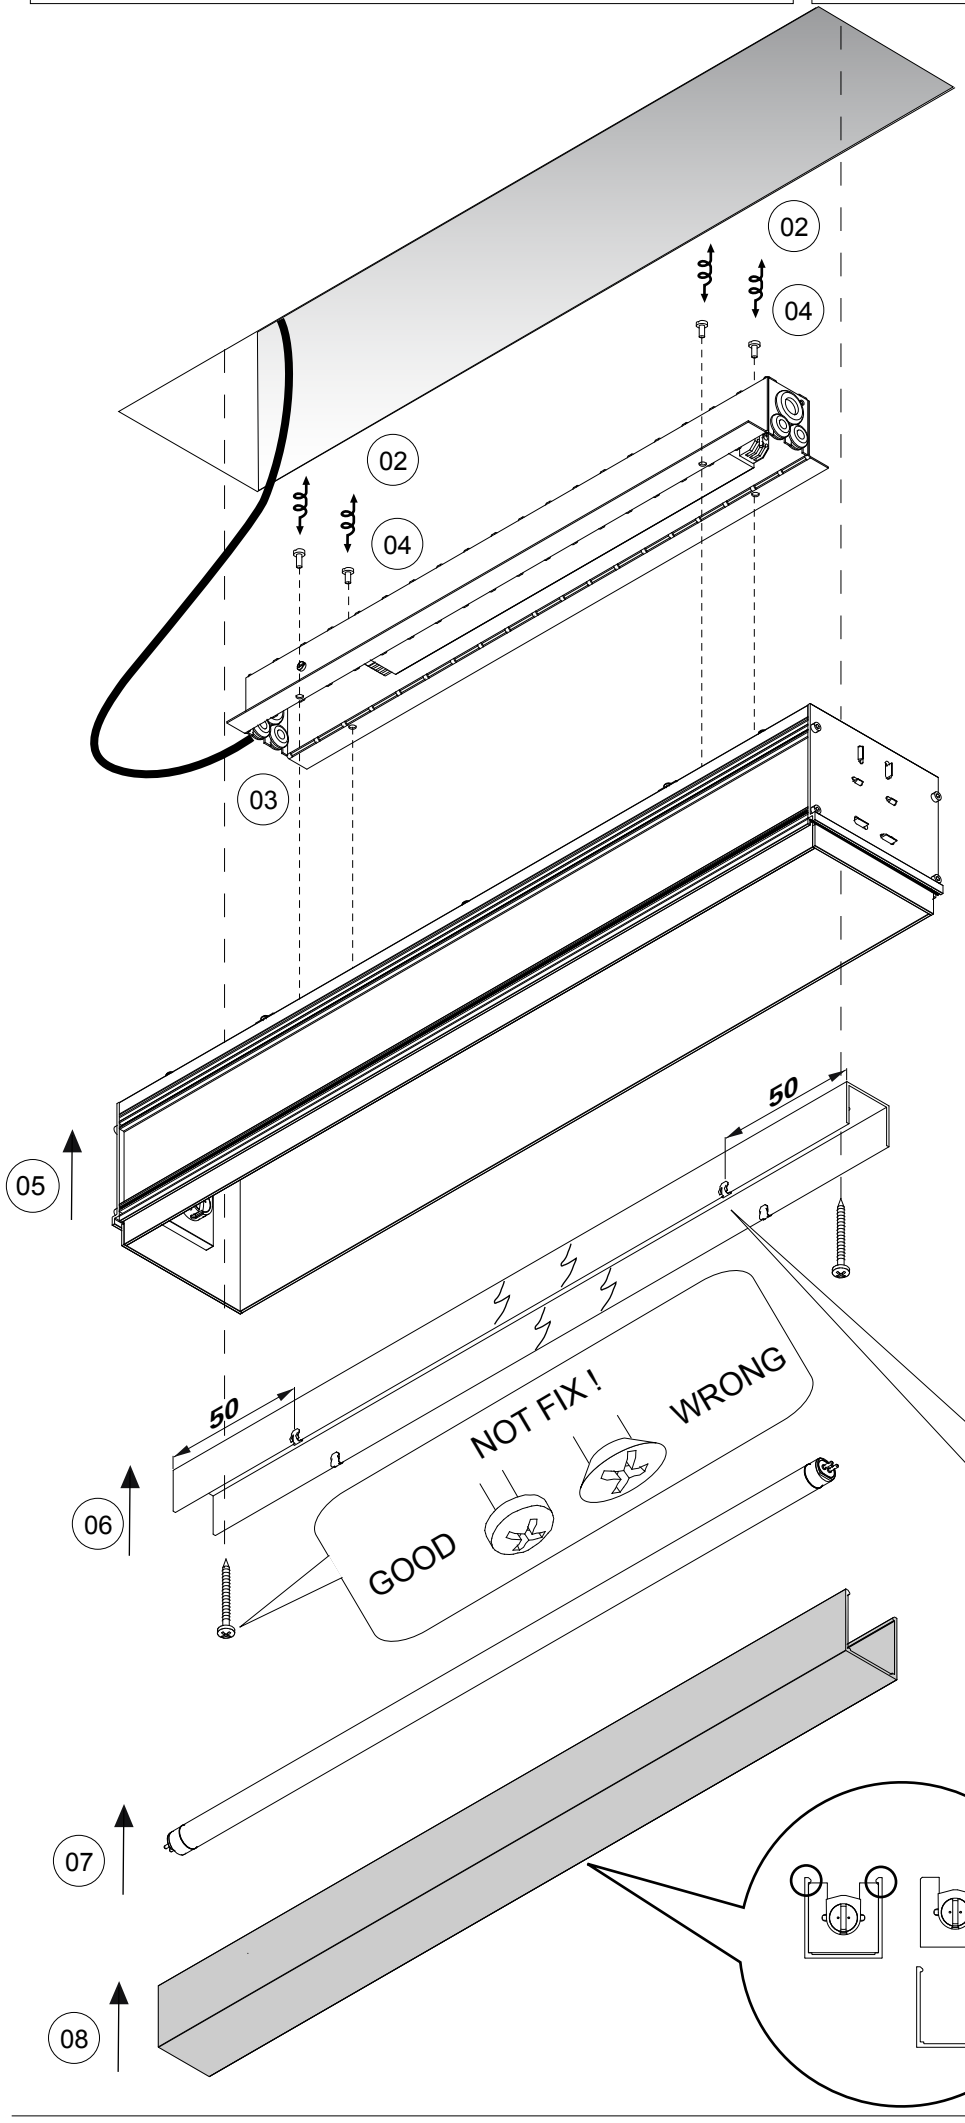


03 FOR **LIMIT 124 EVG DIM ANO**


DIGITAL DIMMING CONTROL

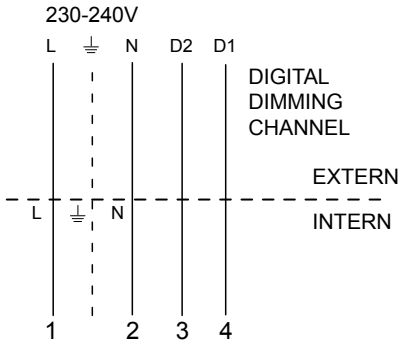



DIMMING BY SWITCH CONTROL

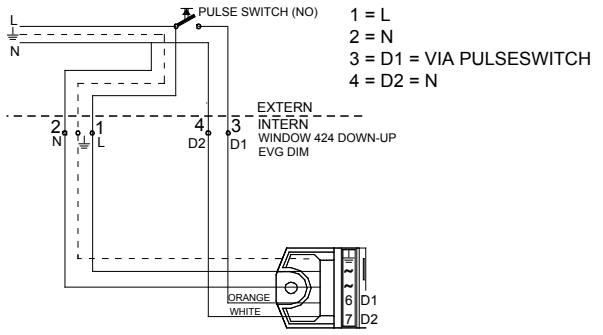

CHECK ALIGNMENT
PC AND U-PROFILE

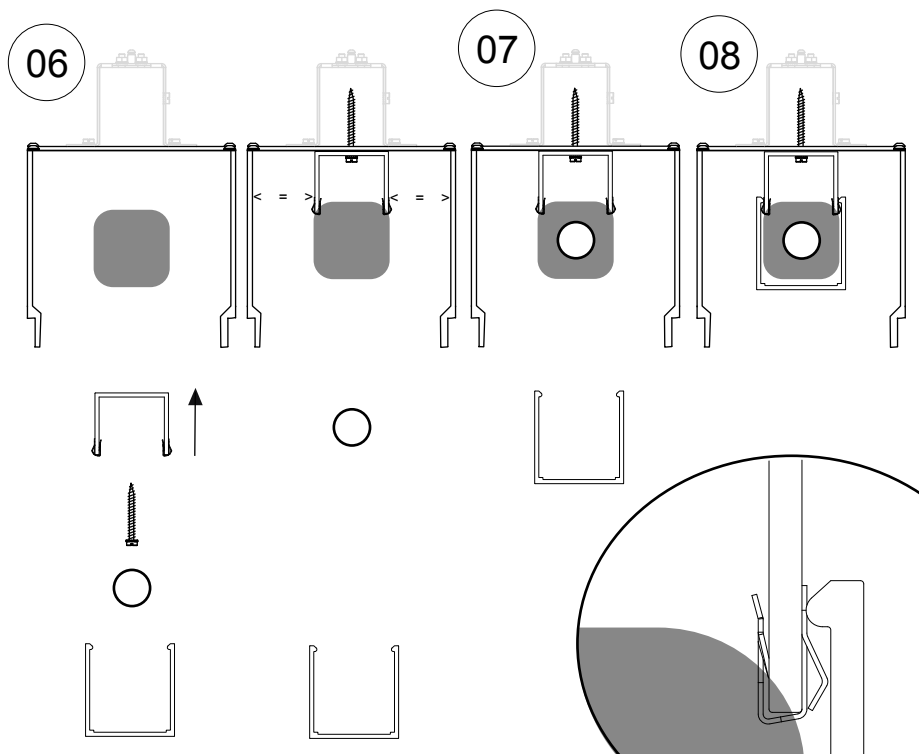

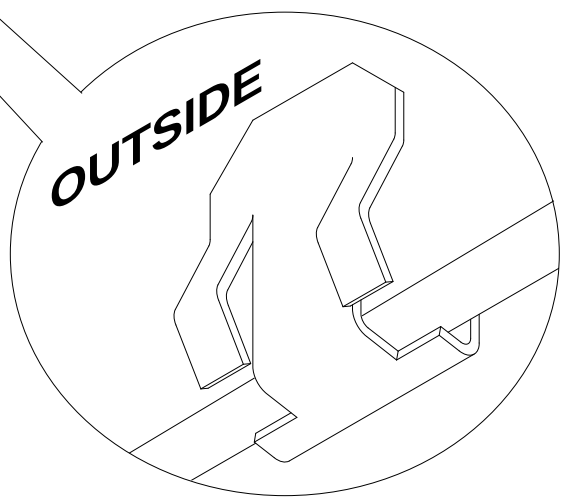

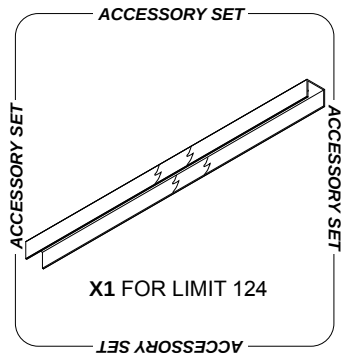

X1 FOR LIMIT 124