

DOWNLIGHT

FCS145/ MCS145

Installation Instruction 安装说明

8238 100 03502




IEC
60598

GB
7000


IP20




Type Number 产品型号	Lamp 光源	Lampholder 灯座	Height 高度
MCS145-070TD	MHN-TD 70W	R×7S	315mm
MCS145-150TD	MHN-TD 150W	R×7S	315mm
SCS145-050TD	SDW-T 50W	PG12-1	315mm
SCS145-100TD	SDW-T100W	PG12-1	315mm
MCS145-035TC	CDM-T35W	G12	315mm
MCS145-070TC	CDM-T 70W	G12	315mm
MCS145-150TC	CDM-T150W	G12	315mm
FCS145-118	PL-C 18W		265mm
FCS145-126	PL-C 26W		265mm
FCS145-218	PL-C 18W		265mm
FCS145-226	PL-C 26W		265mm
FCS145-142T	PLT 42W		265mm
QCS145-120R	PAR38 120W MAX		265mm

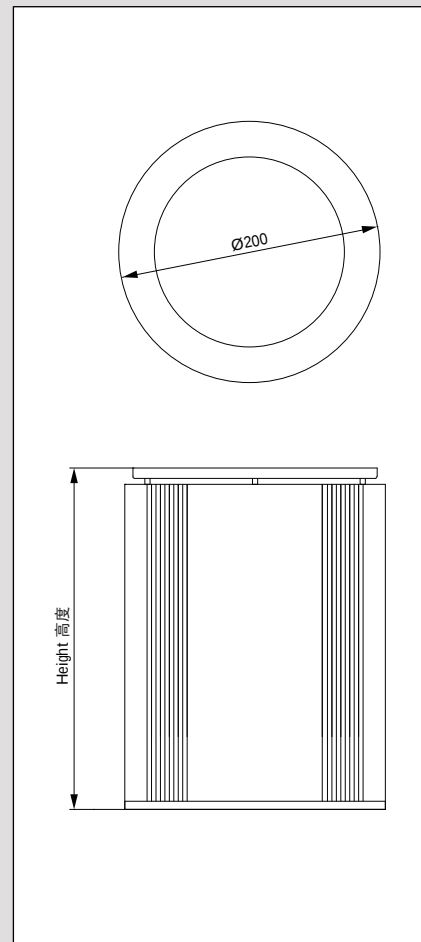


- 1** Make three holes on the ceiling for M4(3x) Screws
在天花板上开3个孔用于安装M4螺钉

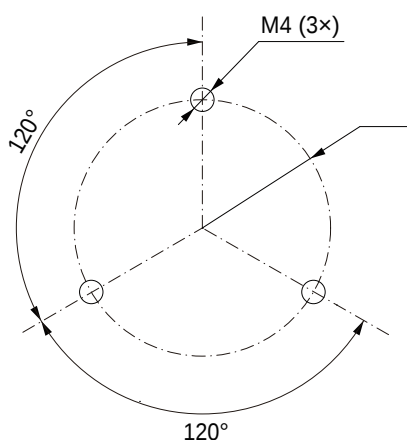


- 2** Fix the Base on the ceiling with three Screws
(not included)
用螺钉将地盘固定在天花板上（螺钉另购）

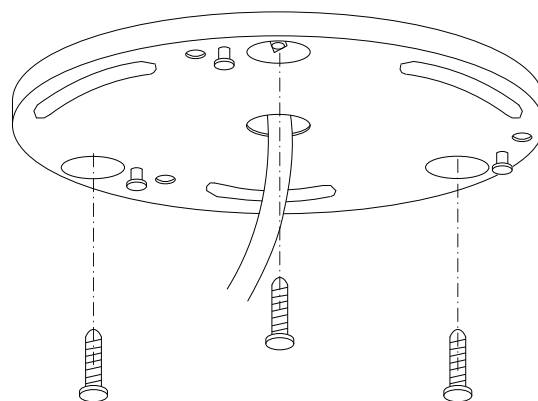


- 3 Open the Cover plate with Screwdriver
用螺丝刀打开盖板

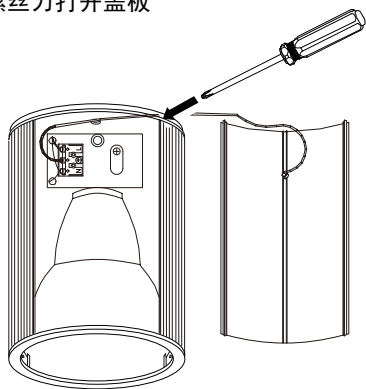


- 4 Connect the Power cord, fix the Power cord by Wire clip
连接电源线，并将电源线固定于线夹

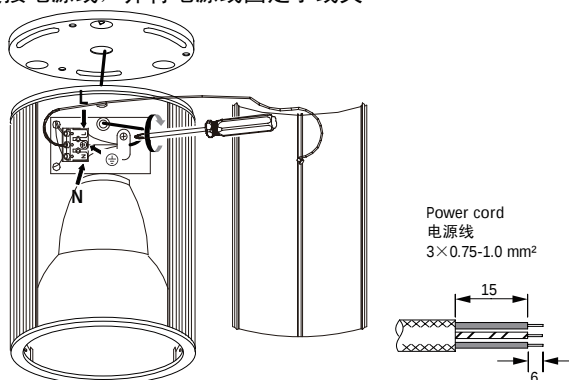


- 5 Make the Luminaire towards the Base on three Screws,
then rotate counter-clockwise to fix
将灯具安装到地盘上并逆时针锁紧螺丝将灯具固定住

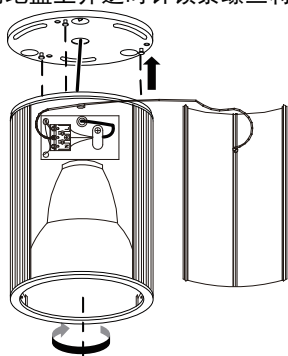


- 6 Rotate the Screw clockwise
顺时针旋转图示螺丝

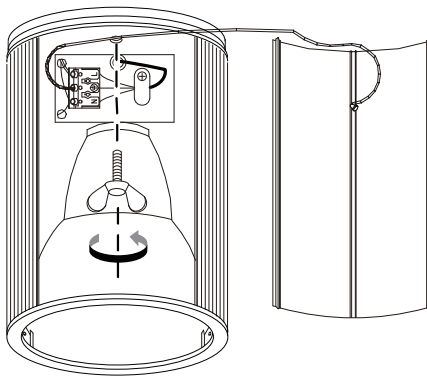

- 7 Install the Cover plate
闭合盖板

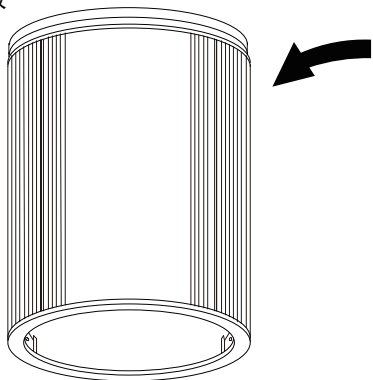


- 8 Install the Lamp
装入光源

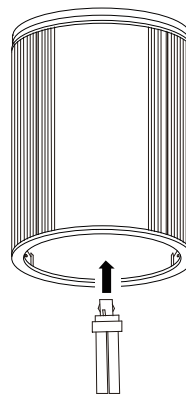


Disconnect the Unit before replacing the Lamp
更换光源请先切断电源


- 3 Open the Cover plate with Screwdriver
用螺丝刀打开盖板

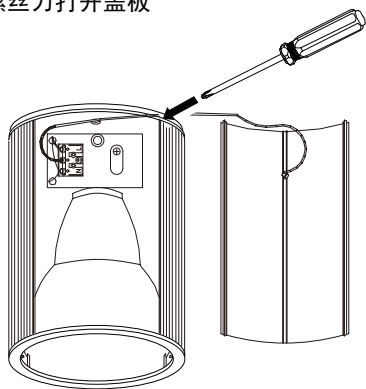


- 4 Connect the Power cord, fix the Power cord by Wire clip
连接电源线，并将电源线固定于线夹

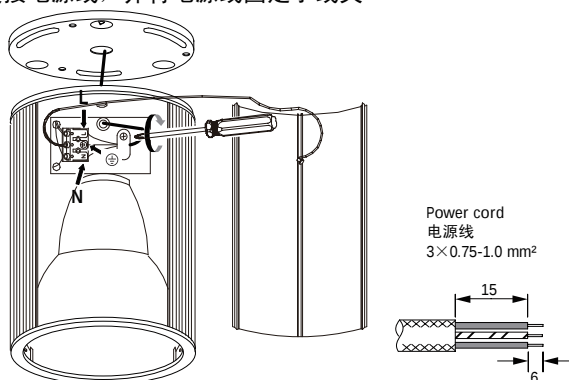


- 5 Make the Luminaire towards the Base on three Screws,
then rotate counter-clockwise to fix
将灯具安装到地盘上并逆时针锁紧螺丝将灯具固定住

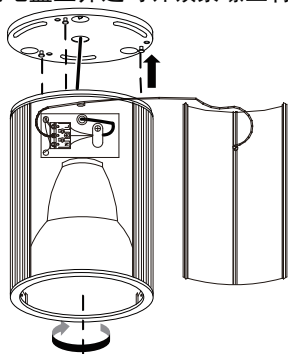


- 6 Rotate the Screw clockwise
顺时针旋转图示螺丝

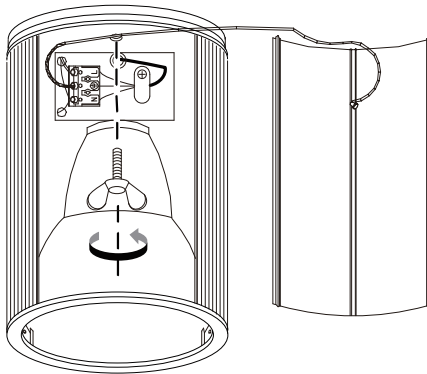

- 7 Install the Cover plate
闭合盖板

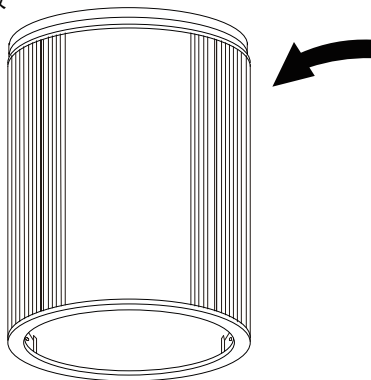

- 8 Install the Lamp
装入光源

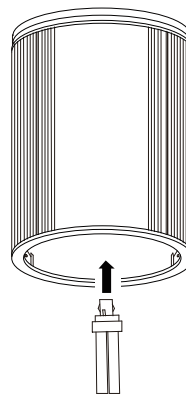

Disconnect the Unit before replacing the Lamp
更换光源前请先切断电源