

- Contents -

▣ General handling precautions	1-2
▣ Electrical & optical parameters & definitions	3
▣ Package type & dimensions	4-5
▣ How to read the part number - Numbering	5
 ▣ Red laser - 635nm	
1. SLD63518240 for Measuring instrument	6
2. SLD63518240C for Measuring instrument	7
3. SLD63518240J for Measuring instrument	8
4. SLD63518260 for Measuring instrument / Barcode Scanner	9
5. SLD63518260 for Measuring instrument / Barcode Scanner	10
6. SLD63518350 for Measuring instrument / Barcode Scanner	11
 ▣ Red laser - 650nm	
7. SLD65018250ST for Barcode Scanner / Pointer	12
8. SLD65038250ST for Barcode Scanner / Pointer	13
9. SLD65018260 for Barcode Scanner / Sensor	14
10. SLD65018271 for DVD-P / DVD-R	15
11. SLD65018271L for DVD-P / DVD-R	16
12. SLD65018271M for DVD-P / DVD-R	17
13. SLD65018371 for DVD-Combo / Industrial Barcode Scanner	18
14. SLD65018871 for DVD-RW	19
 ▣ Infrared laser - 780nm	
15. SLD78018261 for CD-P / CD-R	20
16. SLD78018261F for CD-P / CD-R	21
17. SLD78018262C for LSU (Laser printer)	22
18. SLD78018271D for CD-P (Discman)	23
19. SLD78018360P for LSU (Laser printer)	24
20. SLD78018371 for CD-R / CD-P	25
21. SLD78018971 for CD-RW	26
 ▣ Red / Infra-Red Monolithic laser	
22. 2 Beam laser for DVD-P / DVD-R	27
 ▣ Packing spec.	
26	
 ▣ Labeling spec.	
28	

■ General handling precautions

1. INTRODUCTION

Laser Diode (LD) is a semiconductor device with p-n junction which emit laser / strong coherency / radiation by applying a current in forward direction. However, in difference from usually semiconductor diodes LD have the next peculiarities:

1. LD usually operates at operation current 20-40mA for a low power LD and 80-120mA for a high power LD and low applied forward voltage (usually ~2V). But very important peculiarity of LD is high current densities (~2000-4000A/cm²) during LD operation. Therefore, LD operation generates a significant heat thin active layer.

2. In normal operation mode LD has a relatively small volume for laser output power (3-7mW for low power LD and 25-220mW for high power LD). But they have a very high density of laser radiation in a active layer and on output mirror facet (~10MW/cm² and more). Therefore, there is a optical power limit caused by optical damage of output mirror facet / COD (Catastrophic Optical Damage) /.

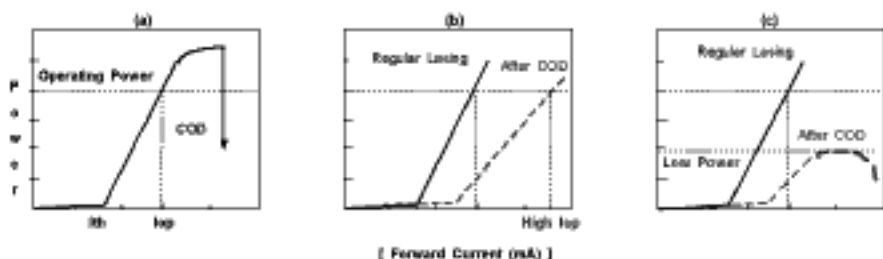


Fig. 1 COD (Catastrophic Optical Damage)

Fig.1 shows us typical COD phenomenon of laser diode. When you operate LD after occurrence of COD, operating current at a specific power would be much higher than before COD (Fig.1(b)). In the worst case, laser power could not reach a required power due to COD (Fig.1(c)). When you drive LD, please pay attention to LD operation under COD power level.

3. LD has a very quick electrical and light response (lower than a few nano-second and less). In connection with these features LD are extremely susceptible to damage caused by current surges. It must be stressed here that even an instantaneous application extra pulse current cause a rapid LD's deterioration. Whenever You handle LD, please pay strict attention to the following precautions.

2. ELECTROSTATIC SURGE PREVENTION.




Fig. 2 Static Electricity Test Circuit




Fig. 3

It is necessary to stress that LD are even more sensitive to electrostatic discharge than Si-based semiconductor chips and require more careful preventive measures. COD also could be happened by small surge due to electrostatic discharge. Fig. 2 shows us a static electricity test circuit of Samsung. When shipping the laser diodes, they would be inserted in antistatic bags to prevent electrostatic charging by transportation. Example of a typical workbench for operation with Laser Diode Fig. 3 :

1. Ground work tables and floors using conductive table mats and floor mats;
2. Ground operators using conductive wrist bands;
3. All used tools as well as soldering irons should be ground.

The grounding should be connected through a resistor of approximately 1M Ω .



Samsung Semiconductor Laser

3. PRECAUTIONS FOR CURRENT DRIVING CIRCUITS

1. While operating, LD can be easily damaged by surge currents which may occur during power on and off of the drive circuit or while adjusting the optical power output.

2. If possible, for standard testing process we recommend to use the special industrial laser diode current driver for example the Melles Griot current source 06 DLD 201 or other type.

3. When you use nonindustrial self designed drivers, please make it sure that the spike current generated in on-off switching of power supplies does not exceed the maximum LD operation current. It is recommended to insert an appropriate filter consisting of a appropriate CR circuit or other slow start circuit when chattering or overshoot shown in Fig. 4. Care must also be taken to prevent surge currents from entering the circuit from external sources. Use an AC noise filter.

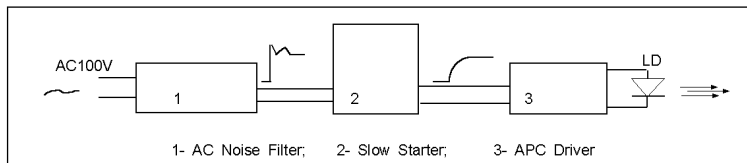


Fig. 4

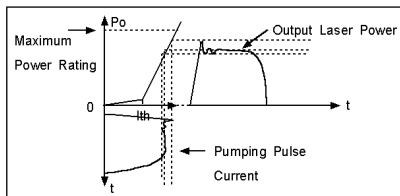


Fig. 5

In pulse mode operation, overshoot in optical power output is sometimes observed.

In this case, try to suppress the overshoot or lower the overshoot power level below the maximum LD operation current shown in Fig. 5.

4. Make all electrical connections secure. An open or short circuit while the LD is on, will result in deterioration. It is desirable to use shielded cables.

5. Use a reliable control for setting the operation current. Improper contacts may result in current surges.

6. While LD is powered up, don't touch probes from a oscilloscope or volt-meter against the circuit or LD terminals.


7. Don't **CONNECT OR DISCONNECT** the laser diode terminals while the **POWER** is **ON**.

4. HEAT DIFFUSION PRECAUTIONS.

1. All main LD's parameters depend on a temperature. Because of LD in operation during generation of heat at the p-n junction/ active layer/ it is necessary provide a good heat conduction mechanism. Usually LD chip is mounted on a heat sink within the package to facilitate effective heat diffusion. Because the heat sink conducts the generated heat to the package flange, it is advisable LD to attach a heat radiator to the LD package flange for better heat diffusion. Thermal contact between the package flange and the heat radiator plate must be good. Furthermore heat diffusion also depends on the design of the radiator plate, i.e., shape, size and material. An appropriate design is required for each industrial application.

2. Ineffective heat diffusion can cause a positive feed back of driving current and limit the usability of the LD. Namely, high temperature of LD package reduces an optical output power below an expected level, which requires higher driving current to maintain the nominal output. As a result, this raises the temperature and requires more higher current. Thus excessive driving current can destroy LD.

5. ON THE SAFETY OF LASER LIGHT



Avoid to look into the laser light directly or directly through an optical system. It is very **DANGEROUS!** Samsung red and IR laser diodes correspond to the class IIIb of the International Radiation Standard of the Laser Products.

Although the typical optical output power of Samsung low power laser ranges from a several mW to 5mW, their power density can reach 1MW/cm². For observing laser beam safely, you always have to use safety goggles that block infrared rays.



Samsung Semiconductor Laser

■ Electrical & optical parameters & definitions


Output optical power	Pop	Maximum allowable instantaneous light power in pulse or CW mode. Up to this output level there are no kinks in the Light-Current curve.
Operating current	Iop	The forward current through the LD which necessary for the LD to produce its specified typical optical output power
Operating voltage	Vop	The forward voltage across the LD by forward operating current
Wavelength	λ_p	The wavelength of the laser spectral line with the greatest intensity
Watt-ampere / Slope / Efficiency	SE	The value of the incremental change in laser beam power for an incremental change in forward current above the threshold current.
Monitoring current	I_m	The monitoring photodiode current is proportional to LD laser output power/ at a specified reverse bias voltage
Threshold current	I_{th}	The forward current value at which the LD begins to produce laser output
Laser beam divergency in horizontal plane	$\theta_{//}$	The laser beam's full angular at the half-maximum intensity points(FWHM), measured in horizontal plane /parallel to the LD p-n junction plane/
Laser beam divergency in vertical plane	θ_{\perp}	The laser beam's full angular at the half-maximum intensity points(FWHN), measured in vertical plane /perpendicular to the LD p-n junction plane/
LD reverse voltage	VR	Maximum admissible reverse bias voltage, which may be applied to the LD without a damage
PD bias voltage	VR_p	Maximum admissible reverse bias voltage, which may be applied to the monitoring PD without a damage
Operating temperature	T_{opr}	Range of the case temperature within which LD may be safety stored
Storage temperature	T_{stg}	Range of the ambient temperature within which LD may be safety stored
Forward current	I_f	Current through the forward biased LD
Forward bias voltage	V_f	Laser diode voltage by an applied forward bias




Samsung Semiconductor Laser

Package 1 : TO-18 (Φ5.6mm)

Top view

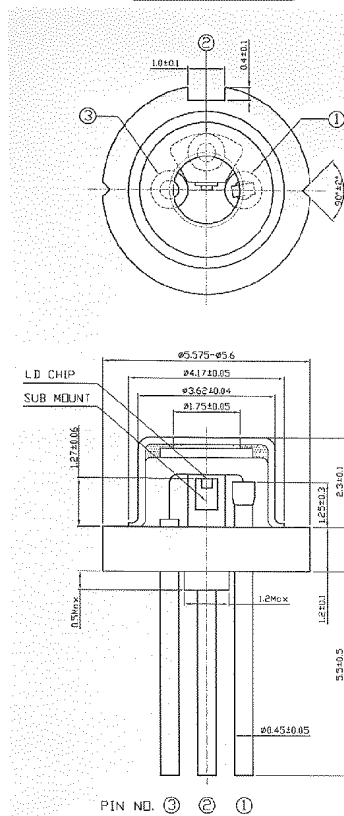


Front view




Package 2 : Φ3.8mm Small size


Top view

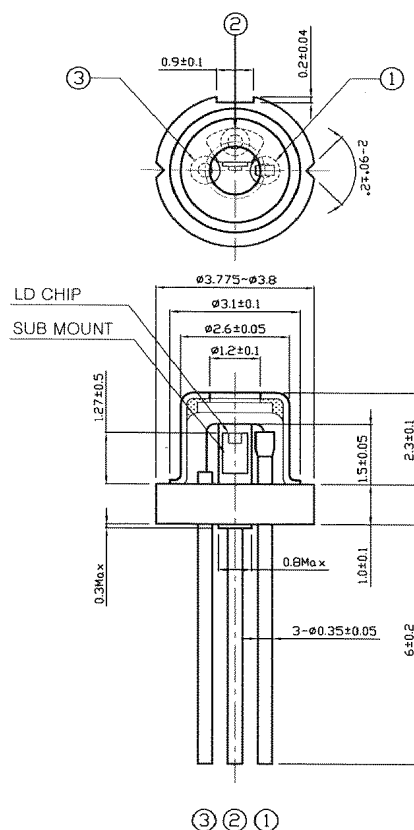

Front view



■ Package 3 : Mold type package

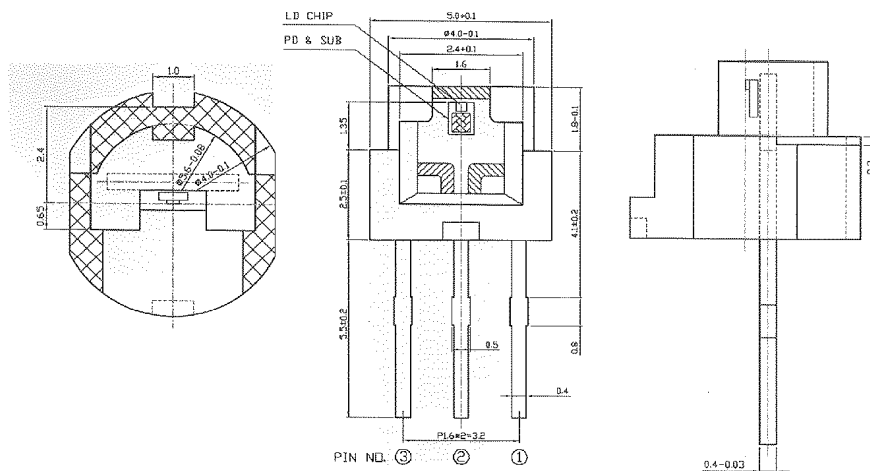

■ How to read the part number - Numbering

Ex.) **SLD** - **650** - **18** - **2** **7** **1** **X**

① ② ③ ④ ⑤ ⑥ ⑦

- ① **Samsung Laser Diode**
- ② **Wavelength** : 635nm, 650nm, 780nm
- ③ **Package type** : 18 ⇒ TO-18 (5.6mm)
38 ⇒ Small package (3.8mm)
★ Suffix 'F' ⇒ Mold type package
- ④ **Optical power** : 2 ⇒ 5mW, 3 ⇒ 7mW, 8 ⇒ 50mW, 9 ⇒ 90mW
- ⑤ **Operating Temp** : 4 ⇒ 40°C, 5 ⇒ 50°C, 6 ⇒ 60°C, 7 ⇒ 70°C
- ⑥ **Pin configuration** : 0 ⇒ LD anode, PD cathode, common
1 ⇒ LD anode, PD anode, common
2 ⇒ LD cathode, PD anode, common
- ⑦ **Suffix** : Derivative parts




1. SLD63518240

■ Application : Measuring Instrument

■ Features

- Lasing wavelength : $\lambda_p = 635\text{nm}$
- Optical output power : $P_o = 5\text{mW (CW)}$
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiode for optical power monitoring
- InGaAlP laser with multi-quantum well structure



[SLD63518240]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +40	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	35	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	38	40	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.7	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.01	0.04	0.1	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	630	637	640	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	6	8	15	degree
	θ_{\perp}	$P_o = 5\text{mW}$	22	33	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.3	0.5	0.7	mW/mA
Astigmatism	As	$P_o = 5\text{mW}$	-	-	-	μm




2. SLD63518240C

■ Application : Measuring Instrument

■ Features

- Lasing wavelength : $\lambda_p = 635\text{nm}$
- Optical output power : $P_o = 5\text{mW}$ (CW)
- Package type : TO-18 [Φ 5.6]
- Built-in photodiode for optical power monitoring
- InGaAlP laser with multi-quantum well structure



[SLD63518240C]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +40	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	35	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	33	36	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.7	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.01	0.04	0.1	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	630	637	640	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	6	8	15	degree
	θ_{\perp}	$P_o = 5\text{mW}$	22	32	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.3	0.5	0.7	mW/mA
Astigmatism	As	$P_o = 5\text{mW}$	-	-	-	μm




3. SLD63518240J

■ Application : Measuring Instrument

■ Features

- Lasing wavelength : $\lambda_p = 635\text{nm}$
- Optical output power : $P_o = 5\text{mW}$ (CW)
- Package type : TO-18 [Φ 5.6]
- Built-in photodiode for optical power monitoring
- InGaAlP laser with multi-quantum well structure



[SLD63518240J]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +40	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	35	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	43	48	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.3	2.7	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.01	0.04	0.1	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	630	637	640	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	6	8	15	degree
	θ_{\perp}	$P_o = 5\text{mW}$	22	32	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.3	0.5	0.7	mW/mA
Astigmatism	As	$P_o = 5\text{mW}$	-	-	-	μm




4. SLD63518250

■ Application : Measuring Instrument, Barcode Scanner

■ Features

- Lasing wavelength : $\lambda_p = 635\text{nm}$
- Optical output power : $P_o = 5\text{mW}$ (CW)
- Package type : TO-18 [Φ 5.6]
- Built-in photodiode for optical power monitoring
- InGaAlP laser with multi-quantum well structure



[SLD63518250]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +50	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	40	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	40	52	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.7	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.1	0.3	0.5	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	630	637	640	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	6	8	10	degree
	θ_{\perp}	$P_o = 5\text{mW}$	30	33	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 2.0	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.4	0.6	0.8	mW/mA
Astigmatism	As	$P_o = 5\text{mW}$	-	-	-	μm




5. SLD63518260 - Preliminary


■ Application : Measuring Instrument, Barcode Scanner

■ Features

- Lasing wavelength : $\lambda_p = 635\text{nm}$
- Optical output power : $P_o = 5\text{mW}$ (CW)
- Package type : TO-18 [Φ 5.6]
- Built-in photodiode for optical power monitoring
- InGaAlP laser with multi-quantum well structure



[SLD63518260]



[SLD63518262]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +60	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	40	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	45	60	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.7	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.1	0.2	0.5	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	630	637	640	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	7	8.5	10	degree
	θ_{\perp}	$P_o = 5\text{mW}$	22	33	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 2.0	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.4	0.65	0.9	mW/mA
Astigmatism	As	$P_o = 5\text{mW}$	-	-	-	μm




6. SLD63518350 - Preliminary


■ Application : Measuring Instrument

■ Features

- Lasing wavelength : $\lambda_p = 635\text{nm}$
- Optical output power : $P_o = 7\text{mW}$ (CW)
- Package type : TO-18 [Φ 5.6]
- Built-in photodiode for optical power monitoring
- High power laser
- InGaAlP laser with multi-quantum well structure



[SLD63518350]



[SLD63518352]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	10	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +50	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	7	-	mW
Threshold current	I_{th}	-	-	30	40	mA
Operating current	I_{op}	$P_o = 7\text{mW}$	-	45	60	mA
Operating voltage	V_{op}	$P_o = 7\text{mW}$	-	2.2	2.7	V
Monitor current	I_m	$P_o = 7\text{mW}$	0.1	0.2	0.5	mA
Lasing wavelength	λ	$P_o = 7\text{mW}$	630	637	640	nm
Beam divergence	$\theta_{//}$	$P_o = 7\text{mW}$	6	8.5	10	degree
	θ_{\perp}	$P_o = 7\text{mW}$	30	33	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 7\text{mW}$	-	-	± 2.0	
	$\Delta\theta_{\perp}$	$P_o = 7\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 7\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.4	0.6	0.8	mW/mA
Astigmatism	As	$P_o = 7\text{mW}$	-	-	-	μm




7. SLD65018250ST

■ Application : Barcode Scanner, Pointer

■ Features

- Lasing wavelength : $\lambda_p = 650\text{nm}$
- Optical output power : $P_o = 5\text{mW}$ (CW)
- Package type : TO-18 [Φ 5.6]
- Built-in photodiode for optical power monitoring
- InGaAlP laser with multi-quantum well structure



[SLD65018250ST]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +50	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	23	35	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	30	40	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.6	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.1	0.2	0.5	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	650	655	660	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	6	8	11	degree
	θ_{\perp}	$P_o = 5\text{mW}$	22	30	38	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 2.0	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 3.0	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.5	0.75	0.95	mW/mA
Astigmatism	As	$P_o = 5\text{ mW}$	-	-	-	μm




8. SLD65038250ST

■ Application : Barcode Scanner, Pointer

■ Features

- Lasing wavelength : $\lambda_p = 650\text{nm}$
- Optical output power : $P_o = 5\text{mW}$ (CW)
- Package type : Small Package [$\Phi 3.8$]
- Built-in photodiode for optical power monitoring
- Ultra small package
- InGaAlP laser with multi-quantum well structure



[SLD65038250ST]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +50	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	35	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	35	45	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.6	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.08	0.2	0.5	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	650	655	660	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	6	9	11	degree
	θ_{\perp}	$P_o = 5\text{mW}$	22	30	38	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 2.0	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 3.0	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.2	0.5	0.8	mW/mA
Astigmatism	As	$P_o = 5\text{mW}$	-	-	-	μm




9. SLD65018260

■ Application : Barcode Scanner, Sensor

■ Features

- Lasing wavelength : $\lambda_p = 650\text{nm}$
- Optical output power : $P_o = 5\text{mW}$ (CW)
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiode for optical power monitoring
- InGaAlP laser with multi-quantum well structure



[SLD65018260]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +60	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	40	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	40	50	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.6	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.1	0.2	0.5	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	648	651	654	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	7	8	9.5	degree
	θ_{\perp}	$P_o = 5\text{mW}$	26	29	32	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.4	0.65	0.9	mW/mA
Astigmatism	As	$P_o = 5\text{ mW}$	-	8	10	μm




10. SLD65018271

■ Application : DVD-P, DVD-R

■ Features

- Lasing wavelength : $\lambda_p = 650\text{nm}$
- Optical output power : $P_o = 5\text{mW (CW)}$
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiodes for optical power monitoring
- InGaAlP laser with multi-quantum well structure



[SLD65018271]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	40	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	40	50	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.6	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.1	0.2	0.4	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	645	654	657	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	7	8	10	degree
	θ_{\perp}	$P_o = 5\text{mW}$	25	28	32	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.4	0.65	0.9	mW/mA
Astigmatism	As	$P_o = 5\text{ mW}$	-	-	12	μm




11. SLD65018271L

■ Application : DVD-P, DVD-R

■ Features

- Lasing wavelength : $\lambda_p = 650\text{nm}$
- Optical output power : $P_o = 5\text{mW (CW)}$
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiodes for optical power monitoring
- InGaAlP laser with multi-quantum well structure



[SLD65018271L]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	35	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	37	40	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.6	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.1	0.2	0.3	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	645	654	657	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	7	8	10	degree
	θ_{\perp}	$P_o = 5\text{mW}$	25	28	33	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.5	0.7	0.9	mW/mA
Astigmatism	As	$P_o = 5\text{ mW}$	-	-	12	μm




12. SLD65018271M

■ Application : DVD-P, DVD-R

■ Features

- Lasing wavelength : $\lambda_p = 650\text{nm}$
- Optical output power : $P_o = 5\text{mW}$ (CW)
- Package type : TO-18 [Φ 5.6]
- Built-in photodiodes for optical power monitoring
- Multi-mode laser
- InGaAlP laser with multi-quantum well structure



[SLD65018271M]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	59	75	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	72	90	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	2.2	2.6	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.1	0.2	0.5	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	645	658	660	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	7	8	12	degree
	θ_{\perp}	$P_o = 5\text{mW}$	26	35	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.4	0.6	0.8	mW/mA
Astigmatism	A_s	$P_o = 5\text{mW}$	-	-	15	μm




13. SLD65018371


■ Application : DVD-Combo, Industrial barcode scanner

■ Features

- Lasing wavelength : $\lambda_p = 650\text{nm}$
- Optical output power : $P_o = 7\text{mW (CW)}$
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiode for optical power monitoring
- High power laser
- InGaAlP laser with multi-quantum well structure



[SLD65018371]



[SLD65018372]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	10	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	7	-	mW
Threshold current	I_{th}	-	-	27	45	mA
Operating current	I_{op}	$P_o = 7\text{mW}$	-	37	43	mA
Operating voltage	V_{op}	$P_o = 7\text{mW}$	-	2.25	2.6	V
Monitor current	I_m	$P_o = 7\text{mW}$	0.1	0.15	0.5	mA
Lasing wavelength	λ	$P_o = 7\text{mW}$	645	655	660	nm
Beam divergence	$\theta_{//}$	$P_o = 7\text{mW}$	7	9	10	degree
	θ_{\perp}	$P_o = 7\text{mW}$	24	26.5	33	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 7\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 7\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 7\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.5	0.75	1.0	mW/mA
Astigmatism	As	$P_o = 7\text{mW}$	-	-	15	μm




14. SLD65018871 - Preliminary

■ Application : DVD-RW, DVD-RAM

■ Features

- Lasing wavelength : $\lambda_p = 650\text{nm}$
- Optical output power : $P_o = 50\text{mW (CW)}$
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiode for optical power monitoring
- High power laser



[SLD65018871]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	70	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	50	-	mW
Threshold current	I_{th}	-	-	35	55	mA
Operating current	I_{op}	$P_o = 50\text{mW}$	-	85	100	mA
Operating voltage	V_{op}	$P_o = 50\text{mW}$	-	2.5	2.95	V
Monitor current	I_m	$P_o = 50\text{mW}$	-	-	-	mA
Lasing wavelength	λ	$P_o = 50\text{mW}$	650	656	660	nm
Beam divergence	$\theta_{//}$	$P_o = 50\text{mW}$	6	8.5	10	degree
	θ_{\perp}	$P_o = 50\text{mW}$	19	22	25	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 50\text{mW}$	-	-	± 2.0	
	$\Delta\theta_{\perp}$	$P_o = 50\text{mW}$	-	-	± 3.0	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 50\text{mW}$	-	-	-	μm
Differential efficiency	η	-	0.8	1.0	-	mW/mA
Astigmatism	As	$P_o = 50\text{mW}$	-	-	-	μm




15. SLD78018261

■ Application : CD-P, CD-R

■ Features

- Lasing wavelength : $\lambda_p = 780\text{nm}$
- Optical output power : $P_o = 3\text{mW (CW)}$
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiode for optical power monitoring
- AlGaAs laser with multi-quantum well structure



[SLD78018261]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	5	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	3	-	mW
Threshold current	I_{th}	-	-	40	50	mA
Operating current	I_{op}	$P_o = 3\text{mW}$	-	46	55	mA
Operating voltage	V_{op}	$P_o = 3\text{mW}$	-	1.9	2.3	V
Monitor current	I_m	$P_o = 3\text{mW}$	0.1	0.2	0.5	mA
Lasing wavelength	λ	$P_o = 3\text{mW}$	770	788	810	nm
Beam divergence	$\theta_{//}$	$P_o = 3\text{mW}$	10	12.5	14	degree
	θ_{\perp}	$P_o = 3\text{mW}$	20	36	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 3\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 3\text{mW}$	-	-	± 3.0	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 3\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.2	0.4	0.6	mW/mA
Astigmatism	As	$P_o = 3\text{mW}$	-	-	-	μm




16. SLD78018261F

■ Application : CD-P

■ Features

- Lasing wavelength : $\lambda_p = 780\text{nm}$
- Optical output power : $P_o = 3\text{mW}$ (CW)
- Package type : Plastic mold Package
- Built-in photodiodes for optical power monitoring
- AlGaAs laser with multi-quantum well structure



[SLD78018261F]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	5	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	$-10 \sim +70$	$^\circ\text{C}$
Storage temperature	T_{stg}	$-40 \sim +85$	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	3	-	mW
Threshold current	I_{th}	-	-	40	50	mA
Operating current	I_{op}	$P_o = 3\text{mW}$	-	1.9	2.3	mA
Operating voltage	V_{op}	$P_o = 3\text{mW}$	0.1	0.2	0.5	V
Monitor current	I_m	$P_o = 3\text{mW}$	770	785	810	mA
Lasing wavelength	λ	$P_o = 3\text{mW}$	9	12	14	nm
Beam divergence	$\theta_{//}$	$P_o = 3\text{mW}$	20	35	40	degree
	θ_{\perp}	$P_o = 3\text{mW}$	-	-	± 1.5	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 3\text{mW}$	-	-	± 3.0	
	$\Delta\theta_{\perp}$	$P_o = 3\text{mW}$	-	-	± 60	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 3\text{mW}$	0.2	0.35	0.6	μm
Differential efficiency	η	-	-	-	-	mW/mA
Astigmatism	As	$P_o = 3\text{mW}$	-	-	-	μm




17. SLD78018262C

■ Application : LSU (Laser printer)

■ Features

- Lasing wavelength : $\lambda_p = 780\text{nm}$
- Optical output power : $P_o = 3\text{mW}$ (CW)
- Package type : TO-18 [Φ 5.6]
- Built-in photodiode for optical power monitoring
- AlGaAs laser with multi-quantum well structure



[SLD78018262C]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	5	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +60	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	3	-	mW
Threshold current	I_{th}	-	-	40	50	mA
Operating current	I_{op}	$P_o = 3\text{mW}$	-	45	55	mA
Operating voltage	V_{op}	$P_o = 3\text{mW}$	-	1.9	2.3	V
Monitor current	I_m	$P_o = 3\text{mW}$	0.15	0.2	0.47	mA
Lasing wavelength	λ	$P_o = 3\text{mW}$	770	787	810	nm
Beam divergence	$\theta_{//}$	$P_o = 3\text{mW}$	10	12.5	14	degree
	θ_{\perp}	$P_o = 3\text{mW}$	30	36	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 3\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 3\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 3\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.3	0.42	0.6	mW/mA
Astigmatism	As	$P_o = 3\text{mW}$	-	-	-	μm




18. SLD78018271D

■ Application : Disk-man (CD-P)

■ Features

- Lasing wavelength : $\lambda_p = 780\text{nm}$
- Optical output power : $P_o = 3\text{mW}$ (CW)
- Package type : TO-18 [Φ 5.6]
- Built-in photodiode for optical power monitoring
- AlGaAs laser with multi-quantum well structure



[SLD78018271D]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	4	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	3	-	mW
Threshold current	I_{th}	-	-	23	25	mA
Operating current	I_{op}	$P_o = 3\text{mW}$	-	26	28	mA
Operating voltage	V_{op}	$P_o = 3\text{mW}$	-	1.9	2.3	V
Monitor current	I_m	$P_o = 3\text{mW}$	0.1	0.2	0.6	mA
Lasing wavelength	λ	$P_o = 3\text{mW}$	770	785	810	nm
Beam divergence	$\theta_{//}$	$P_o = 3\text{mW}$	7.5	9.8	15	degree
	θ_{\perp}	$P_o = 3\text{mW}$	20	33	45	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 3\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 3\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 3\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.7	0.89	1.1	mW/mA
Astigmatism	As	$P_o = 3\text{mW}$	-	-	-	μm




19. SLD78018360P


■ Application : LSU (Laser printer)

■ Features


- Lasing wavelength : $\lambda_p = 780\text{nm}$
- Optical output power : $P_o = 5\text{mW}$ (CW)
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiode for optical power monitoring
- AlGaAs laser with multi-quantum well structure



[SLD78018360P]



[SLD78018361P]



[SLD78018362P]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +60	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	5	-	mW
Threshold current	I_{th}	-	-	30	45	mA
Operating current	I_{op}	$P_o = 5\text{mW}$	-	45	60	mA
Operating voltage	V_{op}	$P_o = 5\text{mW}$	-	1.9	2.3	V
Monitor current	I_m	$P_o = 5\text{mW}$	0.2	0.4	1.0	mA
Lasing wavelength	λ	$P_o = 5\text{mW}$	770	785	810	nm
Beam divergence	$\theta_{//}$	$P_o = 5\text{mW}$	8	11	15	degree
	θ_{\perp}	$P_o = 5\text{mW}$	25	29	33	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5\text{mW}$	-	-	± 2.0	
	$\Delta\theta_{\perp}$	$P_o = 5\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.2	0.4	0.6	mW/mA
Astigmatism	$\frac{(P_{max}-P_{min}) \times 100}{P_{min}}$	100Hz pulse rate at .9 & .1 duty cycle	-	5%	10%	μm




20. SLD78018371

■ Application : CD-R, CD-P

■ Features

- Lasing wavelength : $\lambda_p = 780\text{nm}$
- Optical output power : $P_o = 7\text{mW (CW)}$
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiode for optical power monitoring
- High power laser
- AlGaAs laser with multi-quantum well structure



[SLD78018371]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	10	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	7	-	mW
Threshold current	I_{th}	-	-	40	50	mA
Operating current	I_{op}	$P_o = 7\text{mW}$	-	47	63	mA
Operating voltage	V_{op}	$P_o = 7\text{mW}$	-	2.0	2.3	V
Monitor current	I_m	$P_o = 7\text{mW}$	0.1	0.2	0.5	mA
Lasing wavelength	λ	$P_o = 7\text{mW}$	780	786	810	nm
Beam divergence	$\theta_{//}$	$P_o = 7\text{mW}$	8	12	14	degree
	θ_{\perp}	$P_o = 7\text{mW}$	35	41	45	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 7\text{mW}$	-	-	± 1.5	
	$\Delta\theta_{\perp}$	$P_o = 7\text{mW}$	-	-	± 3.0	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 7\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.6	0.86	1.1	mW/mA
Astigmatism	As	$P_o = 7\text{mW}$	-	-	15	μm




21. SLD78018971 - Preliminary

■ Application : CD-RW

■ Features

- Lasing wavelength : $\lambda_p = 785\text{nm}$
- Optical output power : $P_o = 100\text{mW}$ (CW), $P_o = 220\text{mW}$ (Pulse)
- Package type : TO-18 [$\Phi 5.6$]
- Built-in photodiode for optical power monitoring
- High power laser



[SLD78018971]

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	100	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +65 (CW) -10 ~ +70 (Pulse)	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Optical output power	P_o	-	-	90	-	mW
Threshold current	I_{th}	-	-	45	55	mA
Operating current	I_{op}	$P_o = 90\text{mW}$	-	130	150	mA
Operating voltage	V_{op}	$P_o = 90\text{mW}$	-	2.3	2.5	V
Monitor current	I_m	$P_o = 90\text{mW}$	-	-	-	mA
Lasing wavelength	λ	$P_o = 90\text{mW}$	780	784	788	nm
Beam divergence	$\theta_{//}$	$P_o = 90\text{mW}$	7.5	9	10	degree
	θ_{\perp}	$P_o = 90\text{mW}$	14	17	18	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 90\text{mW}$	-	-	± 2.0	
	$\Delta\theta_{\perp}$	$P_o = 90\text{mW}$	-	-	± 2.5	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 90\text{mW}$	-	-	± 60	μm
Differential efficiency	η	-	0.8	1.0	1.3	mW/mA
Astigmatism	As	$P_o = 90\text{mW}$	-	-	-	μm



22. 2 Beam Laser - Preliminary

■ Application : DVD-P, DVD-R

■ Features

- Lasing wavelength : λ_p = 650nm (DVD), 780nm (CD)
- Optical output power : P_o = 5mW (650nm), 7mW (780nm)
- Package type : TO-18 [Φ 5.6], 4 Pin
- Built-in photodiode for optical power monitoring
- 1 Chip 2 Beam laser : Monolithic

■ Absolute maximum ratings [$T_c = 25^\circ\text{C}$]

Parameter	Symbol	Value	Unit
Optical output power	P_o	7(650nm), 10(780nm)	mW
LD reverse voltage	VR	2	V
PD reverse voltage	VR	30	V
Operating temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 ~ +85	$^\circ\text{C}$

■ Electrical & optical characteristics [$T_c = 25^\circ\text{C}$]


Parameter	Symbol	Condition	DVD (650nm)			CD (780nm)			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Optical output power	P_o	-	-	5	-	-	7	-	mW
Threshold current	I_{th}	-	-	55	65	-	40	50	mA
Operating current	I_{op}	$P_o = 5, 7\text{mW}$	-	70	75	-	55	65	mA
Operating voltage	V_{op}	$P_o = 5, 7\text{mW}$	-	2.2	2.6	-	1.9	2.5	V
Monitor current	I_m	$P_o = 5, 7\text{mW}$	0.1	0.2	0.5	0.12	0.3	0.6	mA
Lasing wavelength	λ	$P_o = 5, 7\text{mW}$	645	655	660	770	785	800	nm
Beam divergence	$\theta_{//}$	$P_o = 5, 7\text{mW}$	7	8.5	11	10	11	15	degree
	θ_{\perp}	$P_o = 5, 7\text{mW}$	31	35	39	34	37	40	
Beam angle accuracy	$\Delta\theta_{//}$	$P_o = 5, 7\text{mW}$	-	-	± 1.5	-	-	± 2.0	
	$\Delta\theta_{\perp}$	$P_o = 5, 7\text{mW}$	-	-	± 3.0	-	-	± 3.0	
Positional accuracy	$\Delta X, \Delta Y, \Delta Z$	$P_o = 5, 7\text{mW}$	-	-	± 60	-	-	± 60	μm
Beam Tolerance	-	-	-	-	-	-	-	-	μm
Differential efficiency	η	-	-	0.6	0.9	-	0.4	0.7	mW/mA
Astigmatism	As	$P_o = 5, 7\text{mW}$	-	-	-	-	-	-	μm




Samsung Semiconductor Laser

■ Packing



► Tray



► INSIDE BOX




► OUTSIDE BOX

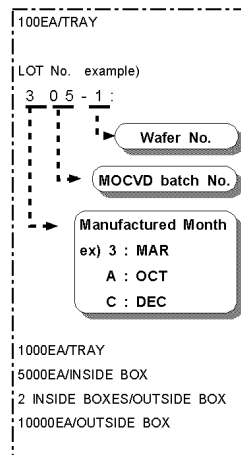


■ Labeling

► Top view

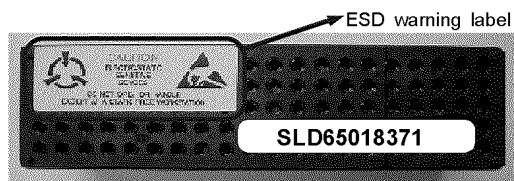


► Side view

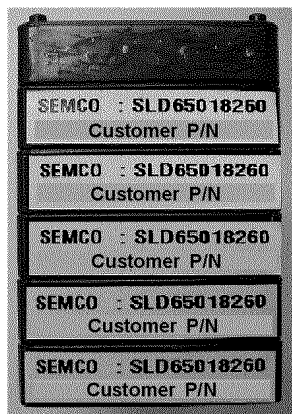

Semco P/N
Customer P/N

► Side view

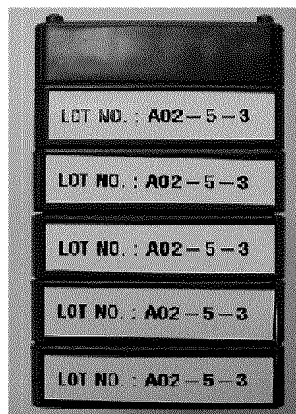

Production lot number

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com