

HBM-190W-XXXX Series

Before You Begin

Read and follow these instructions completely and carefully

Warning

RISK OF ELECTRIC SHOCK

- . Turn off or disconnect input power before installation or servicing
- . Verify that supply voltage is correct by comparing it with the luminaire label information or product specification
- . Properly ground electrical enclosure

RISK OF FIRE/INJURY


- . Follow all NEC and local codes
- . Use only UL or IEC approved wire for input connections (minimum wire size 18 AWG)
- . Wear gloves and safety glasses at all times when performing installation or servicing

RISK OF PRODUCT DAMAGE


- Failure to follow instructions could result in damage to product and void ALL warranties!
- . DO NOT exceed fixtures maximum operating temperature rating

Installation


Recommended tools during installation :

- a) Philip screw driver (for M6 screw) 


Carefully remove unit from packing box and inspect for defects before installation

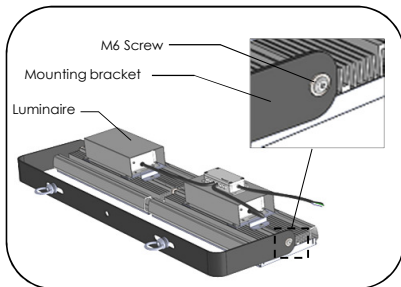


- 1** Loosen screws before Mounting bracket adjustments
 . Loosen the two M6 screws (Left & right) on Holder bracket as in diagram

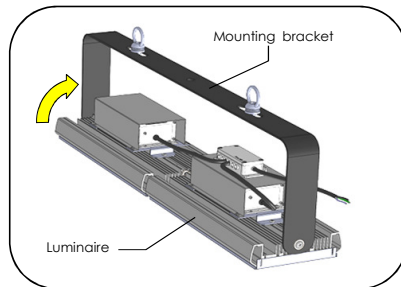


- 2** Mounting bracket adjustment
 . Adjust the Mounting bracket of the Luminaire as in diagram

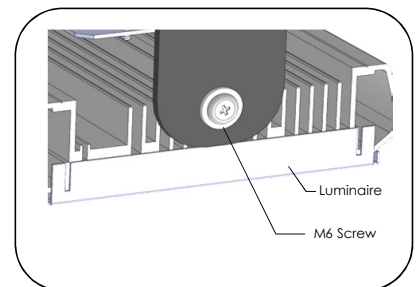


- 3** Locking Luminaire tilt
 . Tighten the two M6 screws (Left & right) on Holder bracket as in diagram

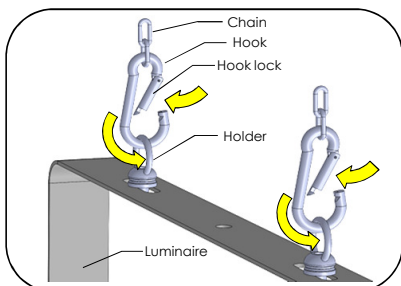

- 4** Hang Luminaire holder to chains/cables with hook from a structural member of the ceiling as in diagram
 . Fixture must be supported min 5.2kg of luminaire weight .

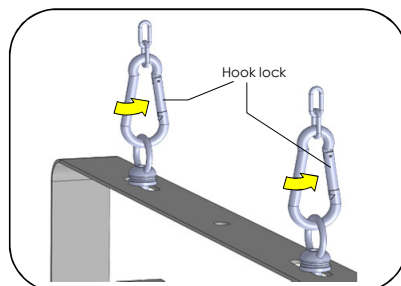

- 5** . Secure the hook lock

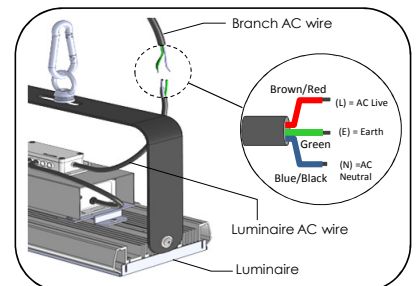

- 6** Install Luminaire AC wire to branch AC wire as in diagram
 . Connection according to local wiring requirements.
 . Installation completed

Troubleshooting

Symptom

Solution

Luminaire will not turn on

- . Check wire connectors are properly connected
- . Verify input voltage is within specs.
- . Verify color of input wires match the color of the wires connected to