


LOGITECH BCC950 CONFERENCE WEBCAM SET-UP QUICK REFERENCE GUIDE V1


The Logitech BCC950 is NOT a stand-alone unit and will need to connect to a laptop or PC via a USB cable and an AC power outlet. The 4 main components which comprise the BCC950 are shown below:



This is the base unit,
which connects via
USB to the computer

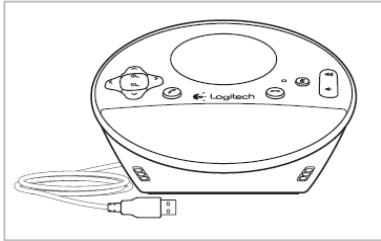

This is the
webcam

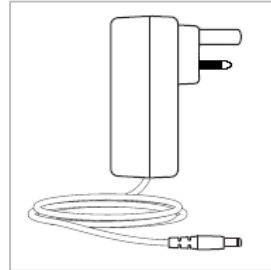

The power supply
plugs into the
base unit



This is the eye-
level stand for the
webcam

Together, these components can be used in either base mode, or extended to eye-level:




This is the
webcam fitted
to the base unit




This is the
webcam with
the eye-level
stand fitted

SETTING UP THE UNIT


Power on the laptop or computer you will be using with the webcam.




Attach the Webcam
to the Base Unit

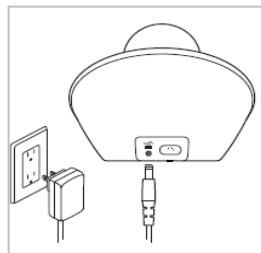

Connect the power supply
to the rear socket of the
base unit and an AC outlet

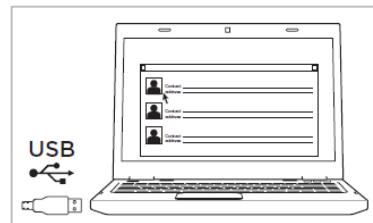

Connect the base
unit to the computer
with the USB cable

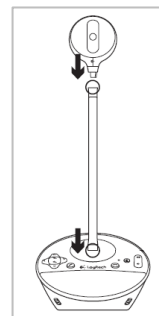


Attach the
stand if required


Note: if you wish to use the eye-level stand, you MUST disconnect the AC power BEFORE attaching or removing the webcam. You can now launch the video conferencing software on the computer.

Please ensure the stand is fitted using the correct orientation, as shown below:

Top Stand Connector:




Bottom Stand Connector:



LOGITECH BCC950 CONFERENCE WEBCAM SET-UP QUICK REFERENCE GUIDE V1

BASE UNIT CONTROLS

The base unit allows for full control of the conference call, from answering and ending calls to controlling the webcam.

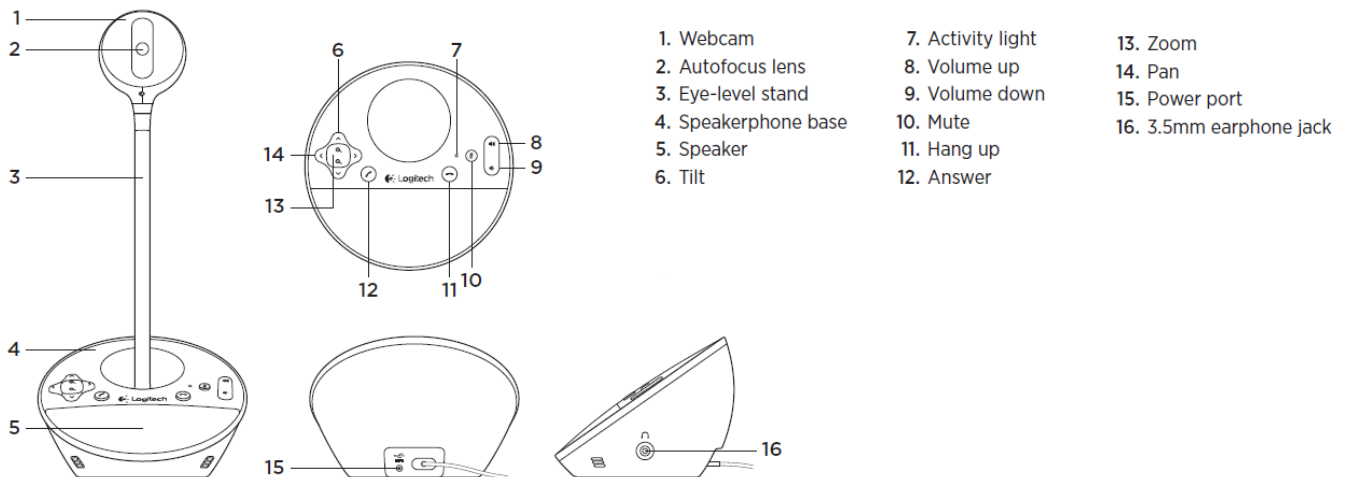

Use the *Tilt*, *Zoom* & *Pan* controls (6, 13 & 14 above) to adjust the webcam image. **IMPORTANT:** Do not rotate/tilt the camera manually as it may damage the device.

The *Volume* of the Base Unit speaker can be adjusted (8 & 9 above)

Once you have launched the video conferencing software, you can *Mute*, *Hang Up*, or *Answer* a call (10, 11 & 12 above) from the Base Unit. (This feature may not work with some video conferencing software. Use the software to answer and end a call).

BASE UNIT ACTIVITY LIGHT

The *Activity Light* will display the status of the Base Unit as follows:

- *Blue*: The webcam is in an active call
- *Flashing Blue*: A call is being received
- *Red*: The audio is muted
- *Flashing Red*: The unit is establishing a USB connection with the host computer

CONTACT:

SERVICE DESK 01623 410310 or Ext 4040
IT TRAINING 01623 622515 Ext 6111