

# Quick Start Operations Guide



Intelligent Security & Fire Ltd.



Protecting people and property in a million locations worldwide.

# Welcome

---

Thank you for purchasing Pelco's DX8000 Series digital video recorder (DVR). This guide is designed to assist the new user in getting immediate results from the DX8000.


## ABOUT THIS GUIDE

This guide provides basic, tutorial instructions on how to start your DVR, log in, view live and prerecorded video, and set up a simple recording schedule.

For complete instructions on installing, programming, and using your DX8000 Series DVR, refer to the installation and operation manuals included with your unit.


# Logging In

1. Open the front panel of the DVR and press the power switch. Wait while the unit starts (this may take a few minutes).

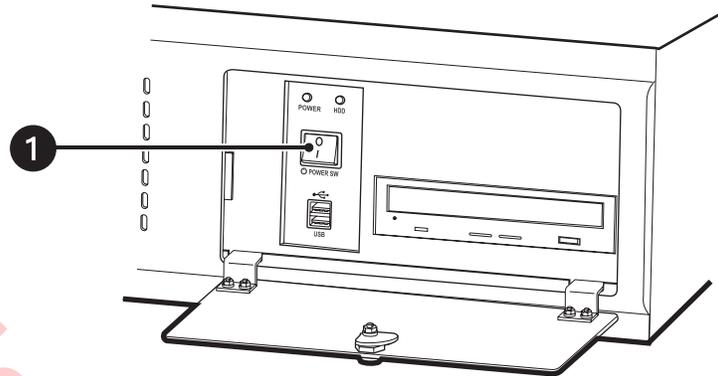

**Figure 1.** Front Panel and Power Switch

2. Click the File menu.
3. Click User Log-in.
4. Enter an Administrator or Power User name and password in the appropriate fields. If you do not already have a user name and password, contact your system administrator or installer to obtain them.
5. Click OK.

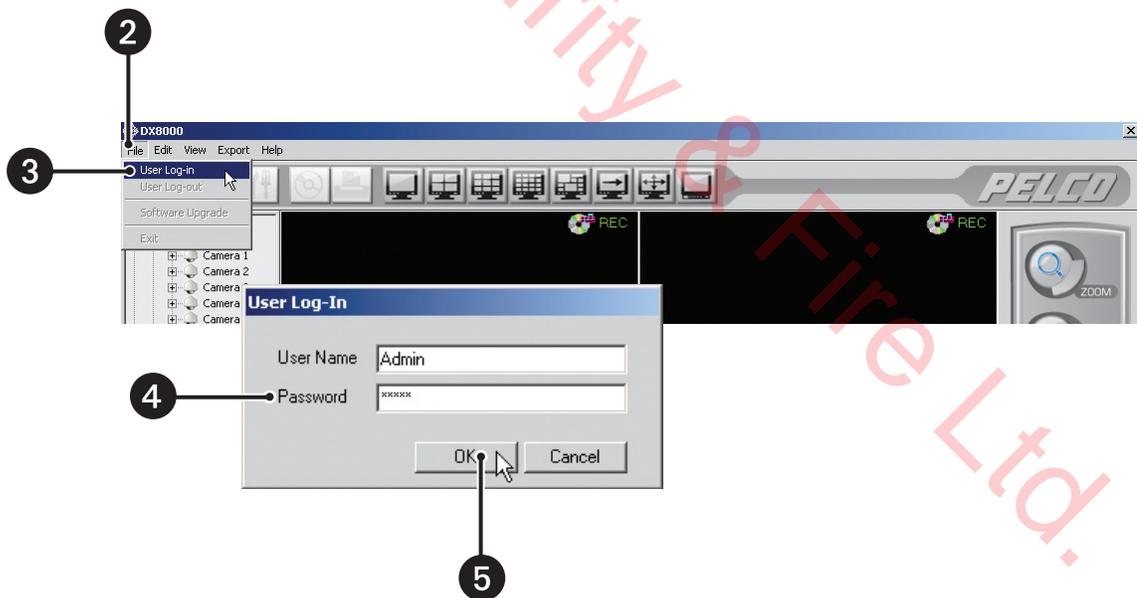

**Figure 2.** User Log-in Dialog Box

# Viewing Live Video

To view live video:

1. Click .
2. Select a screen division icon from the toolbar. (Display anywhere from one to sixteen cameras simultaneously on a single screen.)
3. Click and drag a camera from the site tree to one of the on-screen view panels.
4. Use the PTZ control panel to operate the focus, zoom, and iris functions.



**NOTE:** PTZ functions must be enabled in the Camera setup screen. Refer to the Operations/Programming manual for instructions.

5. To operate the on-screen PTZ control, locate the mouse pointer in the center of a view panel and then click and drag in the direction you wish to move the camera.


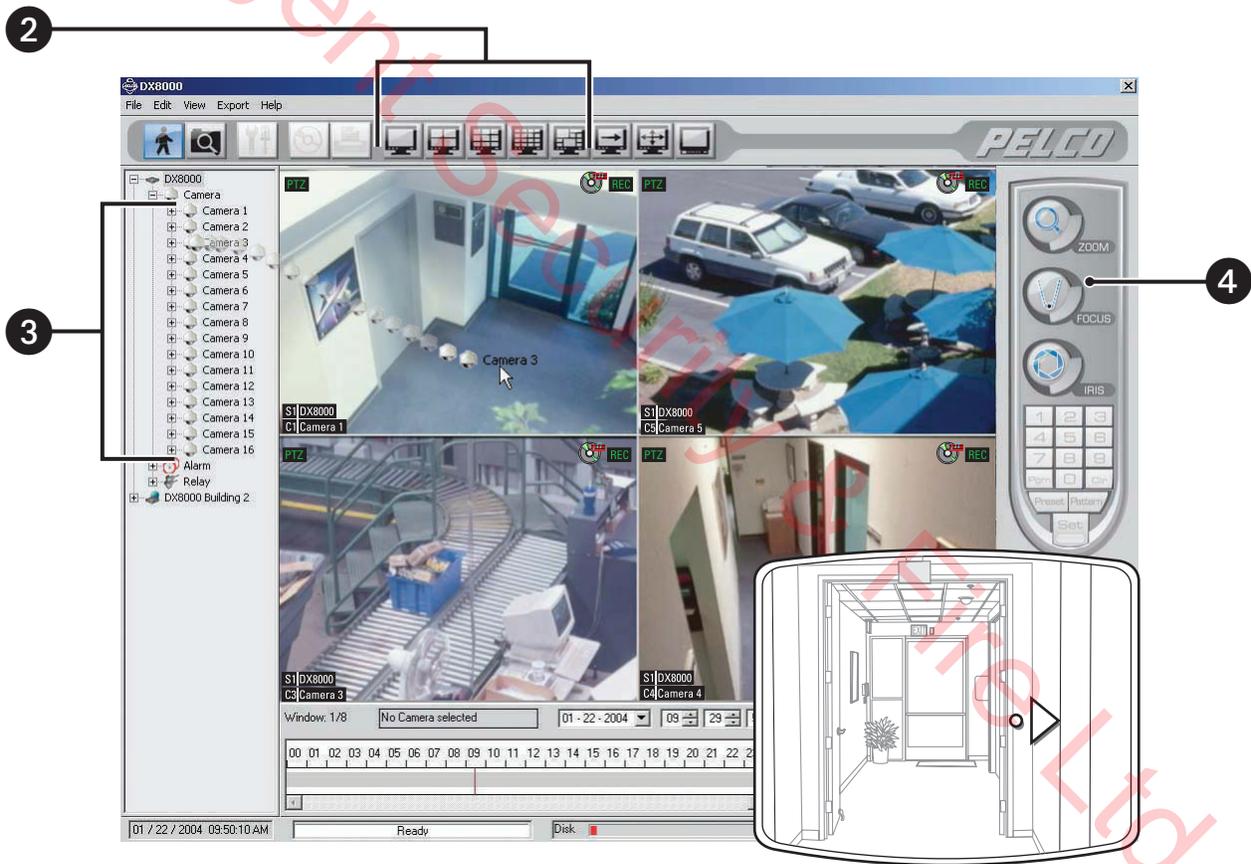


Figure 3. Live View Mode

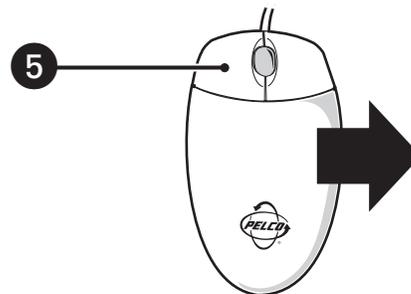

# Setting Up a Recording Schedule

In the example below, you will set up recording schedules for two cameras. Camera 1 will be set to record continuously between 6:00 a.m. and 11:00 p.m. and in response to motion the remainder of the time. Camera 7 will be set up to record between 6:00 p.m. and 7:00 a.m. only if an alarm is triggered.

1. Click .
2. Click .
3. Create and save a schedule profile for Camera 1 and Camera 7 (refer to Figures 4 and 5).
  - a. Select All Days from the drop-down box if it is not already selected.
  - b. Click New.
  - c. Enter a new filename for the profile, for example, New Daily Schedule.
  - d. Click OK.

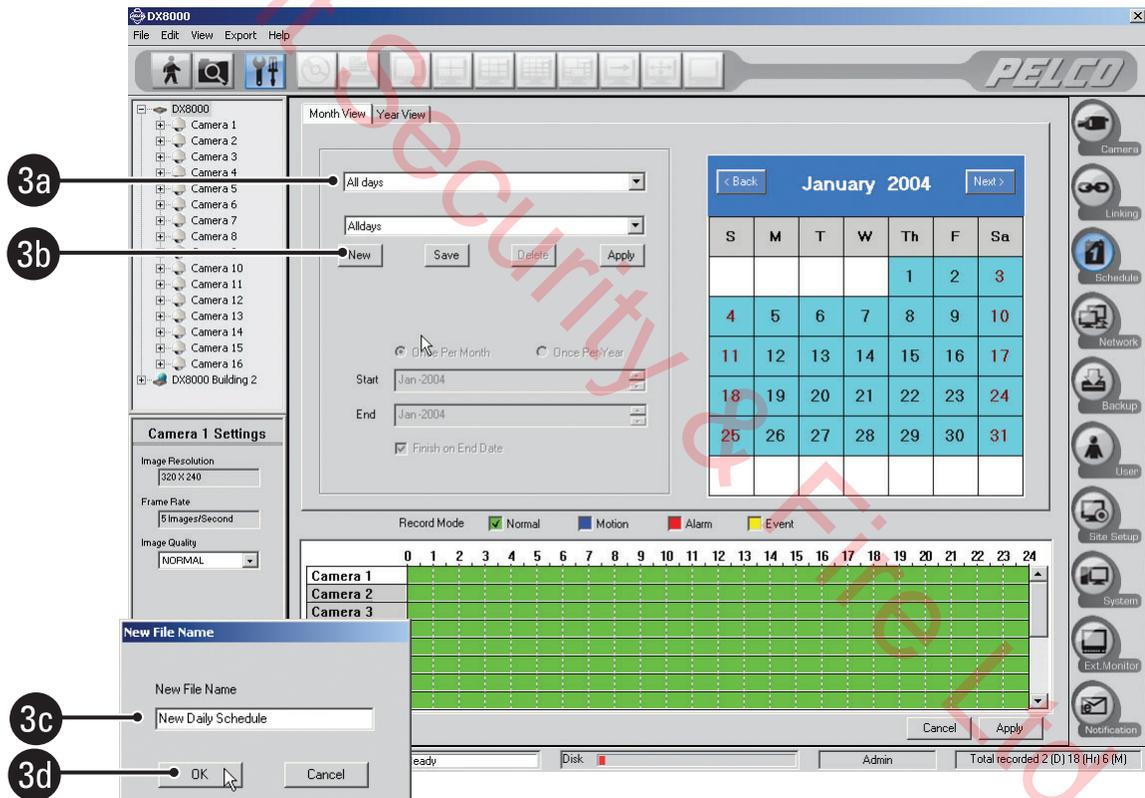


Figure 4. Schedule Setup Screen

Figure 5. Save As Dialog Box

4. Set the recording schedule for Camera 1:
  - a. Select the Normal check box.
  - b. Hold down the left mouse button and drag the mouse over the Camera 1 timeline from 6 to 23.
  - c. Select the Motion check box.
  - d. Hold down the left mouse button and drag the mouse over the Camera 1 timeline from 0 to 6 and from 23 to 24.

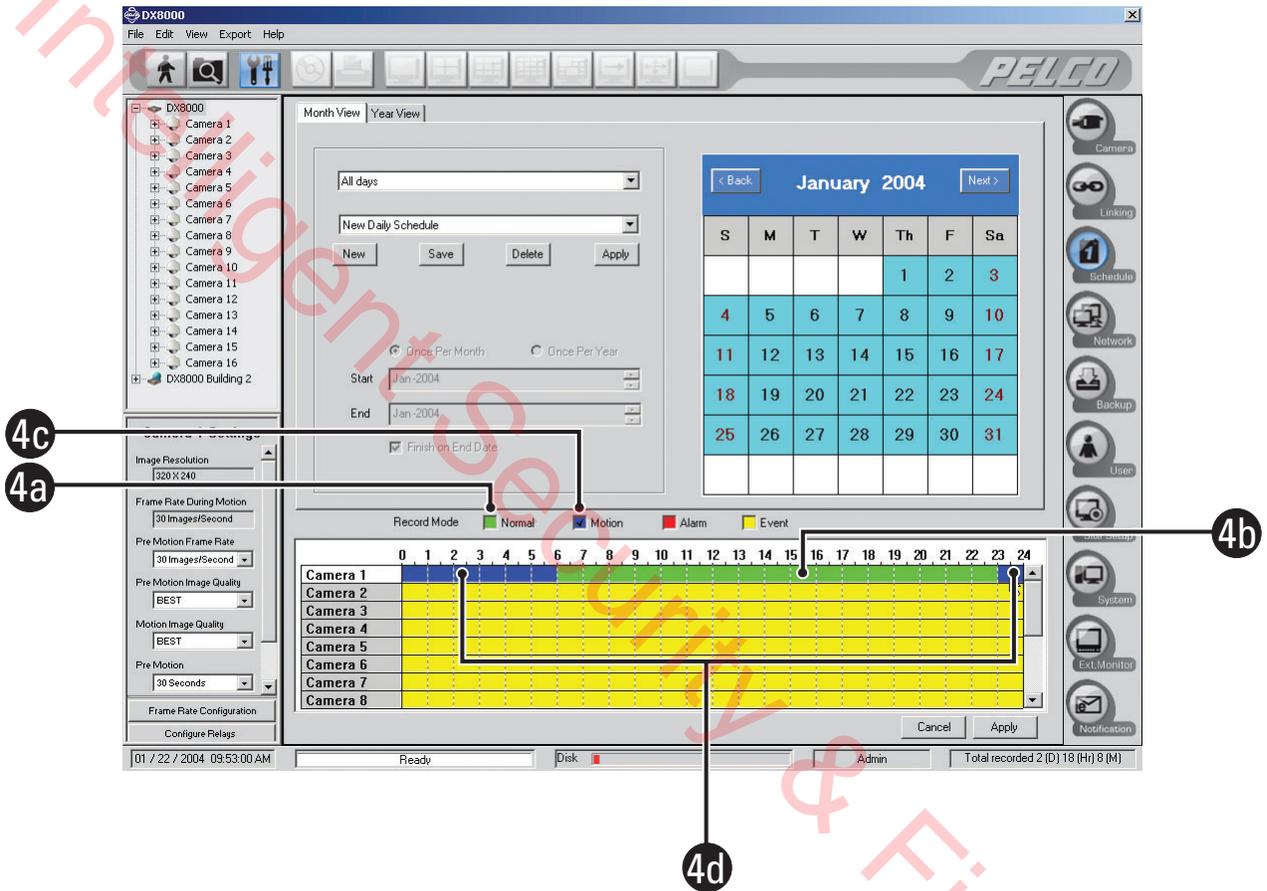


Figure 6. Camera 1 Schedule Setup

5. Set the recording schedule for Camera 7:
  - a. Select the Alarm check box.
  - b. Hold down the left mouse button and drag the mouse over the Camera 7 timeline from 0 to 7 and from 18 to 24.
  - c. Hold down the right mouse button and drag the mouse over the Camera 7 timeline from 7 to 18 to disable recording during this time period.
  - d. Click Save.
  - e. Click Apply.

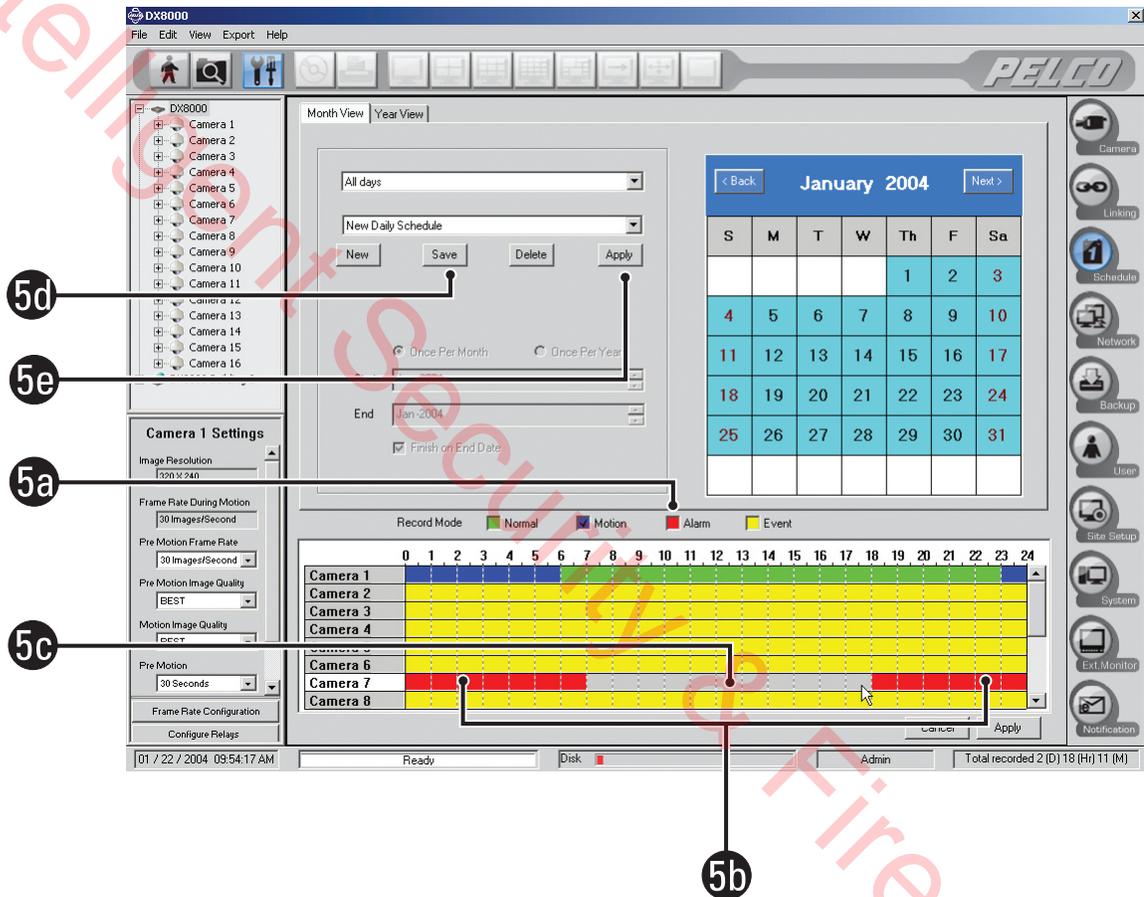


Figure 7. Camera 7 Schedule Setup

# Playing Back Video

To play back video recorded during a particular date and time:

1. Click  .

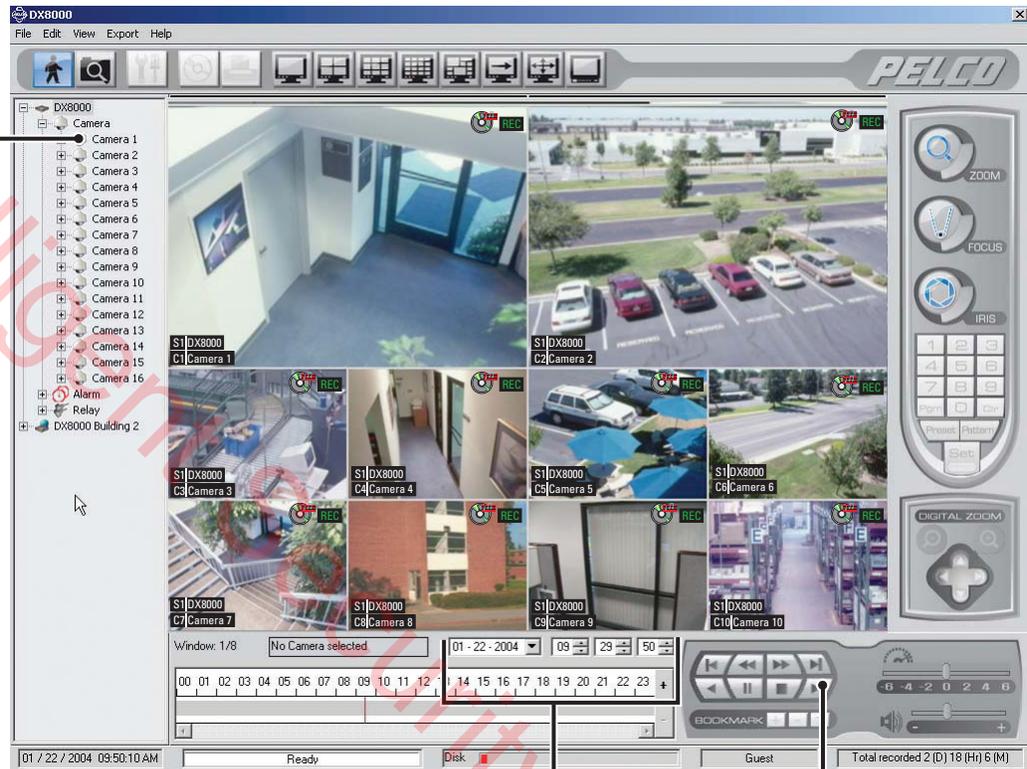


Figure 8. Main Display Screen


2. Select the camera you wish to view from the site tree.
3. Select a date from the drop down-box, and then choose a time from the hours/minutes/seconds spinner buttons.

 **NOTE:** Alternatively, you can move the vertical slider along the timeline to select a time to begin playback.

4. Click  to begin playback.


 **NOTE:** Refer to the Operation/Programming manual for detailed instructions on the DX8000's search features.

5. Use the Playback Panel to control playback.

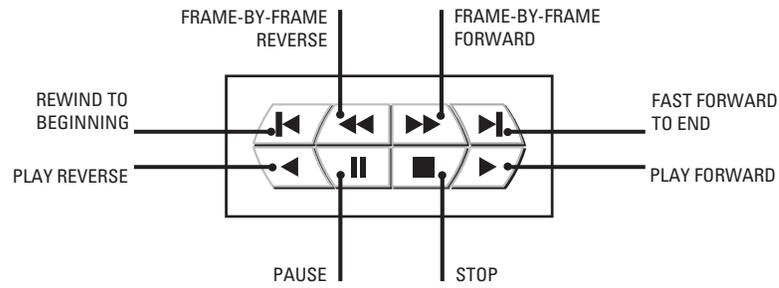

**Figure 9.** Playback Controls

6. Use the Digital Zoom Control to emphasize playback images.

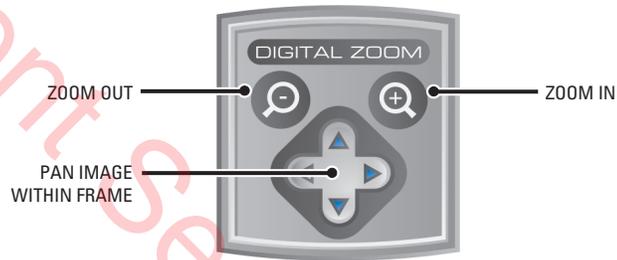

**Figure 10.** Playback Digital Zoom

## PRODUCT WARRANTY AND RETURN INFORMATION

### WARRANTY

Pelco will repair or replace, without charge, any merchandise proved defective in material or workmanship **for a period of one year** after the date of shipment.

Exceptions to this warranty are as noted below:

- Five years on Pelco manufactured cameras (CC3500/CC3600/CC3700 and MC3500/MC3600/MC3700 Series); two years on all other cameras.
- Three years on Genex® Series (multiplexers, server, and keyboard) and 090 Series Camclosure® Camera System.
- Two years on 100/150, 200 and 300 Series Camclosure® Camera Systems.
- Two years on cameras and all standard motorized or fixed focal length lenses.
- Two years on Legacy®, CM6700/CM6800/CM8500/CM9500/CM9740/CM9760 Matrix, DF5 and DF8 Series Fixed Dome products.
- Two years on Spectra®, Esprit®, and PS20 Scanners, including when used in continuous motion applications.
- Two years on Esprit® and WW5700 series window wiper (excluding wiper blades).
- Eighteen months on DX Series digital video recorders.
- One year (except video heads) on video cassette recorders (VCRs). Video heads will be covered for a period of six months.
- Six months on all pan and tilts, scanners or preset lenses used in continuous motion applications (that is, preset scan, tour and auto scan modes).

Pelco will warrant all replacement parts and repairs for 90 days from the date of Pelco shipment. All goods requiring warranty repair shall be sent freight prepaid to Pelco, Clovis, California. Repairs made necessary by reason of misuse, alteration, normal wear, or accident are not covered under this warranty.

Pelco assumes no risk and shall be subject to no liability for damages or loss resulting from the specific use or application made of the Products. Pelco's liability for any claim, whether based on breach of contract, negligence, infringement of any rights of any party or product liability, relating to the Products shall not exceed the price paid by the Dealer to Pelco for such Products. In no event will Pelco be liable for any special, incidental or consequential damages (including loss of use, loss of profit and claims of third parties) however caused, whether by the negligence of Pelco or otherwise.

The above warranty provides the Dealer with specific legal rights. The Dealer may also have additional rights, which are subject to variation from state to state.

If a warranty repair is required, the Dealer must contact Pelco at (800) 289-9100 or (559) 292-1981 to obtain a Repair Authorization number (RA), and provide the following information:

1. Model and serial number
2. Date of shipment, P.O. number, Sales Order number, or Pelco invoice number
3. Details of the defect or problem

If there is a dispute regarding the warranty of a product which does not fall under the warranty conditions stated above, please include a written explanation with the product when returned.

Method of return shipment shall be the same or equal to the method by which the item was received by Pelco.

### RETURNS

In order to expedite parts returned to the factory for repair or credit, please call the factory at (800) 289-9100 or (559) 292-1981 to obtain an authorization number (CA number if returned for credit, and RA number if returned for repair).

All merchandise returned for credit may be subject to a 20% restocking and refurbishing charge.

Goods returned for repair or credit should be clearly identified with the assigned CA or RA number and freight should be prepaid. Ship to the appropriate address below.

*If you are located within the continental U.S., Alaska, Hawaii or Puerto Rico, send goods to:*

Service Department  
Pelco  
3500 Pelco Way  
Clovis, CA 93612-5699

*If you are located outside the continental U.S., Alaska, Hawaii or Puerto Rico and are instructed to return goods to the USA, you may do one of the following:*

If the goods are to be sent by a COURIER SERVICE, send the goods to:

Pelco  
3500 Pelco Way  
Clovis, CA 93612-5699 USA

If the goods are to be sent by a FREIGHT FORWARDER, send the goods to:

Pelco c/o Expeditors  
473 Eccles Avenue  
South San Francisco, CA 94080 USA  
Phone: 650-737-1700  
Fax: 650-737-0933

Intelligent Security & Fire Ltd.



World Headquarters  
3500 Pelco Way  
Clovis, California 93612 USA

USA & Canada  
Tel: 800/289-9100  
Fax: 800/289-9150

International  
Tel: 1-559/292-1981  
Fax: 1-559/348-1120

[www.pelco.com](http://www.pelco.com)

ISO9001

Orangeburg, New York | Las Vegas, Nevada | Eindhoven, The Netherlands | Wokingham, United Kingdom | Montreal, Canada | Singapore