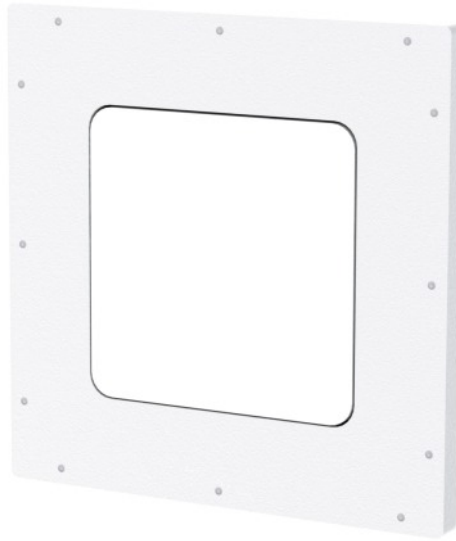


GFG Series**Gypsum Fiber Glass Access Doors**

Doors are designed to be architecturally pleasing with a design which allows the door and frame to blend seamlessly with the gypsum ceiling. With a tapered edge for joint tape, they are easily textured, light weight and will not crack or shrink.

Door and Frame are fabricated from glass reinforced gypsum.

Flange has depressions for screw placement and is tapered for joint compound application.

Guide Specification

Provide Elmdor GFG series gypsum fiber glass access door (specify model number). Access door and frame shall be fabricated from glass reinforced gypsum. Frame shall have pre-positioned depressions for screw placement and tapered for application of joint compound.



Member of U.S. Green
Building Council

GFG

Revised: 07/21/2023

Recyclable
Product

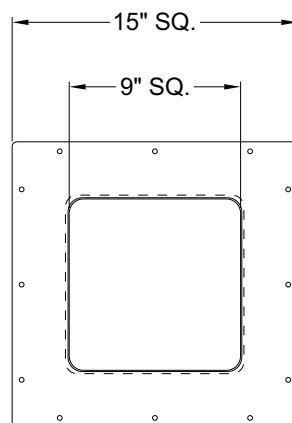
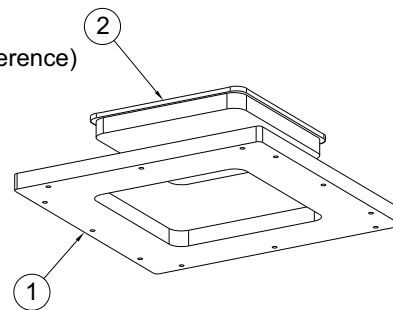
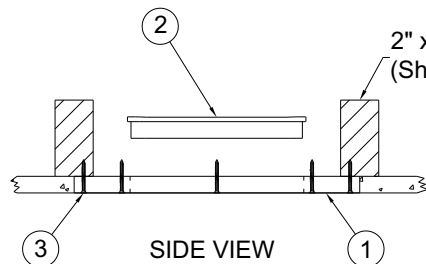
MODEL NUMBER AND OPTIONS SELECTION
Suffix Options

"No Available Options"

BASE MODEL NUMBER
☐ GFG Gypsum Fiber Glass

STANDARD AVAILABLE SIZES

NOMINAL DOOR SIZE (W X H)	ROUGH OPENING	WEIGHT
9" x 9"	15" x 15"	6 lbs.
12" x 12"	18" x 18"	9 lbs.
16" x 16"	22" x 22"	10 lbs.
18" x 18"	24" x 24"	11 lbs.
22" x 30"	28" x 36"	16 lbs.
24" x 24"	30" x 30"	16 lbs.
30" x 30"	36" x 36"	20 lbs.


FRONT VIEW
NOTES:

1. Panel Frame
2. Door
3. Mounting Hardware
(By Others)

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options	Quantity
Company	Date
Contact	Title
Approval for Manufacturing/Signature	

GFG

Revised: 07/21/2023