


RV281

Controllable anti-pollution check valve EA type with union connectors

Product specification sheet

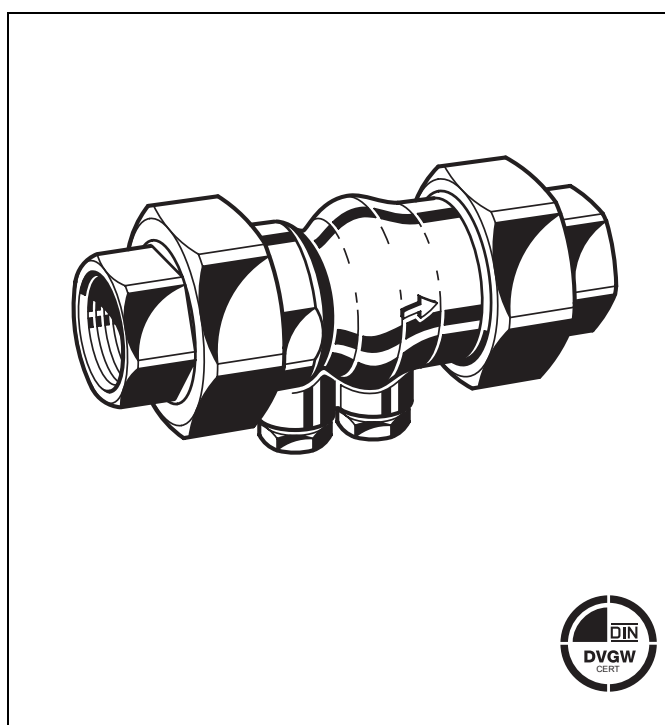

Construction

The check valve comprises:

- Housing with test and drain plugs (1/2" device with test plugs only)
- Check valve insert
- Threaded or soldered union connectors
- Test and drain plugs
- Disc guide
- Spring
- Disc with lip seal ring

Materials

- Brass housing
- Brass threaded connections
- Red bronze threaded connections (only for 1/2" and 1 1/4")
- High grade synthetic material disc guide and disc
- EPDM for lip seal ring
- Stainless steel spring
- High grade synthetic material blanking plugs

Application

Check valves of this type are for use as an independent means of preventing reverse water flow and for installing directly after a water meter on central water supply systems.

They can also be used for industrial, commercial and similar systems where back pressure, back flow and back syphonage must be prevented.

The classifications of appliances to meet these requirements are specified in EN 1717.

Special Features


- DIN/DVGW-certified
- Universal application
- Suitable for installation in any position
- Creates no shock pressure loadings
- Union connectors simplify service
- Fully approved for noise level protection to class 1
- Meets KTW regulations for potable water
- Low pressure loss

Range of Application

Medium Water
Liquid category 2 (no hazardous material)
Operating pressure 16 bar

Technical Data

Operating temperature Water up to 65 °C
accord. DIN EN 13959 (short term up to 90 °C)
Opening pressure approx. 0.05 bar
Connection size 1/2" - 2"

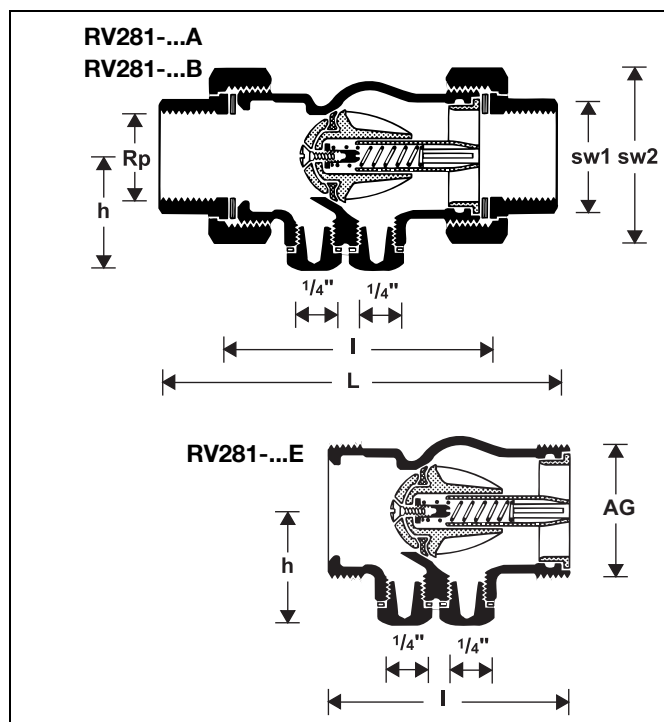

Method of Operation

Spring loaded check valves have a moving seal disc which is lifted off the seat by a greater or lesser amount depending on the flow rate through the valve. If the flow falls towards zero, then the spring pushes the disc back onto the seat and seals the waterway.

To ensure continuing correct function it is recommended that check valves be regularly checked and maintained (as specified in EN 1717).

Options

RV281-... A = Internal threaded connection set

RV281-... B = Soldering connection set


RV281-... E = External thread

Special Versions available on request

Connection size

Connection size with external threads	AG	DN15	DN20	DN25	DN32	DN40	DN50
		1"	1 1/4"	1 1/2"	2"	2 1/4"	2 3/4"
Connection size with internal threaded connection set	Rp	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Connection size with soldering connection set	mm	15	22	28	35	42	54
Weight	approx. kg						
Option A and B		0.45	0.7	0.95	1.4	2.2	3.0
Option E		0.3	0.4	0.6	0.8	1.2	1.6
Dimensions	mm						
	L	106	120	139	161	171	201
	l	60	72	85	95	103	125
	h	34	34	40	45	47	57
	sw 1	24	30	38	46	52	66
	sw 2	37	46	52	64	76	88
Test and drain plug	R	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
k _{VS} -value	m ³ /h	4.5	9.1	17.0	28.0	38.0	60.0
Nominal flow rate in m ³ /h at Δp = 0.15 bar		2.3	3.1	7.7	10.8	15.5	25.2
DIN/DVGW Registration No.		NW-6310 AT 2325					
IfBt Designation		P-IX 2614/I					-

* Test plug only

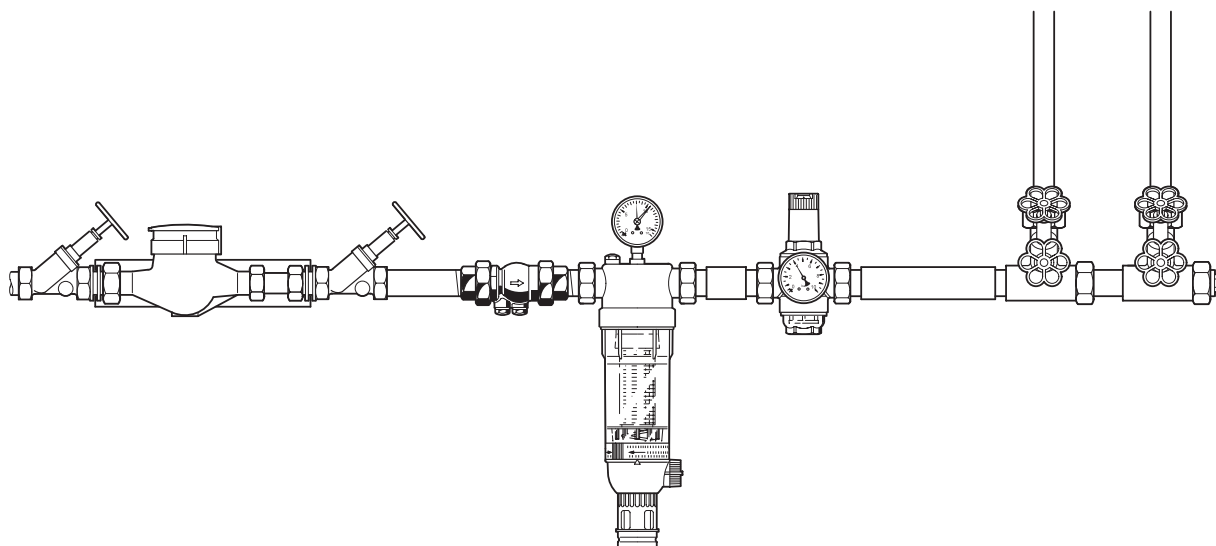Installation Example**Installation Guidelines**

- Install in horizontal pipework with test and drain plug downwards
 - This position is best for draining
- Install shutoff valves
 - Shutoff valves provide optimal serviceability
- Ensure good access
 - Simplifies maintenance and inspection
- Install right after water meter if applicable
 - Protects against backflow from water systems


Typical Applications


Check valves of this type are suitable for use as a safety device on water installations as specified in EN 1717.

They can be used within the scope of their specification.

The following are some typical applications:

- In central water supply systems
- After a water meter
- As a safety device up to liquid category 2 of EN 1717
- Downstream of pumping installations
- Upstream of water heating installations

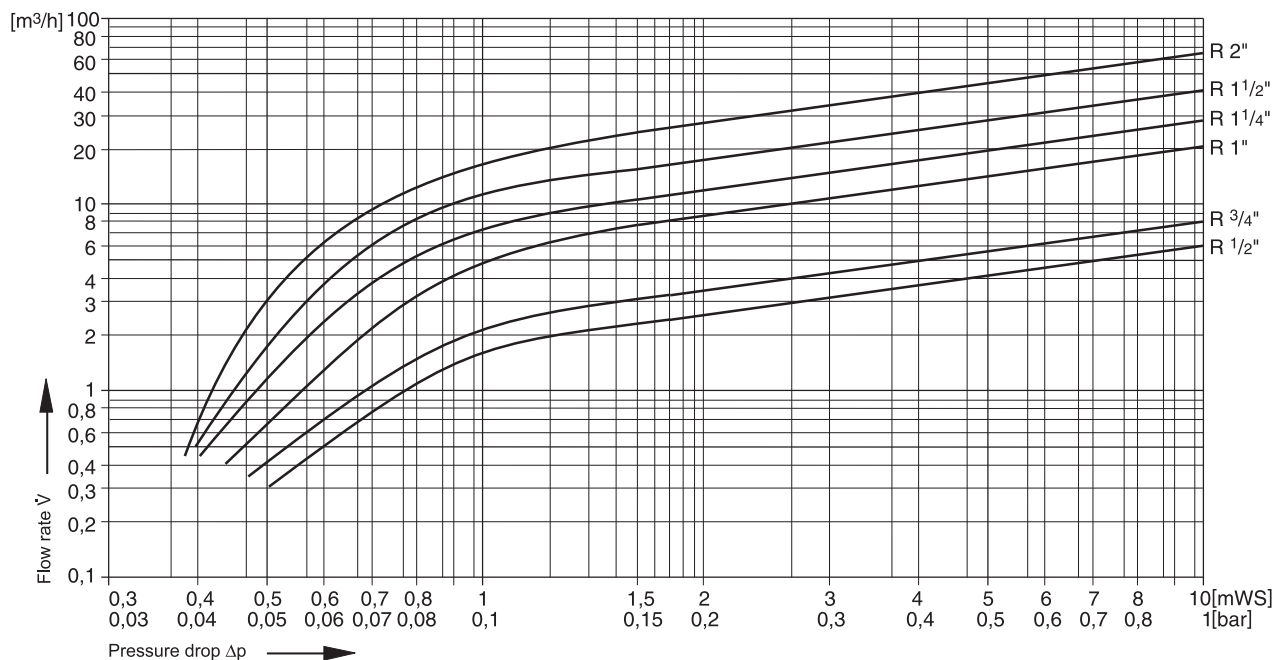Flow Diagram

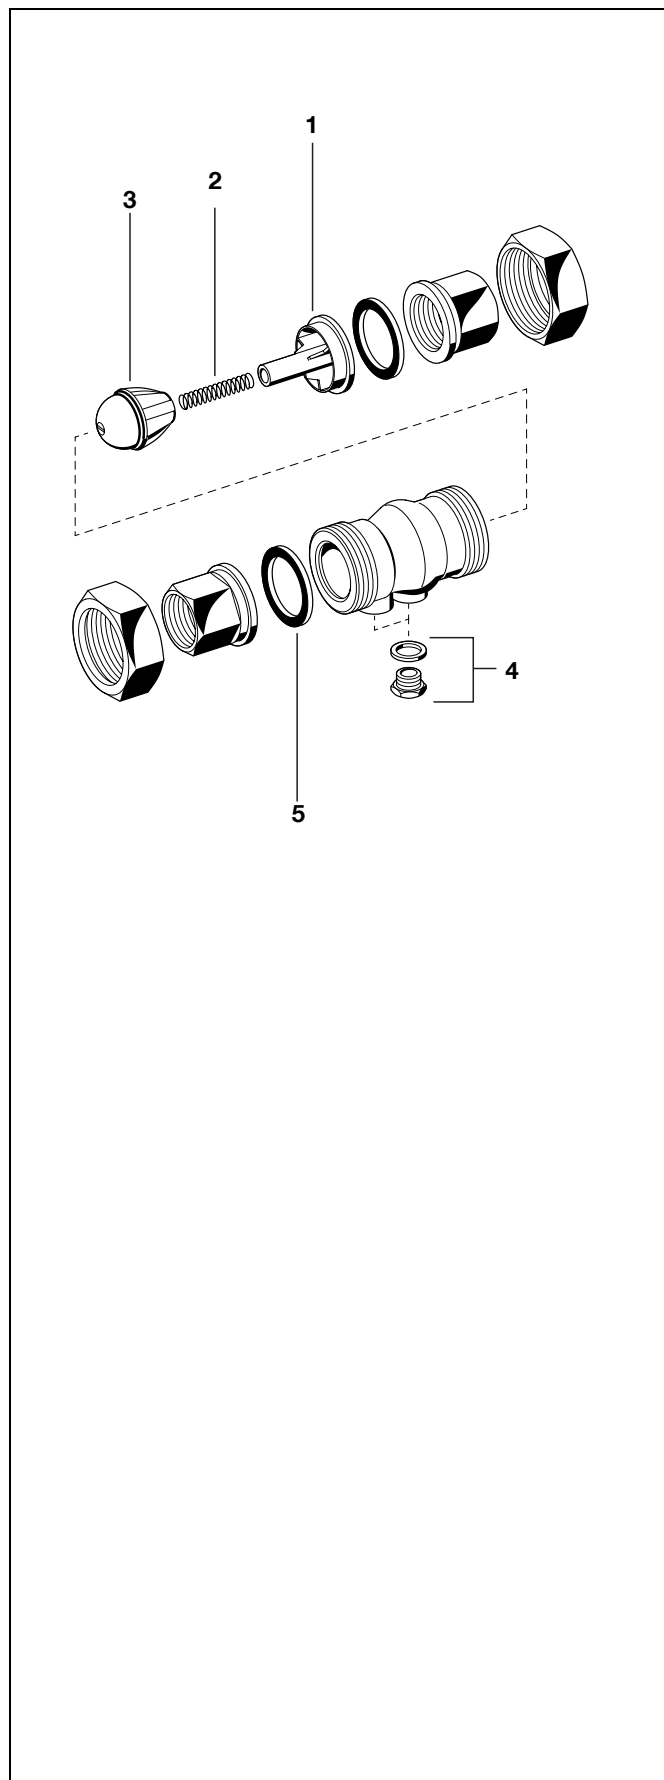

Spare Parts

Inlet check valve RV281, from 1984 onwards

No.	Description	Dimension	Part No.
1	Disc guide	1/2"	5534900
		3/4"	5535100
		1"	5531500
		1 1/4"	5535300
		1 1/2"	5535500
		2"	5535700
2	Spring	1/2"	2061400
		3/4"	2061500
		1"	2061600
		1 1/4"	2061700
		1 1/2"	2062000
		2"	2062400
3	Valve disc complete	1/2"	0900356
		3/4"	0900357
		1"	0900358
		1 1/4"	0900359
		1 1/2"	0900360
		2"	0900361
4	Hexagon-plug with copper sealing-ring R1/4" (5 pcs.)	all	S06M-1/4
5	Seal washer	1/2"	5351200
		3/4"	0901445
		1"	0901446
		1 1/4"	0901447
		1 1/2"	5163000
		2"	5163100

Automation and Control Solutions

Honeywell GmbH
 Hardhofweg
 74821 MOSBACH
 GERMANY
 Phone: (49) 6261 810
 Fax: (49) 6261 81309
<http://ecc.emea.honeywell.com>

Manufactured for and on behalf of the
 Environmental and Combustion Controls Division
 of Honeywell Technologies Sàrl, Z.A. La Pièce 16,
 1180 Rolle, Switzerland by its Authorised Repre-
 sentative Honeywell GmbH

EN0H-1202GE23 R0216
 Subject to change without notice
 © 2016 Honeywell GmbH

Honeywell