

ABB 520BID01 Binary Input datasheet

<http://www.manuallib.com/abb/520bid01-binary-input-datasheet.html>

The binary input module 520BID01 provides 16 galvanic isolated inputs for up to 16 binary process signals. Scanning and processing of the inputs are executed with the high time resolution of 1 ms. The allocation of an input signal to the processing functions can be done according to the rules of configuration.

ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.

<http://www.manuallib.com>

Binary Input 520BID01

Data sheet

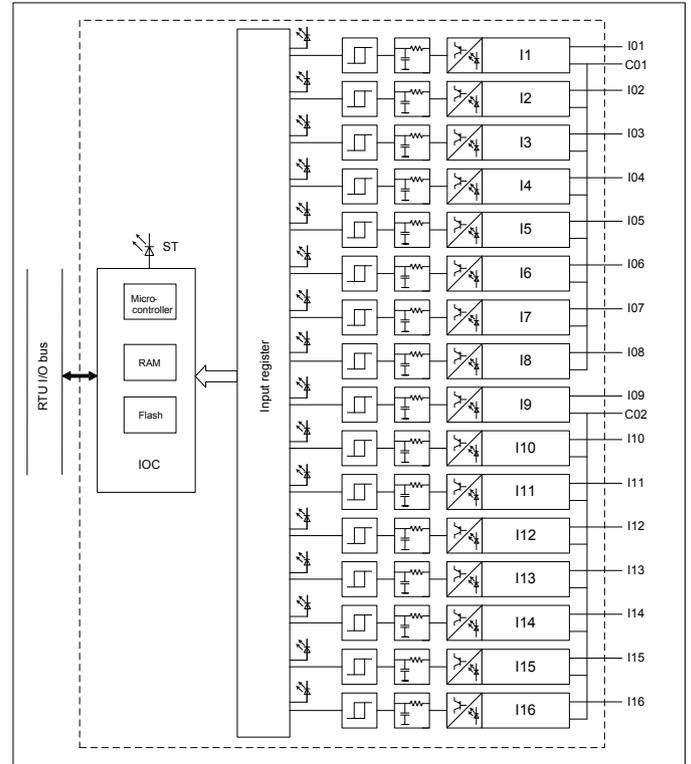


Figure 1: Block diagram 520BID01

Application

The binary input module 520BID01 provides 16 galvanic isolated inputs for up to 16 binary process signals. Scanning and processing of the inputs are executed with the high time resolution of 1 ms. The allocation of an input signal to the processing functions can be done according to the rules of configuration.

The module 520BID01 is able to process the following types of signals:

- 16 single indications with time stamp
- 8 double indications with time stamp
- 2 digital measured values each with 8 bit
- 1 digital measured value with 16 bit
- 16 integrated totals (max. 25 Hz)
- 2 step position information each with 8 bit
- 2 bit string information each with 8 bit
- 1 bit string information with 16 bit

The module is available in two versions (rubrics):

- 520BID01 R0001: process voltage 24 to 60 V DC.
LED signaling for each input, common return per 8 inputs.
- 520BID01 R0002: process voltage 110 to 125 V DC.
LED signaling for each input, common return per 8 inputs.

Characteristics

Binary inputs

The inputs are galvanic isolated by means of optical couplers. 8 inputs are building a group with a common return.

The binary input channels are protected against reverse voltage installation. If the input signal is installed with wrong polarity the input current will be zero.

The module has 16 LEDs to indicate the signal state at the inputs. The LEDs are switched by the controller.

The maximum permissible frequency for counter pulses is 25 Hz.

Power supply input

The required power for the module is supplied via the RTU520 I/O bus connector.

I/O controller (IOC)

The micro-controller on the module processes all time critical tasks of the parameterized processing functions. Moreover it carries out the interactive communication with the RTU I/O bus. All configuration data and processing parameters are loaded by the communication unit via the RTU I/O bus.

In connection with an I/O adapter (e. g. 520ADD01) or the RTU520 communication unit the module has a connection to the RTU520 I/O bus (wired OR-bus).

The binary input unit can execute the following processing functions for the different types of signals:

- Digital filtering to suppress contact bounce
- Suppression of oscillating signals caused by the process
- Validity check and suppression of intermediate input states for double indications
- Validity check for all channels allocated to digital measured values
- Summation of increment pulses to form integrated totals in registers of 31 bit resolution
- Copying of integrated totals values into freezing registers on request for data conservation

The module provides a data buffer for temporally storing of up to 50 event messages including time stamps. The events are stored in chronological order designated for transmission to the communication unit (CMU).

During initialization and operation the module carries out a number of tests. If a fault occurs it is reported to the communication unit. All fault conditions impairing the function of the module are displayed as common fault signal by a red LED. A failure of the module is detected by the communication unit.

Technical data

In addition to the RTU500 series general technical data, the following applies:

Input channels 520BID01 R0001	
Inputs	16 channels, common return for 2 groups of 8 channels, isolated by opto-couplers
Nominal input voltage	24... 60 V DC (+/- 20%)
Max. input voltage	72 V DC
Input current	1.5... 5 mA
Logical '1' definitely detected	≥ 18 V DC
Logical '0' definitely detected	≤ 9 V DC
Reverse voltage protection	yes

Input channels 520BID01 R0002	
Inputs	16 channels, common return for 2 groups of 8 channels, isolated by opto-couplers
Nominal input voltage	110... 125 V DC (+/- 20%)
Max. input voltage	150 V DC
Input current	1.2... 2 mA
Logical '1' definitely detected	≥ 85 V DC
Logical '0' definitely detected	≤ 45 V DC
Reverse voltage protection	yes

Current consumption for power supplied via WRB bus	
5 V DC	50 mA
15 V DC	--
18 V DC	--
24 V DC	--

Signaling by LEDs	
ERR (red)	Common fault information for the module
CH1... CH16	LED displays the active inputs

Mechanical layout	
Dimensions	35 mm x 98 mm x 117 mm (Width x Height x Depth)
Housing type	Plastic housing (V-0), RAL 7035 light gray

Mechanical layout	
Mounting	DIN rail mounting EN 50022 TS35: 35 mm x 15 mm or 35 mm x 7.5 mm
Weight	0.15 kg

Connection type	
Process connector	2 x 10 pole 5.08 mm pluggable spring terminals (included in delivery) 0.2... 2.5 mm ² / AWG 24 - AWG 12

Insulation tests	
AC test voltage IEC 61000-4-16 IEC 60870-2-1 (class VW3)	2.5 kV, 50 Hz Test duration: 1 min
Impulse voltage withstand test IEC 60255-5 IEC 60870-2-1 (class VW 3)	5 kV (1.2 / 50 μs)
Insulation resistance IEC 60255-5	> 100 MΩ at 500 V DC

Immunity test	
Electrostatic discharge IEC 61000-4-2	8 kV air / 6 kV contact (level 3) Performance criteria A
Radiated Radio-Frequency Electro-magnetic Field IEC 61000-4-3	10 V/m (level 3) Performance criteria A
Electrical Fast Transient / Burst IEC 61000-4-4	4 kV (level X) Performance criteria A
Surge IEC 61000-4-5	4 kV (level 4) Performance criteria A
Conducted Disturbances, induced by Radio-Frequency Fields IEC 61000-4-6	10 V (level 3) Performance criteria A
Damped oscillatory wave IEC 61000-4-18	2.5 / 1 kV (level 3) Performance criteria A

Environmental conditions	
Nominal operating temperature range: Start up: Max. operating temperature, max. 96h: EN 60068-2-1, -2-2, -2-14	-25 ... +70 °C -40 °C +85 °C
Relative humidity EN 60068-2-30	5 ... 95 % (non condensing)

Ordering information

520BID01 R0001	1KGT033200R0001
----------------	-----------------

520BID01 R0002	1KGT033200R0002
----------------	-----------------

Contact us

ABB AG
Power Systems Division
P.O. Box 10 03 51
68128 Mannheim, Germany

www.abb.com/substationautomation



Note:

The specifications, data, design or other information contained in this document (the "Brochure") - together: the "Information" - shall only be for information purposes and shall in no respect be binding. The Brochure does not claim to be exhaustive. Technical data in the Information are only approximate figures. We reserve the right at any time to make technical changes or modify the contents of this document without prior notice. The user shall be solely responsible for the use of any application example or information described within this document. The described examples and solutions are examples only and do not represent any comprehensive or complete solution. The user shall determine at its sole discretion, or as the case may be, customize, program or add value to the ABB products including software by creating solutions for the end customer and to assess whether and to what extent the products are suitable and need to be adjusted or customized.

This product is designed to be connected to and to communicate information and data via a network interface. It is the users sole responsibility to provide and continuously ensure a secure connection between the product and users or end customers network or any other network (as the case may be). The user shall establish and maintain any appropriate measures (such as but not limited to the installation of firewalls, application of authentication measures, encryption of data, installation of anti-virus programs, etc) to protect the product, the network, its system and the interface against any kind of security breaches, unauthorized access, interference, intrusion, leakage and/or theft of data or information. ABB AG is not liable for any damages and/or losses related to such security breaches, any unauthorized access, interference, intrusion, leakage and/or theft of data or information.

ABB AG shall be under no warranty whatsoever whether express or implied and assumes no responsibility for the information contained in this document or for any errors that may appear in this document. ABB AG's liability under or in connection with this Brochure or the files included within the Brochure, irrespective of the legal ground towards any person or entity, to which the Brochure has been made available, in view of any damages including costs or losses shall be excluded. In particular ABB AG shall in no event be liable for any indirect, consequential or special damages, such as – but not limited to – loss of profit, loss of production, loss of revenue, loss of data, loss of use, loss of earnings, cost of capital or cost connected with an interruption of business or operation, third party claims. The exclusion of liability shall not apply in the case of intention or gross negligence. The present declaration shall be governed by and construed in accordance with the laws of Switzerland under exclusion of its conflict of laws rules and of the Vienna Convention on the International Sale of Goods (CISG).

ABB AG reserves all rights in particular copyrights and other intellectual property rights. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in part - is not permitted without the prior written consent of ABB AG.

© Copyright ABB 2014

All rights reserved

Power and productivity
for a better world™ 