

Tomfaucet



User's Manual



RB1021

INSTALLATION INSTRUCTIONS

Installation Manual

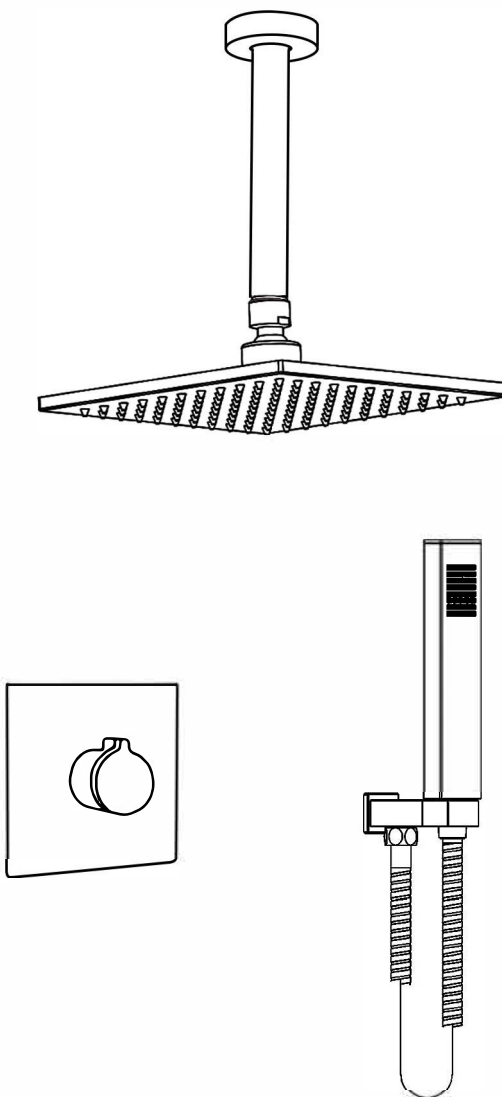

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Orange, California 92667-2816 • (949) 472-4100 Fax (949) 472-4244 • www.iapmo.org

ANSI **IAPMO R&T** **UPC**

CERTIFICATE OF LISTING

The most updated information on this Certificate of Listing is available online at pld.iapmo.org

Effective Date: August 2013 Void After: August 2016

Product: Plumbing Fixture Fittings File No. 8727

Issued To: Batwing Water Cartridge Co., Inc.
No. 23 Hillside Road
Shelton, CT 06484
Shelton, CT 06484

Identification: Plumbing supply fittings complying with this standard shall be marked with the manufacturer's recognized name, trademark, or other mark or, in the case of fittings, the name, trademark, or other mark of the fitting manufacturer. The marking shall be accompanied by use of a permanent mark or by placing a permanent label on the product. Marking on plumbing supply fittings shall be visible after installation.

Single handle, single-control, automatic operation mixing basin and shower valves shall have interchangeable control settings in which the settings are indicated by words ("cold", "open", "hot", etc.), by numbers, or graphically.

Products shall be marked with the manufacturer's name, trademark, or other mark as well as the model number, in the case of private labeling, the name, trademark, or mark of the customer for whom the fitting was manufactured as well as the model number.

David McHenry
Chairman, Product Certification Committee

Ron Chang
CEO, The IAPMO Group

UPC

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Orange, California 92667-2816 • (949) 472-4100 Fax (949) 472-4244 • www.iapmo.org

ANSI **IAPMO R&T** **UPC**

CERTIFICATE OF LISTING

The most updated information on this Certificate of Listing is available online at pld.iapmo.org

Effective Date: October 2016 Void After: 11/28/2016

Product: Flexible Water Cartridges File No. 4955

Issued To: Tushan Flagship Plumbing Hose & Parts Co., Ltd.
Fushan Industry Zone
Tushan County
Dongguan 517400, China

Identification: Manufacturer's name or trademark and cUPC certification mark. Special note on label "For use with water in exposed locations only."

Characteristics: Flexible water cUPC hoses manufactured in various sizes, lengths and metal end fittings for hot or cold water applications that consist of an inner tube, which may or may not have an outer braided cover. Connections are to be installed for use in accessible locations only and in accordance with the manufacturer's instruction, and the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance to the applicable requirements of ISO/IEC 17025.

Products are in compliance with the following code(s):
Uniform Plumbing Code (UPC)

David McHenry
Chairman, Product Certification Committee

Ron Chang
CEO, The IAPMO Group

UPC

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Orange, California 92667-2816 • (949) 472-4100 • www.iapmo.org

ANSI **IAPMO R&T** **UPC**

CERTIFICATE OF LISTING

The most updated information on this Certificate of Listing is available online at pld.iapmo.org

Effective Date: 9/4/2016 Void After: 8/31/2017

Product: Plumbing Fixture Fittings File No. 4528

Issued To: Hager, Inc.
171 Hallsboro Rd
Waterbury, CT 06705

Identification: Each fitting cUPC shall bear permanent legible markings to identify the manufacturer. This marking shall be the trade name, trademark, or other mark known to identify the manufacturer. The product shall also bear all other markings required by the standard. The marking shall be located where it can be readily seen after installation is complete. The product of packaging shall also bear the cUPC certification mark.

Characteristics: Plumbing fixture fittings comply with the requirements of the latest edition of the manufacturer's instructions and the requirements of the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance to the applicable requirements of ISO/IEC 17025.

Products are in compliance with the following code(s):
Uniform Plumbing Code (UPC)
National Plumbing Code of Canada


Tom Collins
Chairman, Product Certification Committee

Ron Chang
CEO, The IAPMO Group


UPC

INSTALLATION STEPS

This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.




Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.




1.Installation Steps of Valve Body


1). According to the product, set the proper height and correct position of the installation. (Please double check, especially the correct space between the wall and valve trim plate.)

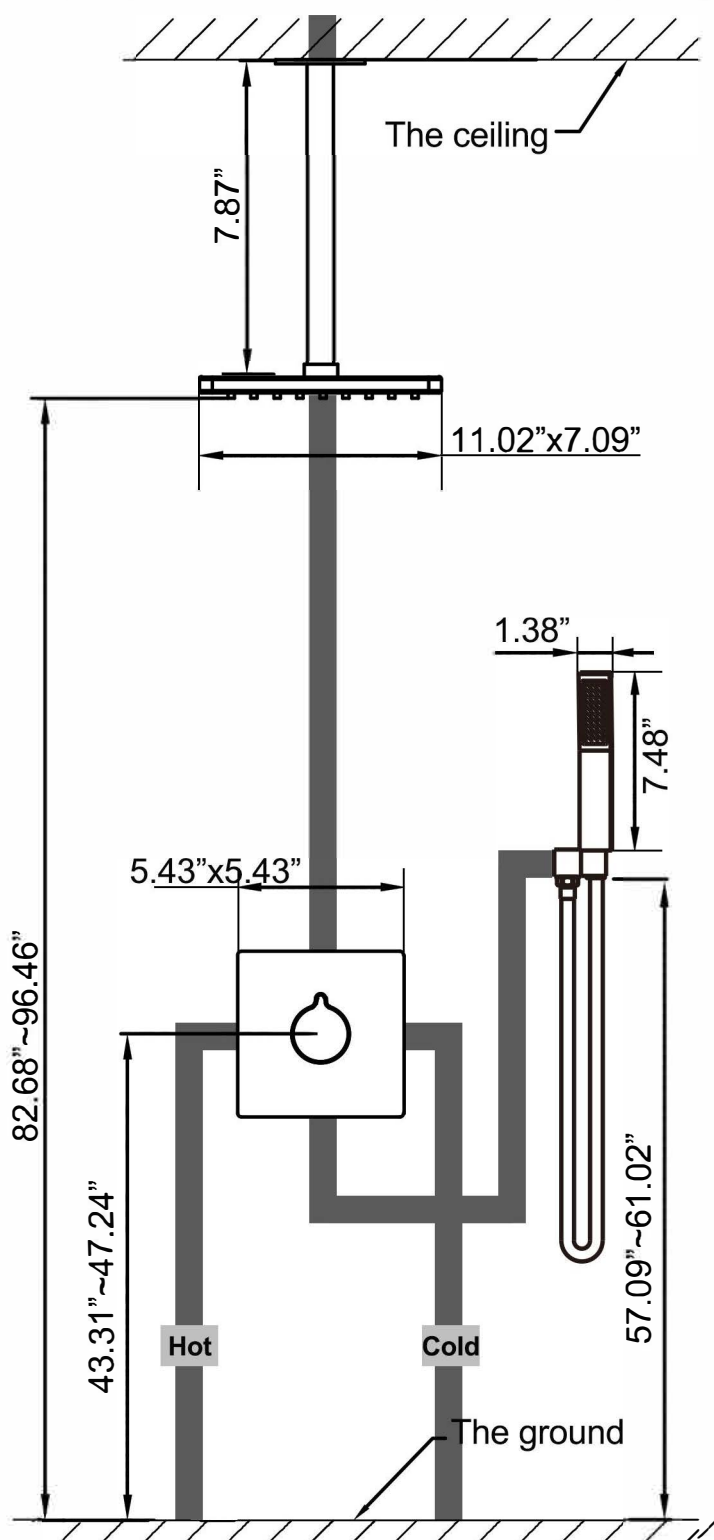

2). Dimensions of the embedded box for dual-function shower set

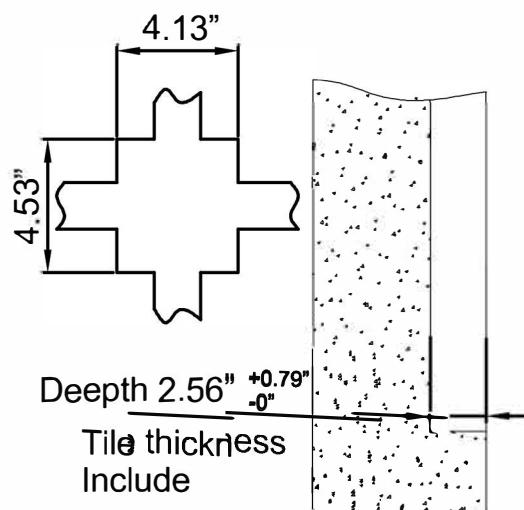

3). Put the product body into the pre-embed slots and be close to the bottomplane of the groove. Check the level meter that comes with the product, and adjust the bottom of the groove so that the air ball in the level can be in the horizontal line.

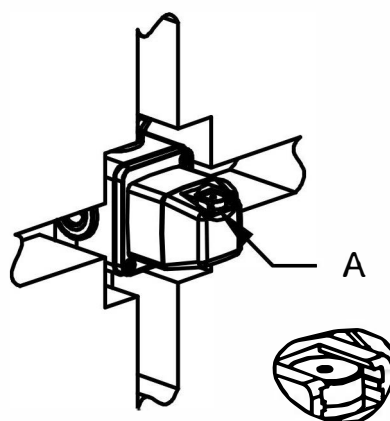


A 3:1


Level meter magnified view

INSTALLATION STEPS


4). Punch 4 holes in the pre-embed slots ($\varnothing=0.24"$, depth=0.31").

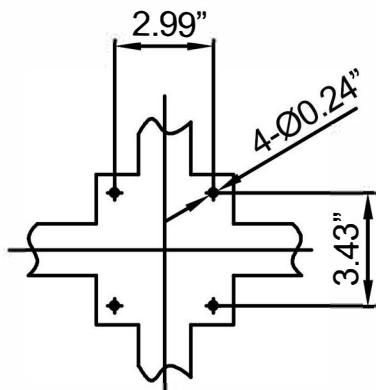


5). Drive expansion sleeves into the 4 holes.

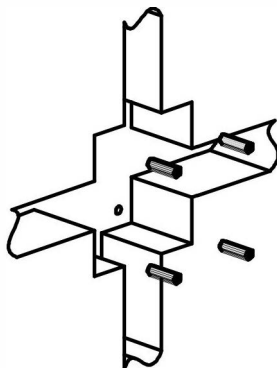


6). Connect the cold and hot inlet pipes, top shower outlet pipe/hand spray pipe and the adapters in order. Note: the thread connection should be wrapped with Teflon tape.

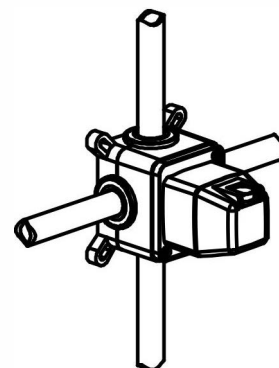


7). Secure the valve body in the slot with self-tapping screws and connect the cold and hot inlet pipes; (Note: left/HOT; right/COLD.)

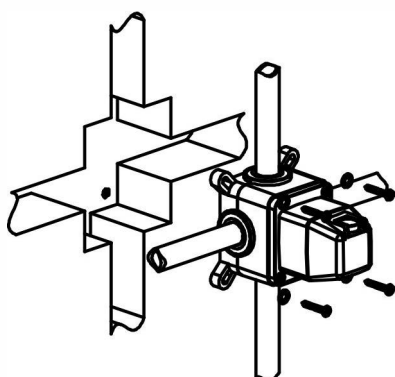


8). Check that the pipe connections are free of leaks. Then seal the pre-buried valve with cement concrete, tiled the wall.

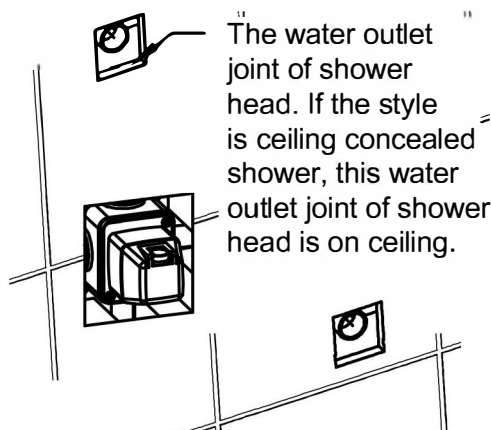


9). Triple check before you tile the wall. Make sure the correct space is reserved for the control box and the water outlet. The control box should be flush with the tile surface when the tile is finished.

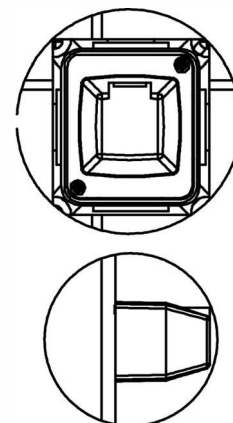

10). Unscrew the screws and remove the plastic shield.

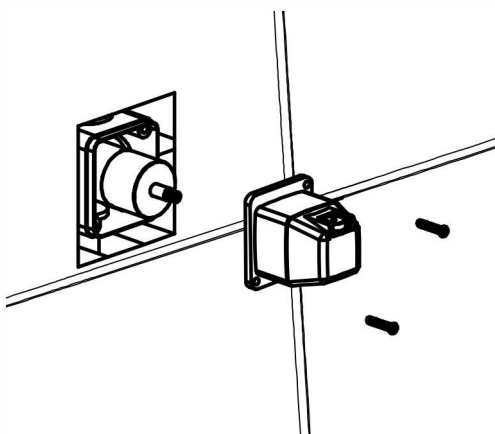


11). Install the panel and handles in order.

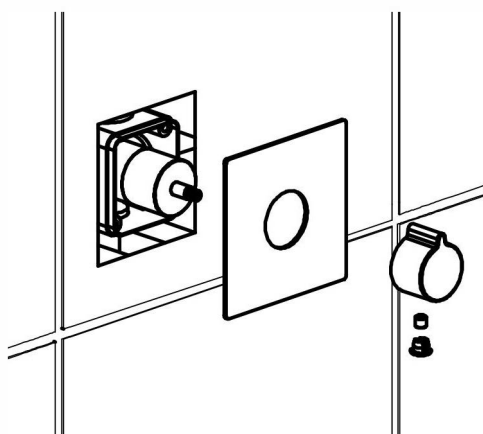


INSTALLATION STEPS

2.Installation Steps of Rain shower


1). Attach the cover plate to the longer tail of the shower arm.



2). Shower arm longer thread with Teflon tape.




3. Screw the shower head clockwise onto the lower end of the shower pipe.

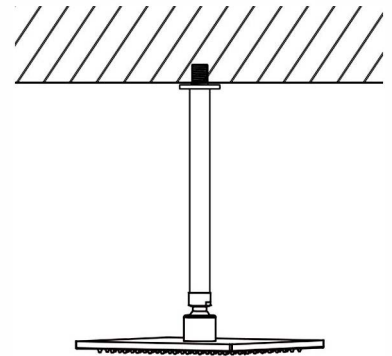


3.Installation Steps of Hand Shower


1). Wrap supply elbow thread with Teflon tape and attach cover plate to it.



2). Screw the shower holder clockwise onto the hand-shower outlet.



3). Place rubber washers in both ends of the hose Connect the shower hose to the supply elbow and shower head. Note the ends of shower hose to be connected correctly.

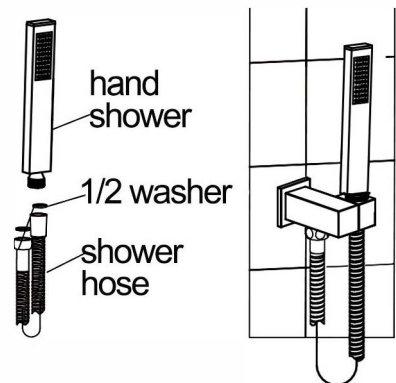

CLEANING CARE

In order to keep the appearance of faucet clean,bright and good performance, please take care of the faucet as follows;

- 1.Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
- 3.Do not use abrasive deterfgent, polish, emery cloth, paper towel or scraper, etc.;
- 4.Do not use acid cleaner,or cleaner and soap with insoluble gran etc.;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show, The bubbler can be unscrewed, rinsed with water, and then installed back in place.





Tomfaucet

Match Your Ideal Bathroom & Kitchen

www.tomfaucet.com