



LOW NOISE 150mA L.D.O REGULATOR

R1110N SERIES

OUTLINE

The R1110N Series are voltage regulator ICs with high output voltage accuracy, lowest supply current, low ON Resistance and high Ripple Rejection by CMOS process. Each of these voltage regulator ICs consists of a voltage reference unit, an error amplifier, resistors, a current limit circuit and a chip enable circuit.

These ICs perform with low dropout voltage and a chip enable function.

The Dynamic Response to line and load is fast, so these ICs are very suitable for the power supply for handheld communication equipment.

The output voltage of these ICs is fixed with high accuracy.

Since the package for these ICs are SOT-23-5(Mini-mold) package, high density mounting of the ICs on boards is possible.

FEATURES


- Ultra-Low Supply Current TYP. 35 μ A
- Standby Current TYP. 0.1 μ A
- Dropout Voltage TYP. 0.2V ($I_{OUT}=100mA$)
- High Ripple Rejection TYP. 70dB ($f=1kHz$)
- High Accuracy Output Voltage $\pm 2.0\%$
- Low Temperature-Drift Coefficient of
Output Voltage TYP. $\pm 100ppm/^\circ C$
- Excellent Line Regulation TYP. 0.05%/V
- Pinout Similar to the LP2980
- Small Package SOT-23-5 (Mini-mold)

APPLICATIONS

- Power source for portable communication tools, cameras and VCRs.
- Power source for battery-powered equipment.
- Power source for domestic appliances.

■ 7744690 0004022 T25 ■

RICOH

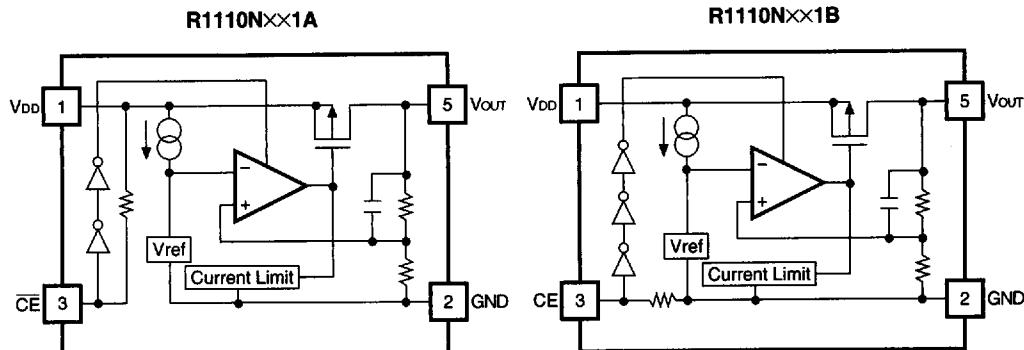BLOCK DIAGRAM**SELECTION GUIDE**

The output voltage, the active type, the packing type and the taping type for the ICs can be selected at the user's request. The selection can be made by designating the part number as shown below:

R1110N ××1×-×× ← Part Number

↑ ↑ ↑

a b c


Code	Contents
a	Setting Output Voltage (Vout) : Stepwise setting with a step of 0.1V in the range of 2.0V to 6.0V is possible.
b	Designation of Chip enable Active Type : A : "L" active type B : "H" active type
c	Designation of Taping Type : Ex. TR, TL (refer to Taping Specifications, TR type is prescribed as a standard.)

■ 7744690 0004023 961 ■

RICOH

PIN CONFIGURATION

• SOT-23-5

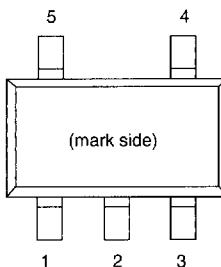

PIN DESCRIPTION

Pin No.	Symbol	Pin Description
1	VDD	Input Pin
2	GND	Ground Pin
3	CE or \overline{CE}	Chip Enable Pin
4	NC	No Connection
5	VOUT	Output Pin

■ 7744690 0004024 8T8 ■

RICOH

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V _{IN}	Input Voltage	9	V
V _{C E}	Input Voltage for CE/ \overline{CE} Pin	-0.3 to V _{IN} +0.3	V
V _{OUT}	Output Voltage	-0.3 to V _{IN} +0.3	V
I _{OUT}	Output Current	200	mA
P _D	Power Dissipation	250	mW
T _{opt}	Operating Temperature Range	-40 to 85	°C
T _{stg}	Storage Temperature Range	-55 to 125	°C

ABSOLUTE MAXIMUM RATINGS

Absolute Maximum ratings are threshold limit values that must not be exceeded even for an instant under any conditions. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

ELECTRICAL CHARACTERISTICS

• R1110N××A

Topt=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
VOUT	Output Voltage	VIN=setVOUT=1.0V 1mA≤IOUT≤30mA	×	0.98	×	1.02
IOUT	Output Current	VIN=setVOUT=1.0V when VOUT=setVOUT-0.1V	150			mA
$\frac{\Delta V_{\text{OUT}}}{\Delta I_{\text{OUT}}}$	Load Regulation	VIN=setVOUT=1.0V 1mA≤IOUT≤80mA		12	40	mV
V _{DIF}	Dropout Voltage	refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE				
Iss	Supply Current	VIN=setVOUT=1.0V		35	70	μA
Istandby	Standby Current	VIN=setVOUT=1.0V, VCE=VIN		0.1	1.0	μA
$\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}}}$	Line Regulation	refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE				
RR	Ripple Rejection	f=1kHz, Ripple 0.5Vp-p VIN=setVOUT=1.0V		70		dB
V _{IN}	Input Voltage		2.7		8	V
$\frac{\Delta V_{\text{OUT}}}{\Delta \text{Topt}}$	Output Voltage Temperature Coefficient	IOUT=30mA -40°C≤Topt≤85°C		±100		ppm/°C
I _{lim}	Short Current Limit	VOUT=0V		50		mA
R _{PU}	Pull up resistance for CE pin		2.5	5	10	MΩ
V _{CEH}	CE Input Voltage "H"		1.5		V _{IN}	V
V _{CEL}	CE Input Voltage "L"		0		0.25	V
en	Output Noise	BW=10Hz to 100kHz		60		pVrms

7744690 0004026 670

R1110N

• R1110N××B

Topt=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
VOUT	Output Voltage	VIN=setVOUT=1.0V 1mA≤IOUT≤30mA	×0.98		×1.02	V
IOUT	Output Current	VIN=setVOUT=1.0V when VOUT=setVOUT=0.1V	150			mA
$\frac{\Delta V_{\text{OUT}}}{\Delta I_{\text{OUT}}}$	Load Regulation	VIN=setVOUT=1.0V 1mA≤IOUT≤80mA		12	40	mV
V _{DIF}	Dropout Voltage	refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE				
Iss	Supply Current	VIN=setVOUT=1.0V		35	70	μA
Istandby	Standby Current	VIN=setVOUT=1.0V, VCE=GND		0.1	1.0	μA
$\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}}}$	Line Regulation	refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE				
RR	Ripple Rejection	f=1kHz, Ripple 0.5Vp-p VIN=setVOUT=1.0V		70		dB
VIN	Input Voltage		2.7		8	V
$\frac{\Delta V_{\text{OUT}}}{\Delta T_{\text{opt}}}$	Output Voltage Temperature Coefficient	IOUT=30mA −40°C≤Topt≤85°C		±100		ppm/°C
Ilim	Short Current Limit	VOUT=0V		50		mA
RPD	Pull down resistance for CE pin		2.5	5	10	MΩ
VCEH	CE Input Voltage "H"		1.5		VIN	V
VCEL	CE Input Voltage "L"		0		0.25	V
en	Output Noise	BW=10Hz to 100kHz		60		μVrms

• ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE


Topt=25°C

Output Voltage Vout (V)	Dropout Voltage			Line Regulation				
	V _{DIF} (V)			ΔV _{out} /ΔV _{in} (%/V)				
	Conditions	TYP.	MAX.	Conditions	TYP.	MAX.		
2.0≤VOUT≤2.4	IOUT=100mA	0.30	0.70	IOUT=30mA setVOUT+0.7V≤VIN≤8V	0.05	0.20		
2.5≤VOUT≤2.7		0.24	0.35	IOUT=30mA setVOUT+0.5V≤VIN≤8V				
2.8≤VOUT≤3.3		0.20	0.30					
3.4≤VOUT≤6.0		0.17	0.26					

7744690 0004027 507

RICOH


OPERATION

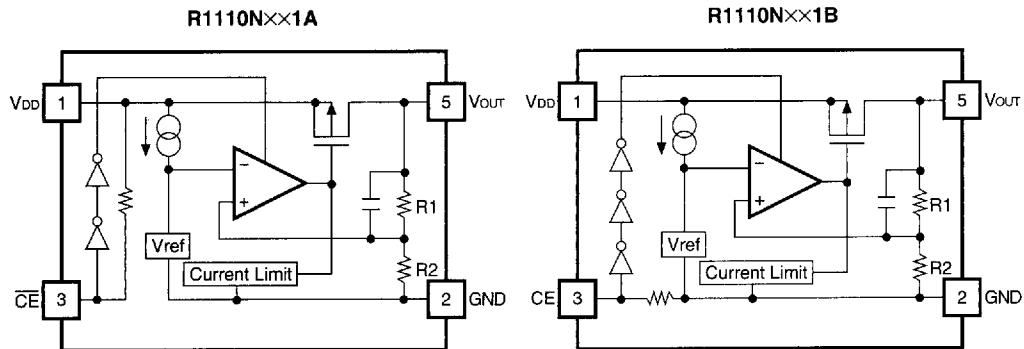


In these ICs, fluctuation in Output Voltage V_{OUT} is detected by Feed-back Registers R₁, R₂, and the result is compare with a reference voltage by Error Amplifier, so that a constant voltage is output.

A current limit circuit working for Short Protect and a chip enable circuit are included.


TEST CIRCUITS

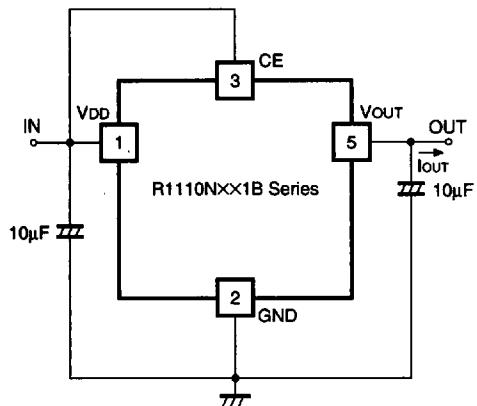


Standard Test Circuit

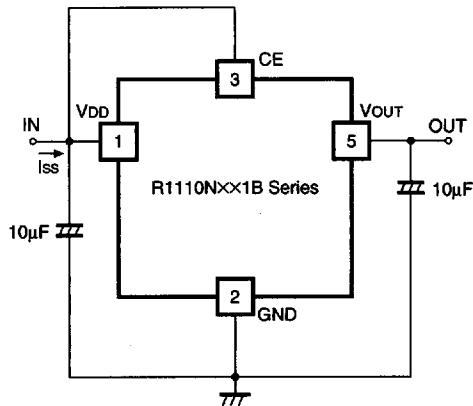

Test Circuit for Supply Current

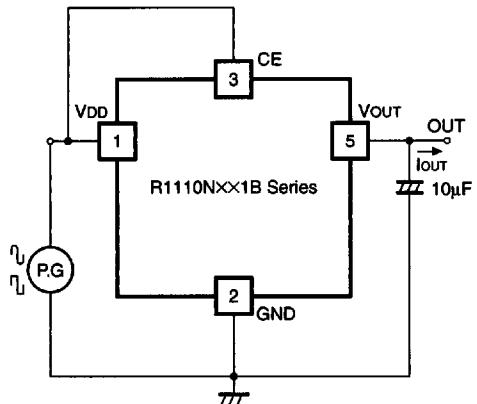

Test Circuit for Ripple Rejection and Line Transient Response

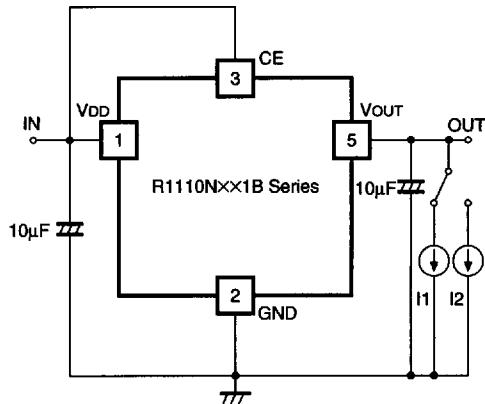




Test Circuit for Load Transient Response

■ 7744690 0004029 38T ■



RICOH

TYPICAL CHARACTERISTICS

1) Output Voltage vs. Output Current

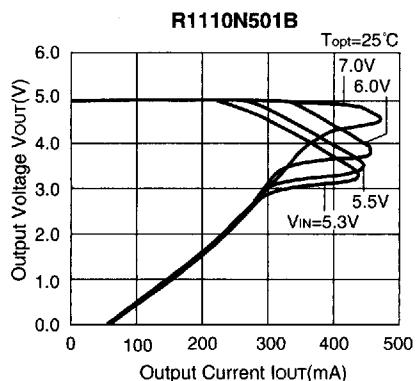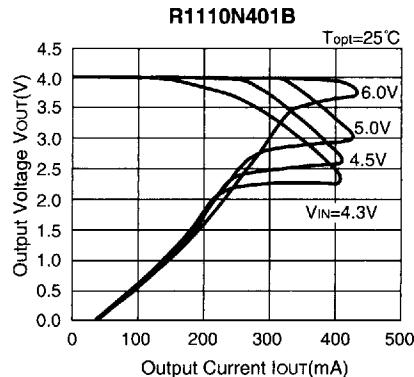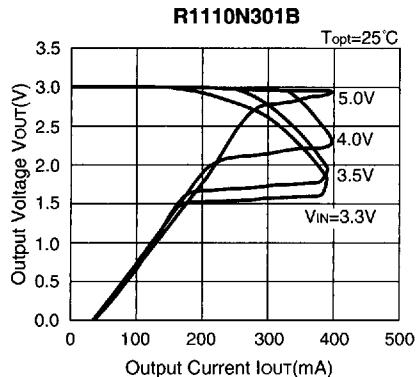


2) Output Voltage vs. Input Voltage


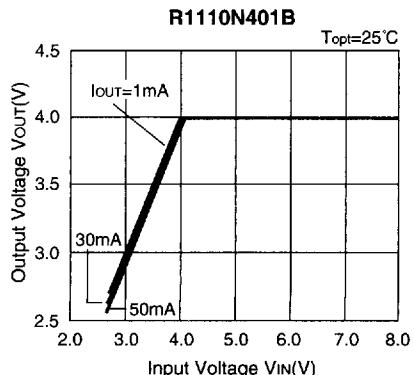
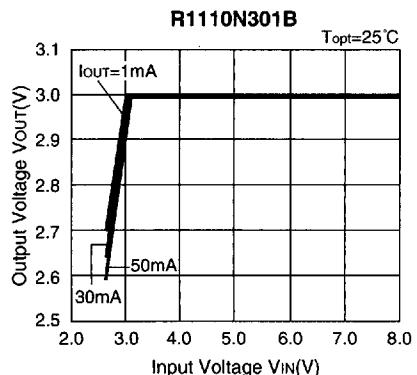


7744690 0004030 OT1

RICOH

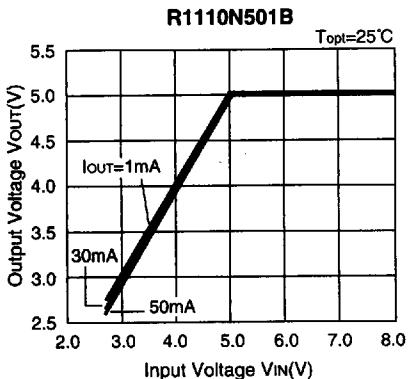




3) Dropout Voltage vs. Output Current

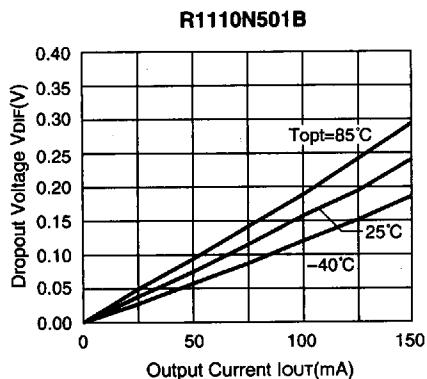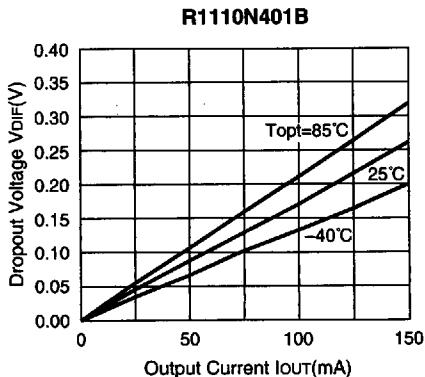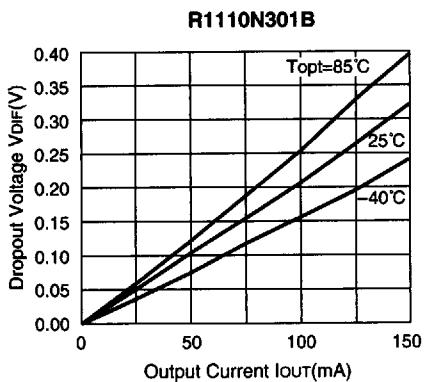



7744690 0004031 T38

RICOH

4) Output Voltage vs. Temperature

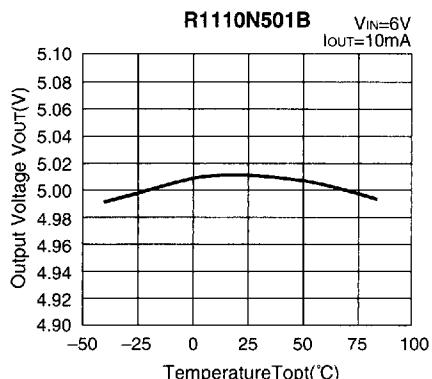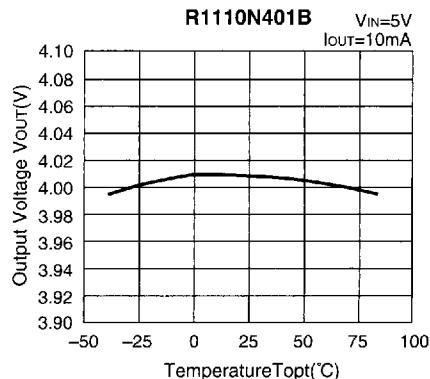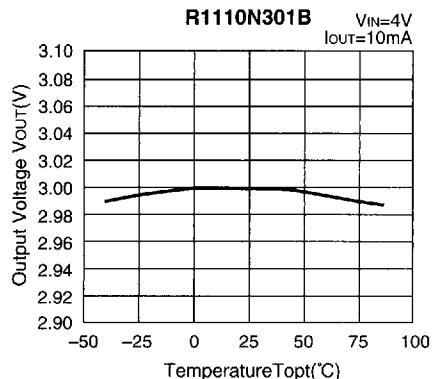


5) Supply Current vs. Input Voltage

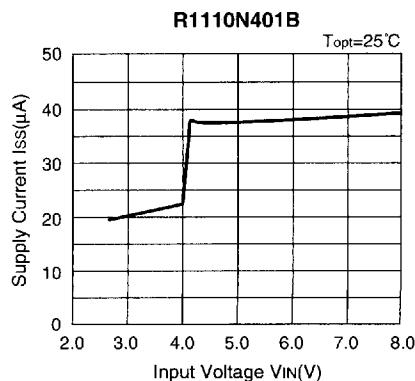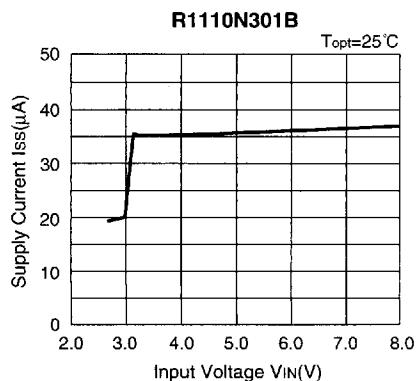

7744690 0004032 974


R1110N501B

$T_{opt}=25^{\circ}\text{C}$

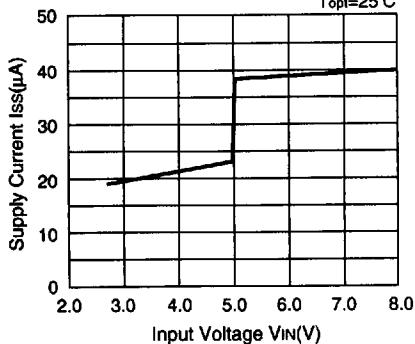


6) Supply Current vs. Temperature


R1110N301B

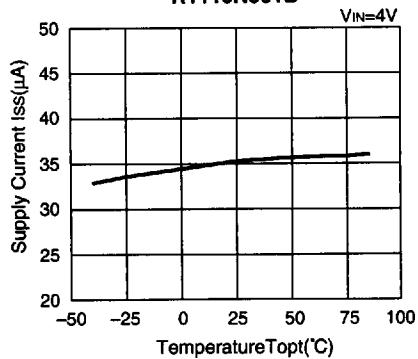

R1110N401B

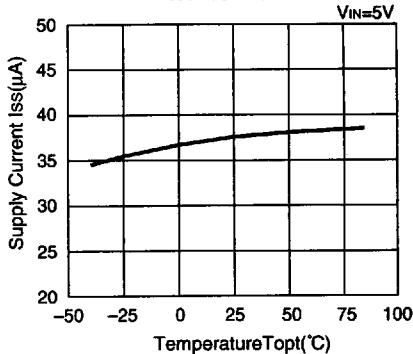


R1110N501B

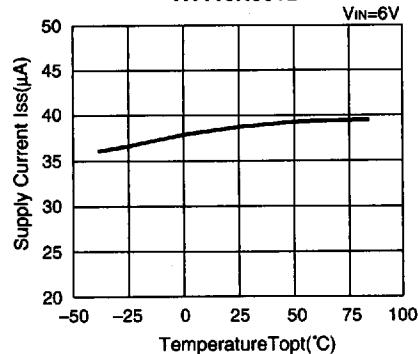





7744690 0004033 800

RICOH



7) Dropout Voltage vs. Set Output Voltage

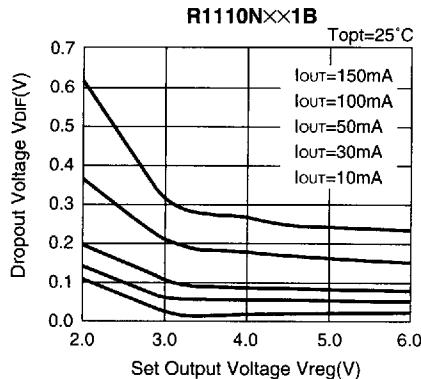




8) Ripple Rejection vs. Frequency

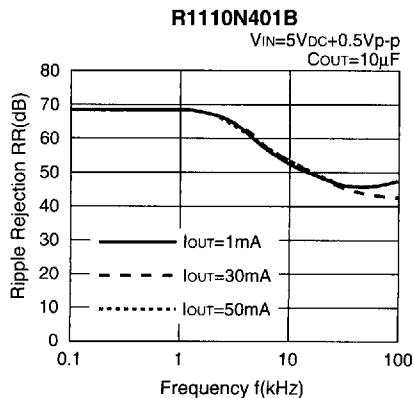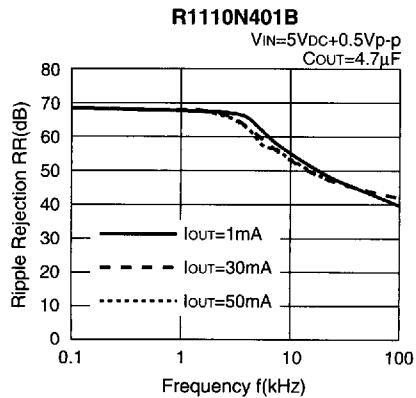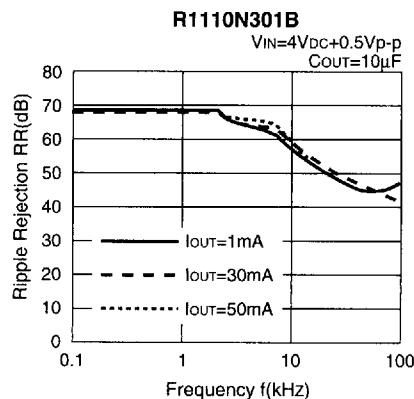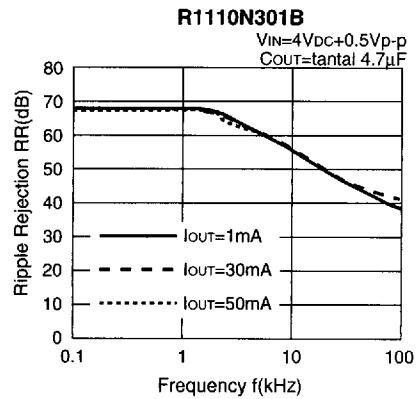

7744690 0004034 747

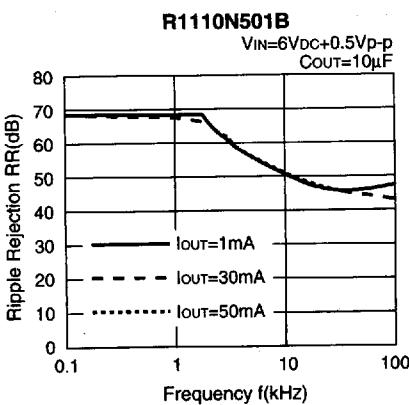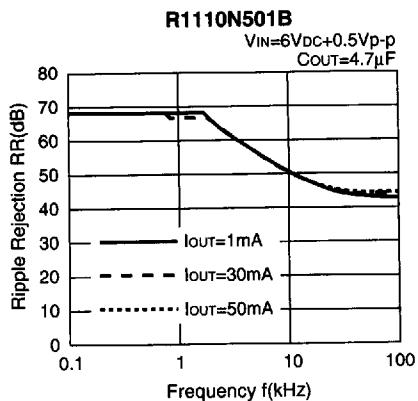

9) Ripple Rejection vs. Input Voltage (DC bias)

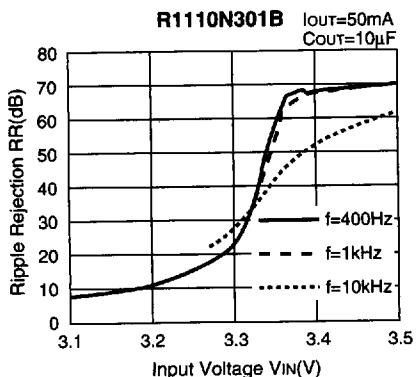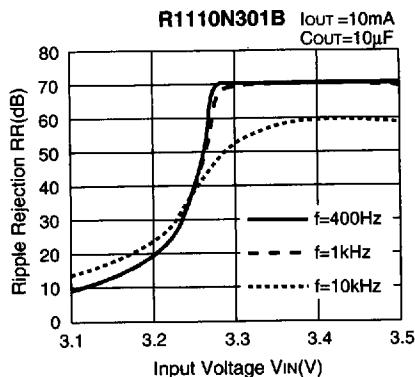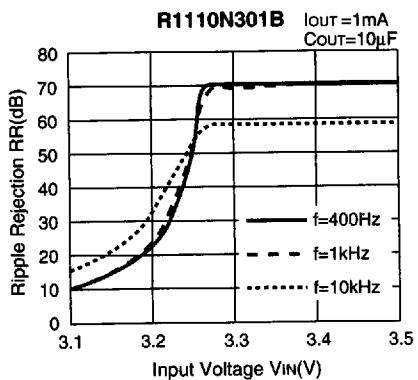


■ 7744690 0004035 683 ■

RICOH

10) Line Transient Response


R1110N301B

$I_{OUT}=30mA$
 $t_r=t_f=5\mu s$
 $C_{OUT}=\text{Tantalum } 4.7\mu F$

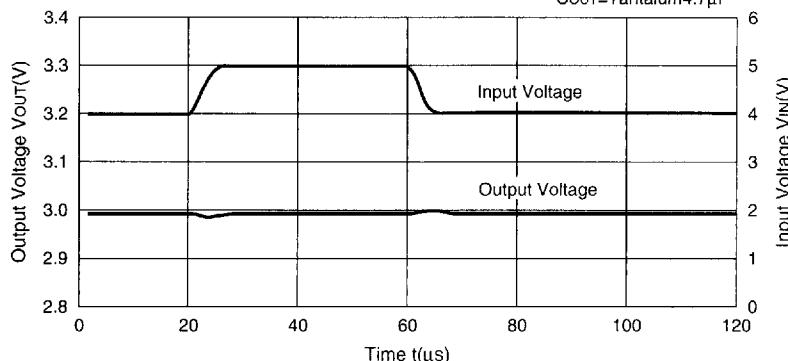


R1110N301B

$I_{OUT}=30mA$
 $t_r=t_f=5\mu s$
 $C_{OUT}=\text{Tantalum } 6.8\mu F$

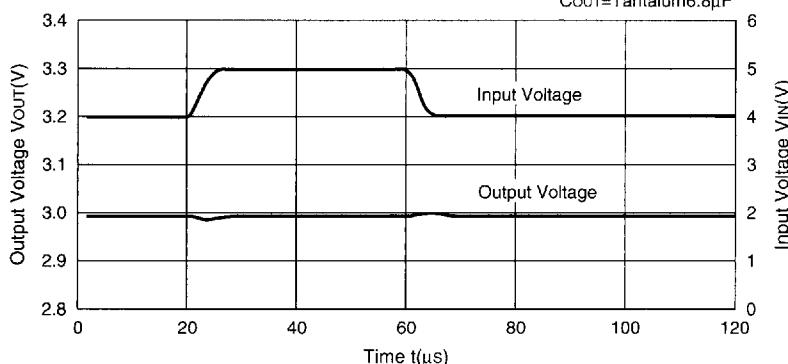

R1110N301B


$I_{OUT}=30mA$
 $t_r=t_f=5\mu s$
 $C_{OUT}=\text{Tantalum } 10\mu F$

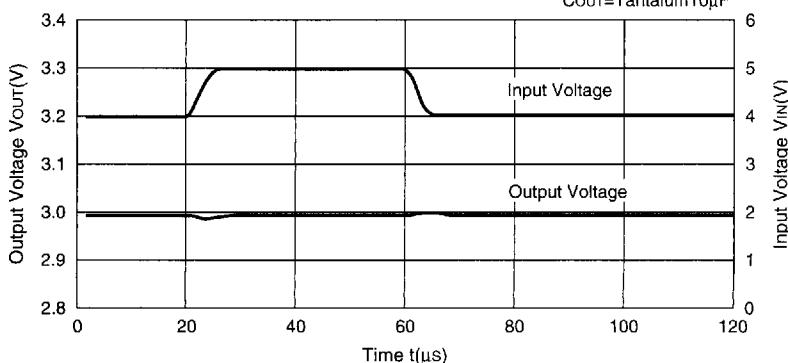

11) Load Transient Response


R1110N301B

V_{IN}=4V
C_{IN}=Tantalum1μF
C_{OUT}=Tantalum4.7μF

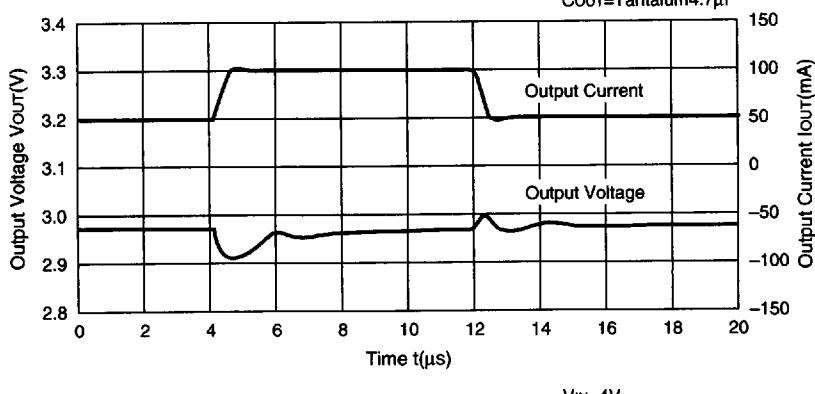


R1110N301B

V_{IN}=4V
C_{IN}=Tantalum1μF
C_{OUT}=Tantalum6.8μF

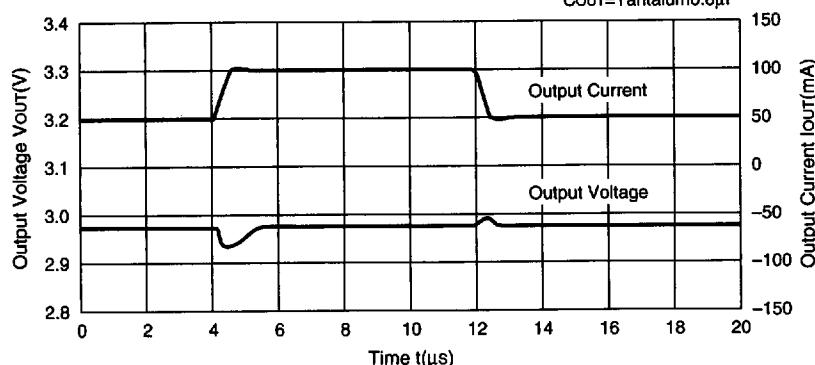

R1110N301B

V_{IN}=4V
C_{IN}=Tantalum1μF
C_{OUT}=Tantalum10μF

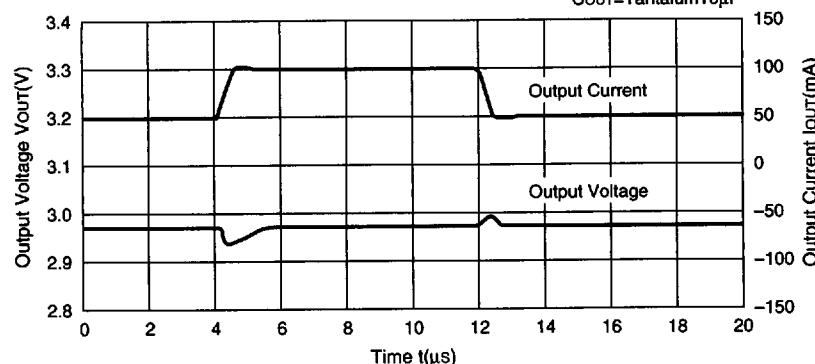

7744690 0004037 456

RICOH

APPLICATION HINTS

When using these ICs, be sure to take care of following points :

- In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, be sure to use a capacitor C_{OUT} with good frequency characteristics and ESR (Equivalent Series Resistance) of which is in the range described as follows : The relations between I_{OUT} (Output Current) and ESR of Output Capacitor are shown below. The conditions when the white noise level is under $40\mu V$ (Avg.) are marked as the hatched area in the graph. (note : When the additional ceramic capacitors are connected to the Output Pin with Output capacitor for phase compensation, there are possibilities that the operation will be unstable. Because of this, test these ICs with as same external components as ones to be used on the PCB.)




< measuring conditions >

$V_{IN}=4V$


Frequency band : 10Hz to 1MHz

Temperature : $25^{\circ}C$

- Make VDD and GND line sufficient. When the impedance of these is high, there is a case to pick up the noise or not to work correctly.
- Connect the capacitor with a capacitance of $1\mu F$ or more between VDD and GND as close as possible.
- Set external components, especially Output Capacitor, as close as possible to the ICs and make wiring shortest.

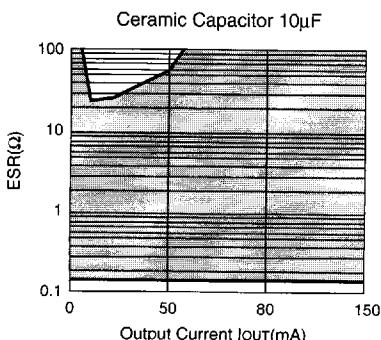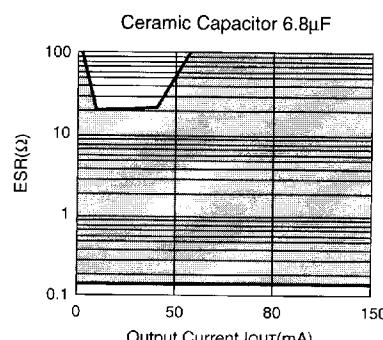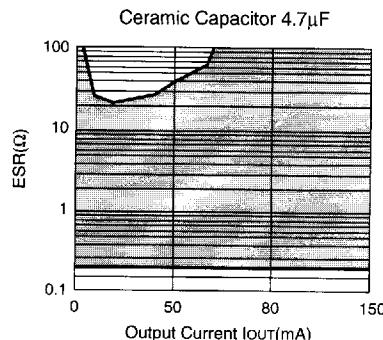


• Measuring Circuit for white noise ; R1110N301B

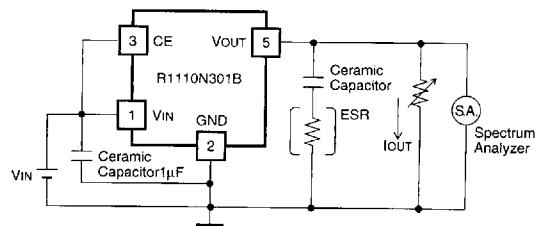

7744690 0004038 392

RICOH

TYPICAL APPLICATION

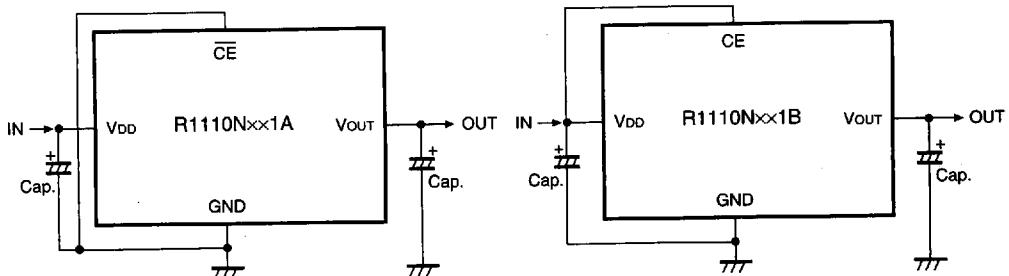

■ 7744690 0004039 229 ■

RICOH