




1) Sensing surface, 2) Notch, 3) LED function indicator, 4) Button

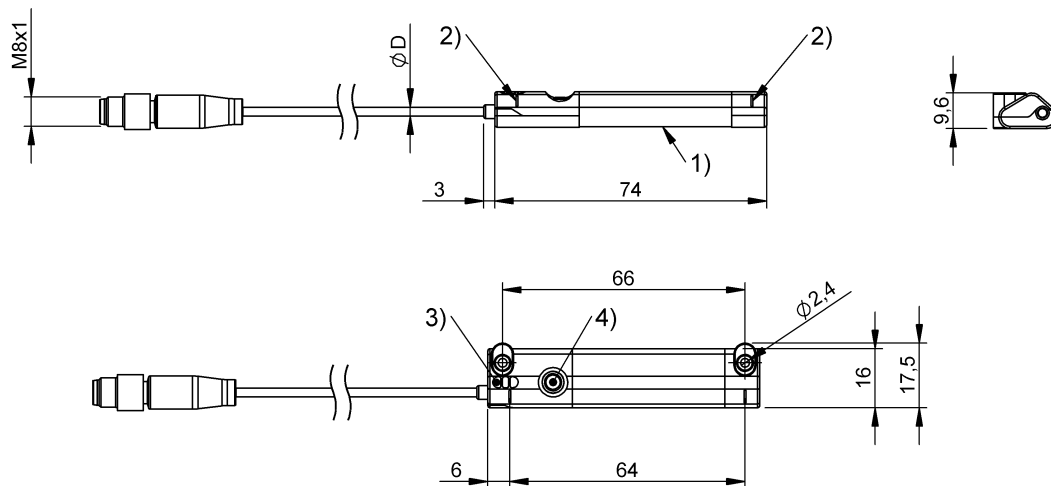

Basic features

Application	Positioning
Approval/Conformity	CE cULus LISTED IO-Link WEEE
Basic standard	IEC 60947-5-2 IEC 60947-5-7
Principle of operation	Magn. Field Positioning System
Scope of delivery	Short guide

Display/Operation

Error diagnostic indicator	Error - LED red
Function indicator	LED yellow
Power indicator	Run - LED green

Electrical connection

Bending radius min., fixed cable	3 x D
Bending radius min., flexible cable	10 x D
Cable	PUR, 0.5 m
Cable diameter D	2.4 mm
Connection	M8x1-Male, 4-pin, A-coded
Number of conductors	4
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Current load capacity in SIO-mode	≤ 100 mA
Load resistance RL max. (Analog I)	500 Ohm
No-load current Io max. at Ue	25 mA
Operating voltage Ub	15...30 VDC
Output current max. (Analog V)	5 mA
Rated insulation voltage Ui	75 V DC
Rated operating voltage Ue DC	24 V
Ready delay tv max.	100 ms

Environmental conditions

Ambient temperature	-25...85 °C
Contamination scale	3
EN 60068-2-27, Shock	30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 2 mm, 3x30 min
ESD	2B (4 kV)
Emission	EN 55022, Class B
Protection degree	IP67

Functional safety

MTTF (40 °C)	201 a
--------------	-------

Material

Housing material	PA 12 Aluminum
Material jacket	PUR

Mechanical data

Dimension	17.5 x 9.6 x 74 mm
Tightening torque max.	0.1 Nm

Output/Interface

Analog output	Analog, voltage/Analog, current selectable 0...10 V/4...20 mA
Interface	IO-Link 1.1
SIO mode	yes

Range/Distance

Measuring range	64 mm
Non-linearity typ.	±250 µm
Repeat accuracy	± 100 µm
Resolution	≤ 1 µm (IO-Link), 12 bits (analog)
Sampling rate max.	1 kHz
Temperature drift max. from end value	±0.3 %

Remarks

Please refer to manual.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams

