

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC


TA4103F

1.9GHz BAND UP CONVERTER APPLICATION



FEATURES

- Built in Lo and IF buffer amplifiers.
- Double balanced MIX circuit
- High conversion gain : $G_C = 3\text{dB}$ (Typ.)
- Recommended operating voltage : $V_{CC} = 2.7\sim 3.3\text{V}$

PIN ASSIGNMENT (Topview)



MARKING

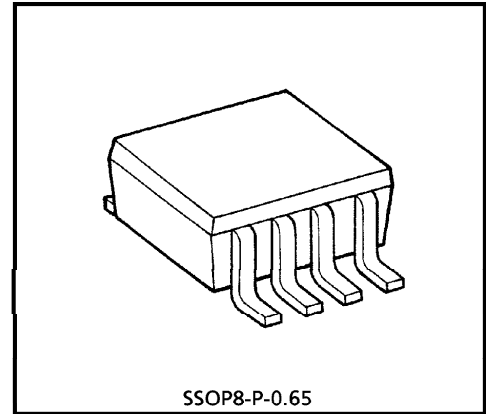

SSOP8-P-0.65
Weight : 0.02g (Typ.)

MAXIMUM RATING (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	5	V
Total Power Dissipation	P_D (*)	300	mW
Operating Temperature	T_{opr}	- 40~85	°C
Storage Temperature Range	T_{stg}	- 55~125	°C

(*) When mounted on the glass epoxy board of 2.5cm² × 1.6t.

961001EBA2


- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

ELECTRICAL CHARACTERISTICS ($V_{CC} = 3V$, $T_a = 25^\circ C$, $Z_g = Z_l = 50\Omega$)


CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
RF Frequency Range	f_{RFout}	—		1895	—	1918	MHz
IF Frequency Range	f_{IFin}			220	—	250	MHz
Lo Frequency Range	f_{LoIn}			1645	—	1698	MHz
Circuit Current	I_{CC}	—	Non Carrier	23	26.5	33	mA
Conversion Gain	G_C	1	$P_{LoIn} = -20dBmW$	1	3	—	dB
Output Power At 1dB Gaing Compression	P_{O1dB}			-19	-17	—	dB
Lo-RF Leakage Power	P_{RFLo}			—	—	-20	dBmW
Lo-IF Leakege Power	P_{IFLo}			—	—	-33	dBmW
Adjacent Channel Leakage Power Ratio	P_{adj}			$P_{RFout} = -18dBmW$ $P_{IFin} = \text{Adjusted}$ $\Delta f = 600kHz$ (Note)	—	-63	—







(Note) Input signal is modulated to $\pi/4QPSK$ ($\alpha = 0.5$). Bit rate is 384 kbps.

BLOCK DIAGRAM

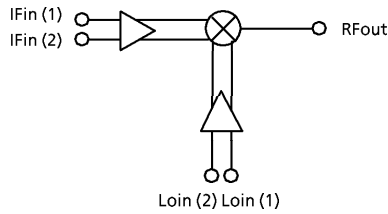



TEST CIRCUIT 1

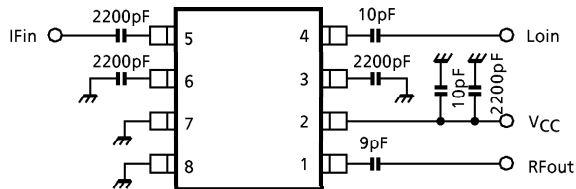

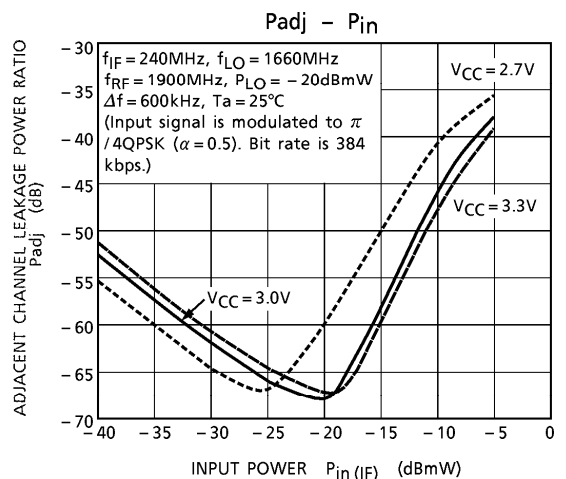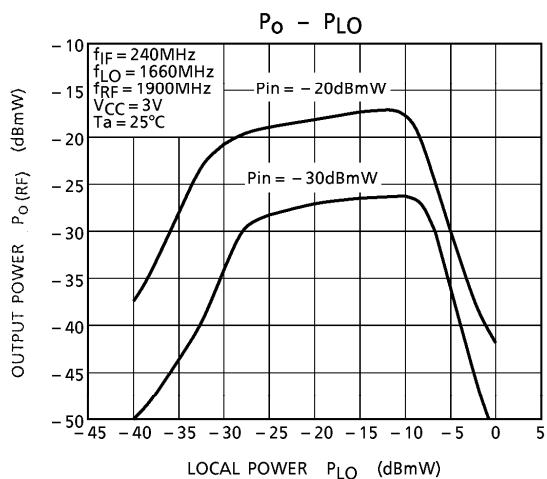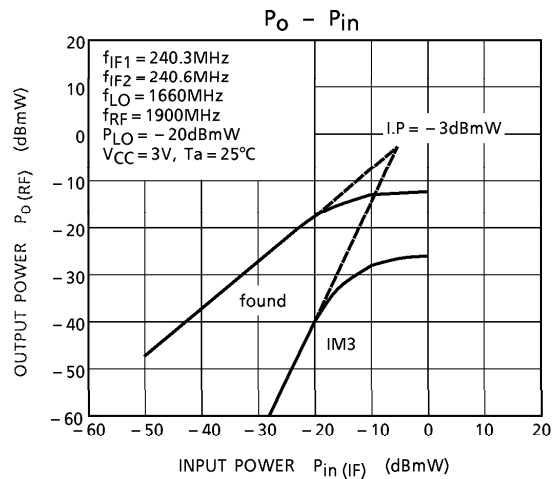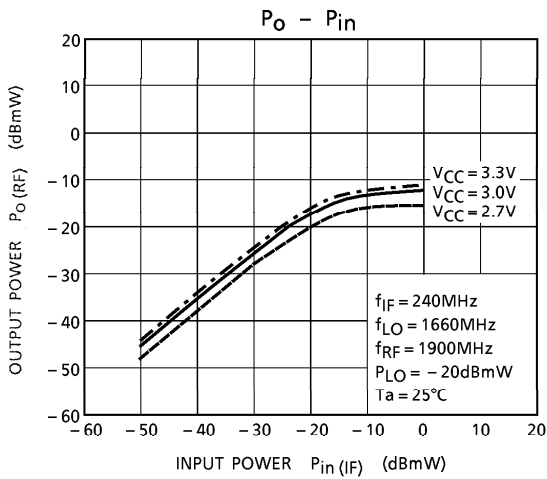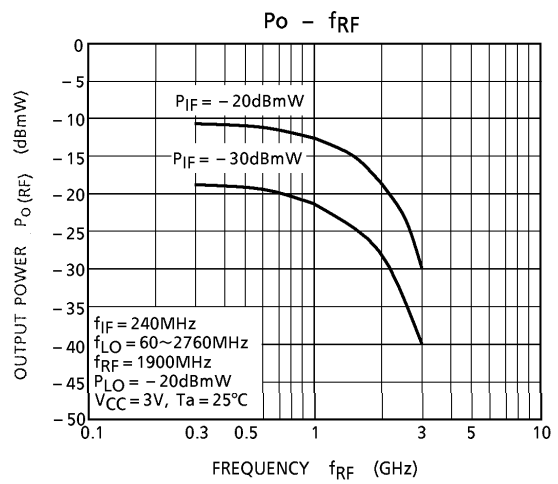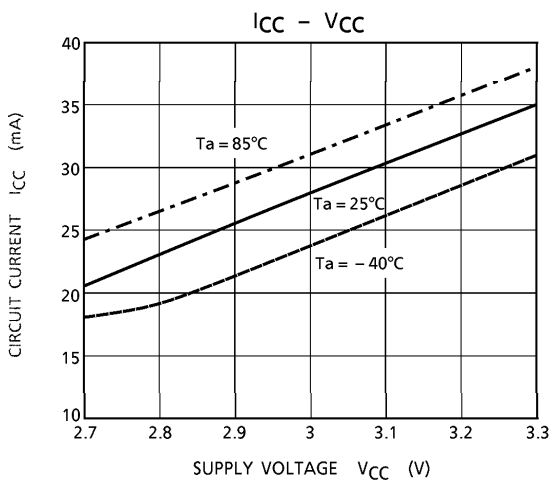

OUTLINE DRAWING
SSOP8-P-0.65

Unit : mm

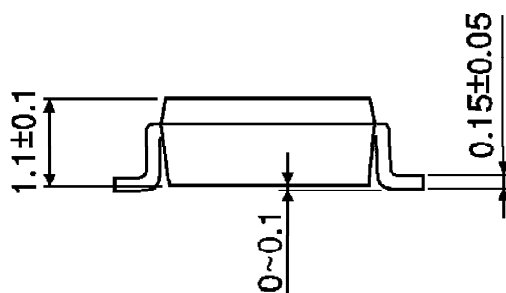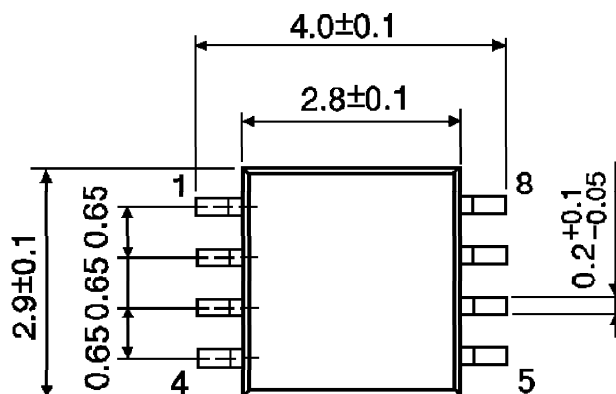

Weight : 0.02g (Typ.)