

# User's Manual for Private Container with Electronic Combination Lock

Applies to Model B-23E1 JJB-23E1、JJB-23E 1-1、G1-930N、G1-931N、G1-932N、G1-933N and B-23E1-1

**Please read this User's Manual carefully before using this product.**



**Its factory code is: 1、5、9.**

## First Time Operation

Open the door of the private container (See "Using the Override Key" in Page 2).

Take out the 4AA batteries from the Private Container, and install it in its compartment. (See "To Replace the Batteries" in Page 2.)

## To Open


Enter the code, then pressing the " " button. The green LED will come on. Turn the knob clockwise  within 5 seconds to open the door of this Private Container.



**Note:** The factory code 1、5、9 should be used to open the door of the Private Container for the first time. Please program your new user code after the first operation. Refer to "To Program Your User Code" for details.

The interval between two button pressing operations should not exceed 20 seconds, otherwise this operation will become invalid.

## To Close

Close the door of Private Container, then turn the knob counterclockwise , and the door will be locked.

## To Program Your User Code


Open the door of Private Container and press the red programming button (See the Figure) located on the back of the door inside the Private Container, coming into process of programming the user code (yellow LED will be on).

Enter your new user code (2-8 digits) followed by pressing the " " button.



**Note:** Please repeat operating the Private Container with your new user code according to "To Open" for several times to confirm that your new user code can open the door. Then close the door and turn knob counterclockwise .

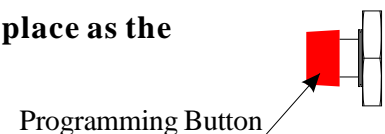

Please keep your new user code in a safe place as the old code becomes invalid now.



Programming Button



## Using the Override Key

Remove the cover of decoration (See Figure A), you will see the override keyhole. Insert the override key (See Figure B) into its hole and turn it clockwise . Then turn the knob clockwise  to open the door of Private Container. (Please remove the override key in time after operation.)

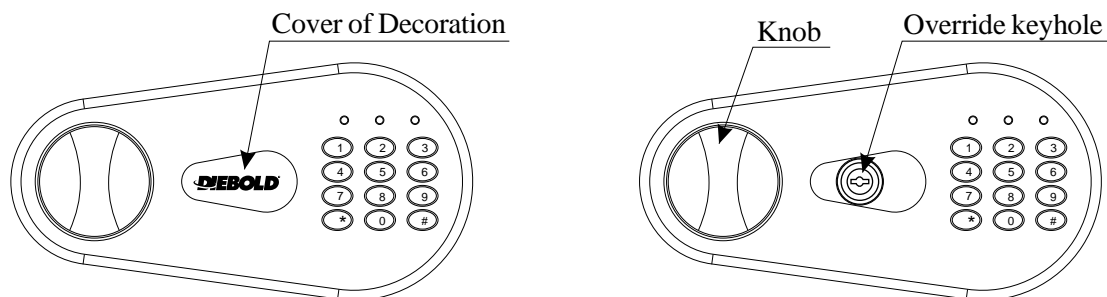


Figure A

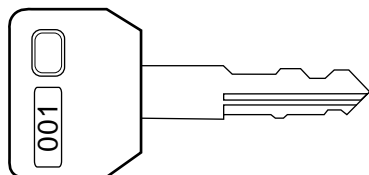


Figure B



**Note:** Please keep your override keys in a safe place. Do not place them in this Private Container!

## To Replace the Batteries

When red LED flashes during you are operating the Private Container, it indicates that the batteries are low and need to be replaced with new ones in time.

### **Replacing Method:**

Open the door of Private Container, remove the battery compartment cover on the back of the door, then remove the old batteries and install the new ones properly as the polarity marks show. Replace the compartment cover into its place.



**Recommend to use LR6 AA batteries, and attend its polarity marks!**

## To Bolt Down the Private Container

Place the Private Container where it will be installed. Mark the locations of the bolt-down holes back (or underside) of the Private Container, drill the holes, then install and tighten the bolts and nuts.