SINGLE SUPPLY QUAD OPERATIONAL AMPLIFIER

GENERAL DESCRIPTION

The NJM13403 is single-supply quad operational amplifier, which can operate from 2V supply. The features are low offset voltage, low bias current, high slew-rate, free cross-over distortion through the AB class output stage.

The package lineup is DIP, DMP and others compact, which is SON, so that the NJM13403 is suitable for audio for low voltage operation and any other kind of signal amplifier.

(+2V~+14V)

FEATURES

JRC

- Operating Voltage
- Slew Rate
- $(1.2V/\mu s typ.)$ (3.0mA typ.)
- Operating Current Bipolar Technology
- Package Outline

DIP14,DMP14,EMP14,SSOP14,SON14(PRELIMINARY)

8. C OUTPUT

9. C-INPUT

10. C +INPUT

12. D +INPUT

13. D-INPUT

14. D OUTPUT

11. GND

PIN FUNCTION

1. A OUTPUT

2. A-INPUT

3. A +INPUT


5. B +INPUT

6. B-INPUT

7. B OUTPUT


4. V

PIN CONFIGURATION



NJM13403D1/13403M NJM13403E/13403V NJM13403x(PURELIMINARY)

EQUIVALENT CIRCUIT (1/4Shown)

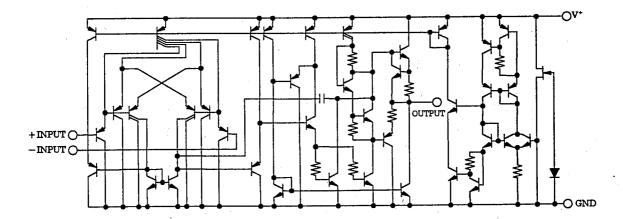

New Japan Radio Co., Ltd.

PACKAGE OUTLINE





NJM13403D1







カタログ版数2 99/06/25 (1/2)

ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT	
Supply Voltage	V ⁺	15	V	
Differential Input Voltage	ViD	14	V	
Input Voltage	Vic	-0.3~+14	V	
Power Dissipation	Po	(DIP8) 700 (DMP8) 300 (EMP8) 300 (SSOP8) 300 (SON8) U.D	mW	
Operating Temperature Range	Topr	-40~+85	℃°	
Storage Temperature Range	Tstg	-40~+125	°C	

■ ELECTRICAL CHARACTERISTICS (V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	۲YP.	MAX.	UNIT
Operating Voltage	Vopr		2	-	14	V
Input Offset Voltage	V _{IO}	Rs=0Ω	-	0.5	4	mV
Input Offset Current	10		-	5	50	nA
Input Bias Current	l _B		-	25	150	nA
Large Signal Voltage Gain	Av	R _L ≧2kΩ	88	100	-	dB
Maximum Output Voltage Swing	Vom	$R_L=2k\Omega$	4.0	4.2	1	V
Input Common Mode Voltage Range	VICM	ι.	0~3.5	-		V
Common Mode Rejection Ratio	CMR		70	90	1	dB
Supply Voltage Rejection Ratio	SVR	•	80	94	1	dB
Output Source Current	ISOURCE	V _{IN} ⁺ =1V,V _{IN} ⁻ =0V	20	35	I	mA
Output Sink Current	ISINK	V _{IN} ⁺ =0V,V _{IN} =1V	10	30	-	mA
Operating Current	lcc	R _L =∞	-	3.0	5.0	mA
Slew Rate	SR	V [*] /V ⁻⁺ =±2.5V,R _L =2kΩ, A _V =0dB,f=1kHz	-	1.2	-	V/µs
Unity Gain Bandwidth	f _T	R _L =2kΩ	—	2.0	-	MHz
Total Harmonic Distortion	THD	R _L =2kΩ,A _V =40dB, f=20kHz,V ₀ =1.5Vrms	-	0.2		%

New Japan Radio Co., Ltd.

MEMO

[CAUTION] The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

New Japan Radio Co., Ltd.