

ClearLine
BBP200 BBP210
Mounting instruction 安装说明书

IEC
EN60598

GB
7000



220V~
240V~

IP66




max
35°C

IK 04

Type 型号	LEDs	Pmax(W) 最大功率(W)	F(Hz) 频率 (Hz)	LxWxH(mm) 长x宽x高(mm)	Wind Area m ² 迎风面积	kg
BBP210 120xLED-HP/NW 220-240 60Hz SI	120	135	60	768x420x105	0.27	13.5
BBP200 60xLED-HP/NW 220-240 60Hz SI	60	73	60	635x336x92	0.17	9.5
BBP210 120xLED-HP/NW 220-240 50Hz SI	120	135	50	768x420x105	0.27	13.5
BBP200 60xLED-HP/NW 220-240 50Hz SI	60	73	50	635x336x92	0.17	9.5
BBP210 120xLED-HP/NW 220-240 60Hz GR	120	135	60	768x420x105	0.27	13.5
BBP200 60xLED-HP/NW 220-240 60Hz GR	60	73	60	635x336x92	0.17	9.5
BBP210 120xLED-HP/NW 220-240 50Hz GR	120	135	50	768x420x105	0.27	13.5
BBP200 60xLED-HP/NW 220-240 50Hz GR	60	73	50	635x336x92	0.17	9.5

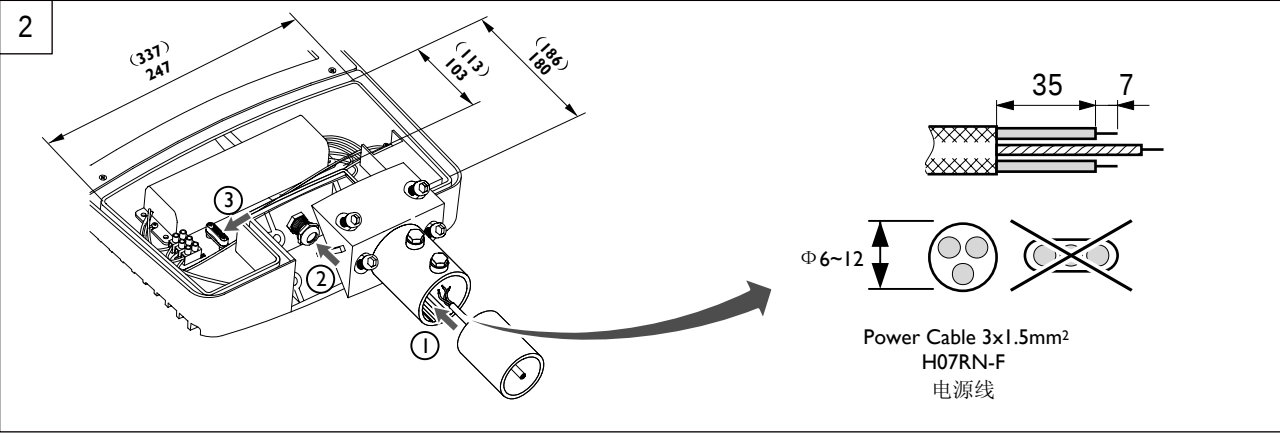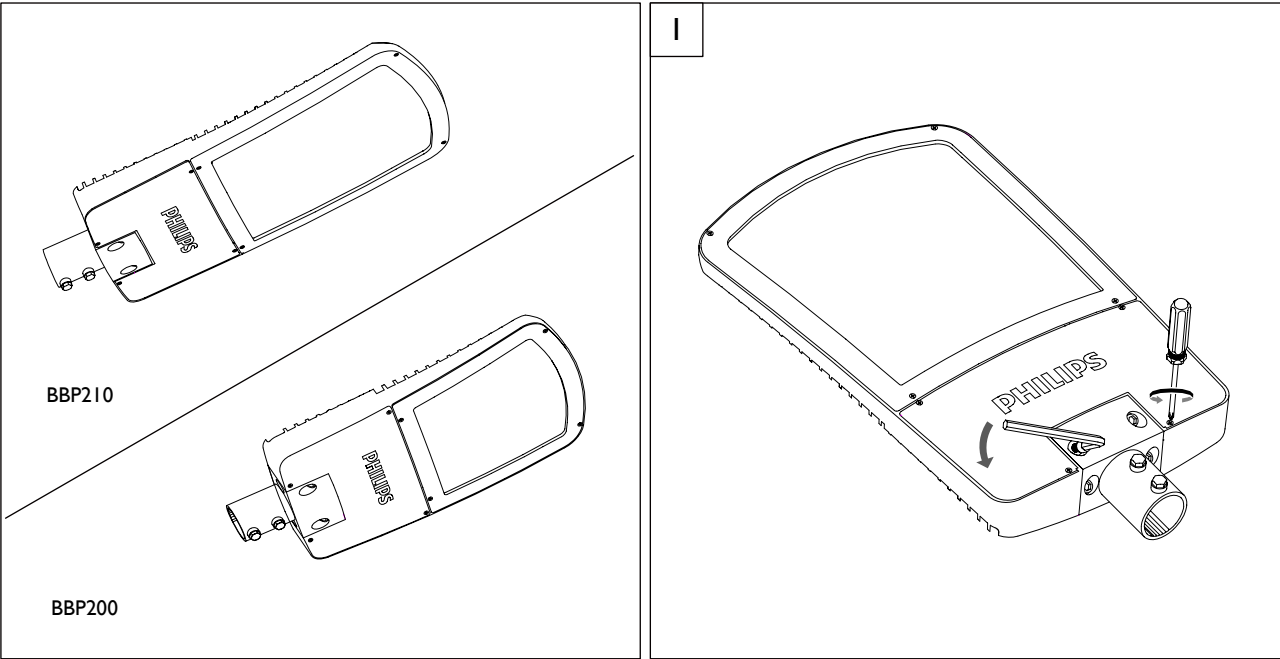

3

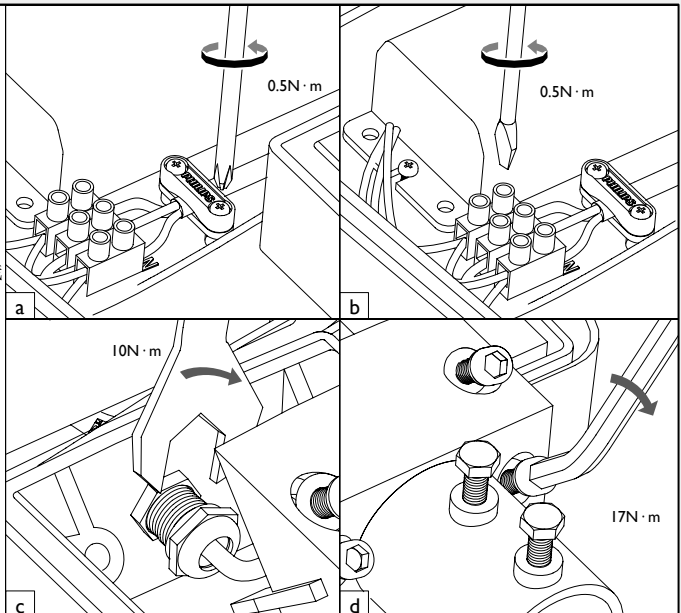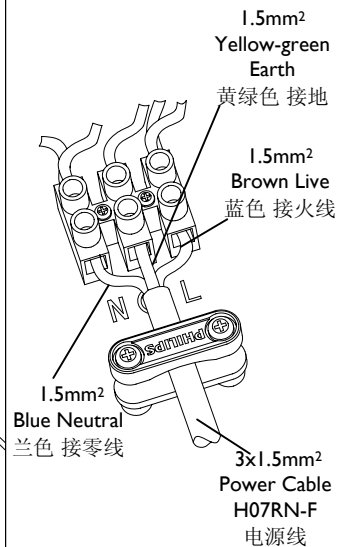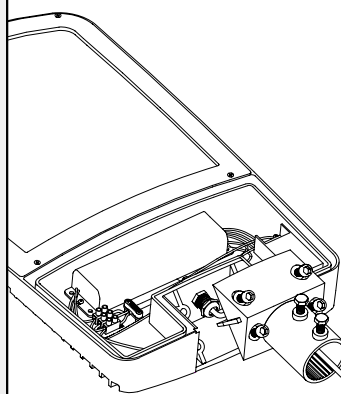

4

Dimmer Setting 调光器设置


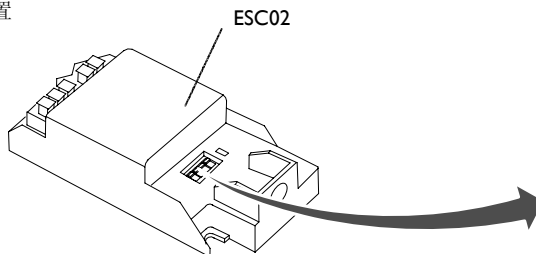


Figure A

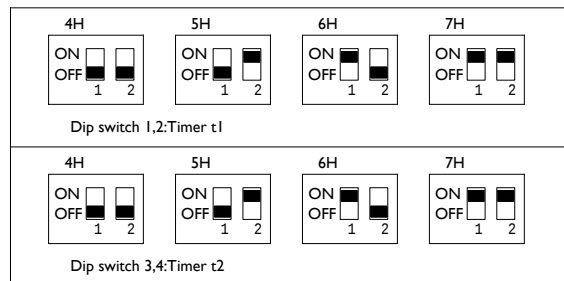


The ESC02 Has a 4-position dip switch. Position 1 and position 2 control the timer t1, from power on to begin dimming. Position 3 and position 4 control the timer t2, from begin dimming to the moment back to full power. There are 4 options for t1 and t2 respectively, totally 16 options for this controller. The indication of how to set t1 and t2 is shown in Figure A:

ESC02有四个控制位。第一和第二控制位控制时段t1，从通电开始到开始渐变。第三和第四控制位控制时段t2，从开始渐变到满负荷运行。控制器在t1和t2 分别有四种情形，总共有16种情况。怎样设置他t1和t2见下图所示：



For instance, if t1 is 6 hour and t2 is 5 hour, the lamp wattage output is shown in Figure B. t1 and t2 are preset at 4 hour when delivery from factory. Please adjust them to the time you want before Installation.


举例，如果t1是6小时，t2是5小时，光源输出功率如图。产品在出厂时，把t1和t2都设置成了4小时。请在安装使用前，将时间设置成你所需要的设置。

Figure B

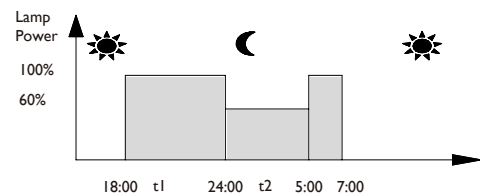


5

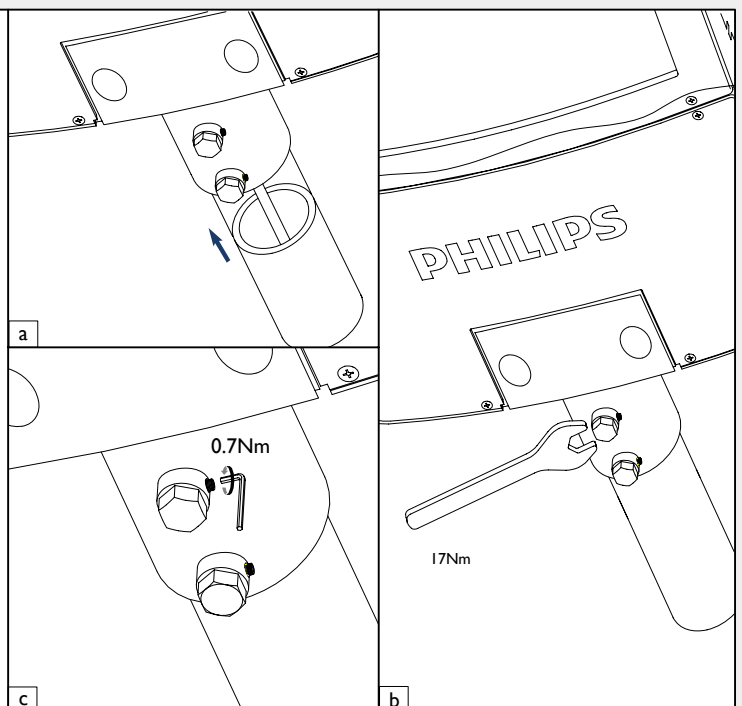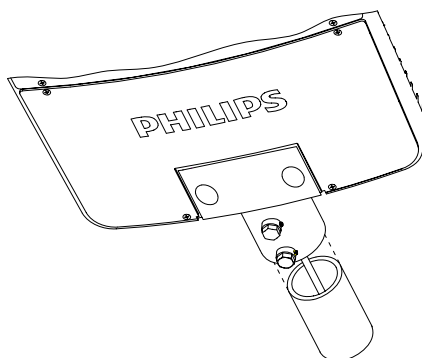


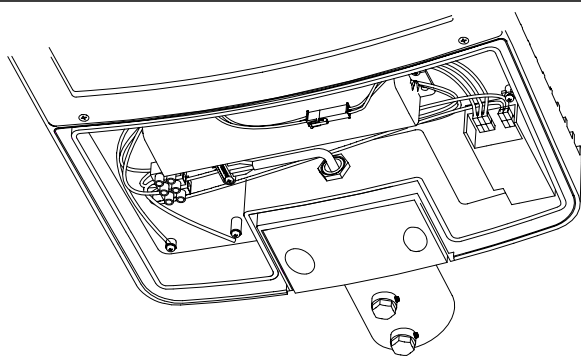


If you want to replace the power supply, first operate Step I, second operate as shown on right, finally act as Step3.
如果要更换电源, 先按照操作步骤I, 然后按照图示操作, 最后按第三步操作。

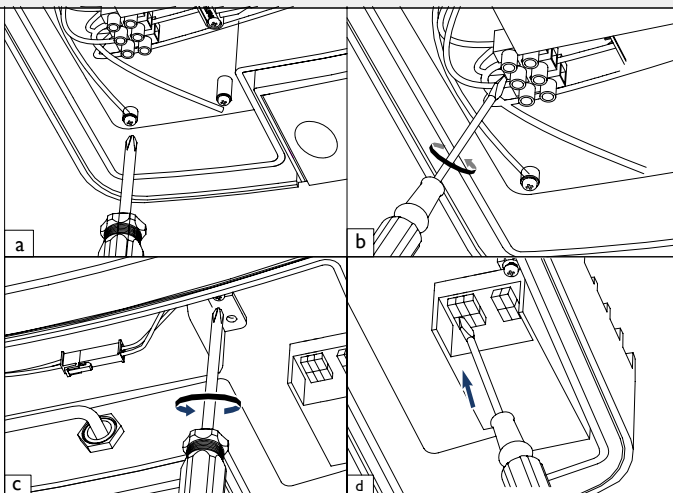


If you want to replace MCPCB module, operate as shown on right.
如果要更换MCPCB模组, 请按下述步骤。换上新模组, 装回原状。

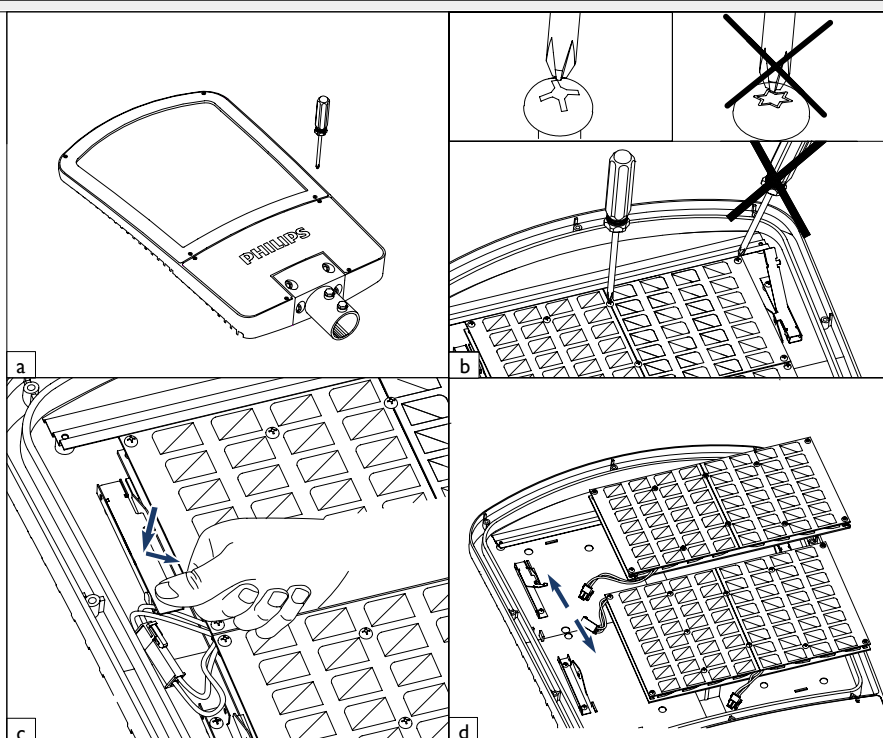

Luminaire installation position 1
灯具安装方式 I

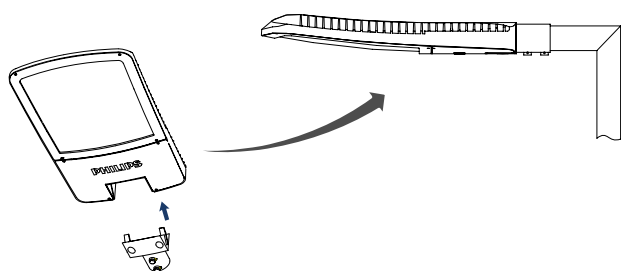

Luminaire installation position 2
灯具安装方式 2

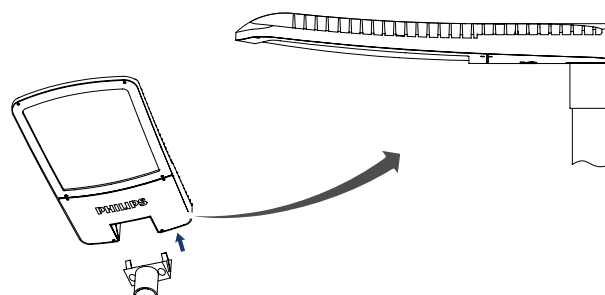

1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
灯具应由有资格的电工安装, 接线要符合IEE 电气标准或国家标准。
2. Turn off the main power when change the power supply or LED module.
更换电源驱动或LED模组时, 必须先断电。