

Vaya LED Spot/LED 射灯





BGP310/6-LED

Mounting instruction/ 安装说明





Type Number 产品型号	LEDs 颗粒数	Power 功率	Voltage 电压	Frequency 频率	
BGP310/6-LED/RGB	6	18	AC 100-240V	50/60 Hz	1. 6KG


BGP310/6-LED



BGP310/6-LED WITH ZGP311 SPK MX



ZGP311 SPK MX (Order separately)



Material
材质

Color
颜色




Al alloy
铝合金

Silvery
银色


0. 115KG

1. Surface Mounting


a. 打安装孔
Drill holes




b. 固定灯具
Mount Luminaire



c. 固定灯具
Mount Luminaire




d. 固定灯具角度
Fix luminaire Angle




2. Landscape Mounting


a. 组装配件
Mount Accessory



b. 固定在地面
Insert Into the ground




c. 固定灯具角度
Fix luminaire Angle




3. 电源线位置

Power cable location

- a. 出厂时电源线位置
Finished Goods




- b. 用户可以变换电源线位置
Cable location can be Adjusted By user

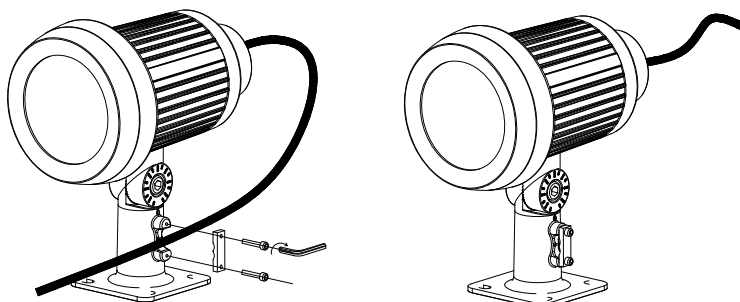

4. RGB color fixtures wiring

RGB颜色灯具接线

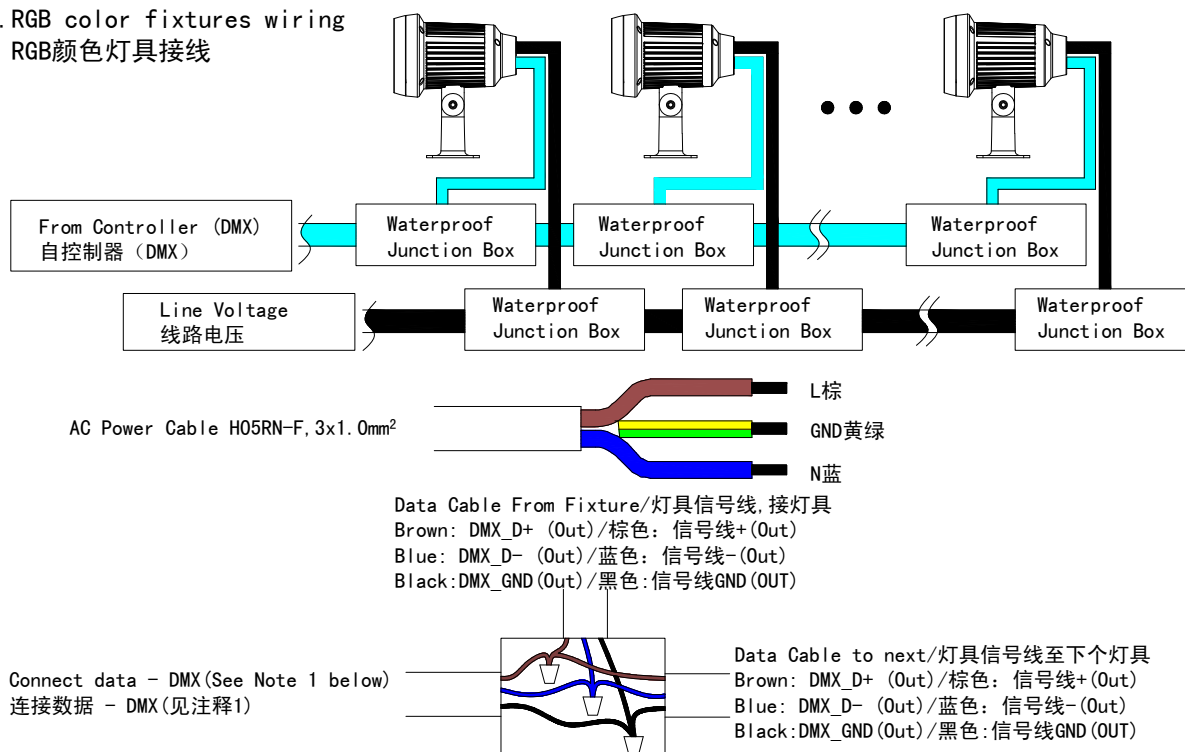

NOTES:

- For DMX Input ESTA Standard is: Orange (DMX D-), White-Orange (DMX D+), Brown and white-brown (DMX GND); If using Philips' iPlayer3 controller, input is: Orange (DMX D+), White-Orange (DMX D-), Green and white-Green (DMX GND).
针对 DMX 输入, ESTA 标准如下: 橙色 (DMX D-), 白色-橙色 (DMX D+), 棕色和白棕色 (DMX GND); 如使用 Philips iPlayer3 控制器, 则输入为: 橙色 (DMX D+), 白色-橙色 (DMX D-), 绿色和白绿色 (DMX GND)。
- Waterproof Junction boxes of grade reaches IP65 (Provided by contractor)
防水等级为 IP65 的接线盒 (需客户自购)
- The wire connection method is determined by local electrical codes and regulations, typically either wire nuts or screw terminal blocks.
接线方式取决于当地电气法规及规定, 一般是使用螺纹旋紧型导线连接器或螺钉接线端子。
- Maximum DMX data run from DMX source to last fixture in chain is 100m, maximum 32 fixtures unless booster or repeater is used.
从 DMX 源到灯串最后一个灯具的 DMX 数据传输距离是 100 米, 若不使用放大器或中继器, 最多可安装 32 个灯具。
- Address fixtures using RDM device
如有需要, 请使用 RDM 设备 (如 Philips SmartJack Pro) 为灯具定位。



- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements
灯具应由有资格的电工安装, 接线要符合 IEE 电气标准或国家标准
- Do not switch on before complete installation.
接线过程中切勿通电
- The external cable of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
此灯具的外部软缆或软线不能替换, 如果软线损坏, 该灯具即报废